

MSB-DP39H

Features

- Three DisplayPort input to Nine HDMI output video splitter box
- Easy and quick installation without driver
- Support EDID caching
- Active cooling, low power consumption, low-profile metal case
- Flexibly deploy multi-monitors video wall configuration with 3 x 3, support 1920x1200 per port

Specifications



Display Support

Max. Displays per Board	9
Max. Digital Display Support	5760 x 3600 (3 x 3 mode)
Display Connectors	9 x HDMI

I/O Interface

Input	DisplayPort 5760 x 1200
Output	HDMI 1920 x 1200

Thermal and Power Specs

Thermal	Active fan
Max. BOX Power Consumption (W)	15W


Dimensions

Form Factor	Low-profile metal case
Length	173 mm
Height	35 mm
Width	105 mm


Others

Operation System	Windows® 10
Other Technology	EDID caching
Operation Temperature(Standard)	0°C ~ 45°C
Storage Temperature	-20°C ~ 65°C

Block Diagram

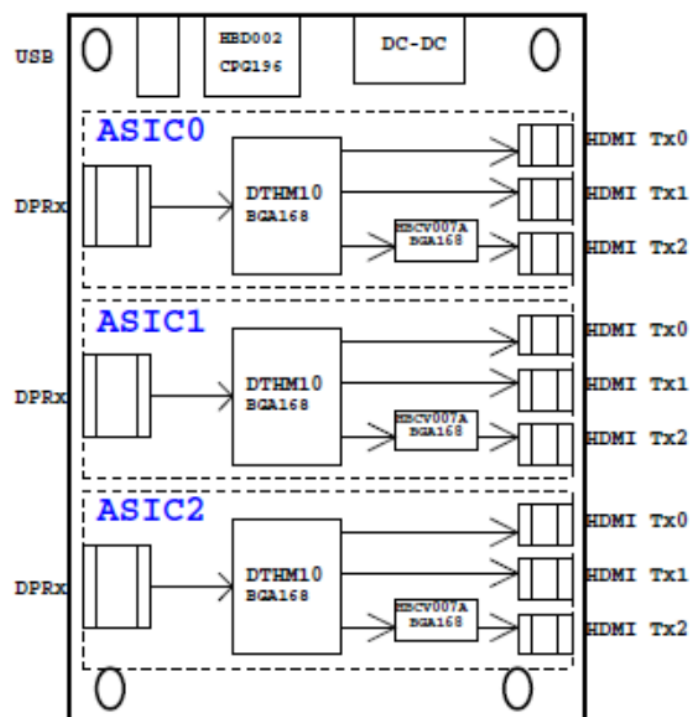

Mechanical

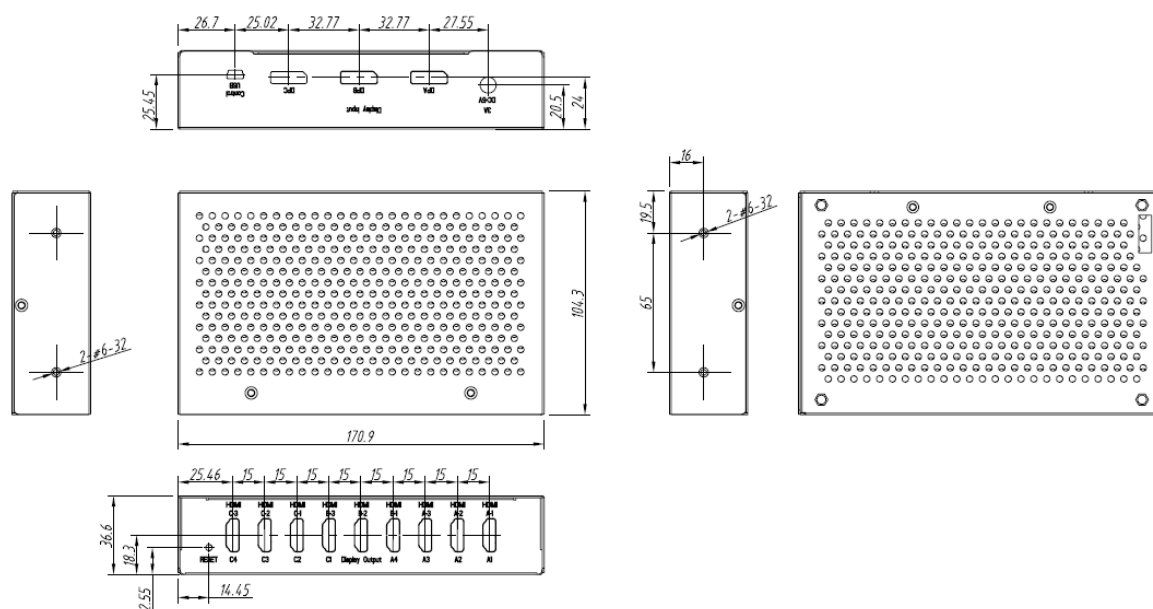

Ordering Information

Model Number	Description
MSB-DP39H	9-displays, Multi-display Splitter Box, Input DP x 3 + Output HDMI x 9, 0°C to +45°C Accessories: DP to DP cable x 3 + Adapter 5V 3A DC x 1