


Key Features

- All Solid Capacitor
- Environment : Operation 0~60°C
- Support RS-232 Port
- Support 2 x HDMI
- Target Application – Kiosk, Embedded & Industrial application
- Status: Mass production



5.5mm DC IN screw type

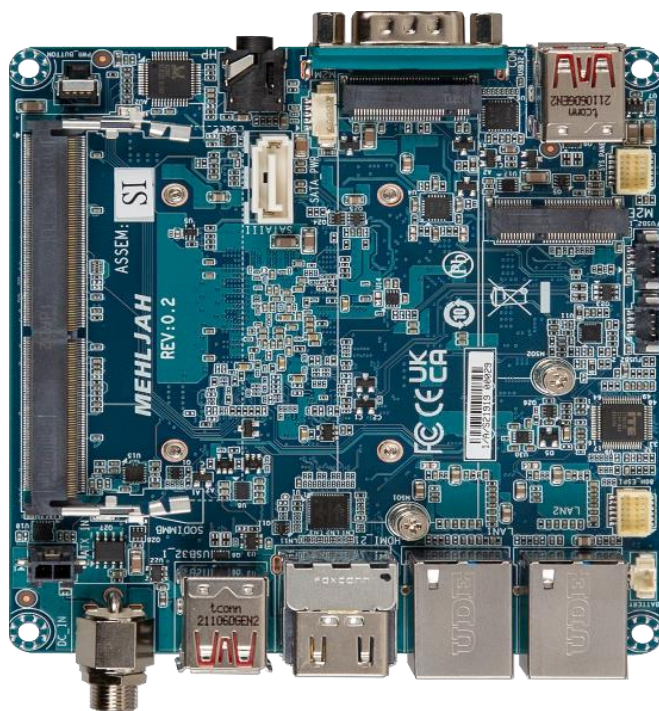

Model	QBi-6412A	QBi-6210A
CPU	Intel® Celeron® J6412 Processor, 10nm, 4 cores, 4 threads, 2.0~2.6 GHz, TDP 10W	Intel® Celeron® N6210 Processor, 10nm, 2 cores, 2 threads, 1.2~2.6 GHz, TDP 6.5W
Socket	FCBGA1493	
Memory	1 x DDR4 SO-DIMM socket, Max. Capacity 32 GB, Support Single Channel DDR4 3200 MHz	
Ethernet	2 x GbE LAN ports (Intel® I211AT)	
Graphic Support	Intel® UHD Graphics for 10th Gen Intel® Processors 2 x HDMI 2.0 2 independent display outputs	
Audio	Realtek® ALC897	
Storage	1 x SATA 6Gb/s port	
Expansion Slots	1 x 2280 M.2 M-Key (PCIeX2+SATA 6Gb/s) 1 x 2230 M.2 E-Key	
Internal I/O	1 x 2-pin power connector 1 x SATA Power header 1 x CPU fan header 1 x Front panel header	2 x USB 2.0 headers
Front I/O	2 x USB 3.2 Gen2 X1 1 x COM (RS-232)	1 x Headphone Jack 1 x Power button
Rear I/O	2 x HDMI 2 x RJ45 LAN ports	2 x USB 3.2 Gen2x1 1 x DC Jack (+12V~19VDC)
Side I/O	--	
TPM	--	
Operating Temp.	0°C to 60°C	