



INTELLIGENT SYSTEMS

Vol.03

Table of Contents

Table of Contents	2-3	
About IBASE	4-5	
IBASE IIoT / Industry 4.0 Solutions	6-7	
Vertical Applications	8-10	
Comparison Table	11-17	
1. AGS Series		
AGS100 AGS100T	Ultra-Compact IoT Gateway Fanless System with Intel® Atom® x7/x5, Pentium® & Celeron® Processors	18-19
AGS102 AGS102T	Ultra-Compact IoT Gateway Fanless System with Intel® Atom® x7/x5, Pentium® & Celeron® Processors	20-21
NEW AGS103T	Ultra-Compact IoT Gateway Fanless System with Intel® Atom® x6413E/x6211E Processors	22-23
2. AMS Series		
MAI602-M4D80	Fanless Motion Control System with 7th/6th Gen Intel® Core™ i7/i5/i3 Desktop Processors Supports 4 Axis Pulse Command Motion Control	24-25
AMS210	Automatic Control System with 9th/8th Gen Intel® Core™ Processor Supports 4th LAN Port, 3x Display Ports	26-27
AMS300	Expandable Fanless & Compact System with 7th/6th Gen Intel® Core™ i7/i5/i3 Desktop Processors Supports 1x Mini PCI-E (full-size)	28-29
AMS300-1	Expandable Fanless & Compact System with 7th/6th Gen Intel® Core™ i7/i5/i3 Desktop Processors Supports 3rd LAN Port	30-31
AMS301	Expandable Fanless & Compact System with 7th/6th Gen Intel® Core™ i7/i5/i3 Desktop Processors Supports 4x Mini PCI-E (full-size)	32-33
AMS302	Expandable Fanless & Compact System with 7th/6th Gen Intel® Core™ i7/i5/i3 Desktop Processors Supports 1x Mini PCI-E (full-size), 1x PCI-E (x8) & 1x PCI-E (x4)	34-35
3. AMI Series		
AMI220	Compact Expandable Fanless System with 7th/6th Gen Intel® Core™ i7/i5/i3 Desktop Processors	36-37
AMI221	Compact Expandable Fanless System with 7th/6th Gen Intel® Core™ i7/i5/i3 Desktop Processors Supports 1x PCI-E/PCI & 2x HDD/SSD Trays	38-39
AMI222	Compact Expandable Fanless System with 7th/6th Gen Intel® Core™ i7/i5/i3 Desktop Processors Supports 2x PCI-E/PCI & 2x HDD/SSD Tray & 2x Fieldbus	40-41
AMI230	Compact Expandable Fanless System with 9th/8th Gen Intel® Core™ i7/i5/i3 Desktop Processors Supports 4x Intel® Gigabit LAN, 8x USB 3.0, 3x M.2	42-43
AMI231	Compact Expandable Fanless System with 9th/8th Gen Intel® Core™ i7/i5/i3 Desktop Processors Supports 1x PCI-E/PCI & 2x HDD/SSD Trays	44-45
AMI232	Compact Expandable Fanless System with 9th/8th Gen Intel® Core™ i7/i5/i3 Desktop Processors Supports 2x PCI-E/PCI & 2x HDD/SSD Trays	46-47

4. CMI Series

Embedded Function Cards	48-49	
Mini PCI-E Cards with Expansion	50	
CMI Series Chassis & Motherboard	51	
CMI202-991	Expandable System with IBASE MI991AF Mini-ITX Motherboard Industrial 250W DC-Input Switching Power Supply	52-53
 CMI203 System Family	Expandable System with IBASE Mini-ITX Motherboard Industrial 250W ATX Power Supply	54-55
 CMI211 System Family	Expandable System with IBASE Mini-ITX Motherboard Industrial 250W ATX Power Supply	56-57
CMI212 System Family	Expandable System with IBASE Mini-ITX Motherboard Optional 150W Power Adaptor	58-59
CMI221-991	Expandable System with IBASE MI991AF Mini-ITX Motherboard Industrial 250W ATX Power Supply	60
CMI222 System Family	Expandable System with IBASE Mini-ITX Motherboard Optional 84W Power Adaptor	61-62
CMI300-988	Slim System with IBASE MI988F Mini-ITX Motherboard AMD Ryzen™ V1000 on board	63-64

5. ASB Series

ASB200-915	Slim System with IBASE IB915 3.5" Disk-Size SBC 6th Gen Intel® Core™ U-series Processor	65
ASB200-916	Slim System with IBASE IB916 3.5" Disk-Size SBC 6th Gen Intel® Core™ U-series Processor	66
ASB200-918	Slim system with IBASE IB918 3.5" Disk-Size SBC AMD Ryzen™ Embedded V1000 /R1000 Processor	67-68
ASB200-919	Slim System with IBASE IB919 3.5" Disk-Size SBC 8th Gen Intel® Core™ U-Series Processor	69-70

6. CSB Series

CSB200-818	Slim System with IBASE IB818 3.5" Disk-Size SBC	71
CSB200-822	Slim System with IBASE IB822 3.5" Disk-Size SBC	72

About IBASE



Core Activities

Design and Manufacturing
of Robust Industrial
Computing Platforms



HEADQUARTERS
Taipei, Taiwan



FOUNDED
February 2000



CHAIRMAN
C. S. Lin



CAPITAL
US\$58M



EMPLOYEE
770
(Worldwide)



Stock Quote
TPEx 8050
(Since 2003)


Company Profile

IBASE Technology specializes in the design and manufacture of robust industrial PC products, delivering high quality products and excellent service since its establishment in 2000. IBASE carries out manufacturing and quality control at its own facilities in Taiwan that are certified with ISO 9001, ISO 13485 and ISO 14001 standards. Current offerings comprise x86 and RISC-based industrial motherboards, embedded systems, panel PCs, network appliances and digital signage players. The company is publicly listed in the Taipei Exchange (TPEx: 8050) and is now a leading global provider of innovative industrial and embedded computing solutions.




R&D Capabilities

IBASE's R&D team boasts of talented electronics, layout, system, mechanical hardware, BIOS, firmware as well as software engineers. Half of the team members are seasoned with more than 15 years of experience in their respective fields, while 45 percent carry more than five years of experience. Because of their accumulated expertise, the R&D team is able to design and create new products for the demanding and dynamic market.

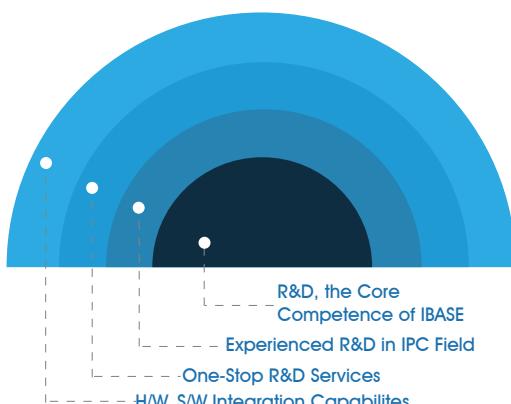

Design⁺, Manufacture⁺, Service⁺

Set up to become a global leading provider of embedded board and system solutions, IBASE manufactures and supplies cutting-edge products based on the latest technologies to match market demands. Our R&D and product management teams have the expertise to design and develop products that are innovative and meet customers' requirements and design specifications. We attach great importance to research and development, investing heavily in manpower and resources to remain competitive by staying ahead in the technology curve. IBASE is also committed to compliance with environmental policies by working to prevent pollution with non-use of banned or restricted substances in our production process and products, helping our customers respond to their environmental challenges.

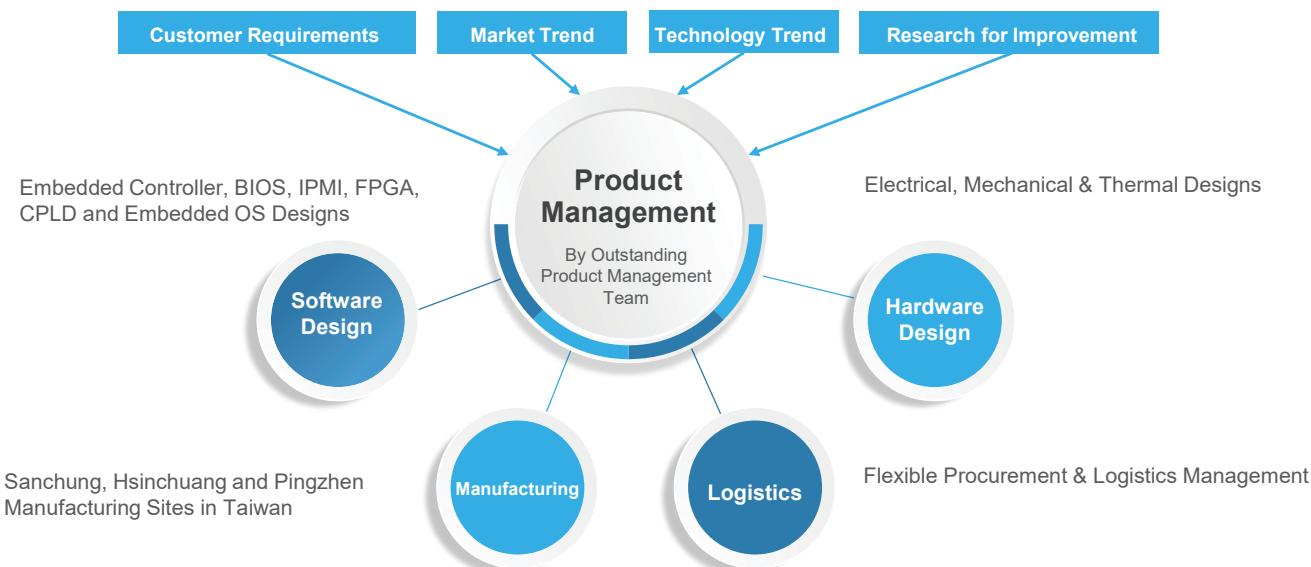

IBASE Manufacturing Sites



3,140 m² / 950 Ping

SANCHUNG

- Board Production
- Validation



6,070 m² / 1,840 Ping

HSINCHUANG

- System Assembly
- Validation



15,700 m² / 4,750 Ping

PINGZHEN

- Board Production
- System Assembly
- Validation

Total Size

268,350 Square-feet
(24,910 m² / 7,540 Ping)

Design & Manufacturing
in Taiwan

Capacity

- SMT Line x 3
- DIP Assembly Line x 2
- System Assembly Line x 10
- Cleanroom x 1
- Burn-in Room x 13
(4 hours per cycle)

PCBA

40K/month (In-house Production) +
Outsourcing

System Assembly

10K/month (In-house Production) +
Outsourcing

Certifications



ISO 9001
DNV CERTIFIED



ISO 14001
DNV CERTIFIED



ISO 13485
DNV CERTIFIED



ISO/TS 16949
DNV CERTIFIED




EN50155

E-Mark

EN60601

IBASE IIoT / Industry 4.0 Solutions

IoT Cloud Level

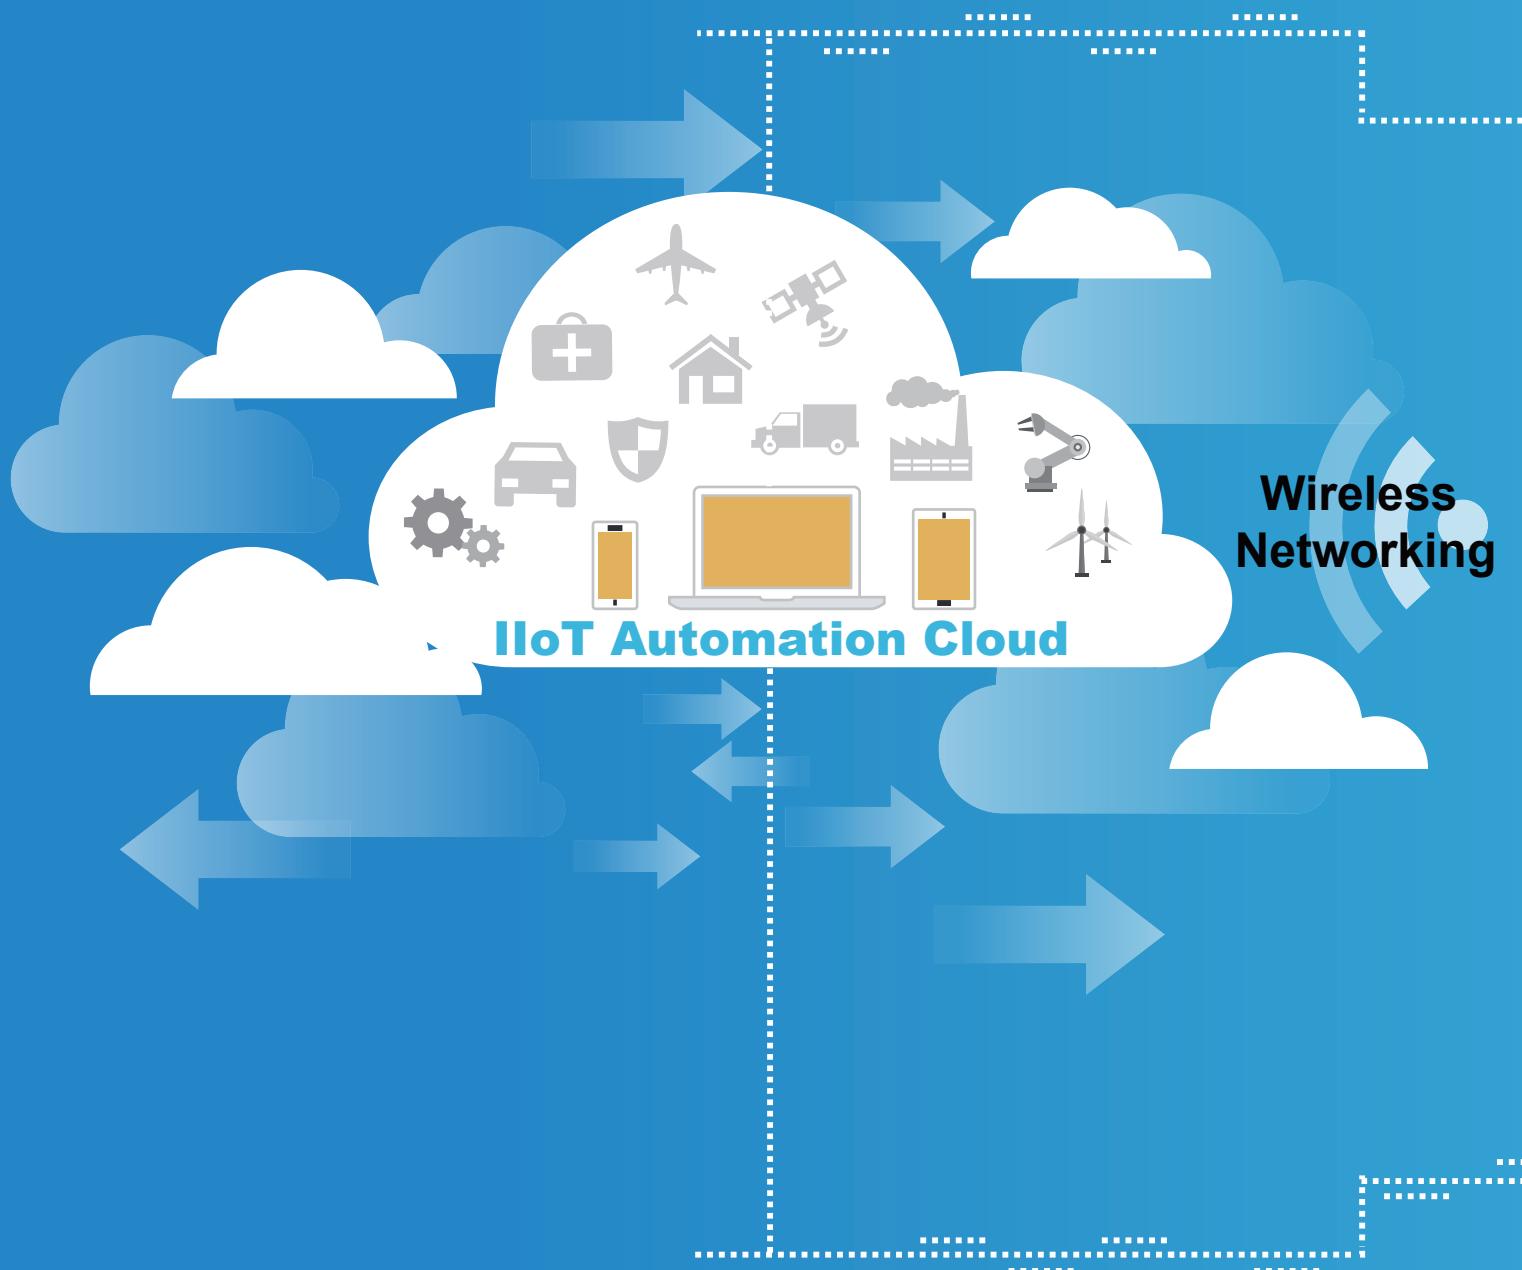

Automation Equipment Level

Robotic-Arm Control



AMI230 Series



AMS300 Series



Robotics Solution

Factory Automation



AMS210 Series



ASB200 Series



CSB200 Series

Softlogic Controller



Automation I/O




Profibus



Profinet

Machine Automation



MAI602-M4D80
(Motion Control)



AMI220 Series
(CNC Controller)



AMS300 Series
(EtherCAT Master Controller)



CMI212 Series
(Machine Controller)



CMI203 Series
(Bender Machine)

Communication Level



IIoT Gateway
AGS100/AGS100T

Data Extraction
Conversion

Field
Protocols
Connection



IIoT Gateway
AGS102/AGS102T



Smart Factory

IBASE intelligent computing platforms are used in modular structured smart factories where systems remotely monitor and control physical processes over the Internet of Things for communication in real time between systems and with humans across the chain of operation. Smart factories are designed with the interconnection of machines, devices, sensors and users in mind in order to collect data and information from all points in the manufacturing process such as robotic control, vision inspection, assembly line and unmanned logistics station where IBASE intelligent systems can be used.



Robotic Control

AMS300
Page.28-29




AMI232/ASB200-919
Page.46-47/ Page.69-70

Vision Inspection



Assembly Line

AGS102
Page.20-21

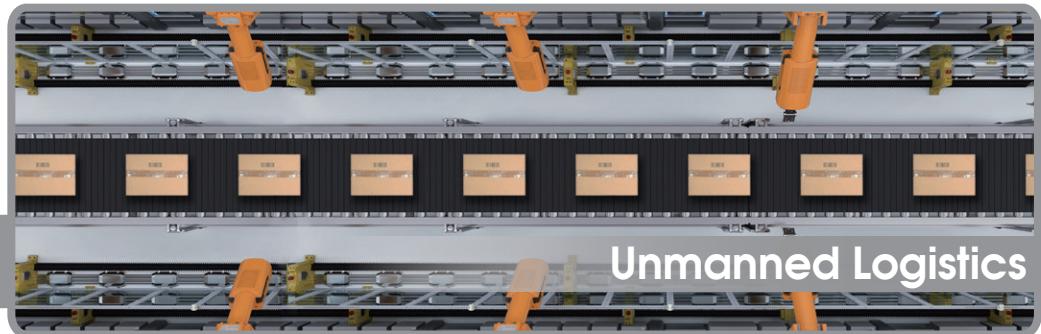

AMI220
Page.36-37

Unmanned Logistics

Intelligent Transportation Gateway

IBASE intelligent transportation systems can be deployed to different points in transport networks for transport and traffic management, with applications in traffic monitoring, automatic fare collection, automatic gateway and smart parking gateway. Designed as IoT and Machine-to-Machine gateways, IBASE transportation solutions deliver unprecedented computing performance and feature extended operating temperature, wide-range power input and hardware monitoring for CPU temperature and voltages to handle data and processing analysis requirements from various stations and sensors with improved reliability even in harsh environments.



CSB200-818
Page.71



AGS102
Page.20-21



AGS102T
Page.20-21



Rugged and Embedded

IBASE intelligent embedded systems include compact and integrated platforms which offer fast time-to-market solutions with reliable and rugged designs, and are able to operate in harsh environments conditions with a temperature range of -40°C ~ 70°C. These systems come with high scalability, rich I/O connectivity and embedded longevity for supply stability assurance, suitable in industrial applications including automation, control and transportation.



CSB200-818

Page.71



ASB200-916

Page.66



Surveillance/Video Analytics

Intelligent surveillance and video analytics systems are used in video analytic applications such as motion detection, flame and smoke detection, shape recognition, face recognition, tamper detection and video tracking. These platforms deliver high computing and graphics performance with advanced networking and seamless I/O speeds for image capturing, data transfers and video transmission.



AMS301

Page.32-33



CMI300-988/ASB200-918

Page.63-64/ Page.67-68



Comparison Table

IoT Gateway Computer



Models		AGS100	AGS100T	AGS102	AGS102T	AGS103T
System	Processor	Intel® Atom® x7-E3950/ x5-E3940/ x5-E3930 & Pentium® N4200/ Celeron® N3350 Processors	Intel® Atom® x7-E3950/ x5-E3940/ x5-E3930 & Pentium® N4200/ Celeron® N3350 Processors	Intel® Atom® x7-E3950/ x5-E3940/ x5-E3930 & Pentium® N4200/ Celeron® N3350 Processors	Intel® Atom® x7-E3950/ x5-E3940/ x5-E3930 & Pentium® N4200/ Celeron® N3350 Processors	Intel® Atom® x6413E/ x6211E Processors
	PCH	N/A	N/A	N/A	N/A	N/A
	Memory	1x DDR3L-1866 SO-DIMM	1x DDR3L-1866 SO-DIMM	1x DDR3L-1866 SO-DIMM	1x DDR3L-1866 SO-DIMM	1x DDR4-3200 SO-DIMM
	Max. Memory	8GB	8GB	8GB	8GB	16GB
	Graphics	Intel® HD Graphics 505	Intel® Gen11 UHD Graphics			
I/O Interface	Display	1x DisplayPort 1x DVI-I	1x DisplayPort 1x DVI-I	1x DisplayPort 1x DVI-I	1x DisplayPort 1x DVI-I	1x HDMI 1x DVI-I
	Ethernet	For E-series CPU: Intel® I210IT GbE LAN For N-series CPU: Intel® I211AT GbE LAN	For E-series CPU: Intel® I210IT GbE LAN For N-series CPU: Intel® I211AT GbE LAN	For E-series CPU: Intel® I210IT GbE LAN For N-series CPU: Intel® I211AT GbE LAN	For E-series CPU: Intel® I210IT GbE LAN For N-series CPU: Intel® I211AT GbE LAN	3x Intel® I210IT GbE LAN
	Serial Port	2x RS232/RS422/485	2x RS232/RS422/485	2x RS232/RS422/485 2x RS232	4x RS232/RS422/485	2x RS232/RS422/485 2x RS232
	USB	4x USB 3.0	4x USB 3.0	4x USB 3.0 1x USB 2.0	4x USB 3.0 1x USB 2.0	2x USB 3.1 2x USB 2.0
	Audio	1x Speaker-out	1x Speaker-out	1x Speaker-out	1x Speaker-out	1x Speaker-out & Mic-in
Storage Interface	SATA HDD	N/A	N/A	N/A	N/A	1x 2.5" slot (for AGS103TS)
	mSATA/M.2	1x mSATA 1x 3042 M.2 B-Key socket 1x 2230 M.2 E-Key socket	1x mSATA 1x 3042 M.2 B-Key socket 1x 2230 M.2 E-Key socket	1x mSATA 1x 3042 M.2 B-Key socket 1x 2230 M.2 E-Key socket	1x mSATA 1x 3042 M.2 B-Key socket 1x 2230 M.2 E-Key socket	1x 3042/2242 M.2 B-Key socket
	PCI Express	N/A	N/A	N/A	N/A	N/A
Expansion Slots	Mini PCI-E/M.2	1x Mini PCI-E slot	3x Mini PCI-E PCI-E slot			
	Power	9V~36V DC-input	9V~36V DC-input	9V~36V DC-input	9V~36V DC-input	9V~36V DC-input
Power	Power Connector	3-pin terminal block	3-pin terminal block	3-pin terminal block	3-pin terminal block	3-pin terminal block
	Power Protection	OVP, UVP, Reverse voltage protection	OVP, UVP, Reverse voltage protection			
	Dimensions	160mm (W) x 110mm (D) x 44mm (H)	160mm (W) x 110mm (D) x 44mm (H)	160mm (W) x 110mm (D) x 44mm (H)	160mm (W) x 110mm (D) x 44mm (H)	190mm (W) x 110mm (D) x 52mm (H)
Mechanical	Weight	1kg	1kg	1kg	1kg	1.2kg
	Construction	Aluminum & steel	Aluminum & steel	Aluminum & steel	Aluminum & steel	Aluminum & steel
	Chassis Color	Silver & Gray	Silver & Gray	Silver & Gray	Silver & Gray	Silver & Gray
	Mounting	Desktop & wall mount DIN-rail mount	Desktop & wall mount DIN-rail mount			
Environmental	Operating Temperature	For E-series CPU: -40°C~70°C (-40°F~158°F) For N-series CPU: -20°C~60°C (-4°F~140°F)	-20°C~70°C (-4°F~158°F)			
	Storage Temperature	-40°C~85°C (-40°F~185°F)	-40°C~85°C (-40°F~185°F)	-40°C~85°C (-40°F~185°F)	-40°C~85°C (-40°F~185°F)	-40°C~85°C (-40°F~185°F)
	Certification	CE/FCC/LVD/CCC/UL	CE/FCC/LVD/UL	CE/FCC/LVD/CCC/UL	CE/FCC/LVD/UL	CE/FCC/LVD(pre-scan)
	Others	N/A	TPM 2.0	N/A	TPM 2.0	TPM 2.0
	Page No.	p. 18 - 19	p. 18 - 19	p. 20 - 21	p. 20 - 21	p. 22 - 23

Comparison Table

Automatic Control System



Models		MAI602-M4D80	AMS210	AMS300/AMS300-1
System	Processor	7th/6th Gen Intel® Core™ i7/i5/i3 Processors (Max. 35W TDP)	9th/8th Gen Intel® Core™ i7/i5/i3 Desktop Processors (35W TDP)	7th/6th Gen Intel® Core™ DT i7/i5/i3 Processors (Max. 35W TDP)
	PCH	Intel® Q170 PCH	Intel® Q370 PCH	Intel® Q170 PCH
	Memory	2x DDR4-2133 SO-DIMM	2x 4GB DDR4-2666/2400 SO-DIMM	2x DDR4-2133 SO-DIMM
	Max. Memory	32GB	32GB	32GB
	Graphics	Intel® HD Graphics 530	Intel® HD Graphics	Intel® HD Graphics 530
I/O Interface	Display	1x DVI-I 1x DisplayPort	3x DisplayPort	1x DisplayPort 1x DVI-I
	Ethernet	1x Intel® I219LM Gigabit LAN PHY 1x Intel® I211AT Gigabit LAN	1x Intel® I219LM GbE PHY 1x Intel® I210IT Gigabit LAN 1x Intel® I210IT Gigabit LAN 1x Intel® I210IT Gigabit LAN	AMS300: 1x Intel® I219LM Gigabit LAN PHY 1x Intel® I211AT Gigabit LAN AMS300-1: 1x Intel® I219LM Gigabit LAN PHY 2x Intel® I211-AT or 2x Intel® I210-AT Gigabit LAN
	Serial Port	1x RS232/422/485 (rear side) 1x RS232 (rear side) 2x RS232 (on riser card)	1x RS232/RS422/485 3x RS232 (optional)	AMS300: 1x RS232/RS422/485 1x RS232 AMS300-1:N/A
	USB	4x USB 3.0 (rear side) 2x USB 2.0 (on riser card) 1x USB 2.0 (on board)	4x USB 3.1 4x USB 2.0	4x USB 3.0 2x USB 2.0
	Audio	1x Line-out	1x Line-out	1x Line-out
	Digital I/O	GPIO 4-in & 4-out (optional)	4-in & 4-out (optional)	4-in & 4-out (optional)
Storage Interface	SATA HDD	2x 2.5" HDD or SSD	2x 2.5" HDD or SSD	2x 2.5" HDD or SSD
	mSATA/M.2	1x mSATA	1x mSATA via mPCI-E	1x mSATA
Expansion Slots	PCI Express	1x PCI-E (x8) for Isolated Digital I/O 48-in/32-out 1x PCI-E (x1) for 4-Axis Motion control	2x PCI-E (x16) (by ABP-IP701/ABP-IP702/ABP-IP703)	N/A
	Mini PCI-E/M.2	1x Mini PCI-E slot	1x Mini PCI-E slot	1x Mini PCI-E slot
Power	Power input	24V(±10%) DC-input	24V(±10%) DC-input	24V(±10%) DC-input
	Power Connector	3-pin terminal block DC-jack (optional)	3-pin DC-in terminal block	3-pin terminal block
	Power Protection	OVP, UVP, Reverse voltage protection	Reverse voltage	OVP, UVP, Reverse voltage protection
Mechanical	Dimensions	275mm (W) x 140mm (D) x 117mm (H)	297.4mm (W) x 266.2mm (D) x 78.5mm (H)	275mm (W) x 140mm (D) x 70mm (H)
	Weight	3.5 kg	3.7 kg	2.7kg
	Construction	Aluminum & steel	SGCC	Aluminum & steel
	Chassis Color	Silver & Navy blue	Silver	Silver & Gray
	Mounting	Desktop & wall mount Side mounting DIN-rail mounting (optional)	Desktop or wall mount	Desktop & wall mount DIN-rail mount
Environmental	Operating Temperature	-10°C to 60°C (14°F~140°F) *With airflow -10°C to 50°C (14°F to 122°F) *without airflow	0°C to 55°C (32°F~131°F)	-10°C to 60°C (14°F~140°F) *With airflow -10°C to 50°C (14°F to 122°F) *without airflow
	Storage Temperature	-20°C to 80°C (-4°F to 176°F)	-20°C~80°C (-4°F~176°F)	-20°C~80°C (-4°F~176°F)
	Certification	CE/FCC/LVD	CE/FCC/LVD (Prescan only)	CE/FCC/LVD

Page No. p. 24 - 25

p. 26 - 27

p. 28 - 31

Comparison Table

Expandable Modular System



Models		AMS301	AMS302	AMI220
System	Processor	7th/6th Gen Intel® Core™ DT i7/i5/i3 Processors (Max. 35W TDP)	7th/6th Gen Intel® Core™ DT i7/i5/i3 Processors (Max. 35W TDP)	7th/6th Gen Intel® Core™ DT i7/i5/i3 Processors (Max. 35W TDP)
	PCH	Intel® Q170 PCH	Intel® Q170 PCH	Intel® Q170 PCH Intel® H110 PCH
	Memory	2x DDR4-2133 SO-DIMM	2x DDR4-2133 SO-DIMM	2x 4GB DDR4-2400 SO-DIMM
	Max. Memory	32GB	32GB	32GB
	Graphics	Intel® HD Graphics 530	Intel® HD Graphics 530	Intel® HD Graphics 530
I/O Interface	Display	1x DisplayPort 1x DVI-I	1x DisplayPort 1x DVI-I	1x DVI-D, 1x VGA 2x DisplayPort
	Ethernet	1x Intel® I219LM Gigabit LAN PHY 1x Intel® I211AT Gigabit LAN	1x Intel® I219LM Gigabit LAN PHY 1x Intel® I211AT Gigabit LAN	1x Intel® I219LM Gigabit LAN PHY 1x Intel® I211AT Gigabit LAN
	Serial Port	1x RS232/RS422/485 1x RS232 2x RS232 (optional)	1x RS232/RS422/485 1x RS232 2x RS232 (optional)	1x RS232/RS422/485 3x RS232
	USB	4x USB 3.0 2x USB 2.0	4x USB 3.0 2x USB 2.0	4x USB 3.0 4x USB 2.0
	Audio	1x Line-out	1x Line-out	1x Line-out, 1x MIC-in
Storage Interface	Digital I/O	4-in & 4-out (optional)	4-in & 4-out (optional)	4-in & 4-out (optional)
	SATA HDD	2x 2.5" HDD or SSD	2x 2.5" HDD or SSD	1x 2.5" HDD or SSD
	mSATA/M.2	1x mSATA	1x mSATA	2x mSATA (AMI220AF) 1x mSATA (AMI220EF)
Expansion Slots	PCI Express	N/A	1x PCI-E (x8) + 1x PCI-E (x4)	N/A
	Mini PCI-E/M.2	4x Mini PCI-E slot	1x Mini PCI-E slot	2x Mini PCI-E slot
Power	Power input	24V(±10%) DC-input	24V(±10%) DC-input	12V(-10%) ~ 24V(+10%) DC-input
	Power Connector	3-pin terminal block	3-pin terminal block	3-pin terminal block DC-jack (optional)
	Power Protection	OVP, UVP, Reverse voltage protection	OVP, UVP, Reverse voltage protection	OVP, UVP, Reverse voltage protection
Mechanical	Dimensions	275mm (W) x 140mm (D) x 113mm (H)	275mm (W) x 140mm (D) x 113mm (H)	210mm (W) x 265mm (D) x 71.4mm (H)
	Weight	3.3kg	3.3kg	3.6 kg
	Construction	Aluminum & steel	Aluminum & steel	Aluminum & steel
	Chassis Color	Silver & Gray	Silver & Gray	Silver & Gray
	Mounting	Desktop & wall mount DIN-rail mount	Desktop & wall mount DIN-rail mount	Desktop & wall mount
Environmental	Operating Temperature	-10°C to 60°C (14°F~140°F) *With airflow -10°C to 50°C (14°F to 122°F) *without airflow	-10°C to 60°C (14°F~140°F) *With airflow -10°C to 50°C (14°F to 122°F) *without airflow	-10°C~50°C (14°F~122°F)
	Storage Temperature	-20°C~80°C (-4°F~176°F)	-20°C~80°C (-4°F~176°F)	-20°C~80°C (-4°F~176°F)
	Certification	CE/FCC/LVD	CE/FCC/LVD	CE/FCC/LVD/CCC
Page No.		p. 32 - 33	p. 34 - 35	p. 36 - 37

Remarks: 1. Specifications are subject to change without prior notice. 2. ODM/OEM is available. 3. For user's manual & datasheet download, visit www.ibase.com.tw.

Comparison Table

Expandable Modular System



Models		AMI221	AMI222	AMI230
System	Processor	7th/6th Gen Intel® Core™ DT i7/i5/i3 Processors (Max. 35W TDP)	7th/6th Gen Intel® Core™ DT i7/i5/i3 Processors (Max. 35W TDP)	9th/8th Gen Intel® Core™ i7/i5/i3 Desktop Processors (35W TDP)
	PCH	Intel® Q170 PCH TDP Intel® H110 PCH TDP	Intel® Q170 PCH TDP Intel® H110 PCH TDP	Intel® Q370 PCH
	Memory	2x 4GB DDR4-2400 SO-DIMM	2x 4GB DDR4-2400 SO-DIMM	2x DDR4-2666/2400 SO-DIMM
	Max. Memory	32GB	32GB	32GB
	Graphics	Intel® HD Graphics 530	Intel® HD Graphics 530	Intel® HD Graphics
I/O Interface	Display	1x DVI-D, 1x VGA 2x DisplayPort	1x DVI-D, 1x VGA 2x DisplayPort	1x HDMI+ DisplayPort 1x DVI-D
	Ethernet	1x Intel® I219LM Gigabit LAN PHY 1x Intel® I211AT Gigabit LAN	1x Intel® I219LM Gigabit LAN PHY 1x Intel® I211AT Gigabit LAN	1x Intel® I219LM GbE PHY 1x Intel® I210IT Gigabit LAN 1x Intel® I211AT Gigabit LAN 1x Intel® I211AT Gigabit LAN *2 supports PoE+*
	Serial Port	1x RS232/RS422/485 5x RS232	1x RS232/RS422/485 5x RS232	1x RS232/RS422/485 3x RS232
	USB	4x USB 3.0 6x USB 2.0	4x USB 3.0 6x USB 2.0	8x USB 3.1
	Audio	1x Line-out, 1x MIC-in	1x Line-out, 1x MIC-in	1x Line-out, 1x MIC-in
Storage Interface	SATA HDD	2x 2.5" HDD or SSD	2x 2.5" HDD or SSD	1x 2.5" HDD or SSD
	mSATA/M.2	2x mSATA (AMI221AF) 1x mSATA (AMI221EF)	2x mSATA (AMI222AF) 1x mSATA (AMI222EF)	3x M.2 (B-Key/E-Key/M-Key)
	PCI Express	1x PCI-E (x16) + 1x PCI	1x PCI-E (x8) + 1x PCI-E (x1) or 1x PCI-E (x16) + 1x PCI	N/A
Expansion Slots	Mini PCI-E/M.2	2x Mini PCI-E slot	4x Mini PCI-E slot	N/A
	Power input	12V(-10%) ~ 24V(+10%) DC-input	12V(-10%) ~ 24V(+10%) DC-input	12V(±10%) or 18V(-10%)~24V(+10%) DC-input
Power	Power Connector	3-pin terminal block DC-jack (optional)	3-pin terminal block DC-jack (optional)	5-pin DC-In terminal block
	Power Protection	OVP, UVP, Reverse voltage protection	OVP, UVP, Reverse voltage protection	OVP, UVP, Reverse voltage protection
	Dimensions	210mm (W) x 265mm (D) x 108.6mm (H)	210mm (W) x 265mm (D) x 128.6mm (H)	210mm (W) x 265mm (D) x 77mm (H)
Mechanical	Weight	4.3 kg	4.3 kg	4 kg
	Construction	Aluminum & steel	Aluminum & steel	Aluminum & steel
	Chassis Color	Silver & Gray	Silver & Gray	Silver & Gray
	Mounting	Desktop & wall mount	Desktop & wall mount	Desktop & wall mount
	Operating Temperature	-10°C~50°C (14°F~122°F)	-10°C~50°C (14°F~122°F)	-20°C~70°C (-4°F~158°F) (for 35W CPU)
Environmental	Storage Temperature	-20°C~80°C (-4°F~176°F)	-20°C~80°C (-4°F~176°F)	-20°C~80°C (-4°F~176°F)
	Certification	CE/FCC/LVD	CE/FCC/LVD	CE/FCC/LVD
	Page No.	p. 38 - 39	p. 40 - 41	p. 42 - 43

Comparison Table

Expandable Modular System



Models		AMI231	AMI232	CMI300-988
System	Processor	9th/8th Gen Intel® Core™ i7/i5/i3 Desktop Processors (35W TDP)	9th/8th Gen Intel® Core™ i7/i5/i3 Desktop Processors (35W TDP)	AMD Ryzen™ Embedded V1000 Series
	PCH	Intel® Q370 PCH	Intel® Q370 PCH	N/A
	Memory	2x 8GB DDR4-2666/2400 SO-DIMM	2x 8GB DDR4-2666/2400 SO-DIMM	2x 4GB DDR4-2400 SO-DIMM
	Max. Memory	32GB	32GB	32GB
	Graphics	Intel® HD Graphics	Intel® HD Graphics	AMD V-series APU built-in GPU
I/O Interface	Display	1x HDMI + DisplayPort 1x DVI-D	1x HDMI + DisplayPort 1x DVI-D	1x HDMI + DisplayPort
	Ethernet	1x Intel® I219LM GbE PHY 1x Intel® I210IT Gigabit LAN 1x Intel® I211AT Gigabit LAN 1x Intel® I211AT Gigabit LAN *2 supports PoE+*	1x Intel® I219LM GbE PHY 1x Intel® I210IT Gigabit LAN 1x Intel® I211AT Gigabit LAN 1x Intel® I211AT Gigabit LAN *2 supports PoE+*	2x Intel® I211AT Gigabit LAN
	Serial Port	1x RS232/RS422/485 3x RS232	1x RS232/RS422/485 3x RS232	2x RS232/RS422/485 2x RS232
	USB	8x USB 3.1	8x USB 3.1	4x USB 3.1
	Audio	1x Line-out, 1x MIC-in	1x Line-out, 1x MIC-in	1x Line-out, 1x Line-in, 1x MIC-in
	Digital I/O	4-in & 4-out (optional)	4-in & 4-out (optional)	N/A
Storage Interface	SATA HDD	2x 2.5" HDD or SSD	2x 2.5" HDD or SSD	N/A
	mSATA/M.2	3x M.2 (B-Key/E-Key/M-Key)	3x M.2 (B-Key/E-Key/M-Key)	1x M.2 (M-Key)
Expansion Slots	PCI Express	1x PCI-E (x16) + 1x PCI	1x PCI-E (x8) + 1x PCI-E (x1) or 1x PCI-E (x16) + 1x PCI	N/A
	Mini PCI-E/M.2	N/A	N/A	N/A
Power	Power input	12V(±10%) or 18V(-10%)~24V(+10%) DC-input	12V(±10%) or 18V(-10%)~24V(+10%) DC-input	12V(-10%) ~ 24V(+10%) DC-input
	Power Connector	5-pin DC-in terminal block	5-pin DC-in terminal block	3-pin terminal block DC-jack (optional)
	Power Protection	OVP, UV, Reverse voltage protection	OVP, UV, Reverse voltage protection	N/A
Mechanical	Dimensions	210mm (W) x 285mm (D) x 109mm (H)	210mm (W) x 285mm (D) x 128.6mm (H)	200mm (W) x 200mm (D) x 60mm (H)
	Weight	4.5 kg	4.9 kg	1.8 kg
	Construction	Aluminum & steel	Aluminum & steel	Aluminum & steel
	Chassis Color	Silver & Gray	Silver & Gray	Black
	Mounting	Desktop or wall mount	Desktop or wall mount	Desktop & wall mount Optional VESA mount kit
Environmental	Operating Temperature	-20°C to 70°C (-4°F~158°F) (for 35W CPU)	-20°C to 70°C (-4°F~158°F) (for 35W CPU)	0°C~45°C (32°F~113°F)
	Storage Temperature	-20°C~80°C (-4°F~176°F)	-20°C~80°C (-4°F~176°F)	-20°C~80°C (-4°F~176°F)
	Certification	CE/FCC/LVD	CE/FCC/LVD	CE/FCC/LVD

Page No. p. 44 - 45

p. 46 - 47

p. 63 - 64

Comparison Table

SBC System



Models		ASB200-915	ASB200-916	ASB200-918
System	Processor	6th Gen Intel® Core™ U-series Processor	7th Gen Intel® Core™ U-series Processor	AMD Ryzen™ Embedded V1000 /R1000 Series
	PCH	N/A	N/A	N/A
	Memory	2x DDR3L-1600 SO-DIMM	2x DDR3L-1600 SO-DIMM	2x 8GB DDR4-2666 SO-DIMM
	Max. Memory	16GB	32GB	32GB
	Graphics	Intel® HD Graphics 520	Intel® HD Graphics 620	AMD Radeon™ Vega integrated
I/O Interface	Display	1x DisplayPort	1x DisplayPort, 1x HDMI	2x HDMI
	Ethernet	1x Intel® I219LM Gigabit LAN PHY 1x Intel® I211AT Gigabit LAN	1x Intel® I219LM Gigabit LAN PHY 1x Intel® I211AT Gigabit LAN	2x Intel® I211AT PCI-E Gigabit LAN
	Serial Port	1x RS232/RS422/485 3x RS232	1x RS232/RS422/485 3x RS232 ^a	1x RS232/422/485
	USB	1x USB 3.1 Type-C 4x USB 3.0 2x USB 2.0	4x USB 3.0 2x USB 2.0	4 x USB 3.1 1x USB2.0
	Audio	1x Line-out, 1x Line-in, 1x MIC-in	1x Line-out, 1x Line-in, 1x MIC-in	1x Audio Jack for Line-out/ Line-in/ MIC-in
Storage Interface	SATA HDD	1x 2.5" HDD or SSD	1x 2.5" HDD or SSD	1x 2.5" HDD or SSD
	mSATA/M.2	1x mSATA	1x mSATA	1x mSATA
	PCI Express	N/A	N/A	N/A
Expansion Slots	Mini PCI-E/M.2	1x Mini PCI-E slot	1x Mini PCI-E slot	2x M.2 (M-Key/E-Key)
	Power input	12V(-10%) ~ 24V(+10%) DC-input	12V(-10%) ~ 24V(+10%) DC-input	12V(-10%) ~ 24V(+10%) DC-input
Power	Power Connector	3-pin terminal block DC-jack (optional)	3-pin terminal block DC-jack (optional)	3-pin terminal block DC-jack (optional)
	Power Protection	N/A	N/A	N/A
	Dimensions	180mm(W) x 150mm(D) x 66mm(H)	180mm(W) x 150mm(D) x 66mm(H)	240mm (W) x 162mm (D) x 42mm (H)
Mechanical	Weight	1.8 kg	1.8 kg	1.7 kg
	Construction	Aluminum & steel	Aluminum & steel	Aluminum & steel
	Chassis Color	Black	Black	Black
	Mounting	Desktop & wall mount Optional VESA mount kit	Desktop & wall mount Optional VESA mount kit	Desktop or wall mount Optional VESA mount kit
	Operating Temperature	-10°C~50°C (14°F~122°F)	-10°C~50°C (14°F~122°F)	0°C~45°C (32°F~113°F)
Environmental	Storage Temperature	-20°C~80°C (-4°F~176°F)	-20°C~80°C (-4°F~176°F)	-20°C ~80°C (-4°F~176°F)
	Certification	CE/FCC/LVD	CE/FCC/LVD	CE/LVD/FCC

Comparison Table

SBC System



Models		ASB200-919	CSB200-818	CSB200-822
System	Processor	8th Gen Intel® Core™ U-Series Processor	Intel® Atom® Processors E3930 & Pentium® N4200 / Celeron® N3350	Intel® Pentium® Silver Processor J5040
	PCH	N/A	N/A	N/A
	Memory	2x 8GB DDR4-2666 SO-DIMM	1x DDR3L-1866 SO-DIMM	1x DDR4-2400 SO-DIMM
	Max. Memory	32GB	8GB	8GB
	Graphics	Intel® UHD Graphics 610	Intel® HD Graphics 505	Intel® UHD Graphics 605
I/O Interface	Display	2x DisplayPort (1 by Type-C)	1x HDMI	1x HDMI, 1x DP
	Ethernet	1x Intel® I219LM Gigabit LAN PHY for IB919AF Series (Intel® I219V Gigabit LAN PHY for IB919EF Series) 1x Intel® I211AT PCI-E Gigabit LAN	2x Intel® I210IT Gigabit LAN (For E-series CPU) 2x Intel® I210AT Gigabit LAN (For N-series CPU)	2x Intel® I211IT Gigabit LAN
	Serial Port	1x RS232/422/485	1x RS232/RS422/485 3x RS232	1x RS232/RS422/485 3x RS232
	USB	4x USB3.1	4x USB 3.0 2x USB 2.0	4x USB 3.0 2x USB 2.0
	Audio	N/A	1x Line-out, 1x MIC-in	1x Line-out, 1x MIC-in
Storage Interface	SATA HDD	1x 2.5" HDD or SSD	1x 2.5" HDD or SSD	1x 2.5" HDD or SSD
	mSATA/M.2	N/A	1x mSATA	1x mSATA
	PCI Express	N/A	N/A	N/A
Expansion Slots	Mini PCI-E/M.2	2x M.2 (M-Key/E-Key)	2x Mini PCI-E slot	2x M.2 (B-Key/E-key)
	Power input	12V(-10%) ~ 24V(+10%) DC-input	12V(-10%) ~ 24V(+10%) DC-input	12V(±10%) DC-input
	Power Connector	3-pin terminal block DC-jack (optional)	3-pin terminal block DC-jack (optional)	3-pin terminal block DC-jack (optional)
Power	Power Protection	N/A	N/A	N/A
	Dimensions	180mm(W) x 150mm(D) x 66mm(H)	172mm(W) x 111.6mm(D) x 53mm(H)	172mm(W) x 111.6mm(D) x 53mm(H)
	Weight	1.5kg	1.1 kg	1.1 kg
	Construction	Aluminum & steel	Aluminum & steel	Aluminum & steel
	Chassis Color	Black	Black	Black
Mechanical	Mounting	Desktop or wall mount	Desktop & wall mount	Desktop & wall mount
	Operating Temperature	0°C~45°C (32°F~113°F) *with air flow 0.9m/s	For E3940 CPU : -30°C~65°C (22°F~149°F) (With SSD) *With air flow For N-Series CPU: -10°C ~45°C(14°C~113°C) (With HDD) *With air flow	0°C~45°C (14°F~113°F) (With HDD) *With air flow 0°C~50°C (32°F~122°F) (With SSD) *With air flow
	Storage Temperature	-20°C ~80°C(-4°F~176°F)	-40°C~85°C (-40°F~185°F)	-40°C~85°C (-40°F~185°F)
	Certification	CE/LVD/FCC	CE/FCC/LVD	CE/FCC/LVD
	Page No.	p. 69 - 70	p. 71	p. 72



Rear I/O

Specifications

System Mainboard	IB801/ IB802T (F-1 Stepping)
CPU Type	Intel® Atom® x7-E3950/x5-E3940/x5-E3930 & Pentium® N4200/ Celeron® N3350 Series Processors
System Speed	Up to 2.5GHz
Memory	1x 4GB DDR3L-1866 SO-DIMM, Max. 8GB
Rear Panel External I/O	1x DVI-I + 1x DisplayPort 4x USB 3.0 ports 2x RJ45 Gigabit Ethernet port 3x LED indicators (HDD, WLAN, WWAN) 1x power button with green LED (Silver power button with Green LED for AGS100, Black power button with Blue LED for AGS100T) 1x 3-pin DC-in terminal block for 9V-36V 1x Antenna hole for WLAN module
Left Panel External I/O	2x RS232/422/485 port for COM#1/COM#2 1x Antenna hole for WLAN module 1x Line-out (AGS100 for 2W mono speaker, AGS100T for stereo output)
Right Panel External I/O	1x SIM card slot
Expansion Slots	1x Full-size Mini PCI-E socket (USB 2.0 + PCI-E + SATA) 1x 2230 M.2 E-Key socket for WLAN & BT (USB 2.0 + PCI-E) 1x 3042 M.2 B-Key socket for WWAN & SSD (USB 2.0 + SATA)
Storage	1x mSATA socket (Mini-PCI-E) 1x 2242 M.2 B-Key socket for SSD
Construction	Aluminum & steel
Chassis Color	Silver & Gray
Mounting	DIN-rail mounting (DIN-rail mount kit included) Desktop or wall mounting (wall mount kit included)
Dimensions	160mm (W) x 110mm (D) x 44mm (H) 6.3" (W) x 4.33" (D) x 1.73" (H)
Weight	1kg
Operating Temperature	For E-series CPU: -40°C~70°C (-40°F~158°F) For N-series CPU: -20°C~60°C (-4°F~140°F)
Storage Temperature	-40°C ~ 85°C (-40°F~185°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	Operating: 2.0 grms / 5~500Hz / random operation (with IEC 60068-2-64) Non-Operating: 3.0 grms / 5~500Hz / random operation (with IEC 60068-2-64)
Shock	Operating: 30G/11 ms Duration (with MIL-STD-810G) Non-operating: 40G/11 ms Duration (with MIL-STD-810G)
Certification	CE / LVD / FCC Class B / CCC (AGS100 Only) / UL

Features

- Intel® Atom® x7-E3950/x5-E3940/x5-E3930 & Pentium® N4200 / Celeron® N3350 Series Processors
- Over/Under/Reverse voltage protection
- **Wide-range operating temperature from -40°C to 70°C**
- 9V~36V DC wide-range power input
- Supports DIN-rail mount & wall mount
- Supports TPM2.0 (AGS100T Only)
- 2x RS232/422/485 serial ports
- Rugged and fanless design

Ordering Information


AGS100-I50/ AGS100T-I50	Fanless DIN-rail System supports TPM2.0 (AGS100T Series only) w/ Intel® Atom® Processor x7-E3950, 2x COM, 1x 4GB DDR3L industrial-grade memory, 1x 64GB MLC industrial-grade mSATA SSD, w/o power adaptor
AGS100-I40/ AGS100T-I40	Fanless DIN-rail System supports TPM2.0 (AGS100T Series only) w/ Intel® Atom® Processor x5-E3940, 2x COM, 1x 4GB DDR3L industrial-grade memory, 1x 64GB MLC industrial-grade mSATA SSD, w/o power adaptor
AGS100-I30/ AGS100T-I30	Fanless DIN-rail System supports TPM2.0 (AGS100T Series only) w/ Intel® Atom® Processor x5-E3930, 2x COM, 1x 4GB DDR3L industrial-grade memory, 1x 64GB MLC industrial-grade mSATA SSD, w/o power adaptor
AGS100-420/ AGS100T-420 (MOQ)	Fanless DIN-rail System supports TPM2.0 (AGS100T Series only) w/ Intel® Pentium® Processor N4200, 2x COM, 1x 4GB DDR3L industrial-grade memory, 1x 64GB MLC industrial-grade mSATA SSD, w/o power adaptor
AGS100-335/ AGS100T-335	Fanless DIN-rail System supports TPM2.0 (AGS100T Series only) w/ Intel® Celeron® Processor N3350, 2x COM, 1x 4GB DDR3L industrial-grade memory, 1x 64GB MLC (industrial-grade) mSATA SSD, w/o power adaptor
60W power adaptor (optional)	60W (12V@5A) power adaptor (bare wire type) Compatible with IEC62368-1/EN62368-1
Optional Accessories	WiFi/BT antenna kit, 4G/LTE antenna kit, GPS antenna kit

AGS100/AGS100T


Intel® Entry Processor Ultra Low Power Reference Table

Processor Number	Intel® Pentium® Processors - 14 nm Apollo-Lake SoC Platform	Intel® Celeron® Processors - 14 nm Apollo-Lake SoC Platform	Intel® Atom® Processors - 14nm Apollo-Lake-I SoC Platform		
	N4200	N3350	x7-E3950	x5-E3940	x5-E3930
Base Freq (GHz)	1.1	1.1	1.6	1.6	1.3
Intel® Turbo Boost Technology 2.0 (GHz)	2.5	2.4	2.0	1.8	1.8
Last Level Cache	2M	2M	2M	2M	2M
Cores/Threads	4/4	2/2	4/4	4/4	2/2
Memory Speed (DDR3L)	1866	1600	1866	1866	1866
TDP	6W	6W	12W	9.5W	6.5W

Product Appearance

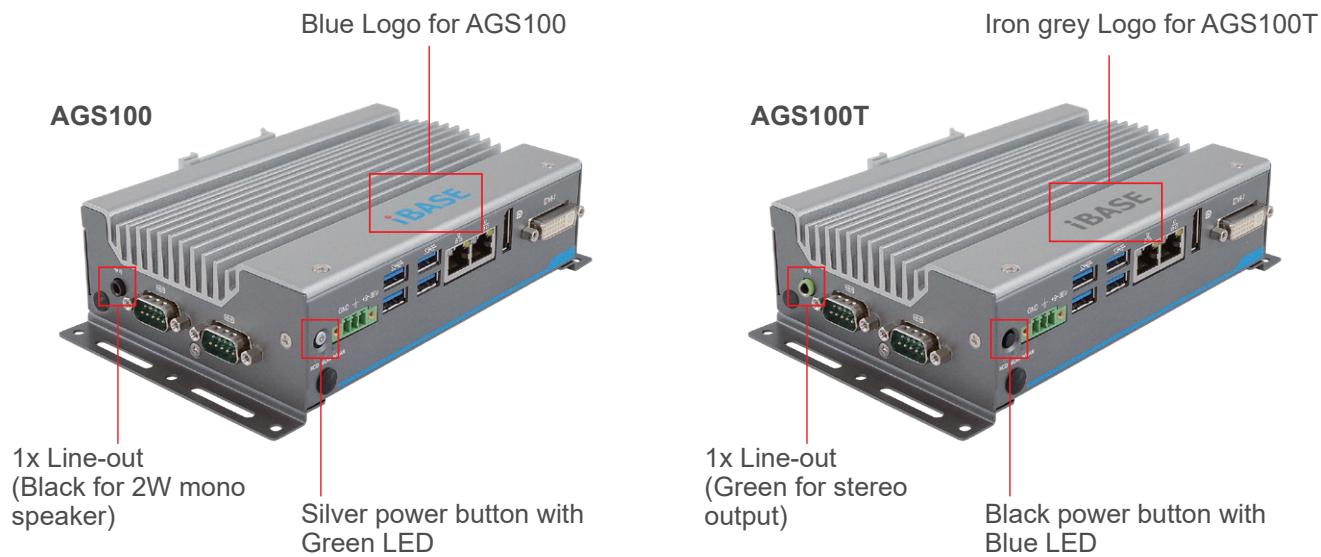

Dimensions and Drawing

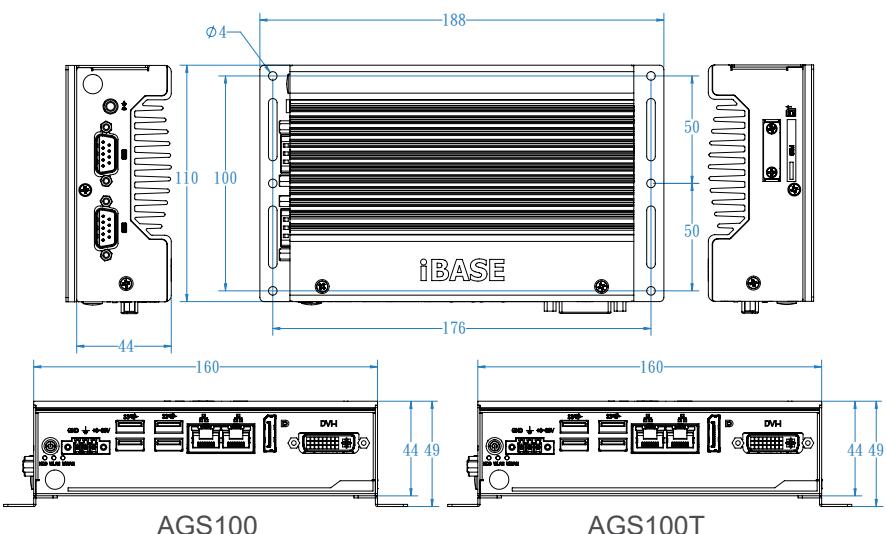

DIN-rail Mounting



1 AGS Series

2 AMS Series

3 AMI Series

4 CMI Series

5 ASB Series

6 CSB Series



Rear I/O

Specifications

System Mainboard	IB801/ IB802T (F-1 Stepping)
CPU Type	Intel® Atom® x7-E3950/x5-E3940/x5-E3930 & Pentium® N4200 / Celeron® N3350 Series Processors
System Speed	Up to 2.5GHz
Memory	1x 4GB DDR3L-1866 SO-DIMM, Max. 8GB
Rear Panel External I/O	1x DVI-I + 1x DisplayPort connector 4x USB 3.0 ports, 1x USB 2.0 port 2x RJ45 Gigabit Ethernet port 3x LED indicators (HDD, WLAN, WWAN) 1x power button with Green LED (Silver power button with Green LED for AGS102, Black power button with Blue LED for AGS102T) 1x 3-pin DC-in terminal block for 9V-36V 1x Antenna hole for WLAN module AGS102T: 2x RS232/422/485 ports for COM#3/COM#4 AGS102: 2x RS232 ports for COM#3/COM#4 1x 4-in & 4-out GPIO with isolation
Left Panel External I/O	2x RS232/422/485 ports for COM#1/COM#2 1x Antenna hole for WLAN module 1x Line-out (AGS102 for 2W mono speaker, AGS102T for stereo output)
Right Panel External I/O	1x SIM card slot
Expansion Slots	1x Full-size Mini PCI-E socket (USB 2.0 + PCI-E + SATA) 1x 2230 M.2 E-Key socket for WLAN & BT (USB 2.0 + PCI-E) 1x 3042 M.2 B-Key socket for WWAN & SSD (USB 2.0 + SATA)
Storage	1x mSATA socket (Mini-PCI-E) 1x 2242 M.2 B-Key socket for SSD
Construction	Aluminum & steel
Chassis Color	Silver & Gray
Mounting	DIN-rail mounting (DIN-rail mount kit included) Desktop or wall mounting (wall mount kit included)
Dimensions	160mm (W) x 110mm (D) x 44mm (H) 6.3" (W) x 4.33" (D) x 1.73" (H)
Weight	1kg
Operating Temperature	For E-series CPU: -40°C~70°C (-40°F~158°F) For N-series CPU: -20°C~60°C (-4°F~140°F)
Storage Temperature	-40°C ~ 85°C (-40°F~185°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	Operating: 2.0 grms / 5~500Hz / random operation (with IEC 60068-2-64) Non-Operating: 3.0 grms / 5~500Hz / random operation (with IEC 60068-2-64)
Shock	Operating: 30G/11 ms Duration (with MIL-STD-810G) Non-operating: 40G/11 ms Duration (with MIL-STD-810G)
Certification	CE / LVD / FCC Class B / CCC (AGS102 Only) / UL

Features

- Intel® Atom® x7-E3950/x5-E3940/x5-E3930 & Pentium® N4200 / Celeron® N3350 Series Processors
- GPIO 4-in & 4-out with isolation function
- Over/Under/Reverse voltage protection
- **Wide-range operating temperature from -40°C to 70°C**
- 9V~36V DC wide-range power input
- Supports DIN-rail mount & wall mount
- Supports TPM2.0 (AGS102T Only)
- AGS102T: 4x RS232/422/485 serial ports
AGS102: 2x RS232/422/485 and 2x RS232 serial ports
- Rugged and fanless design

Ordering Information


AGS102-I50/ AGS102T-I50	Fanless DIN-rail System supports TPM2.0 (AGS102T Series only) w/ Intel® Atom® Processor x7-E3950, 4x COM, 1x 4GB DDR3L industrial-grade memory, 1x 64GB MLC industrial-grade mSATA SSD, w/o power adaptor
AGS102-I40/ AGS102T-I40	Fanless DIN-rail System supports TPM2.0 (AGS102T Series only) w/ Intel® Atom® Processor x5-E3940, 4x COM, 1x 4GB DDR3L industrial-grade memory, 1x 64GB MLC industrial-grade mSATA SSD, w/o power adaptor
AGS102-I30/ AGS102T-I30	Fanless DIN-rail System supports TPM2.0 (AGS102T Series only) w/ Intel® Atom® Processor x5-E3930, 4x COM, 1x 4GB DDR3L industrial-grade memory, 1x 64GB MLC industrial-grade mSATA SSD, w/o power adaptor
AGS102-420/ AGS102T-420 (MOQ)	Fanless DIN-rail System supports TPM2.0 (AGS102T Series only) w/ Intel® Pentium® Processor N4200, 4x COM, 1x 4GB DDR3L industrial-grade memory, 1x 64GB MLC industrial-grade mSATA SSD, w/o power adaptor
AGS102-335/ AGS102T-335	Fanless DIN-rail System supports TPM2.0 (AGS102T Series only) w/ Intel® Celeron® Processor N3350, 4x COM, 1x 4GB DDR3L industrial-grade memory, 1x 64GB MLC industrial-grade mSATA SSD, w/o power adaptor
60W power adaptor (optional)	60W (12V@5A) power adaptor, bare wire type Compatible with IEC62368-1/EN62368-1
Optional Accessories	WiFi/BT antenna kit, 4G/LTE antenna kit, GPS antenna kit

AGS102/AGS102T


Intel® Entry Processor Ultra Low Power Reference Table

Processor Number	Intel® Pentium® Processors - 14 nm Apollo-Lake SoC Platform	Intel® Celeron® Processors - 14 nm Apollo-Lake SoC Platform	Intel® Atom® Processors - 14nm Apollo-Lake-I SoC Platform		
	N4200	N3350	x7-E3950	x5-E3940	x5-E3930
Base Freq (GHz)	1.1	1.1	1.6	1.6	1.3
Intel® Turbo Boost Technology 2.0 (GHz)	2.5	2.4	2.0	1.8	1.8
Last Level Cache	2M	2M	2M	2M	2M
Cores/Threads	4/4	2/2	4/4	4/4	2/2
Memory Speed (DDR3L)	1866	1600	1866	1866	1866
TDP	6W	6W	12W	9.5W	6.5W

Product Appearance

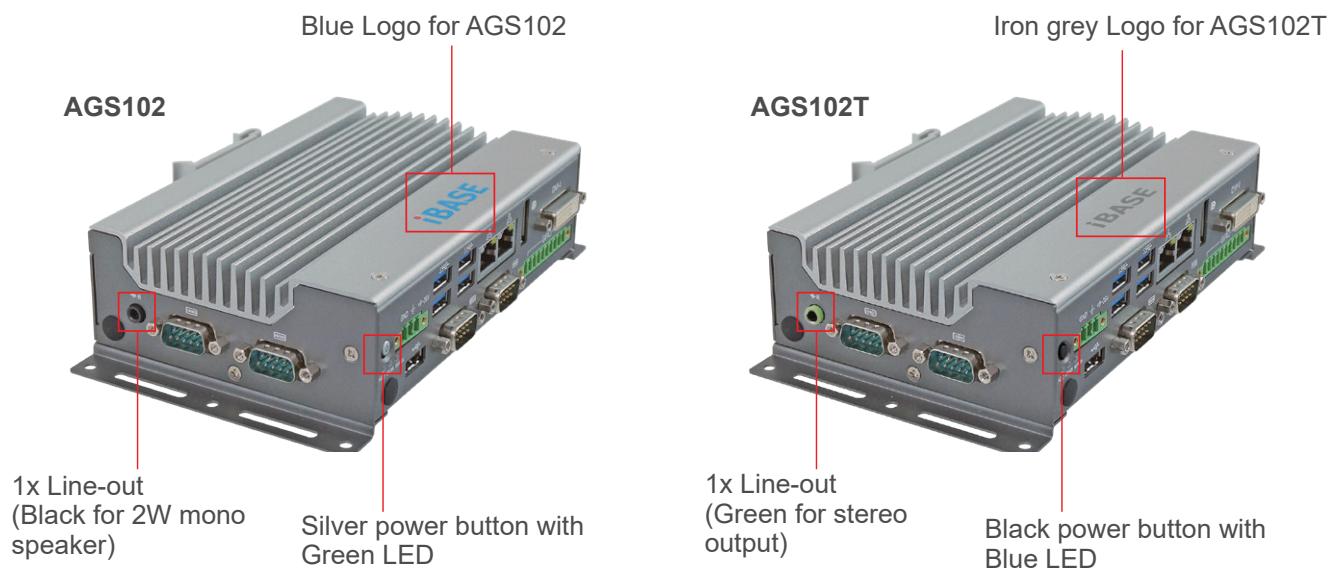

Dimensions and Drawing

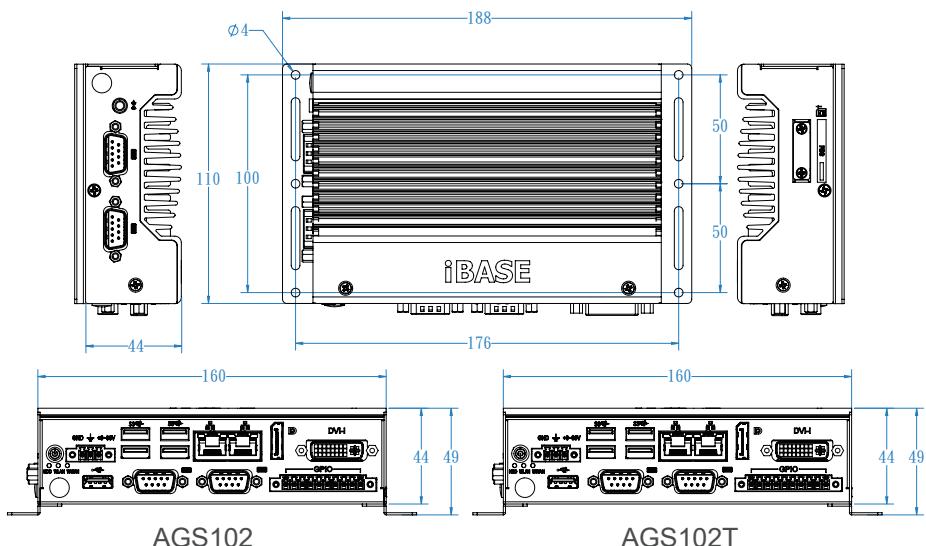

DIN-rail Mounting



1 AGS Series

2 AMS Series

3 AMI Series

4 CMI Series

5 ASB Series

6 CSB Series



Rear I/O

1 AGS Series

2 AMS Series

3 AMI Series

4 CMI Series

5 ASB Series

6 CSB Series

Features

- Intel® Atom® x6413E/x6211E Processors
- GPIO 4-in/4-out & 1x DVI-I & 1x HDMI
- Over/Under/Reverse voltage protection
- Extended operating temperature from -20°C to 70°C
- 9V~36V DC wide-range power input
- 1x 3042/2242 M.2 B-Key, 1x Micro SD, optional 1x 2.5" SSD
- 3x Gigabit Ethernet, 3x full-size Mini PCI-E sockets & 2x SIM card slots
- 4x COM (RS232/422/485), 2x USB 3.1 & 2x USB 2.0
- Supports DIN-rail mount, wall mount & TPM 2.0

Ordering Information

AGS103T-6413M	Fanless DIN-rail System supports TPM2.0 w/ Intel® Atom® Processor x6413E, 3x Gigabit Ethernet, 4x COM, w/o memory, storage, power adaptor
AGS103TS-6413M	Fanless DIN-rail System supports TPM2.0 w/ Intel® Atom® Processor x6413E, 3x Gigabit Ethernet, 4x COM, w/o memory, storage, power adaptor, w/ 2.5" storage slot
AGS103T-6211M	Fanless DIN-rail System supports TPM2.0 w/ Intel® Atom® Processor x6211E, 3x Gigabit Ethernet, 4x COM, w/o memory, storage, power adaptor
AGS103TS-6211M	Fanless DIN-rail System supports TPM2.0 w/ Intel® Atom® Processor x6211E, 3x Gigabit Ethernet, 4x COM, w/o memory, storage, power adaptor, w/ 2.5" storage slot

Specifications

System Mainboard	SL100
CPU Type	Intel® Atom® QC x6413E (1.5GHz/3.0GHz, 1.5MB cache, 9W TDP) Intel® Atom® DC x6211E (1.2GHz/3.0GHz, 1.5MB cache, 6W TDP)
System Speed	Up to 3.0GHz
Memory	1x 4GB DDR4-3200 SO-DIMM, Max. 16GB
Rear Panel External I/O	1x DVI-I + 1x HDMI 2x USB 3.1 ports, 2x USB 2.0 port 3x RJ45 Gigabit Ethernet port 4x LED indicators (GPIO, WLAN, WWAN) 1x power button with Green LED 1x 3-pin DC-in terminal block for 9V-36V 2x Antenna hole for WLAN module 2x RS232/422/485 ports for COM#3/COM#4 1x 4-in & 4-out GPIO with isolation, 1x Micro SD
Left Panel External I/O	2x RS232/422/485 ports for COM#1/COM#2 1x Antenna hole for WLAN module 1x Line-out/ Mic-in
Right Panel External I/O	2x SIM card slot 1x Antenna hole for WLAN module
Expansion Slots	1x Full-size Mini PCI-E socket (USB 2.0) 2x Full-size Mini PCI-E socket (USB 2.0 + PCI-E) 1x 3042/2242 M.2 B-Key socket (USB 2.0 + PCI-E+SATA)
Storage	1x 3042/2242 M.2 B-Key socket ,1x 2.5" SSD (Optional)
Construction	Aluminum & steel
Chassis Color	Silver & Gray
Mounting	DIN-rail mounting (DIN-rail mount kit included) Desktop or wall mounting (wall mount kit included)
Dimensions	218mm(W) x 110mm(D) x 57mm(H) w/ Wall mount kit 8.58"(W) x 4.33"(D) x 2.24"(H)
Weight	TBD
Operating Temperature	-20°C~70°C (-4°F~158°F)
Storage Temperature	-40°C ~ 85°C (-40°F~185°F)
Relative Humidity	5~90% @ 60°C, (non-condensing)
Vibration	Operating: 1.0 grms / 5~500Hz
Shock	Operating: 30G/11 ms Duration Non-operating: 40G/11 ms Duration
Certification	Prescan

Product Appearance

AGS103T



SIM Card Slot

AGS103TS



Additional 2.5" Storage Slot




COM1 & COM2



Easily Accessible Storage Device

Dimensions and Drawing

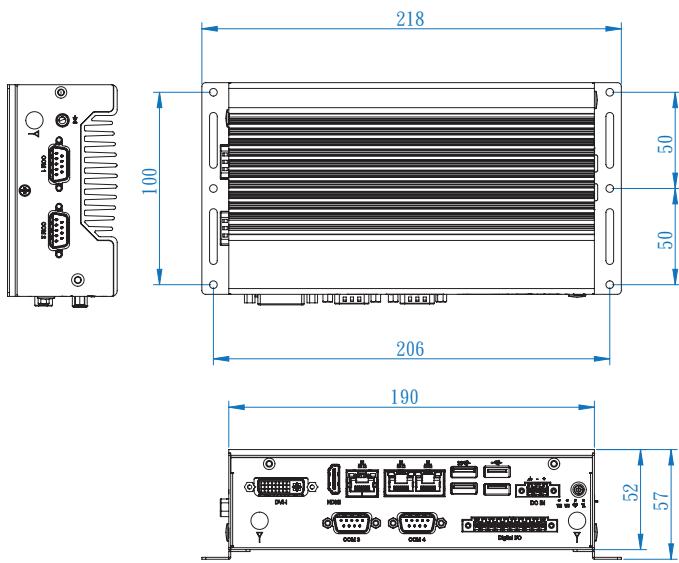

DIN-rail Mounting





Specifications

System Mainboard	MB300-TLP with Intel® Q170 PCH
CPU Type	7th/6th Gen Intel® Core™ i7/i5/i3 desktop Processors
System Speed	Up to 3.4GHz
Memory	2x DDR4-2133 SO-DIMM, Max. 32GB
Front Panel External I/O	2x Antenna hole for WLAN module
Rear Panel External I/O	1x DVI-I + 1x DisplayPort connector 1x Audio jack for Line-out 4x USB 3.0 ports, 2x USB 2.0 ports 1x Red HDD LED, 1x green power LED 2x Error LED by programming 1x Power button 1x 2-pin terminal block for external power button 1x RS232/422/485 port for COM#1 1x RS232 port for COM#2 2x RJ45 Gigabit Ethernet port 1x 3-pin DC-in terminal block for 24V(±10%)
Expansion Slots	1x Mini PCI-E sockets (full-size) 1x 4 Axis Pulse Command Motion Control 1x 80-ch. Isolated Digital I/O (48-ch. DI / 32-ch. DO)
Storage	2x 2.5" SSD + 1x mSATA socket
Construction	Aluminum & steel
Chassis Color	Silver & Navy blue
Mounting	Desktop or wall mounting (wall mount kit included) Side mounting DIN-rail mounting (optional)
Dimensions	275mm (W) x 140mm (D) x 117mm (H) 10.83" (W) x 5.51" (D) x 4.61" (H)
Weight	3.1kg
Operating Temperature	-10°C to 60°C (14°F ~ 140°F)*With airflow -10°C to 50°C (14°F to 122°F) without airflow
Storage Temperature	-20°C to 80°C (-4°F to 176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	Non-Operating: 1.0 grms / 5~500Hz / random operation Operating: 0.25 grms / 5~500Hz / random operation
Shock	Operating: 20 g / 11 ms Non-operating: 40 g / 11 ms
Certification	CE / LVD / FCC Class B

Features

- Fanless motion control system with IBASE MB300-TLP customized board
- 7th/6th Gen Intel® Core™ i7/i5/i3 Processors
- 2MB MRAM module (optional)
- Front removable drive bay for HDD/SSD (supports RAID 0/1)
- 4 Axis Pulse Command Motion Control
- 80-ch. Isolated Digital I/O (48-ch. DI / 32-ch. DO)
- Over/Under/Reverse voltage protection
- Supports DIN-rail mount & wall mount
- iSMART, iAMT (11.6)

Ordering Information

MAI602-M4D80	Fanless System w/ Intel® Core™ i5-6500TE (2.3GHz) CPU, 2x 4GB DDR4 SO-DIMM, 1x 2.5" 128GB MLC industrial-grade SSD, IP302 riser card, 4 Axis Motion card, 80-ch. Isolated Digital I/O card, w/o power adaptor
180W power adaptor	180W(24V @ 7.5A) power adaptor, bare wire type Compatible with IEC62368-1/EN62368-1

Recommended Processor list


Model	TDP	Base Freq	Turbo Freq	Cache	Cores / Threads
i7-7700T	35W	2.9 GHz	3.8 GHz	8M	4/8
i7-6700TE	35W	2.4 GHz	3.4 GHz	8M	4/8
i5-7500T	35W	2.7 GHz	3.3 GHz	6M	4/4
i5-6500TE	35W	2.3 GHz	3.3 GHz	6M	4/4
i3-7101TE	35W	3.4 GHz	N/A	3M	2/4
i3-6100TE	35W	2.7 GHz	N/A	4M	2/4
G4400TE	35W	2.9 GHz	N/A	3M	2/2
G3900TE	35W	2.6 GHz	N/A	2M	2/2

Compact size
for material &
cost reduction



Add-on card
expansion slot

Expansion Cards

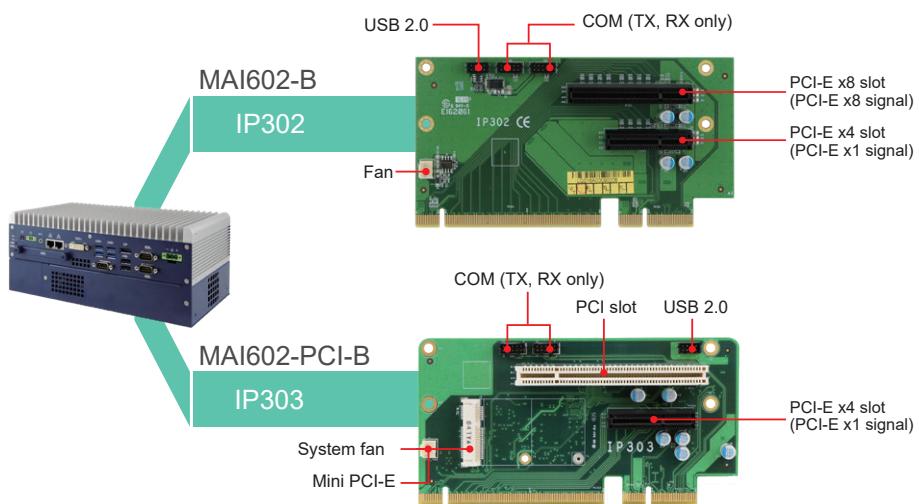

Flexible Mounting


Side Mounting



DIN-rail Mounting



Dimensions and Drawing

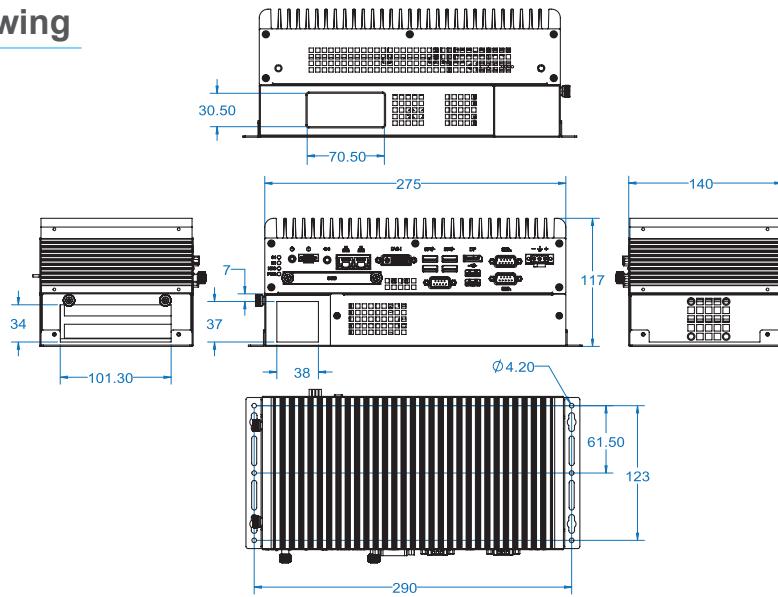



Rear I/O

Specifications

System Mainboard	Customized board
CPU Type	9th/8th Gen Intel® Core™ Processor
System Speed	Up to 4.0GHz
Memory	2x 4GB DDR4-2666/2400 SO-DIMM
Front Panel External I/O	2x RS232 (Optional COM port cable)
Rear Panel External I/O	1x RS232/RS422/RS485 1x RS232 (Optional COM port cable kit) 1x Power On/Off switch 3x DisplayPort (1x DP via pin-header) 4x USB 2.0 4x RJ45 (Gigabit Ethernet) 4x USB 3.1 1x Line-Out 1x DC input (3-pin Phoenix connector with lock)
Expansion Slots	ABP-IP701: 1x PCI-E(x16) + 1x PCI-E(x4) ABP-IP702: 1x PCI + 1x PCI-E(x16) ABP-IP703: 2x PCI
Storage	2x 2.5" SATA HDD or SSD (Optional 2nd drive bay bracket)
Construction	SGCC
Chassis Color	Silver
Mounting	Desktop or wall mount
Dimensions	297.4mm (W) x 266.2mm(D) x 78.5mm (H) 11.71" (W) x 10.48" (D) x 3.09" (H)
Weight	5.9kg
Operating Temperature	0°C~55°C (32°F~131°F)

Features

- 9th/8th Gen Intel® Core™ Processor (35W TDP)
- 2x DDR4 SO-DIMM, Max. 32GB
- 4x Gigabit LAN
- 512k SRAM on board
- 2x expansion slots
- 3x DisplayPort outputs
- 2.5" drive bays (supports RAID 0/1)



MB211

Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	10~95%, non-condensing@60 degree C
Vibration	Operating: 3Grms / 5~500Hz
Shock	Operating: 20 g / 11 ms Non-operating: 40 g / 11 ms
Certification	CE/FCC Class B/ LVDS (Prescan only)

Ordering Information


AMS210	Box PC Controller with Intel® Core™ i7-9700TE Processor CPU with 8GB DDR4 SO-DIMM, 2.5" 500GB SATA HDD/SSD and 1x PCI + 1x PCI-E(x16) expansion slots
AMS210M	Box PC Controller MB211 w/o CPU / memory/ HDD / riser card / power adaptor, desktop stand & mounting brackets (RoHS2)
270W Power Adaptor Kit (optional)	270W (24V@11.25A) power kit compatible with IEC62368-1/EN62368-1

Recommended Processor list


Model	TDP	Base Freq	Turbo Freq	Cache	Cores / Threads
i7-9700TE	35W	1.8 GHz	3.8 GHz	12M	8/8
i7-8700T	35W	2.4 GHz	4.0 GHz	12M	6/12
i5-9500TE	35W	2.2 GHz	3.6 GHz	9M	6/6
i5-8500T	35W	2.1 GHz	3.5 GHz	9M	6/6
i3-9100TE	35W	2.2 GHz	3.2 GHz	6M	4/4
i3-8100T	35W	3.1 GHz	N/A	6M	4/4
G5400T	35W	3.1 GHz	N/A	4M	2/4
G4900T	35W	2.9 GHz	N/A	2M	2/2

Inside view of the system

MB211 Digital IO

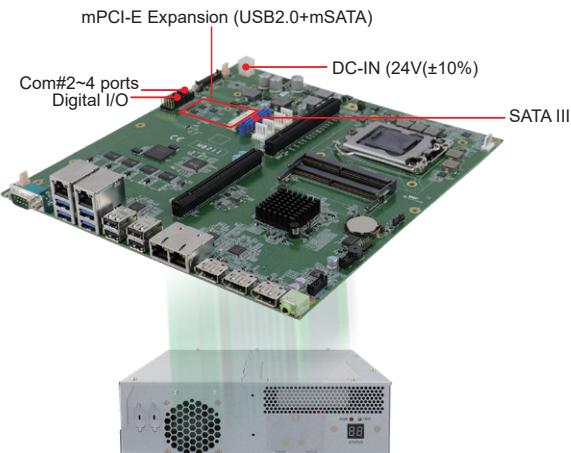

Dimensions and Drawing

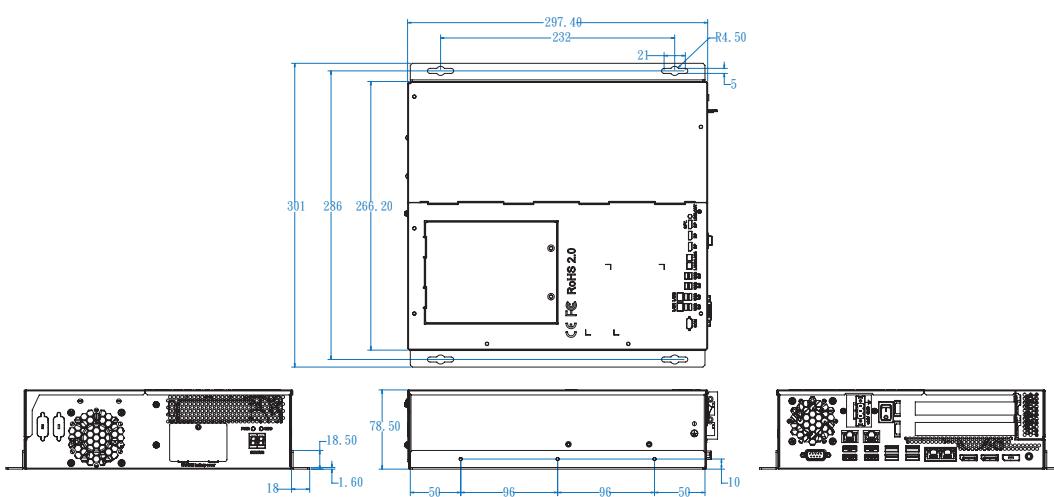

Remarks: 1. Specifications are subject to change without prior notice. 2. ODM/OEM is available. 3. For user's manual & datasheet download, visit www.ibase.com.tw.



Rear I/O



Specifications

System Mainboard	MB300 with Intel® Q170 PCH
CPU Type	7th/6th Gen Intel® Core™ i7/i5/i3 desktop Processors (35W TDP)
System Speed	Up to 3.4GHz
Memory	2x DDR4-2133 SO-DIMM, Max. 32GB
Front Panel External I/O	2x Antenna hole for WLAN module
Rear Panel External I/O	1x DVI-I + 1x DisplayPort connector 1x Audio jack for Line-out 4x USB 3.0 ports, 2x USB 2.0 ports 1x Red HDD LED, 1x green power LED 2x Error LED by programming 1x Power button 1x 2-pin terminal block for external power button 1x RS232/422/485 port for COM#1 1x RS232 port for COM#2 2x RJ45 Gigabit Ethernet port 1x 3-pin DC-in terminal block for 24V(±10%)
Expansion Slots	1x Mini PCI-E socket (full-size)
Storage	2x 2.5" HDD/SSD (1x internal & 1x external-accessible) + 1x mSATA socket
Construction	Aluminum & steel
Chassis Color	Silver & Gray
Mounting	Desktop or wall mounting (wall mount kit included) Side mounting DIN-rail mounting (optional)
Dimensions	275mm (W) x 140mm (D) x 70mm (H) 10.83" (W) x 5.51" (D) x 2.76" (H)
Weight	2.7kg
Operating Temperature	-10°C to 60°C (14°F~140°F) *with air flow -10°C to 50°C (14°F to 122°F) without air flow
Storage Temperature	-20°C to 80°C (-4°F to 176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	Operating: 3 grms / 5~500Hz / random operation (storage is mSATA)
Shock	Operating: 20 g / 11 ms Non-operating: 40 g / 11 ms
Certification	CE / LVD / FCC Class B

Features

- Compact fanless system with IBASE MB300 customized board
- 7th/6th Gen Intel® Core™ i7/i5/i3 Processors (35W TDP)
- 2MB MRAM module (optional)
- Front removable drive bay for HDD/SSD (supports RAID 0/1)
- Over/Under/Reverse voltage protection
- iSMART, iAMT (11.6)


Ordering Information

AMS300	Fanless System with MB300, w/ Intel® Core™ i7/i5/i3 desktop Processor, 2x COM, 2x 4GB memory, 1x 2.5" 64GB MLC industrial-grade SSD, w/o power adaptor
180W power adaptor (optional)	180W (24V @7.5A) power adaptor, bare wire type Compatible with IEC62368-1/EN62368-1
2 nd storage ACC Kit (optional)	Storage ACC Kit including screws and cable (SC2AMS300-A10100R)
Optional Accessories	WiFi/BT antenna kit 4G/LTE antenna kit (Must have have M2MU2-S) GPS antenna kit (Must have have M2MU2-S)

Recommended Processor list

Model	TDP	Base Freq	Turbo Freq	Cache	Cores / Threads
i7-7700T	35W	2.9 GHz	3.8 GHz	8M	4/8
i7-6700TE	35W	2.4 GHz	3.4 GHz	8M	4/8
i5-7500T	35W	2.7 GHz	3.3 GHz	6M	4/4
i5-6500TE	35W	2.3 GHz	3.3 GHz	6M	4/4
i3-7101TE	35W	3.4 GHz	N/A	3M	2/4
i3-6100TE	35W	2.7 GHz	N/A	4M	2/4
G4400TE	35W	2.9 GHz	N/A	3M	2/2
G3900TE	35W	2.6 GHz	N/A	2M	2/2

Features of New Automation Box PC

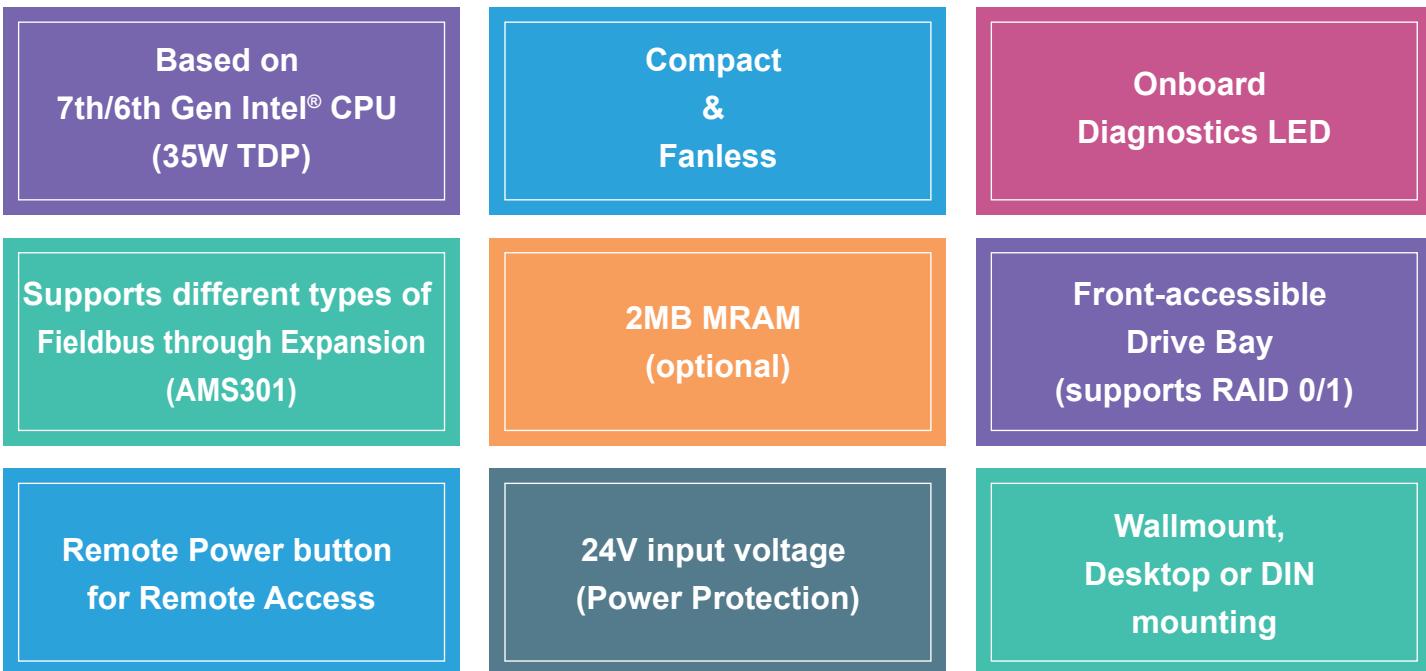

1 AGS Series

2 AMS Series

3 AMI Series

4 CMI Series

5 ASB Series

6 CSB Series

Flexible Mounting


Side Mounting



DIN-rail Mounting



Dimensions and Drawing

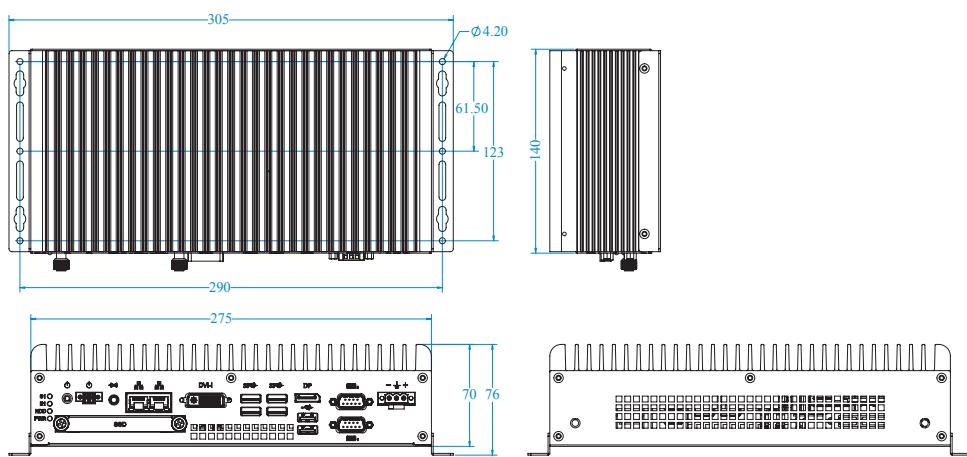



Rear I/O

Specifications

System Mainboard	MB300-1 with Intel® Q170 PCH
CPU Type	7th/6th Gen Intel® Core™ i7/i5/i3 desktop Processors (35W TDP)
System Speed	Up to 3.4GHz
Memory	2x DDR4-2133 SO-DIMM, Max. 32GB
Front Panel External I/O	2x Antenna hole for WLAN module
Rear Panel External I/O	1x DVI-I + 1x DisplayPort connector 1x Audio jack for Line-out 4x USB 3.0 ports, 2x USB 2.0 ports 1x Red HDD LED, 1x green power LED 2x Error LED by programming 1x Power button 1x 2-pin terminal block for external power button 3x RJ45 Gigabit Ethernet port 1x 3-pin DC-in terminal block for 24V($\pm 10\%$)
Expansion Slots	1x Mini PCI-E socket (full-size)
Storage	2x 2.5" HDD/SSD (1x internal & 1x external-accessible) + 1x mSATA socket
Construction	Aluminum & steel
Chassis Color	Silver & Gray
Mounting	Desktop or wall mounting (wall mount kit included) Side mounting DIN-rail mounting (optional)
Dimensions	275mm (W) x 140mm (D) x 70mm (H) 10.83" (W) x 5.51" (D) x 2.76" (H)
Weight	2.7kg
Operating Temperature	-10°C to 60°C (14°F~140°F) *with air flow -10°C to 50°C (14°F to 122°F) without air flow
Storage Temperature	-20°C to 80°C (-4°F to 176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	Operating: 3 grms / 5~500Hz / random operation (storage is mSATA)
Shock	Operating: 20 g / 11 ms Non-operating: 40 g / 11 ms
Certification	CE / LVD / FCC Class B (Prescan only)

Features

- Compact fanless system with IBASE MB300-1 customized board
- 7th/6th Gen Intel® Core™ i7/i5/i3 Processors (35W TDP)
- 2MB MRAM module (optional)
- Front removable drive bay for HDD/SSD (supports RAID 0/1)
- Over/Under/Reverse voltage protection
- iSMART, iAMT (11.6)

Ordering Information

AMS300-1	Fanless System with MB300-1, w/ Intel® Core™ i7/i5/i3 desktop Processor, 3x RJ45, 2x 4GB memory, 1x 2.5" 64GB MLC industrial-grade SSD, w/o power adaptor
180W power adaptor (optional)	180W (24V @7.5A) power adaptor, bare wire type Compatible with IEC62368-1/EN62368-1
2 nd storage ACC Kit (optional)	Storage ACC Kit including screws and cable (SC2AMS300-A10100R)
Optional Accessories	WiFi/BT antenna kit 4G/LTE antenna kit (Must have w/ M2MU2-S) GPS antenna kit (Must have w/ M2MU2-S)

Recommended Processor list

Model	TDP	Base Freq	Turbo Freq	Cache	Cores / Threads
i7-7700T	35W	2.9 GHz	3.8 GHz	8M	4/8
i7-6700TE	35W	2.4 GHz	3.4 GHz	8M	4/8
i5-7500T	35W	2.7 GHz	3.3 GHz	6M	4/4
i5-6500TE	35W	2.3 GHz	3.3 GHz	6M	4/4
i3-7101TE	35W	3.4 GHz	N/A	3M	2/4
i3-6100TE	35W	2.7 GHz	N/A	4M	2/4
G4400TE	35W	2.9 GHz	N/A	3M	2/2
G3900TE	35W	2.6 GHz	N/A	2M	2/2

AMS300-1

Product Appearance

AMS300 VS AMS300-1



Flexible Mounting


Side Mounting



DIN-rail Mounting



Dimensions and Drawing

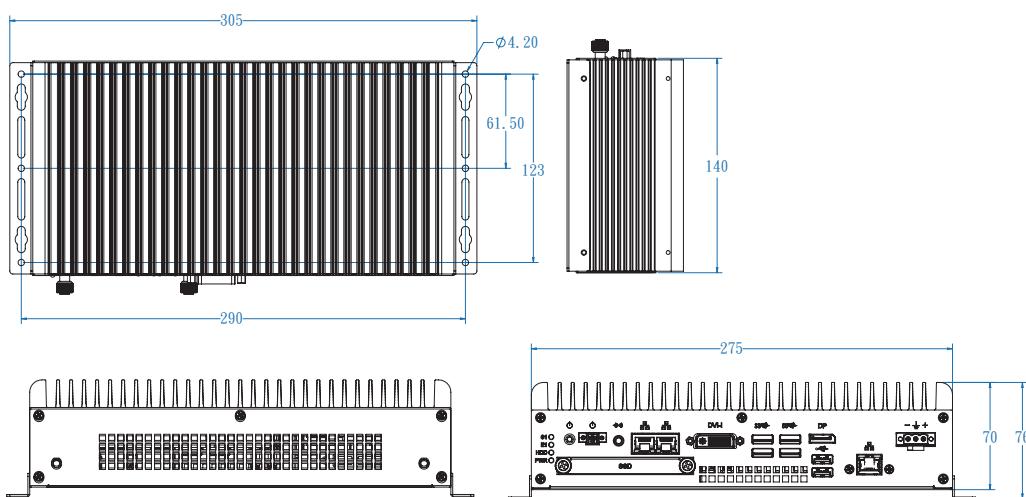

Remarks: 1. Specifications are subject to change without prior notice. 2. ODM/OEM is available. 3. For user's manual & datasheet download, visit www.ibase.com.tw.



Rear I/O

Specifications

System Mainboard	MB300 with Intel® Q170 PCH
CPU Type	7th/6th Gen Intel® Core™ i7/i5/i3 desktop Processors (35W TDP)
System Speed	Up to 3.4GHz
Memory	2x DDR4-2133 SO-DIMM, Max. 32GB
Front Panel External I/O	2x Antenna hole for WLAN module
Rear Panel External I/O	1x DVI-I + 1x DisplayPort connector 1x Audio jack for Line-out 4x USB 3.0 ports, 2x USB 2.0 ports 1x Red HDD LED, 1x green power LED 2x Error LED by programming 1x Power button 1x 2-pin terminal block for external power button 1x RS232/422/485 port for COM#1 1x RS232 port for COM#2 2x RJ45 Gigabit Ethernet port 1x 3-pin DC-in terminal block for 24V($\pm 10\%$) 3x Fieldbus module bracket
Expansion Slots	4x Mini PCI-E sockets (full-size)
Storage	2x 2.5" HDD/SSD (1x internal & 1x external-accessible) + 1x mSATA socket
Construction	Aluminum & steel
Chassis Color	Silver & Gray
Mounting	Desktop or wall mounting (wall mount kit included) Side mounting DIN-rail mounting (optional)
Dimensions	275mm (W) x 140mm (D) x 117mm (H) 10.83" (W) x 5.51" (D) x 4.61" (H)
Weight	3.3kg
Operating Temperature	-10°C to 60°C (14°F~140°F) *with air flow -10°C to 50°C (14°F to 122°F) without air flow
Storage Temperature	-20°C to 80°C (-4°F to 176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	Non-Operating: 1.0 grms / 5~500Hz / random operation Operating: 0.25 grms / 5~500Hz / random operation
Shock	Operating: 20 g / 11 ms Non-operating: 40 g / 11 ms
Certification	CE / LVD / FCC Class B

Features

- Compact fanless system with IBASE MB300 customized board
- 7th/6th Gen Intel® Core™ i7/i5/i3 Processors (35W TDP)
- 2MB MRAM module (optional)
- Front removable drive bay for HDD/SSD (supports RAID 0/1)
- Supports different types of Fieldbus through expansion slot
- Over/Under/Reverse voltage protection
- Supports DIN-rail mount & wall mount
- iSMART, iAMT (11.6)

Ordering Information


AMS301	Fanless System with MB300, w/ Intel® Core™ i7/i5/i3 desktop Processor, 2x COM, 2x 4GB memory, 1x 2.5" 64GB MLC industrial-grade SSD, 3x Mini PCI-E, w/o power adaptor
180W power adaptor (optional)	180W (24V @7.5A) power adaptor, bare wire type Compatible with IEC62368-1/EN62368-1
2 nd storage ACC Kit (optional)	Storage ACC Kit including screws and cable (SC2AMS300-A10100R)
Optional Accessories	WiFi/BT antenna kit 4G/LTE antenna kit (Must have w/ M2MU2-S) GPS antenna kit (Must have w/ M2MU2-S)

Recommended Processor list

Model	TDP	Base Freq	Turbo Freq	Cache	Cores / Threads
i7-7700T	35W	2.9 GHz	3.8 GHz	8M	4/8
i7-6700TE	35W	2.4 GHz	3.4 GHz	8M	4/8
i5-7500T	35W	2.7 GHz	3.3 GHz	6M	4/4
i5-6500TE	35W	2.3 GHz	3.3 GHz	6M	4/4
i3-7101TE	35W	3.4 GHz	N/A	3M	2/4
i3-6100TE	35W	2.7 GHz	N/A	4M	2/4
G4400TE	35W	2.9 GHz	N/A	3M	2/2
G3900TE	35W	2.6 GHz	N/A	2M	2/2

Expansion Cards

IP301

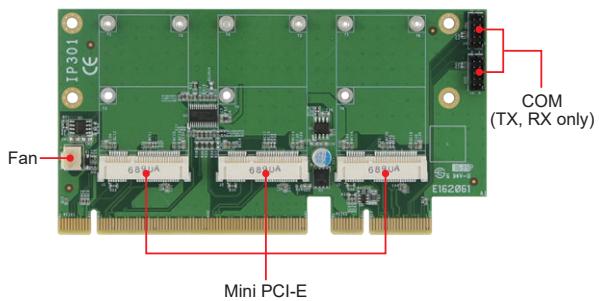

Flexible Mounting


Side Mounting



DIN-rail Mounting



Field Bus Adaptor via Mini PCI-E

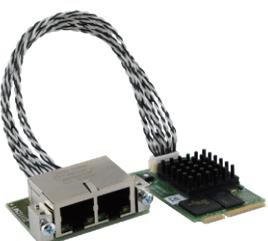


PROFINET module



PROFIBUS module

Dimensions and Drawing

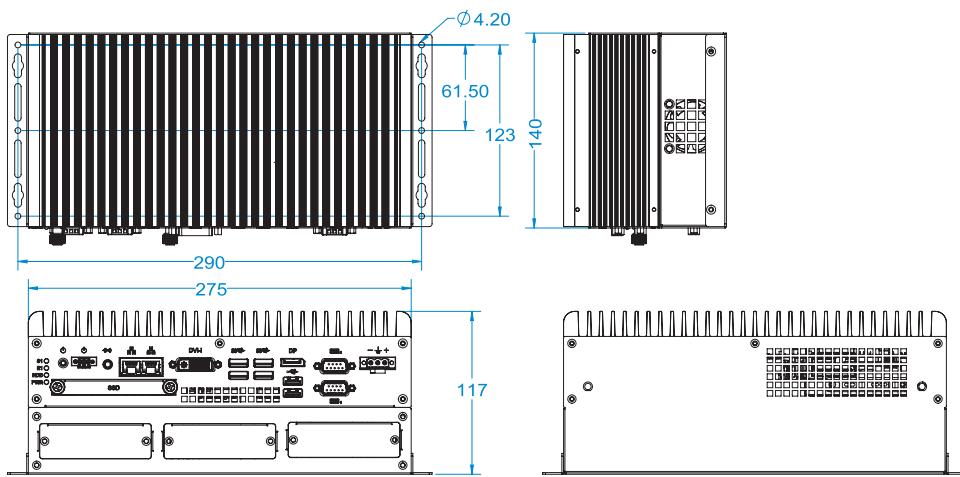

Remarks: 1. Specifications are subject to change without prior notice. 2. ODM/OEM is available. 3. For user's manual & datasheet download, visit www.ibase.com.tw.



Rear I/O

Specifications

System Mainboard	MB300 with Intel® Q170 PCH
CPU Type	7th/6th Gen Intel® Core™ i7/i5/i3 desktop Processors (35W TDP)
System Speed	Up to 3.4GHz
Memory	2x DDR4-2133 SO-DIMM, Max. 32GB
Front Panel External I/O	2x Antenna hole for WLAN module
Rear Panel External I/O	1x DVI-I + 1x DisplayPort connector 1x Audio jack for Line-out 4x USB 3.0 ports, 2x USB 2.0 ports 1x Red HDD LED, 1x green power LED 2x Error LED by programming 1x Power button 1x 2-pin terminal block for external power button 1x RS232/422/485 port for COM#1 1x RS232 port for COM#2 2x RJ45 Gigabit Ethernet port 1x 3-pin DC-in terminal block for 24V(±10%)
Expansion Slots	1x Mini PCI-E sockets (full-size) 1x PCI-E (x8) slot 1x PCI-E (x4) slot
Storage	2x 2.5" HDD/SSD (1x internal & 1x external-accessible) + 1x mSATA socket
Construction	Aluminum & steel
Chassis Color	Silver & Gray
Mounting	Desktop or wall mounting (wall mount kit included) Side mounting DIN-rail mounting (optional)
Dimensions	275mm (W) x 140mm (D) x 117mm (H) 10.83" (W) x 5.51" (D) x 4.61" (H)
Weight	3.3kg
Operating Temperature	-10°C to 60°C (14°F~140°F) *with air flow -10°C to 50°C (14°F to 122°F) without air flow
Storage Temperature	-20°C to 80°C (-4°F to 176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	Non-Operating: 1.0 grms / 5~500Hz / random operation Operating: 0.25 grms / 5~500Hz / random operation
Shock	Operating: 20 g / 11 ms Non-operating: 40 g / 11 ms
Certification	CE / LVD / FCC Class B

Features

- Compact fanless system with for IBASE MB300 customized board
- 7th/6th Gen Intel® Core™ i7/i5/i3 Processors (35W TDP)
- 2MB MRAM module (optional)
- Front removable drive bay for HDD/SSD (supports RAID 0/1)
- 1x PCI-E (x8) + 1x PCI-E (x4) expansion slot
- Over/Under/Reverse voltage protection
- Supports DIN-rail mount & wall mount
- iSMART, iAMT (11.6)

Ordering Information

AMS302	Fanless System with MB300, w/ Intel® Core™ i7/i5/i3 desktop Processor, 2x COM, 2x 4GB memory, 1x 2.5" 64GB MLC industrial-grade SSD, 1x PCI-E (x8) + 1x PCI-E (x4) expansion slots, w/o power adaptor
180W power adaptor (optional)	180W (24V @7.5A) power adaptor, bare wire type Compatible with IEC62368-1/EN62368-1
2 nd storage ACC Kit (optional)	Storage ACC Kit including screws and cable (SC2AMS300-A10100R)
Optional Accessories	WiFi/BT antenna kit 4G/LTE antenna kit (Must have w/ M2MU2-S) GPS antenna kit (Must have w/ M2MU2-S)

Recommended Processor list

Model	TDP	Base Freq	Turbo Freq	Cache	Cores / Threads
i7-7700T	35W	2.9 GHz	3.8 GHz	8M	4/8
i7-6700TE	35W	2.4 GHz	3.4 GHz	8M	4/8
i5-7500T	35W	2.7 GHz	3.3 GHz	6M	4/4
i5-6500TE	35W	2.3 GHz	3.3 GHz	6M	4/4
i3-7101TE	35W	3.4 GHz	N/A	3M	2/4
i3-6100TE	35W	2.7 GHz	N/A	4M	2/4
G4400TE	35W	2.9 GHz	N/A	3M	2/2
G3900TE	35W	2.6 GHz	N/A	2M	2/2




Compact size
for material &
cost reduction

Add-on card
expansion slot

Expansion Cards

IP302

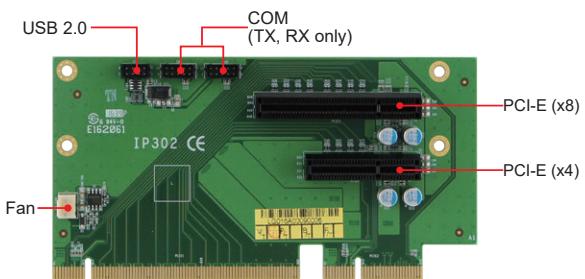

Flexible Mounting


Side Mounting



DIN-rail Mounting



Dimensions and Drawing

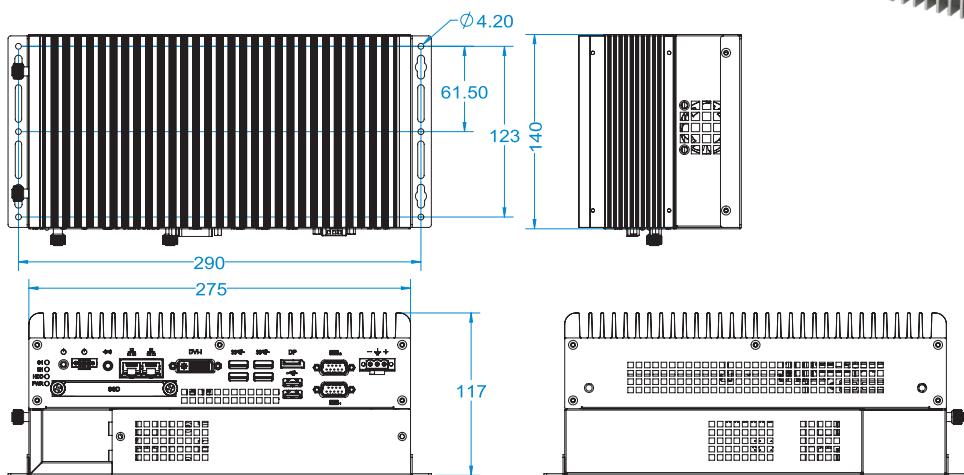



Microsoft Azure
Certified

Rear I/O

Specifications

System Mainboard	MB220AF-1 with Intel® Q170 PCH MB220EF-1 with Intel® H110 PCH
CPU Type	7th/6th Gen Intel® Core™ i7/i5/i3 desktop Processors (35W TDP)
System Speed	Up to 3.4GHz
Memory	2x 2GB DDR4-2400 SO-DIMM, Max. 32GB
Front Panel External I/O	1x DVI-D + 1x VGA 1x Audio jack for MIC-in / Line-out 4x USB 2.0 ports 1x Red HDD LED 1x Power button with green LED indicator 2x SIM card slots 1x 2-pin terminal block for external power button
Rear Panel External I/O	1x RS232/RS422/485 port for COM#1 3x RS232 port for COM#2/COM#3/COM#4 2x DisplayPort connector 1x RJ45 Gigabit Ethernet port + 2x USB 3.0 ports 1x RJ45 Gigabit Ethernet port + 2x USB 3.0 ports 1x 3 pin DC-in terminal block for 12V(-10%) ~ 24V(+10%) 2x Antenna holes
Expansion Slots	N/A
Storage	1x 2.5" HDD/SSD 2x mSATA (AMI220AF only) & 1x mSATA (AMI220EF only) RAID 0,1,5,10 supported (AF version only)
Construction	Aluminum & steel
Chassis Color	Silver & Gray
Mounting	Desktop or wall mount (wall mount kit included)
Dimensions	210mm (W) x 265mm (D) x 77mm (H) 8.27" (W) x 10.43" (D) x 3.03" (H)
Weight	3.6kg
Operating Temperature	-10°C to 50°C (14°F~122°F)
Storage Temperature	-20°C ~ 80°C (-4°F~176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	Non-Operating: 1.0 grms / 5~500Hz / random operation Operating: 0.25 grms / 5~500Hz / random operation
Shock	Operating: 20G/ 11ms Non-Operating: 40G/ 11ms (MIL-STD-810G)
Certification	CE / LVD /FCC Class B / CCC

Features

- Fanless system with IBASE MB220 customized board
- 7th/6th Gen Intel® Core™ i7/i5/i3 Processors (35W TDP)
- Supports three independent display outputs
- Flexible expansion slot system
- Dual SIM slot supports WWAN redundancy
- 12V(-10%) ~ 24V(+10%) DC wide-range voltage input
- Over/Under/Reverse voltage protection
- iSMART, iAMT (11.6), TPM (2.0)

Ordering Information

AMI220AF	Fanless box system with MB220AF, w/ Intel® Core™ i7/i5/i3 desktop Processor, 4x COM, 2x 4GB memory, 1x 2.5" 64GB MLC industrial-grade SSD, w/o power adaptor
AMI220EF	Fanless box system with MB220EF, w/ Intel® Core™ i7/i5/i3 desktop Processor, 4x COM, 2x 4GB memory, 1x 2.5" 64GB MLC industrial-grade SSD, w/o power adaptor
150W power adaptor (optional)	150W (12V @12.5A) power adaptor, bare wire type Compatible with IEC62368-1/EN62368-1
Optional Accessories	GPS antenna kit

Recommended Processor list

Model	TDP	Base Freq	Turbo Freq	Cache	Cores / Threads
i7-7700T	35W	2.9 GHz	3.8 GHz	8M	4/8
i7-6700TE	35W	2.4 GHz	3.4 GHz	8M	4/8
i5-7500T	35W	2.7 GHz	3.3 GHz	6M	4/4
i5-6500TE	35W	2.3 GHz	3.3 GHz	6M	4/4
i3-7101TE	35W	3.4 GHz	N/A	3M	2/4
i3-6100TE	35W	2.7 GHz	N/A	4M	2/4
G4400TE	35W	2.9 GHz	N/A	3M	2/2
G3900TE	35W	2.6 GHz	N/A	2M	2/2

Product Appearance

Comparison of AMI Series System

Depth



AMI220

265mm
10.43-inch



AMI230

285mm
11.22-inch

Real I/O



AMI220



AMI230

Front I/O





AMI220




AMI230

Dimensions and Drawing

Rear View

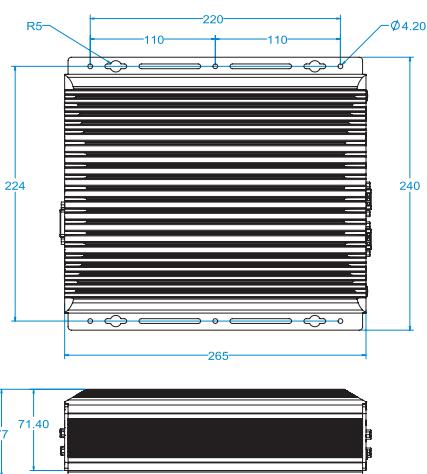

Front View

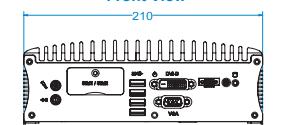



Rear I/O

Specifications

System Mainboard	MB220AF-1 with Intel® Q170 PCH MB220EF-1 with Intel® H110 PCH
CPU Type	7th/6th Gen Intel® Core™ i7/i5/i3 desktop Processors (35W TDP)
System Speed	Up to 3.4GHz
Memory	2x 2GB DDR4-2400 SO-DIMM, Max. 32GB
Front Panel External I/O	1x DVI-D + 1x VGA 1x Audio jack for MIC-in / Line-out 4x USB 2.0 ports 1x Red HDD LED 1x Power button with green LED indicator 2x SIM card slots 1x 2-pin terminal block for external power button 1x front removable drive bay for SSD
Rear Panel External I/O	1x RS232/RS422/485 port for COM#1 5x RS232 port for COM#2/COM#2~6 2x DisplayPort connector 1x RJ45 Gigabit Ethernet port + 2x USB 3.0 port 1x RJ45 Gigabit Ethernet port + 2x USB 3.0 port 1x 3-pin DC-in terminal block for 12V(-10%) ~ 24V(+10%) 2x Antenna holes 1x Expansion slot
Expansion Slots	1x Mini PCI-E sockets
Storage	2x 2.5" HDD/SSD (1x internal & 1x external-accessible) 2x mSATA (AMI221AF only) & 1x mSATA (AMI221EF only) RAID 0,1,5,10 supported (AF version only)
Construction	Aluminum & steel
Chassis Color	Silver & Gray
Mounting	Desktop or wall mount (wall mount kit included)
Dimensions	210mm (W) x 265mm (D) x 108.6mm (H) 8.27" (W) x 10.43" (D) x 4.28" (H)
Weight	4.3kg
Operating Temperature	-10°C to 50°C (14°F~122°F)
Storage Temperature	-20°C ~ 80°C (-4°F~176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	Non-Operating: 1.0 grms / 5~500Hz / random operation Operating: 0.25 grms / 5~500Hz / random operation
Shock	Operating: 20G/ 11ms Non-Operating: 40G/ 11ms (MIL-STD-810G)
Certification	CE / LVD / FCC Class B

Features

- Fanless system with IBASE MB220 customized board
- 7th/6th Gen Intel® Core™ i7/i5/i3 Processors (35W TDP)
- Supports three independent display outputs
- Flexible expansion slot system
- Dual SIM slot supports WWAN redundancy
- **2x 2.5" HDD/SSD (Supports RAID 0/1)**
- 12V(-10%) ~ 24V(+10%) DC wide-range voltage input
- Over/Under/Reverse voltage protection
- iSMART, iAMT (11.6), TPM (2.0)

Ordering Information


AMI221AF	Fanless box System with MB220AF, w/ Intel® Core™ i7/i5/i3 desktop Processor, 6x COM (from IP214 / IP215), 2x 4GB memory, 1x 2.5" 64GB MLC industrial-grade SSD, w/o power adaptor, optional riser card
AMI221EF	Fanless box System with MB220EF, w/ Intel® Core™ i7/i5/i3 desktop Processor, 6x COM (from IP214 / IP215), 2x 4GB memory, 1x 2.5" 64GB MLC industrial-grade SSD, w/o power adaptor, optional riser card
IP214 Riser Card Kit (optional)	IP214 ZM05IP214---0A100P) w/ COM cable (2x C501PK1H009302A00P) for AMI221/AMI231
IP215 Riser Card Kit (optional)	IP215 (ZM05IP215---0A100P) w/ COM cable (2x C501PK1H009302A00P) for AMI221/AMI231
150W power adaptor (optional)	150W (12V @12.5A) power adaptor, bare wire type Compatible with IEC62368-1/EN62368-1
Optional Accessories	GPS antenna kit

Recommended Processor list



Model	TDP	Base Freq	Turbo Freq	Cache	Cores / Threads
i7-7700T	35W	2.9 GHz	3.8 GHz	8M	4/8
i7-6700TE	35W	2.4 GHz	3.4 GHz	8M	4/8
i5-7500T	35W	2.7 GHz	3.3 GHz	6M	4/4
i5-6500TE	35W	2.3 GHz	3.3 GHz	6M	4/4
i3-7101TE	35W	3.4 GHz	N/A	3M	2/4
i3-6100TE	35W	2.7 GHz	N/A	4M	2/4
G4400TE	35W	2.9 GHz	N/A	3M	2/2
G3900TE	35W	2.6 GHz	N/A	2M	2/2

Expansion Cards

IP214

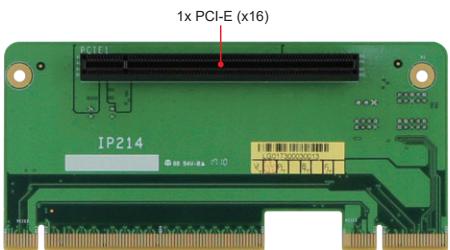




IP215

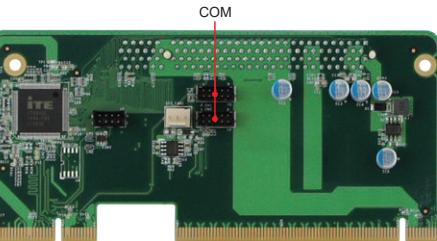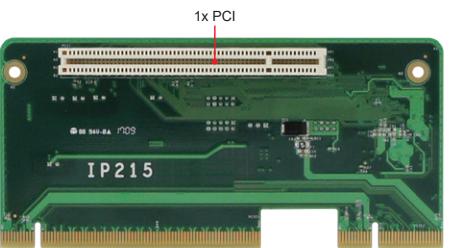

COM#5-6 from IP214 & IP215



Dimensions and Drawing

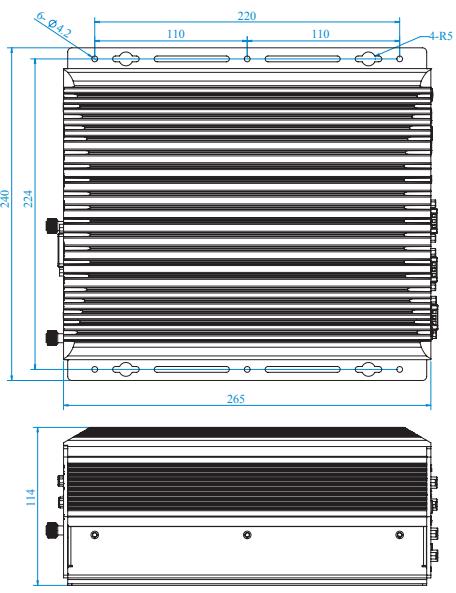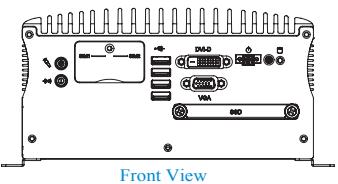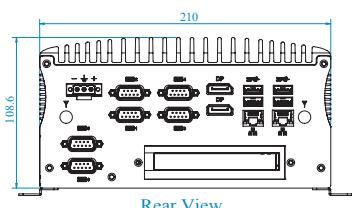



Rear I/O

Specifications

System Mainboard	MB220AF-1 with Intel® Q170 PCH MB220EF-1 with Intel® H110 PCH
CPU Type	7th/6th Gen Intel® Core™ i7/i5/i3 desktop Processors (35W TDP)
System Speed	Up to 3.4GHz
Memory	2x 2GB DDR4-2400 SO-DIMM, Max. 32GB
Front Panel External I/O	1x DVI-D + 1x VGA 1x Audio jack for MIC-in / Line-out 4x USB 2.0 ports 1x Red HDD LED 1x Power button with green LED indicator 2x SIM card slots 1x 2-pin terminal block for external power button 1x Front removable drive bay for SSD
Rear Panel External I/O	1x RS232/RS422/485 port for COM#1 5x RS232 port for COM#2/COM#2~6 2x DisplayPort connector 1x RJ45 Gigabit Ethernet port + 2x USB 3.0 port 1x RJ45 Gigabit Ethernet port + 2x USB 3.0 port 1x 3-pin DC-in terminal block for 12V(-10%)~24V(+10%) 2x USB 2.0 port (AMI222AF only) 2x Antenna holes 2x Expansion Slots
Expansion Slots	2x Mini PCI-E sockets
Storage	2x 2.5" HDD/SSD (1x internal & 1x external-accessible) 2x mSATA (AMI222AF only) & 1x mSATA (AMI222EF only) RAID 0,1,5,10 supported (AF version only)
Construction	Aluminum & steel
Chassis Color	Silver & Gray
Mounting	Desktop or wall mount (wall mount kit included)
Dimensions	210mm (W) x 265mm (D) x 128.6mm (H) 8.27" (W) x 10.43" (D) x 5.06" (H)
Weight	4.3kg
Operating Temperature	-10°C to 50°C (14°F~122°F)
Storage Temperature	-20°C ~ 80°C (-4°F~176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	Non-Operating: 1.0 grms / 5~500Hz / random operation Operating: 0.25 grms / 5~500Hz / random operation
Shock	Operating: 20G/ 11ms Non-Operating: 40G/ 11ms (MIL-STD-810G)
Certification	CE / LVD / FCC Class B



Features

- Fanless system with IBASE MB220 customized board
- 7th/6th Gen Intel® Core™ i7/i5/i3 Processors (35W TDP)
- Supports three independent display outputs
- Flexible expansion slot system
- Dual SIM slot supports WWAN redundancy
- **2x 2.5" HDD/SSD (Supports RAID 0/1)**
- 12V(-10%) ~ 24V(+10%) DC wide-range voltage input
- Over/Under/Reverse voltage protection
- iSMART, iAMT (11.6), (TPM 2.0)

Ordering Information


AMI222AF	Fanless box system with MB220AF, w/ Intel® Core™ i7/i5/i3 desktop Processor, 6x COM (from IP211 / IP212), 2x 4GB memory, 1x 2.5" 64GB MLC industrial-grade SSD, w/o power adaptor, optional riser card
AMI222EF	Fanless box system with MB220EF, w/ Intel® Core™ i7/i5/i3 desktop Processor, 6x COM (from IP211 / IP212), 2x 4GB memory, 1x 2.5" 64GB MLC industrial-grade SSD, w/o power adaptor, optional riser card
IP211 Riser Card Kit (optional)	IP211 (ZM05IP211---OB1000P) w/ COM cable (2x C501PK1H009302A00P) for AMI222/AMI232
IP212 Riser Card Kit (optional)	IP212 (ZM05IP212---OA1000R) w/ COM cable (2x C501PK1H009302A00P) for AMI222/AMI232
IP213 Riser Card Kit (optional)	IP213 (ZM05IP213---OA1000R) w/o COM cable for AMI222/AMI232
150W power adaptor (optional)	150W (12V @12.5A) power adaptor, bare wire type Compatible with IEC62368-1/EN62368-1
Optional Accessories	GPS antenna kit

Recommended Processor list


Model	TDP	Base Freq	Turbo Freq	Cache	Cores / Threads
i7-7700T	35W	2.9 GHz	3.8 GHz	8M	4/8
i7-6700TE	35W	2.4 GHz	3.4 GHz	8M	4/8
i5-7500T	35W	2.7 GHz	3.3 GHz	6M	4/4
i5-6500TE	35W	2.3 GHz	3.3 GHz	6M	4/4
i3-7101TE	35W	3.4 GHz	N/A	3M	2/4
i3-6100TE	35W	2.7 GHz	N/A	4M	2/4
G4400TE	35W	2.9 GHz	N/A	3M	2/2
G3900TE	35W	2.6 GHz	N/A	2M	2/2

Expansion Cards


IP211

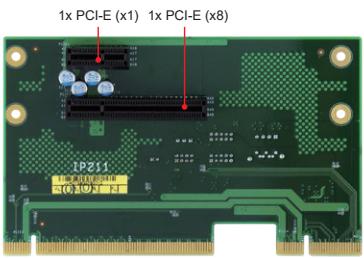


IP212

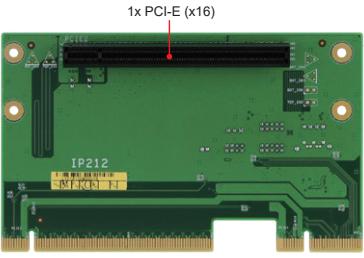


IP213

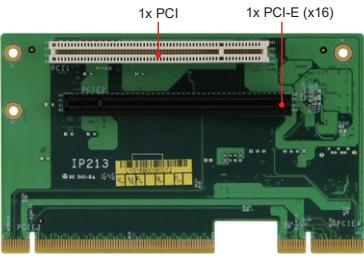

COM

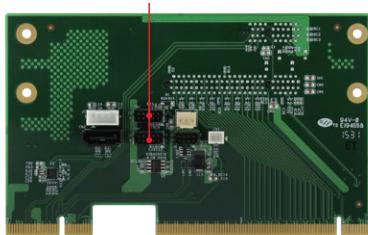




COM

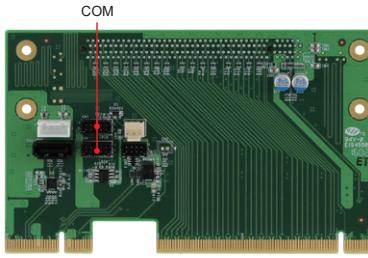

COM#5-6 from IP211/IP212



Dimensions and Drawing

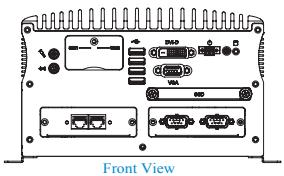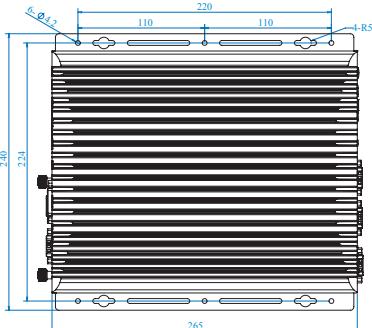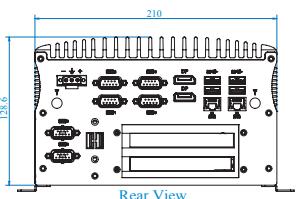

1 AGS Series

2 AMS Series

3 AMI Series

4 CMI Series

5 ASB Series

6 CSB Series



Rear I/O

Features

- Fanless system with IBASE MB230 customized board
- 9th/8th Gen Intel® Core™ i7/i5/i3 Desktop Processors
- Dual SIM slots supports WWAN redundancy
- 4x RJ45 Gigabit Ethernet port (2x Supports 802.3at PoE+)
- 3x M.2 (B-Key/E-Key/M-Key)
- Supports Over/Under/Reverse voltage protection
- iSMART, iAMT (11.6), TPM (2.0)

Specifications

System Mainboard	MB230AF with Intel® Q370 PCH
CPU Type	9th/8th Gen Intel® Core™ i7/i5/i3 Desktop Processors
System Speed	Up to 4.0 GHz
Memory	2x DDR4-2666/2400 SO-DIMM, Max. 32GB
Front Panel External I/O	2x RS232/422/485 port for COM#1~COM#2 2x RS232 ports for COM#3~COM#4 1x DisplayPort (1.2) 2x RJ45 Gigabit Ethernet port (Supports 802.3at PoE+) 1x 5-pins DC-in terminal block type for 12V(±10%) or 18V(-10%)~24V(+10%) 2x Antenna holes
Rear Panel External I/O	1x DVI-D + HDMI(1.4) 4x USB 3.1 ports 2x Antenna holes 2x RJ45 Gigabit Ethernet ports + dual USB 3.1 stack ports 1x Red HDD LED 1x power button with Green LED indicator 1x 2-pin terminal block 2x SIM card
Expansion Slots	N/A
Storage	1x 2.5" HDD/SSD 1x M.2 (B-Key Supports USB2.0 for 4G/LTE) 1x M.2 (E-Key Supports PCI-E + USB2.0 for CNVi) 1x M.2 (M-Key Supports PCI-E(4x) + SATA for NVMe SSD)
Construction	Aluminum & steel
Chassis Color	Silver & Gray
Mounting	Desktop & wall mount
Dimensions	210mm (W) x 285mm (D) x 77mm (H) 8.27" (W) x 11.22" (D) x 3.03" (H)

Weight	4kg
Operating Temperature	-20°C to 70°C (-4°F~158°F) (for 35W CPU)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	5~90% @60°C, (non-condensing)
Vibration	Operating: 3Grms / 5~500Hz
Shock	Operating: 20G / 11ms Non-operating: 40G / 11ms
Certification	CE/ FCC Class A/ LVD


Ordering Information

AMI230AF (Supports Sierra module)	Fanless box System with MB230AF, w/ Intel® Core™ i7/i5/i3 desktop Processor, 4x COM, 1x 8GB memory, 1x 2.5" 64GB MLC industrial-grade SSD, w/o power adaptor
270W Power Adaptor Kit (optional)	270W (24V@11.25A) power adaptor kit Compatible with IEC62368-1/EN62368-1
Optional Accessories	Global 4G antenna kit for Sierra Wireless EM7565 module, M.2 (M-Key 2280) Thermal kit

Recommended Processor list

Model	TDP	Base Freq	Turbo Freq	Cache	Cores / Threads
i7-9700TE	35W	1.8 GHz	3.8 GHz	12M	8/8
i7-8700T	35W	2.4 GHz	4.0 GHz	12M	6/12
i5-9500TE	35W	2.2 GHz	3.6 GHz	9M	6/6
i5-8500T	35W	2.1 GHz	3.5 GHz	9M	6/6
i3-9100TE	35W	2.2 GHz	3.2 GHz	6M	4/4
i3-8100T	35W	3.1 GHz	N/A	6M	4/4
G5400T	35W	3.1 GHz	N/A	4M	2/4
G4900T	35W	2.9 GHz	N/A	2M	2/2

Dimensions and Drawing

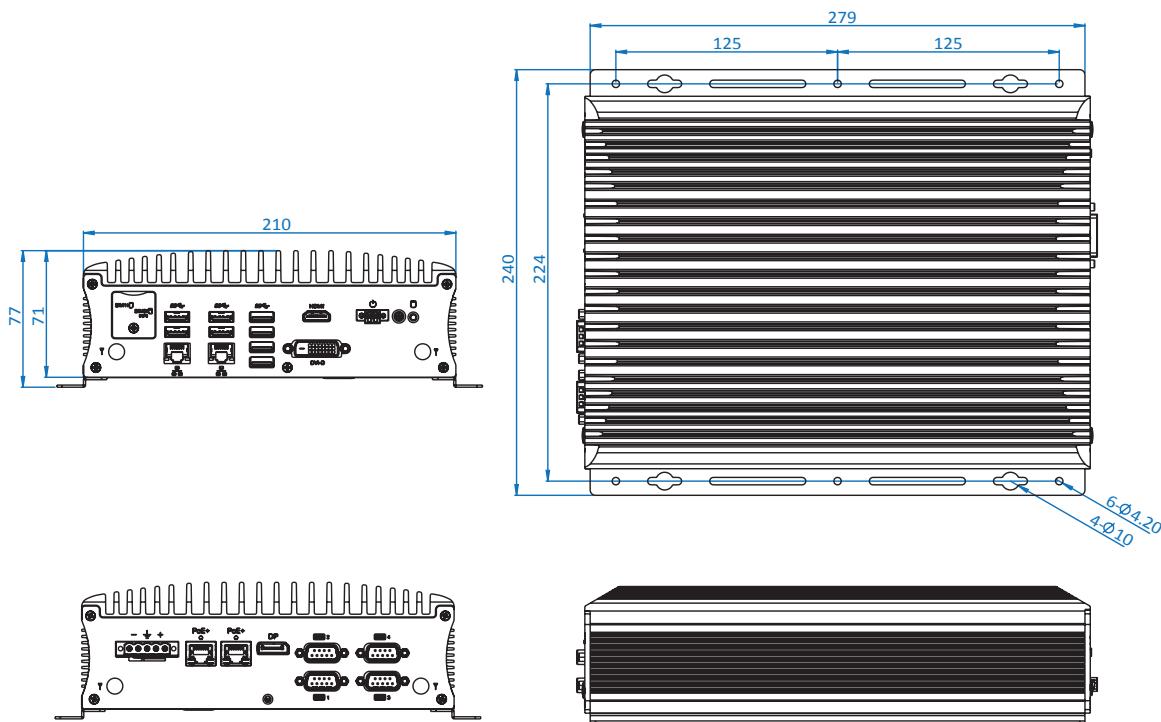



Rear I/O

Specifications

System Mainboard	MB230AF with Intel® Q370 PCH
CPU Type	9th/8th Gen Intel® Core™ i7/i5/i3 Desktop Processors
System Speed	Up to 4.00 GHz
Memory	2x DDR4-2666/2400 SO-DIMM, Max. 32GB
Front Panel External I/O	1x RS232/422/485 port for COM#1~COM#2 3x RS232 ports for COM#3~COM#4 2x RS232 ports for COM#5~6 from optional IP214/5 1x DisplayPort (1.2) 2x RJ45 Gigabit Ethernet port (Supports 802.3at PoE+) 1x 5-pins DC-in terminal block type for 12V(±10%) or 18V(-10%)~24V(+10%) 2x Antenna holes 1x expansion slot
Rear Panel External I/O	1x DVI-D + HDMI(1.4) 4x USB3.1 ports 2x Antenna holes 2x RJ45 Gigabit Ethernet port + Dual USB3.1 stack ports 1x Red HDD LED 1x power button with Green LED indicator 1x 2-pin terminal block 2x SIM Card
Expansion Slots	1x Mini PCI-E sockets
Storage	2x 2.5" HDD/SSD 1x M.2 (B-Key Supports USB2.0 for 4G/LTE) 1x M.2 (E-Key Supports PCI-E + USB2.0 for CNVi) 1x M.2 (M-Key Supports PCI-E(4x) + SATA for NVMe SSD)
Construction	Aluminum & steel
Chassis Color	Silver & Gray
Mounting	Desktop & wall mount
Dimensions	210mm (W) x 285mm (D) x 109mm (H) 8.27" (W) x 11.22" (D) x 4.29" (H)

Features

- Fanless system with IBASE MB230 customized board
- 9th/8th Gen Intel® Core™ i7/i5/i3 Desktop Processors
- Dual SIM slots supports WWAN redundancy
- 4x RJ45 Gigabit Ethernet port (**2x Supports 802.3at PoE+**)
- 3x M.2 (B-Key/E-Key/M-Key)
- Supports Over/Under/Reverse voltage protection
- iSMART, iAMT (11.6), TPM (2.0)
- Flexible expansion slot system
- 2x 2.5" storage (Supports RAID 0/1)


Weight	4.5 kg
Operating Temperature	-20°C to 70°C (-4°F~158°F) (for 35W CPU)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	5~90% @60°C, (non-condensing)
Vibration	Operating : 3Grms / 5~500Hz
Shock	Operating : 20G / 11ms Non-operating : 40G / 11ms
Certification	CE / FCC Class A / LVD

Ordering Information



AMI231AF (Supports Sierra module)	Fanless box System with MB230AF, w/ Intel® Core™ i7/i5/i3 desktop Processor, 6x COM (from IP214 / IP215), 1x 8GB memory, 1x 2.5" 64GB MLC industrial-grade SSD, w/o power adaptor, optional riser card
IP214 Riser Card Kit (optional)	IP214 (ZM05IP214---0A1000P) w/ COM cable (2x C501PK1H009302A00P) for AMI221/AMI231
IP215 Riser Card Kit (optional)	IP215 (ZM05IP215---0A1000P) w/ COM cable (2x C501PK1H009302A00P) for AMI221/AMI231
330W Power Adaptor Kit (optional)	330W (24V@13.75A) power adaptor kit Compatible with IEC62368-1/EN62368-1
Optional Accessories	Global 4G antenna kit for Sierra Wireless EM7565 module, M.2 (M-Key 2280) Thermal kit

Expansion Cards

IP214

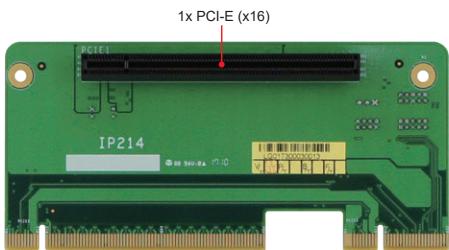




IP215

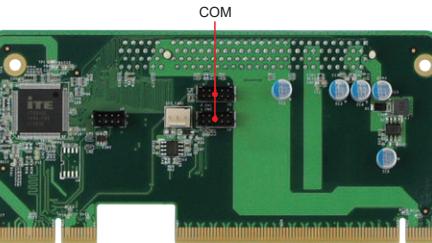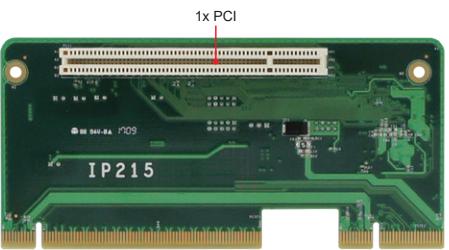

COM#5-6 from IP214 & IP215



Dimensions and Drawing

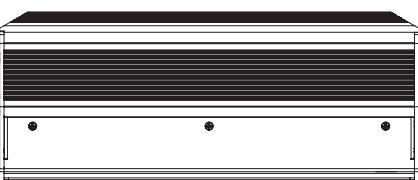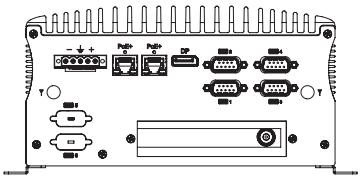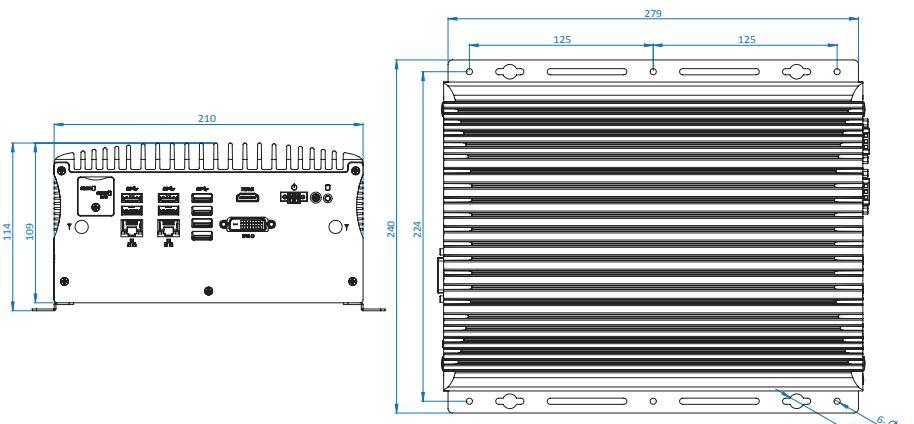

1 AGS Series

2 AMS Series

3 AMI Series

4 CMI Series

5 ASB Series

6 CSB Series



Rear I/O



Specifications

System Mainboard	MB230AF with Intel® Q370 PCH
CPU Type	9th/8th Gen Intel® Core™ i7/i5/i3 Desktop Processors
System Speed	Up to 4.00 GHz
Memory	2x DDR4-2666/2400 SO-DIMM, Max. 32GB
Front Panel External I/O	1x RS232/422/485 port for COM#1~COM#2 3x RS232 ports for COM#3~COM#4 2x RS232 ports for COM#5~6 from optional IP211/IP212 1x DisplayPort (1.2) 2x RJ45 Gigabit Ethernet port (Supports 802.3at PoE+) 1x 5-pins DC-in terminal block type for 12V(±10%) or 18V(-10%)~24V(+10%) 2x Antenna holes 2x USB 2.0 from optional IP211/IP212/IP213 2x expansion slot
Rear Panel External I/O	1x DVI-D + HDMI(1.4) 4x USB3.1 ports 2x Antenna holes 2x RJ45 Gigabit Ethernet port + Dual USB3.1 stack ports 1x Red HDD LED 1x power button with Green LED indicator 1x 2-pin terminal block 2x SIM Card
Expansion Slots	2x Mini PCI-E sockets
Storage	2x 2.5" HDD/SSD 1x M.2 (B-Key Supports USB2.0 for 4G/LTE) 1x M.2 (E-Key Supports PCI-E + USB2.0 for CNVi) 1x M.2 (M-Key Supports PCI-E(4x) + SATA for NVMe SSD)
Construction	Aluminum & steel
Chassis Color	Silver & Gray
Mounting	Desktop & wall mount
Dimensions	210mm (W) x 285mm (D) x 129mm (H) 8.27" (W) x 11.22" (D) x 5.08" (H)
Weight	4.9 kg

Features

- Fanless system with IBASE MB230 customized board
- 9th/8th Gen Intel® Core™ i7/i5/i3 Desktop Processors
- Dual SIM slots supports WWAN redundancy
- 4x RJ45 Gigabit Ethernet port (2x Supports 802.3at PoE+)
- 3x M.2 (B-Key/E-Key/M-Key)
- Supports Over/Under/Reverse voltage protection
- iSMART, iAMT (11.6), TPM (2.0)
- Flexible expansion slot system
- 2x 2.5" storage (supports RAID 0/1)


Operating Temperature	-20°C to 70°C (-4°F~158°F) (for 35W CPU)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	5~90% @60°C, (non-condensing)
Vibration	Operating: 3Grms / 5~500Hz
Shock	Operating: 20G / 11ms Non-operating: 40G / 11ms
Certification	CE/ FCC ClassA/ LVD

Ordering Information


AMI232AF (Supports Sierra module)	Fanless box System with MB230AF, w/ Intel® Core™ i7/i5/i3 desktop Processor, 6x COM (from IP211/ IP212) 4x COM (from IP213), 1x 8GB memory, 1x 2.5" 64GB MLC industrial-grade SSD, w/o power adaptor, optional riser card
AMI232-217	Fanless box System with MB230AF, w/ Intel® Core™ i5-8500T desktop Processor, 4x COM, 1x 8GB memory, 1x 2.5" 64GB MLC industrial-grade SSD, Riser card (IP217), w/o power adaptor
IP211 Riser Card Kit (optional)	IP211 (ZM05IP211--0B1000P) w/ COM cable (2x C501PK1H009302A00P) for AMI222/AMI232
IP212 Riser Card Kit (optional)	IP212 (ZM05IP212--0A1000R) w/ COM cable (2x C501PK1H009302A00P) for AMI222/AMI232
IP213 Riser Card Kit (optional)	IP213 (ZM05IP213--0A1000R) w/o COM cable for AMI222/AMI232
330W Power Adaptor Kit (optional)	330W (24V@13.75A) power adaptor kit compatible with IEC62368-1/EN62368-1
Optional Accessories	Global 4G antenna kit for Sierra Wireless EM7565 module, M.2 (M-Key 2280) Thermal kit

Expansion Cards


IP211

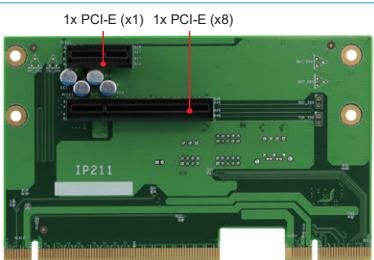


IP212

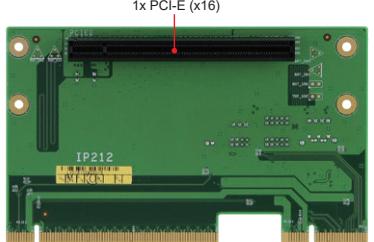


IP213

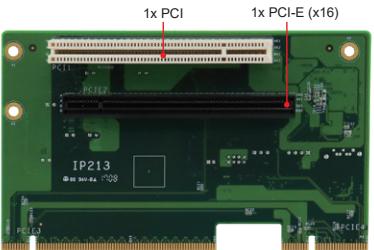


IP217

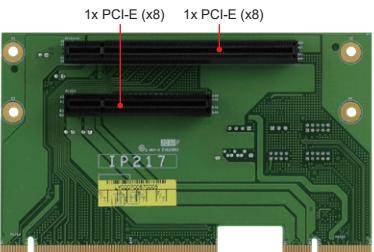

COM

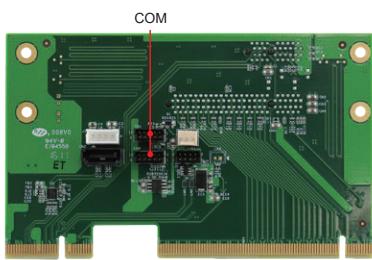

COM

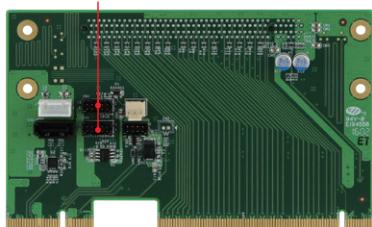

COM






COM



Dimensions and Drawing



COM#5-6 from IP211 & IP212 & IP217

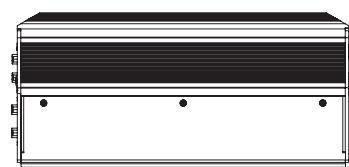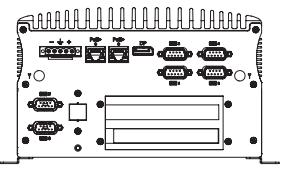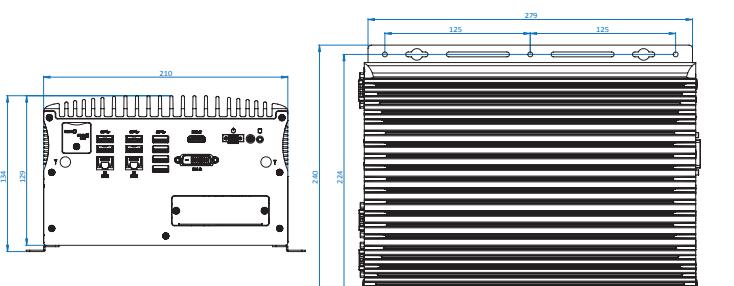

1 AGS Series

2 AMS Series

3 AMI Series


4 CMI Series

5 ASB Series

6 CSB Series

Embedded Function Cards

Daughter Boards and Function Cards



ID107

Features

- 55mm x 47mm
- Amplifier board
- TI TPA3110D2 on board



ID452

Features

- 90mm x 45mm
- 12V(-10%) ~ 24V(+10%) DC-in to ATX power interface board



ID450-R

Features

- 90mm x 45mm
- 12V DC-in to ATX power interface board



IB-CFAST

Features


- 72.4mm x 57.5mm
- SATA + power connector (CFast socket)



IBP358-4

Features

- 103.06 mm x 55.27 mm
- PCI-E (1x) to 4x RS232 COM ports
- EXAR XR17V354 chipset



IBP358

Features

- 103.06 mm x 55.27 mm
- PCI-E (1x) to 8x RS232 COM ports
- EXAR XR17V358 chipset

Riser Cards



IP115

Features

- 139.7mm x 51.38mm
- 1x PCI interface to PCI



IP116-R

Features

- 139.7mm x 55.34mm
- 1x PCI-E (x16) interface to PCI-E (x16) slot



IP118

Features


- 119.63mm x 64.5mm
- 1x PCI-E (x16) interface to PCI-E (x16) slot



IP119

Features

- 123.96mm x 55.50mm
- 1x PCI-E (x16) interface to PCI-E (x16) slot



IP155

Features

- 139.7mm x 75.74mm
- ASM1083 chipset
- 1x PCI interface to 2x PCI slot

Embedded Function Cards

Riser Cards



IP242

Features

- 130mm x 65mm
- 1x PCI + PCI-E (x1) interface to PCI slot + 1x PCI-E (x1)



IP245

Features

- 130mm x 60mm
- IT8893E chipset
- PCI-E (x1) interface to 2x PCI slot



IP246

Features

- 30mm x 60mm
- IT8893E & PEX8603 chipset
- 1x PCI-E (x1) to PCI + 1x PCI-E (x1) slot



IP271

Features

- 129.97mm x 51.25mm
- 1x PCI interface to PCI slot



IP340

Features

- 110mm x 62.5mm
- 2x PCI interface to PCI slot



IP390-R

Features

- 139.7mm x 75.74mm
- 1x PCI + PCI-E (x1) interface to PCI slot + 1x PCI-E (x1)



IP403

Features

- 144.6 mm x 68.3mm
- PCI-E (x16) interface to 2x Mini PCI-E



IP404

Features

- 139.7mm x 75.74mm
- PCI-E (x16) interface to 2x PCI-E (x8)



IP405

Features

- 139.25mm x 62.78mm
- PCI-E (x16) interface to 2x PCI-E (x8)



IP406

Features

- 123mm x 50.77mm
- 1x PCI-E (x1) interface to Mini PCI-E + 1x SIM card slot

1 AGS Series

2 AMS Series

3 AMI Series

4 CMI Series

5 ASB Series

6 CSB Series

Mini PCI-E Cards with Expansion

1 AGS Series

2 AMS Series

3 AMI Series

4 CMI Series

5 ASB Series

6 CSB Series

IBD182



Features:

- PCI-E to 2x RS232
- XR17V352 chipset
- 50.95mm x 30mm

IBD183



Features:

- USB to UART, 1x RS232+1x RS422/485
- XR21V1412 chipset
- 50.95mm x 30mm

IBD184



Features:

- PCI-E to 4x RS232
- XR17V354 chipset
- 50.95mm x 30mm

IBD185



Features:

- USB to GPIO
- 16-in /16-out
- STM32F103V8 chipset
- 50.95mm x 30mm

IBD186



Features:

- PCI-E to 2x RS232 w/ Isolation
- XR17V352 & 2x LTM2882CY-3 chipset
- 50.95mm x 30mm

IBD188



Features:

- PCI-E to 8x RS232
- XR17V358 chipset
- 50.95mm x 30mm

IBD190



Features:

- PCI-E to 1x GbE LAN
- 1x Intel® I211-AT chipset
- 50.95mm x 30mm

IBD192



Features:

- PCI-E to 2x GbE LAN
- 2x Intel® I211-AT or 2x Intel® I210-AT chipset
- 50.95mm x 30mm

IBD193



Features:

- PCI-E to MRAM storage
- 1x MR2A16ACYS35 chipset
- 50.95mm x 30mm

IBD194



Features:

- USB to 2nd VGA Display
- Resolution up to 1920x 1080 (Max.)
- DisplayLink DL-165 chipset
- 50.95 mm x 30 mm


IBD195



Features:

- PCI-E to 2x CAN Bus
- Dual channel isolation
- 50.95mm x 30mm

IBD196



Features:

- Mini-PCI-E to M.2 E key
- 54.5mm x 30mm

CMI Series Chassis & Motherboard



Compatible Motherboard List

Model	CMI202	CMI211	CMI212	CMI203	CMI222	CMI300
MI992		V		V		
MI991	V	V	V	V		
MI990		V	V	V		
MI988						V
MI985		V				
MI982		V		V		
MI981		V	V	V		
MI980		V	V			
MI811					V	
MI808					V	
MI805					V	

Remarks: 1. Specifications are subject to change without prior notice. 2. ODM/OEM is available. 3. For user's manual & datasheet download, visit www.ibase.com.tw.



Rear I/O

Specifications

System Mainboard	MI991AF
CPU Type	6th Gen Intel® Core™ i7/i5/i3 / Pentium® / Celeron® DT Processors
PCH	Intel® Q170
System Speed	i7-6700 (3.4GHz ~4.0 GHz)
Memory	2x 8G DDR4-2400 SO-DIMM, Max.32GB
Front-side Panel I/O	N/A
Rear-side Panel I/O	1x 2-pin DC input for 24V($\pm 10\%$) 1x 2-pin DC output for 12V($\pm 10\%$) 1x Power on/off button 1x reset button 1x Power LED, 1x HDD LED 1x DB9 (for GPIO 4-in & 4-out) 3x RS232 for COM#2~4 (2-ports thru pin header) 1x RS232/422/485 for COM#1 6x USB 3.0 ,2x USB2.0 2x system fans 2x RJ45, 1x Audio port for Line-in/Line-out/Mic-in 1x SPK Out (6W output) thru ID107 (Optional) 1x DVI-D, 1x HDMI, 1x DisplayPort
Storage Interface	2x 2.5" SATA HDD or SSD
Expansion Slots	1x PCI-E (x16) expansion slot Add-on card dimensions: up to 106mm x 200mm
Power Supply	Industrial 250W DC input powered switching power supply Input Voltage: Direct 24V($\pm 10\%$) DC, 18A
Construction	SECC
Chassis Color	Black

Features


- 6th Gen Intel® Core™ i7/i5/i3 / Pentium® / Celeron® DT Processors
- Dual-channel memory, up to 32GB DDR4
- 4x DB9, 1x GPIO
- Supports DVI-D, HDMI and DisplayPort
- Removable 2.5" storage (Supports RAID 0/1)
- Supports Intel® iAMT(11.0) and TPM(1.2)

Mounting Type	Wall mount & Desktop
Dimensions	345mm (W) x 240mm (D) x 100mm (H) 13.5" (W) x 9.44" (D) x 3.93" (H)
Weight	4.4 kg
Operating Temperature	0°C~45°C (32°F~113°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	5% ~ 90% @45C (Non-condensing)
Vibration	Non-Operating : 1.0 grms / 5~500Hz / random Operating : 0.25 grms / 5~500Hz / random
Certification	CE / LVD / FCC Class B (Pre-scan only)


Ordering Information

CMI202-991M	Chassis with MI991AF + IP118 riser card, w/o CPU, HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E(x16) expansion slots (RoHS22)
-------------	---

Chassis for Add-on card Dimensions (Max.)

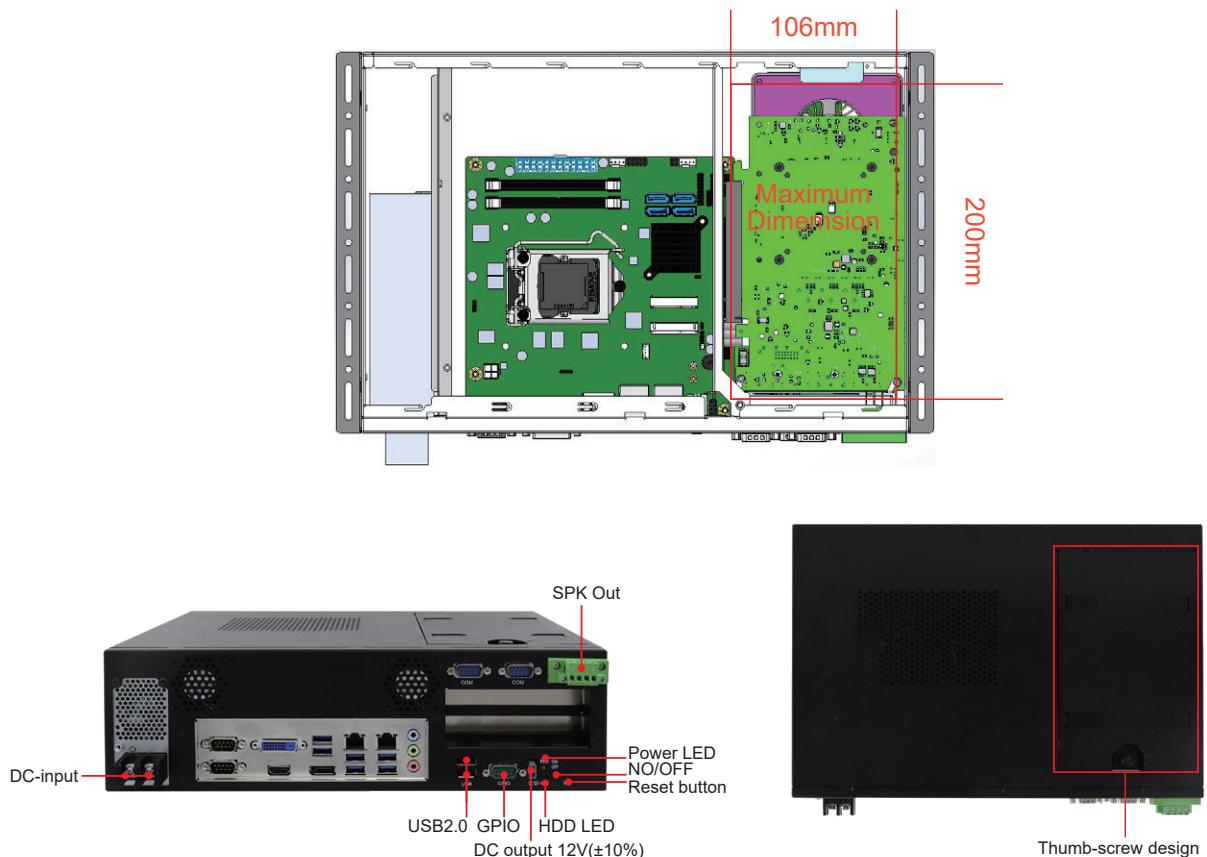

Dimensions and Drawing

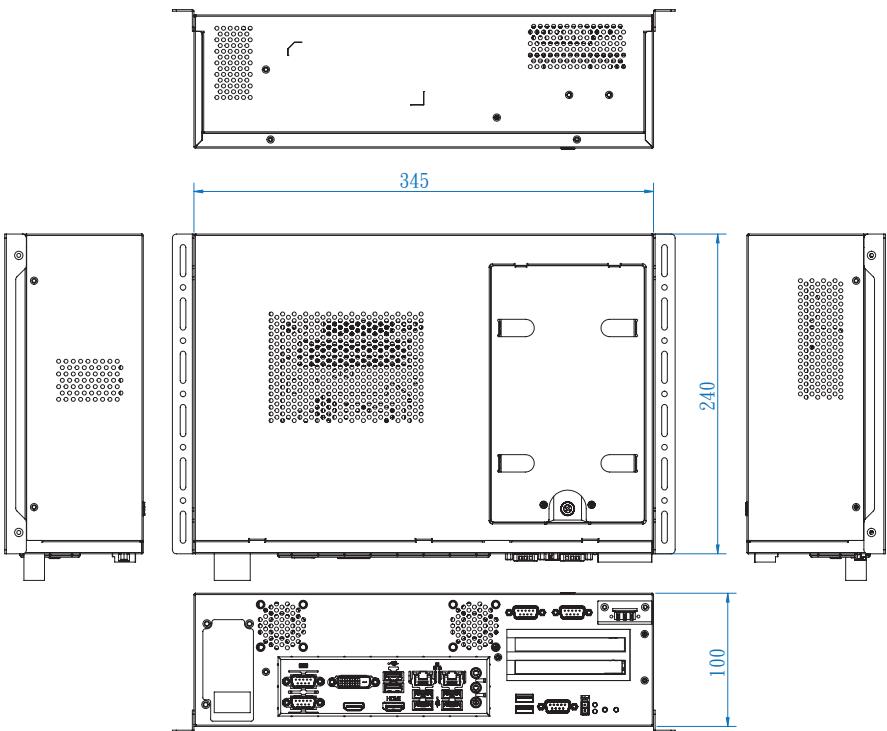

CMI203 System Family

Mini-ITX System

Expandable System with IBASE Mini-ITX Motherboard

CMI203-992VF-X3G / CMI203-991 / CMI203-990



Rear I/O




Specifications

		CMI203-992VF-X3G	CMI203-991	CMI203-990
System	System Mainboard	MI992VF	MI991AF/MI991EF	MI990VF/MI990EF
	Processor	7th Gen Intel® Kabylake-H mobile Processors	6th Gen Intel® Core™ i7/i5/i3/ Pentium®/ Celeron® DT Processors	6th Gen Intel® Core™ i7/i5/i3/ Pentium®/ Celeron® MB Processors
	PCH	Intel® CM238	MI991AF: Intel® Q170 MI991EF: Intel® H110	MI990VF: Intel® CM236 MI990EF: Intel® HM170
	System Speed	Up to 3.7 GHz	Up to 4.0 GHz	Up to 3.7 GHz
	Memory	1x DDR4-2400 SO-DIMM	2x DDR4-2133 SO-DIMM	2x DDR4-2133 SO-DIMM
I/O Interface	Front-side Panel I/O		N/A	
	Rear-side Panel I/O		1x AC-outlet, 1x Power button, 1x reset button 1x Power LED, 1x HDD LED 1x DB9M for GPIO (4-in & 4-out) 3x RS232 ports via pin header 2x USB 2.0 ports via pin header 2x system fans Based on different motherboard I/O ports	
Storage Interface	SATA / M.2	1 x 3.5" or 2.5" HDD drive bay, 1x M.2 (M-Key)		1x 3.5" or 2.5" HDD drive bay
	mSATA	1x mSATA	1x mSATA	1x mSATA
Expansion Slots	PCI-E Expansion		1x PCI-E (x16) expansion slot	
	Add-on card Max. Size		111mm(W) x 170mm(D) x 40mm(H)	
Power Supply	ATX Power		Industrial 250W ATX power supply Input voltage: 100V ~ 240V Input frequency: 47Hz ~ 63Hz Compatible with IEC62368-1/EN62368-1	
Mechanical	Construction		SECC	
	Chassis Color		Black	
	Mounting Type		Wall mount & Desktop	
	Dimensions		345mm (W) x 225mm (D) x 100mm (H) 13.58" (W) x 8.86" (D) x 3.94" (H)	
	Weight	4.4kg	4.4kg	4.4kg
Environmental	Operating Temperature		0°C~45°C (32°F~113°F)	
	Storage Temperature		-20°C~80°C (-4°F~176°F)	
	Humidity		5% ~ 90% @45C (Non-condensing)	
	Vibration		Non-Operating : 1.0 grms / 5~500Hz / random Operating : 0.25 grms / 5~500Hz / random	
	Certification		CE / LVD / FCC Class B (Pre-scan only)	

CMI203 System Family

Dimensions and Drawing

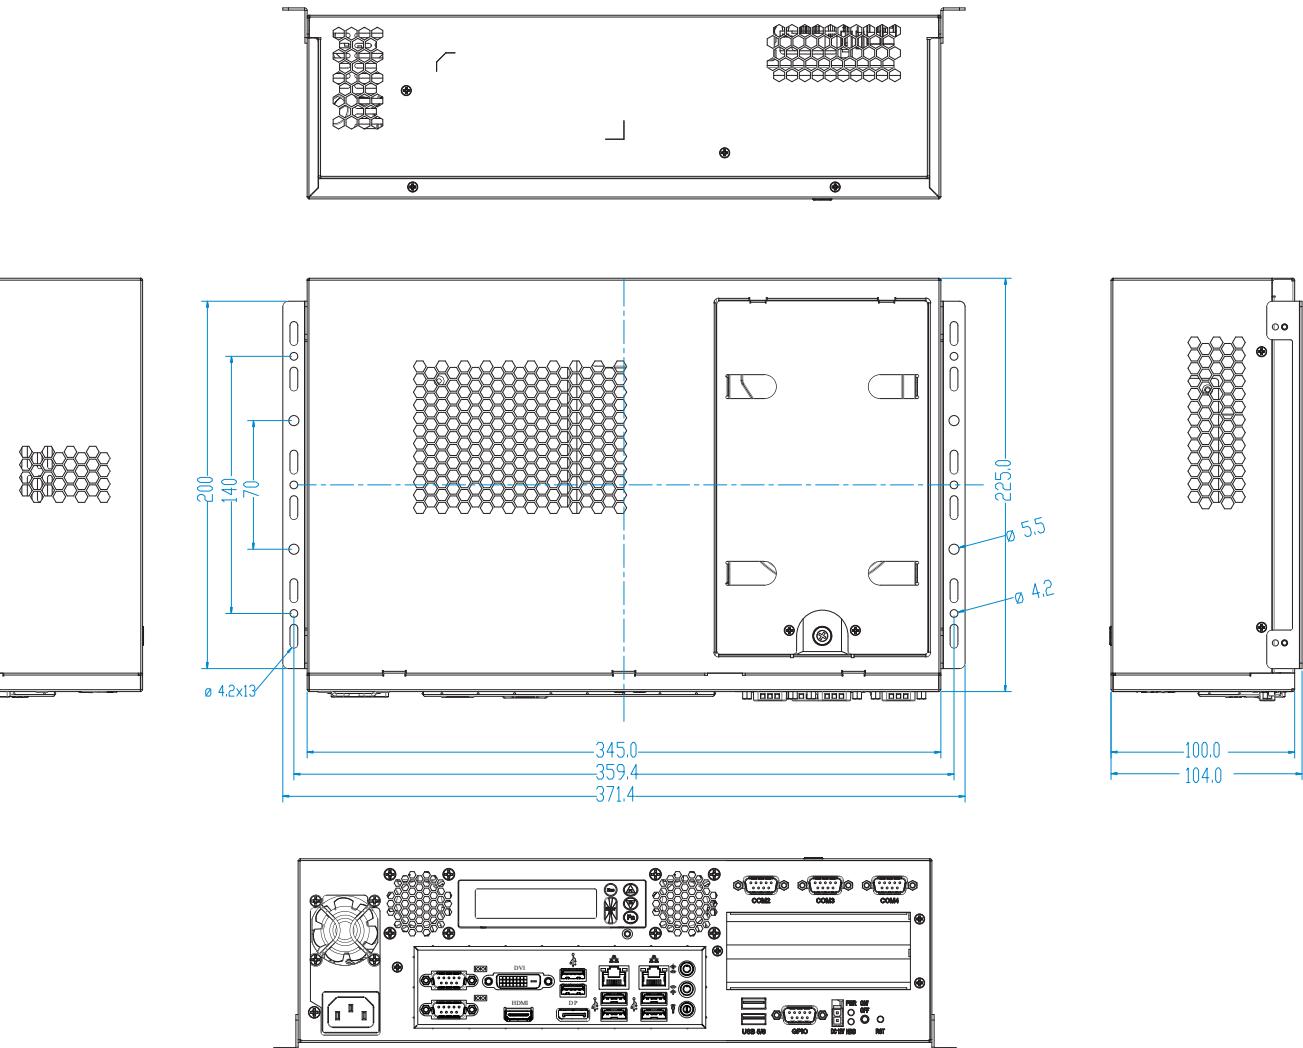

Ordering Information

CMI203-992VF-X3G	Chassis with MI992VF + IP118 riser card, w/ 250W PSU, CPU & memory & 500G HDD, 2.5" storage holder, mounting brackets, (RoHS2)
CMI203-992VF-X3GM	Chassis with MI992VF + IP118 riser card, w/ 250W PSU, CPU, 2.5" storage holder, w/o memory & HDD, 1x PCI-E(x16) expansion slot, (RoHS2)
CMI203-991AFM	Chassis with MI991AF + IP118 riser card, w/o CPU, HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)
CMI203-991EFM	Chassis with MI991EF + IP118 riser card, w/o CPU, HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)
CMI203-990-6820M	Chassis with MI990VF-6820 + IP118 riser card, w/o HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)
CMI203-990-6440M	Chassis with MI990VF-6440 + IP118 riser card, w/o HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)
CMI203-990-6100M	Chassis with MI990EF-6100 + IP118 riser card, w/o HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)

Remarks: 1. Specifications are subject to change without prior notice. 2. ODM/OEM is available. 3. For user's manual & datasheet download, visit www.ibase.com.tw.

CMI211 System Family

Mini-ITX System

Expandable System with IBASE Mini-ITX Motherboard



CMI211-989 / CMI211-992VF-7820 / CMI211-991 / CMI211-990



Rear I/O (Based on MI992VF-7820 & MI991 & MI990 I/O)



Rear I/O(Based on MI989 I/O)




Specifications

Model	CMI211-989	CMI211-992VF-7820	CMI211-991	CMI211-990	
System	System Mainboard	MI989F	MI992VF	MI991AF/MI991VF	
	Processor	AMD Ryzen™ Embedded V2000 series	7th Gen Intel® Core™ i7-7820EQ Processors	6th Gen Intel® Core™ i7/i5/i3/Pentium®/ Celeron® DT Processors	
	PCH	AMD integrated SoC	Intel® CM238	MI991AF: Intel® Q170 MI991EF: Intel® H110	
	System Speed	Up to 4.15 GHz	Up to 3.7 GHz	Up to 4.0 GHz	
	Memory	2x DDR4-3200 SO-DIMM	2x DDR4 -2400 SO-DIMM	2x DDR4-2133 SO-DIMM	
I/O Interface	Front-side Panel I/O	2x USB 2.0 ports 2x Antenna hole	2x USB 2.0 ports		
	Rear-side Panel I/O	1x AC-inlet, 1x Power button 1x Power LED, 1x HDD LED Based on different motherboard I/O ports	1x AC-inlet, 1x Power button 1x Power LED, 1x HDD LED 1x Antenna hole Based on different motherboard I/O ports		
Storage Interface	SATA	1x 2.5" HDD drive bay			
	M.2 / mSATA	1x M.2	1x mSATA	1x mSATA	
Expansion Slots	PCI-E Expansion	1x PCI-E (x16) expansion slot			
	Add-on card Max. Size	111mm(W) x 168mm(D) x 18mm(H)			
Power Supply	ATX Power	Industrial 250W ATX power supply Input voltage: 100V ~ 240V Input frequency: 47Hz ~ 63Hz Compatible with IEC62368-1/EN62368-1			
	Construction	SECC			
Mechanical	Chassis Color	Black			
	Mounting Type	Wall mount & Desktop			
	Dimensions	300m (W) x 205mm (D) x 72mm (H) 11.81" (W) x 8.07" (D) x 2.83" (H)			
	Weight	TBD	2.91kg	3.1kg	
	Weight	2.8kg			
Environmental	Operating Temperature	0°C~45°C (32°F~113°F)			
	Storage Temperature	-20°C~80°C (-4°F~176°F)			
	Humidity	5% ~ 90% @45C (Non-condensing)			
	Vibration	Non-Operating : 1.0 grms / 5~500Hz / random Operating : 0.25 grms / 5~500Hz / random			
	Certification	CE / LVD / FCC Class B (Pre-scan only)			

CMI211 System Family

Dimensions and Drawing

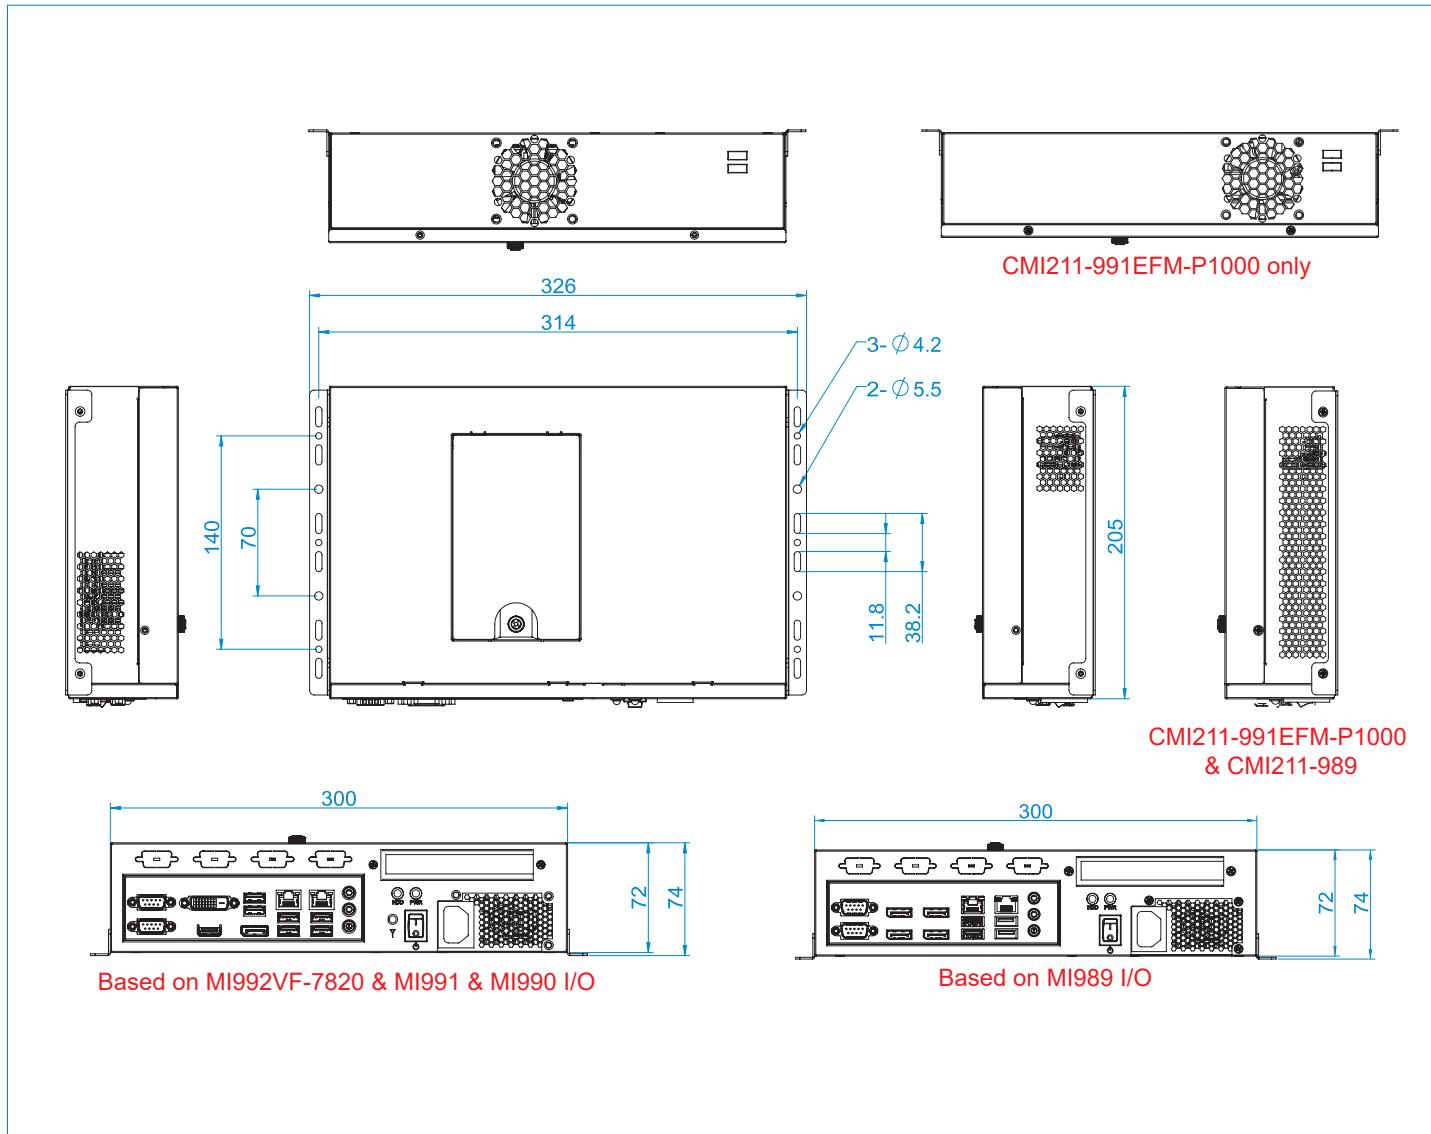

Ordering Information

CMI211-989-2748	Chassis with MI989F-2748 (AMD V2748) + IP119 riser card, w/o HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)
CMI211-989-2718	Chassis with MI989F-2718 (AMD V2718) + IP119 riser card, w/o HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)
CMI211-992VF-7820M	Chassis with MI992VF-7820 + IP119 riser card, w/o CPU, HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)
CMI211-991AFM	Chassis with MI991AF + IP119 riser card, w/o CPU, HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)
CMI211-991EFM	Chassis with MI991EF + IP119 riser card, w/o CPU, HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)
CMI211-990-6820M	Chassis with MI990VF-6820E + IP119 riser card, w/o HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)
CMI211-990-6440M	Chassis with MI990VF-6440E + IP119 riser card, w/o HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)
CMI211-990-6100M	Chassis with MI990EF-6100E + IP119 riser card, w/o HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)

Remarks: 1. Specifications are subject to change without prior notice. 2. ODM/OEM is available. 3. For user's manual & datasheet download, visit www.ibase.com.tw.

CMI212 System Family

Mini-ITX System

Expandable System with IBASE Mini-ITX Motherboard

CMI212-999 / CMI212-991 / CMI212-990

1 AGS Series

2 AMS Series

3 AMI Series

4 CMI Series

5 ASB Series

6 CSB Series



Rear I/O




Specifications

	Model	CMI212-999	CMI212-991	CMI212-990
System	System Mainboard	MI999AFE-W/MI999EFE-H	MI991AF	MI990VF/MI990EF
	Processor	10th Gen Intel® Core™ i7/i5/i3/ Pentium® / Celeron® DT Processors	6th Gen Intel® Core™ i7/i5/i3/ Pentium® / Celeron® DT Processors	6th Gen Intel® Core™ i7/i5/i3/ Pentium® / Celeron® MB Processors
	PCH	MI999AFE-W: Intel® W480E MI999EFE-H: Intel® H420E	Intel® Q170	MI990VF: Intel® CM236 MI990EF: Intel® HM170
	System Speed	Up to 4.8 GHz	Up to 4.0 GHz	Up to 3.7 GHz
	Memory	2x DDR4-2933/2666 SO-DIMM	2x DDR4-2133 SO-DIMM	2x DDR4-2133 SO-DIMM
I/O Interface	Front-side Panel I/O		1x Power LED, 1x HDD LED 1x Power button, 1x reset button 2x USB 2.0 ports	
	Rear side Panel I/O		2x RS232 ports via pin header 2x Antenna hole 1x DC-jack for power input 2x COM DB9 1x DVI 1x HDMI 1x Display Port 6x USB 2x LAN RJ45 1x 3-ports Audio Jack	
Storage Interface	SATA		1x 2.5" HDD drive bay	
	mSATA / M.2	1x M.2 (MI999AFE-W only)	1x mSATA	1x mSATA
Expansion Slots	PCI-E Expansion		2x PCI-E (x16) expansion slots (2x PCI-E (x8) signal)	
	Add-on Card Max. Size		111mm(W) x 185mm(D) x 17mm(H) (For MI990) 111mm(W) x 185mm(D) x 11mm(H) (For MI999/MI991)	
Power Supply	AC Adapter		150W power adaptor Input voltage: 100V~240V Input frequency: 47Hz~63Hz Output voltage: 12V Output current: 0A to 12.5A Compatible with IEC62368-1/EN62368-1	
Mechanical	Construction		SGCC	
	Chassis Color		Black	
	Mounting Type		Wall mount & Desktop	
	Dimensions		198m (W) x 235mm (D) x 118mm (H) 7.8" (W) x 9.25" (D) x 4.65" (H)	
	Weight	3kg	3kg	2.7kg
Environmental	Operating Temperature		0°C~45°C (32°F~113°F)	
	Storage Temperature		-20°C~80°C (-4°F~176°F)	
	Humidity		5% ~ 90% @45C (Non-condensing)	
	Vibration		Non-Operating : 1.0 grms / 5~500Hz / random Operating : 0.25 grms / 5~500Hz / random	
	Certification		CE / LVD / FCC Class A (Pre-scan only)	

Remarks: 1. Specifications are subject to change without prior notice. 2. ODM/OEM is available. 3. For user's manual & datasheet download, visit www.ibase.com.tw.

CMI212 System Family

Dimensions and Drawing

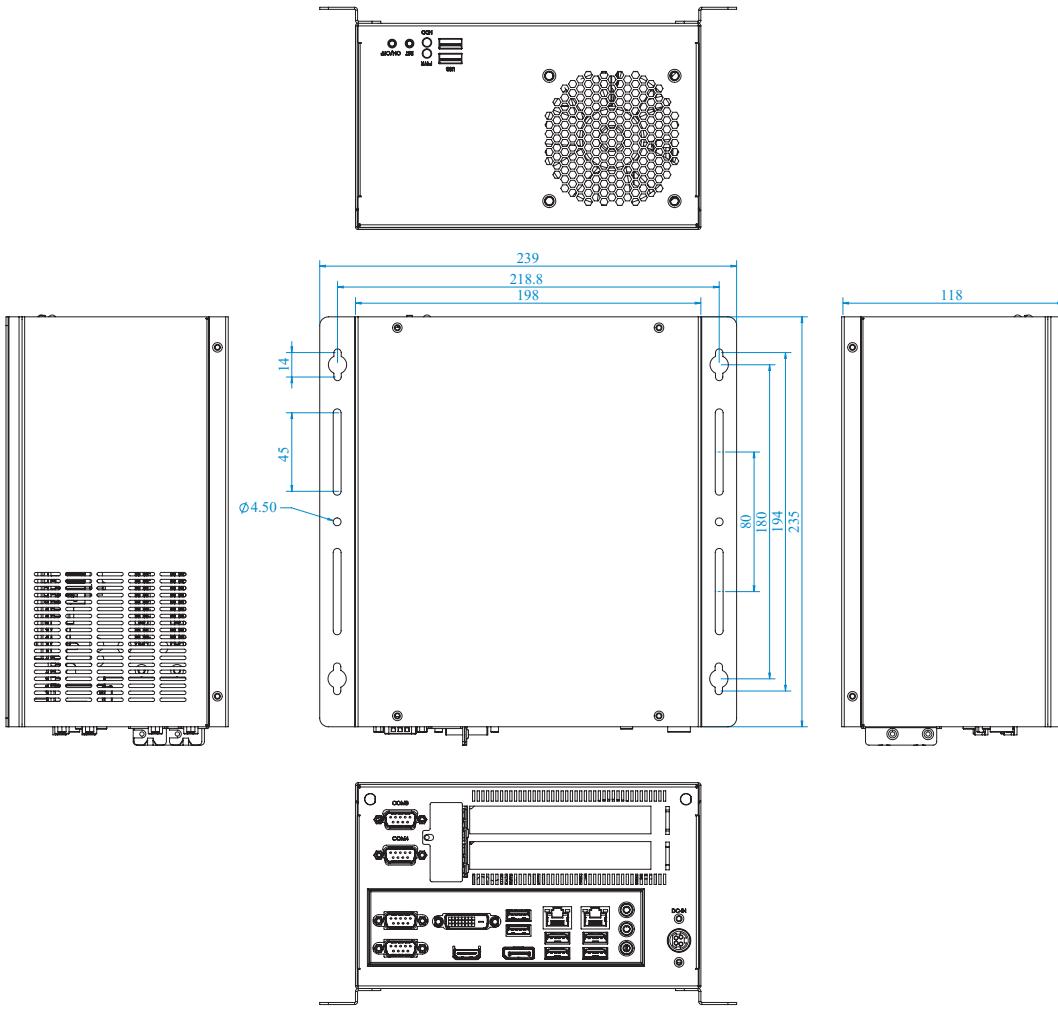

Ordering Information

CMI212-999AFM	Chassis with MI999AFE-W + IP404 riser card, w/o CPU, HDD, memory, w/ 150W power adaptor, 2.5" HDD holder, 2x PCI-E (x16) expansion slots (with PCI-E (x8) signal) (RoHS2)
CMI212-999EFM	Chassis with MI999EFE-H + IP404 riser card, w/o CPU, HDD, memory, w/ 150W power adaptor, 2.5" HDD holder, 2x PCI-E (x16) expansion slots (with PCI-E (x8) signal) (RoHS2)
CMI212-991AFM	Chassis with MI991AF + IP404 riser card, w/o CPU, HDD, memory, w/ 150W power adaptor, 2.5" HDD holder, 2x PCI-E (x16) expansion slots (with PCI-E (x8) signal) (RoHS2)
CMI212-991EFM	Chassis with MI991EF + IP404 riser card, w/o CPU, HDD, memory, w/ 150W power adaptor, 2.5" HDD holder, 2x PCI-E (x16) expansion slots (with PCI-E (x8) signal) (RoHS2)
CMI212-990-6820M	Chassis with MI990VF-6820 + IP404 riser card, w/o HDD, memory, w/ 150W power adaptor, 2.5" HDD holder, 2x PCI-E (x16) expansion slots (with PCI-E (x8) signal) (RoHS2)
CMI212-990-6440M	Chassis with MI990VF-6440 + IP404 riser card, w/o HDD, memory, w/ 150W power adaptor, 2.5" HDD holder, 2x PCI-E (x16) expansion slots (with PCI-E (x8) signal) (RoHS2)
CMI212-990-6100M	Chassis with MI990EF-6100 + IP404 riser card, w/o HDD, memory, w/ 150W power adaptor, 2.5" HDD holder, 2x PCI-E (x16) expansion slots (with PCI-E (x8) signal) (RoHS2)

Remarks: 1. Specifications are subject to change without prior notice. 2. ODM/OEM is available. 3. For user's manual & datasheet download, visit www.ibase.com.tw.



Rear I/O

Specifications

System Mainboard	MI991AF
CPU Type	6th Gen Intel® Core™ i7/i5/i3 / Pentium® / Celeron® DT Processors (35W TDP)
PCH	Intel® Q170
System Speed	i7-6700TE (2.4GHz ~ 3.4GHz) i5-6500TE (2.3GHz ~ 3.3GHz)
Memory	2x 8G DDR4-2400 SO-DIMM, Max.32GB
Front-side Panel I/O	1x Power LED 1x HDD LED 1x Power On/Off button, 1x Reset button 2x USB 2.0
Rear-side Panel I/O	1x RS-232/422/485 for COM#1 3x RS-232 for COM#2~4 2x RS-232 for COM#5~6 ports(CMI221-991-6COM Series only) 6x USB 3.0 2x GbE LAN 1x DVI-D, 1x HDMI, 1x DP Line-In, Line-Out, Mic-In 4x Digital Input + 4x Digital Output 1x AC power inlet
Storage Interface	1x mSATA 2x 2.5" SATA Drive Bay (2nd storage cable reserved)
Expansion Slots	1x PCI-E (x16) expansion slot Add-on card dimensions:
Power Supply	Industrial 250W ATX power supply (80-plus) 100V~240V Input Voltage 50Hz ~ 60Hz Input frequency Compatible with IEC62368-1/EN62368-1
Construction	SECC
Chassis Color	Black
Mounting Type	Desktop or wall mount
Dimensions	300mm (W) x 250mm (D) x 72mm (H) 11.81" (W) x 9.84" (D) x 2.83" (H)
Operating Temperature	0°C ~ 45°C (32°F ~ 113°F)
Storage Temperature	-20°C ~ 80°C (-4°F ~ 176°F)

Features


- 6th Gen Intel® Core™ i7/i5/i3 / Pentium® / Celeron® DT Processors
- Dual-channel memory, up to 32GB DDR3
- Supports DVI-D,HDMI & DisplayPort
- Removable 2.5" storage (Supports RAID 0/1)
- Supports 1x Mini PCI-E, 1x mSATA, 1x PCI-E expansion slot
- Supports Intel® iAMT(11.0) and TPM(1.2)
- Long-term supply & supports

Relative Humidity	5%~90%@45°C (non-condensing)
Vibration	Operating : 0.25Grms / 5~500Hz Non-operating : 1Grms / 5~500Hz
Certification	CE/ FCC Class A/ LVD

Ordering Information

CMI221-991-6COM-I7	Chassis with MI991AF + IP119+ IBD182V, w/ Intel® Core™ i7-6700TE CPU + CPU cooler ,2x 8GB DDR4 memory, 1x 1TB 2.5" SATA HDD, w/ 250W power supply
CMI221-991-6COM-I5	Chassis with MI991AF + IP119+ IBD182V, w/ Intel® Core™ i5-6500TE CPU + CPU cooler ,2x 8GB DDR4 memory, 1x 1TB 2.5" SATA HDD, w/ 250W power supply
CMI221-991M	Chassis with MI991AF + IP119 + CPU cooler, w/o CPU, Storage, memory, w/ 250W power supply 2.5" SSD/HDD holder, 1x PCI-E(x16) expansion

Dimensions and Drawing

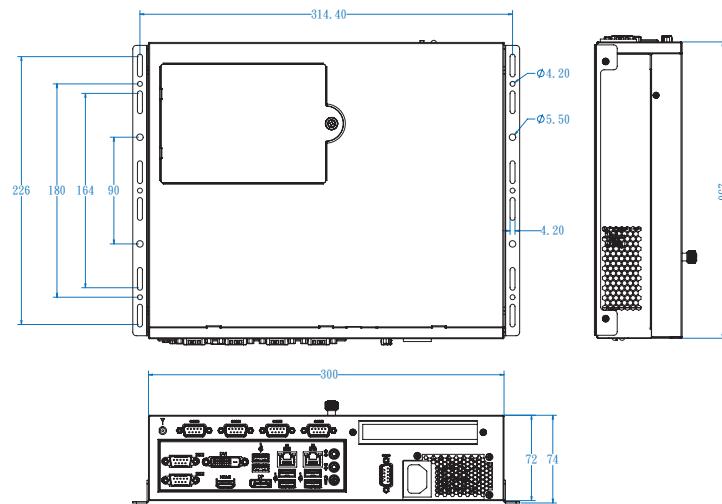

CMI222 System Family

Mini-ITX System

Expandable System with IBASE Mini-ITX Motherboard

CMI222-811 / CMI222-808



Rear I/O (Based on MI811 I/O)



Rear I/O (Based on MI808 I/O)



Specifications

	Model	CMI222-811	CMI222-808
System	System Mainboard	MI880F	MI808F
	Processor	Intel® Pentium® QC N4200 @ 1.1GHz ~ 2.5GHz Intel® Celeron® DC N3350 @ 1.1GHz ~ 2.4GHz	Intel® Pentium® N3710 / Celeron® N3010 Processor
	PCH	N/A	N/A
	System Speed	Up to 2.4 GHz	Up to 2.24 GHz
	Memory	2x DDR3L-1866 SO-DIMM	2x DDR3L-1600 SO-DIMM
I/O Interface	Front side Panel I/O	1x Power LED, 1x HDD LED 1x Power button 2x USB 2.0 ports 8x DB9M ports (Reserved hole)	
	Rear side Panel I/O	4x RS232 ports thru pin header 1x Antenna hole 1x 3-pin terminal block for power input or DC-jack type 1x 10-pin terminal block for GPIO (4-in & 4-out) Based on different motherboard I/O ports	
Storage Interface	SATA	1x 2.5" HDD drive bay	
	mSATA	1x mSATA	1x mSATA
Expansion Slots	PCI-E Expansion	2x PCI slot (IP245 riser card), 1x PCI + 1x PCI-E (x1) slots (IP246 riser card)	
	Add-on Card Max. Size	111mm(W) x 168mm(D) x 17mm(H) (For PCI-E card) 106mm(W) x 175mm(D) x 17mm(H) (For PCI card)	
Power	AC Adapter	84W power adaptor Input voltage: 90V~264V Input frequency: 47Hz~63Hz Output voltage: 12V Output current: 0A to 7A Compatible with IEC62368-1/EN62368-1	
Mechanical	Construction	SECC	
	Chassis Color	Black	
	Mounting Type	Wall mount & Desktop	
	Dimensions	300mm (W) x 235mm (D) x 83mm (H) 11.81" (W) x 9.25" (D) x 3.27" (H)	
	Weight	2.6kg	2.6kg
Environmental	Operating Temperature	0°C~45°C (32°F~113°F)	
	Storage Temperature	-20°C~80°C (-4°F~176°F)	
	Humidity	5% ~ 90% @45C (Non-condensing)	
	Vibration	Non-Operating : 1.0 grms / 5~500Hz / random Operating : 0.25 grms / 5~500Hz / random	
	Certification	CE / LVD / FCC Class B (Pre-scan only)	

Remarks: 1. Specifications are subject to change without prior notice. 2. ODM/OEM is available. 3. For user's manual & datasheet download, visit www.ibase.com.tw.

iBASE

1 AGS Series

2 AMS Series

3 AMI Series

4 CMI Series

5 ASB Series

6 CSB Series

CMI222 System Family

1 AGS Series

2 AMS Series


3 AMI Series

4 CMI Series

5 ASB Series

6 CSB Series

Dimensions and Drawing

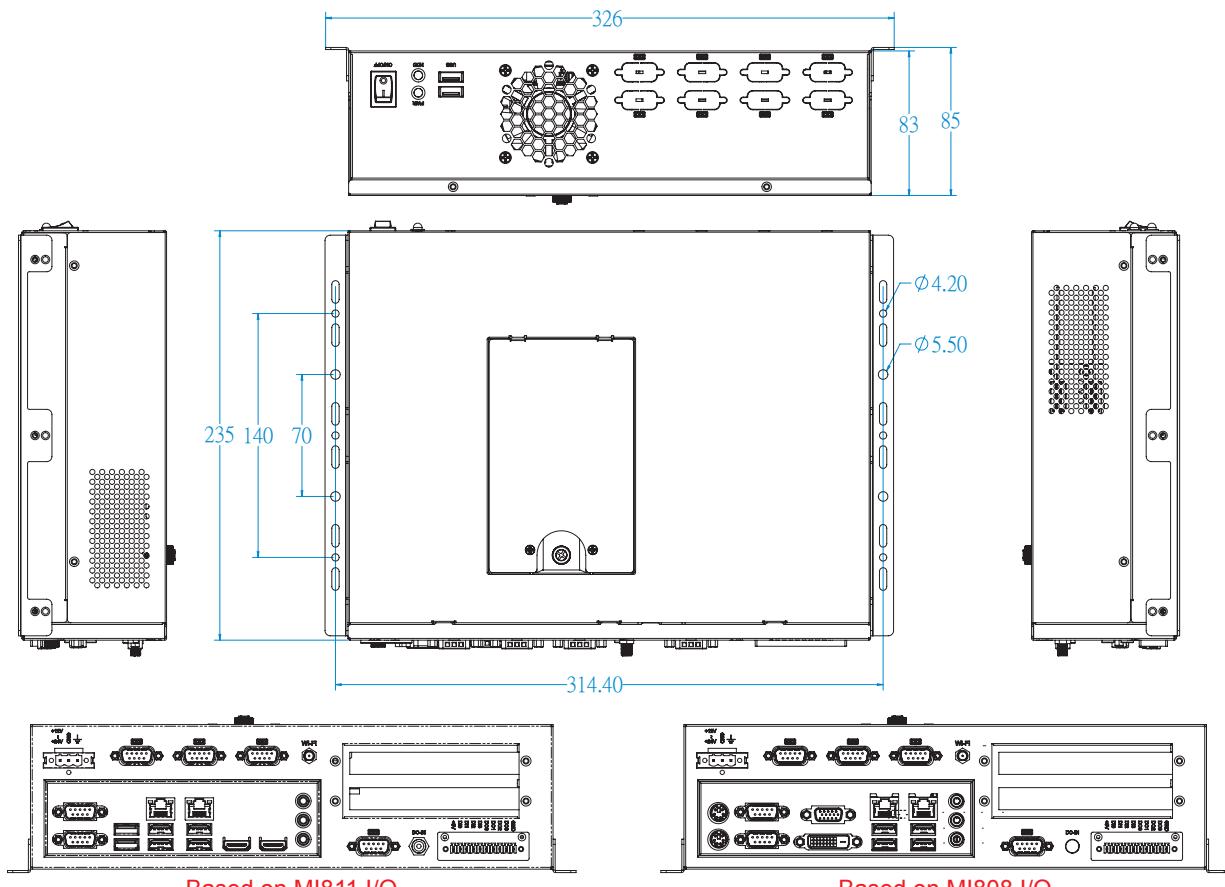

Ordering Information

CMI222-808M-371	Chassis with MI808F-371 + IP246 riser card, w/o HDD, memory, w/ 84W PSU, 2.5" HDD holder, 1x PCI-E (x1) + 1x PCI expansion slot (RoHS2)
CMI222-808M-301	Chassis with MI808F-301 + IP246 riser card, w/o HDD, memory, w/ 84W PSU, 2.5" HDD holder, 1x PCI-E (x1) + 1x PCI expansion slot (RoHS2)
CMI222-811M-420	Chassis with MI811F-420D + IP246 riser card, w/o HDD, memory, 84W PSU, w/ 2.5" HDD holder, 1x PCI-E (x1) + 1x PCI expansion slot (RoHS2)
CMI222-811M-335	Chassis with MI811F-335D + IP246 riser card, w/o HDD, memory, 84W PSU, w/ 2.5" HDD holder, 1x PCI-E (x1) + 1x PCI expansion slot (RoHS2)



Rear I/O

Specifications

System Mainboard	MI988F
CPU Type	AMD Ryzen™ Embedded V1000 Series
PCH	N/A
System Speed	Up to 3.8GHz
Memory	2x 4GB DDR4 SO-DIMM, Max. 32GB
Front-side Panel I/O	2x Antenna hole reserved Power button
Rear-side Panel I/O	2x RS232/422/485 for COM#1~#2 2x RS232 for COM#3~#4 4x USB 3.1 ports 2x RJ-45 Gigabit Ethernet port 1x HDMI+DisplayPort 1x Audio port for [Line-in / Line-out / Mic-in] 1x Antenna hole reserved
Storage Interface	1x 2.5" SSD
Expansion Slots	1x Mini PCI-E socket, 1x M.2 (M Key:2280)
Power Supply	84W power adaptor
Construction	Aluminum & steel
Chassis Color	Black
Mounting Type	Desktop or wall mount bracket Optional VESA mount kit
Dimensions	200mm (W) x 200mm (D) x 62mm (H) 7.87" (W) x 7.87" (D) x 2.44" (H)
Weight	1.8kg
Operating Temperature	0°C~45°C (32°F~113°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	5%~90%@45°C (non-condensing)
Vibration	Operating: 0.25Grms / 5~500Hz Non-operating: 1Grms / 5~500Hz
Certification	CE/FCC Class A


Features

- AMD Ryzen™ Embedded V1807B on board
- Dual-channel memory, up to 32GB DDR4
- Supports HDMI & DisplayPort
- 2x Gigabit Ethernet, 4x USB 3.1, 4x COM
- Wall mount kit included, optional VESA mount kit
- 1x Mini PCI-E socket, 1x M.2 (M-key)

Ordering Information

CMI300-988-1807	Embedded System with MI988F-1807 (AMD V1807B 3.35/3.8GHz on board), w/ 128GB 2.5" SSD, 1x 4GB DDR4 memory, 84W power adaptor (RoHS2) Compatible with IEC62368-1/EN62368-1
CMI300-988-1605	Embedded System with MI988F-1605 (AMD V1605B 2.0/3.6GHz on board), w/ 128GB 2.5" SSD, 1x 4GB DDR4 memory, 84W power adaptor (RoHS2) Compatible with IEC62368-1/EN62368-1

Dimensions and Drawing

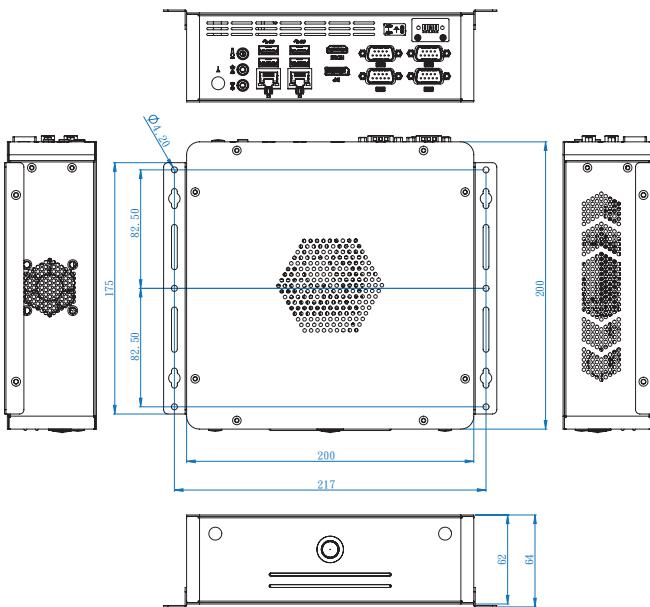

Comparison of CMI Series System Width

7.87-inch
(200mm)

11.81-inch
(300mm)

11.81-inch
(300mm)

13.58-inch
(345mm)

13.58-inch
(345mm)



CMI300



CMI211



CMI222



CMI203



CMI202

Comparison of CMI Series System Depth

7.87-inch
(200mm)

8.07-inch
(205mm)

8.86-inch
(225mm)

9.25-inch
(235mm)

9.45-inch
(240mm)



CMI300



CMI211



CMI203



CMI222




CMI202

Wall Mounting



Optional VESA Mount Kit

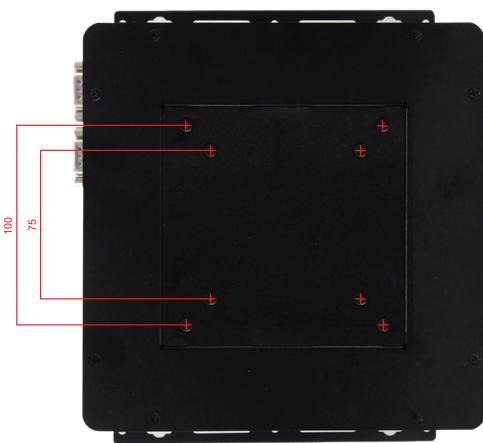



Rear I/O

Specifications

System Mainboard	IB915AF-6600 / IB915AF-6300 / IB915AF-6100
CPU Type	Intel® Core™ i7 6600U Processor Intel® Core™ i5 6300U Processor Intel® Core™ i3 6100U Processor
System Speed	2.6GHz / 2.4GHz / 2.3GHz
Memory	2x 2GB DDR3L-1600 SO-DIMM Memory, Max.16GB
Front Panel External I/O	1x Power button 2x USB 2.0 1x Audio Jack for Line-out / Line-in / MIC-in 1x HDD LED 1x Digital I/O (4-in / 4-out)
Rear Panel External I/O	1x COM thru RJ50 connector (RS-232/422/485) 3x COM (RS232) 4x USB 3.0 ports 1x USB 3.1 port type-C 1x DisplayPort 2x RJ-45 GbE connector 1x 3-pin DC-in terminal block for 12V(-10%)~24V(+10%)
Expansion Slots	1x Full-size Mini PCI-E socket
Storage	1x 2.5" HDD or SSD
Construction	Aluminum & Steel
Chassis Color	Black
Mounting Type	Desktop or wall mount (wall mount kit included) Optional VESA mount kit
Dimensions	180mm (W) x 150mm (D) x 66mm (H) 7.09" (W) x 5.91" (D) x 2.6" (H)
Weight	1.8kg
Operating Temperature	0°C~40°C (32°F~104°F) (With HDD) -10°C~50°C (14°F~122°F) (With SSD)
Storage Temperature	-20°C ~ 80°C (-4°F~176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	Operating : 0.25Grms / 5~500Hz Non-operating : 1Grms / 5~500Hz
Shock	Operating : 20G / 11ms Non-operating : 40G / 11ms
Certification	CE / LVD / FCC Class B


Features

- Fanless system with IBASE IB915 3.5" Disk-Size SBC
- Onboard 6th Gen Intel® Core™ U-series Processor
- iSMART- for auto-scheduler and power resume
- 12V(-10%) ~ 24V(+10%) DC wide-range power input
- Supports 1x Mini PCI-E (full-size)
- Supports 1x 2.5" SATA HDD
- 1x USB 3.1 port type-c, 4x USB 3.0 ports
- Wall mount kit included

Ordering Information

ASB200-915-i7	Fanless chassis with IB915AF-6600, Intel® i7-6600U 2.6GHz CPU, 4x COM, 2x 2GB DDR3L memory, 1x 2.5" 64GB MLC SSD, supports iAMT11.0, w/o 90W power adaptor and VESA mount bracket
ASB200-915-i5	Fanless chassis with IB915AF-6300, Intel® i5-6300U 2.4GHz CPU, 4x COM, 2x 2GB DDR3L memory, 1x 2.5" 64GB MLC SSD, supports iAMT11.0, w/o 90W power adaptor and VESA mount bracket
ASB200-915-i3	Fanless chassis with IB915F-6100, Intel® i3-6100U 2.3GHz CPU, 4x COM, 2x 2GB DDR3L memory, 1x 2.5" 64GB MLC SSD, w/o 90W power adaptor and VESA mount bracket
ASB200-915-i7-DC	Fanless chassis with IB915AF-6600, Intel® i7-6600U 2.6GHz CPU, 4x COM, 2x 2GB DDR3L memory, 1x 2.5" 64GB MLC SSD, 1x90W power adaptor, supports iAMT11.0, w/o VESA mount bracket
ASB200-915-i5-DC	Fanless chassis with IB915AF-6300, Intel® i5-6300U 2.4GHz CPU, 4x COM, 2x 2GB DDR3L memory, 1x 2.5" 64GB MLC SSD, 1x 90W power adaptor, supports iAMT11.0, w/o VESA mount bracket
ASB200-915-i3-DC	Fanless chassis with IB915F-6100, Intel® i3-6100U 2.3GHz CPU, 4x COM, 2x 2GB DDR3L memory, 1x 2.5" 64GB MLC SSD, 1x 90W power adaptor, w/o VESA mount bracket
90W power adaptor (optional)	90W (24V @3.75) power adaptor, DC-jack or bare wire type, Compatible with IEC62368-1/EN62368-1

Dimensions and Drawing

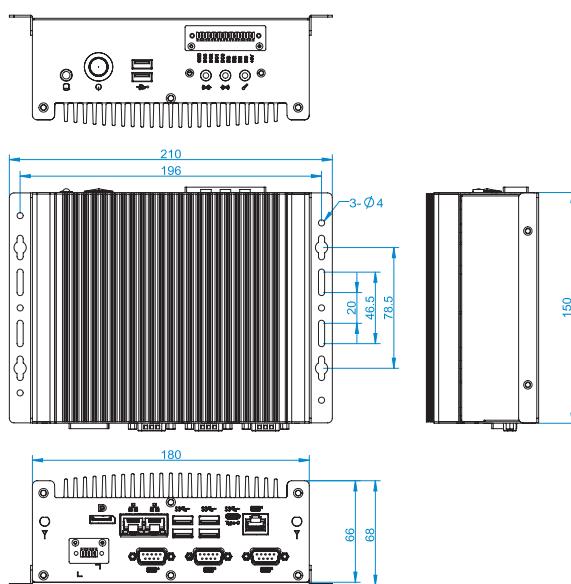



Rear I/O

Specifications

System Mainboard	IB916AF-7600 / IB916AF-7300 / IB916F-7100
CPU Type	Intel® Core™ i7 7600U Processor Intel® Core™ i5 7300U Processor Intel® Core™ i3 7100U Processor
System Speed	Up to 2.8GHz
Memory	2x 4GB DDR4-2133 SO-DIMM, Max.32GB
Front Panel External I/O	1x Power button 2x USB 2.0 1x Audio Jack for Line-out / Line-in / MIC-in 1x HDD LED 1x Digital I/O (4-in / 4-out)
Rear Panel External I/O	4x USB 3.0 port 1x HDMI display, 1x DisplayPort 1x RS232/422/485 port for COM#1 3x RS232 ports for COM#2/COM#3/ COM#4 2x RJ45 Gigabit Ethernet port 1x 3-pin DC-in terminal block for 12V(-10%)~24V(+10%)
Expansion Slots	1x Full-size Mini PCI-E socket (USB 2.0 + SATA)
Storage	1x 2.5" HDD or SSD
Construction	Aluminum & steel
Chassis Color	Black
Mounting Type	Desktop or wall mount (wall mount kit included) Optional VESA mount kit
Dimensions	180mm (W) x 150mm (D) x 66mm (H) 7.09" (W) x 5.91" (D) x 2.6" (H)
Weight	1.8kg
Operating Temperature	0°C~45°C (32°F~113°F) (With HDD) -20°C~60°C (-4°F~140°F) (With SSD)
Storage Temperature	-20°C to 80°C (-4°F to 176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	Operating : 0.25Grms / 5~500Hz Non-operating : 1Grms / 5~500Hz
Shock	Operating : 20G / 11ms Non-operating : 40G / 11ms
Certification	CE / LVD / FCC Class B


Features

- Fanless system with IBASE IB916 3.5" Disk-Size SBC
- Onboard 6th Gen Intel® Core™ U-series Processor
- iSMART- for auto-scheduler and power resume
- 12V(-10%) ~ 24V(+10%) DC wide-range power input
- Supports 1x Mini PCI-E (full-size)
- Supports 1x 2.5" SATA HDD
- 4x USB 3.0 DP/HDMI
- Wall mount kit included

Ordering Information

ASB200-916-i7	Fanless chassis with IB916AF-7600, Intel® i7-7600U 2.8GHz CPU, 4x COM, 2x 4GB DDR4 memory, 1x 2.5" 64GB MLC SSD, w/o 90W power adaptor and VESA mount bracket
ASB200-916-i5	Fanless chassis with IB916AF-7300, Intel® i5-7300U 2.6GHz CPU, 4x COM, 2x 4GB DDR4 memory, 1x 2.5" 64GB MLC SSD, w/o 90W power adaptor and VESA mount bracket
ASB200-916-i3	Fanless chassis with IB916F-7100, Intel® i3-7100U 2.4GHz CPU, 4x COM, 2x 4GB DDR4 memory, 1x 2.5" 64GB MLC SSD, w/o 90W power adaptor and VESA mount bracket
90W power adaptor (optional)	90W (24V @3.75) power adaptor, DC-jack or bare wire type, Compatible with IEC62368-1/EN62368-1
Optional Accessories	WiFi/BT antenna kit

Dimensions and Drawing

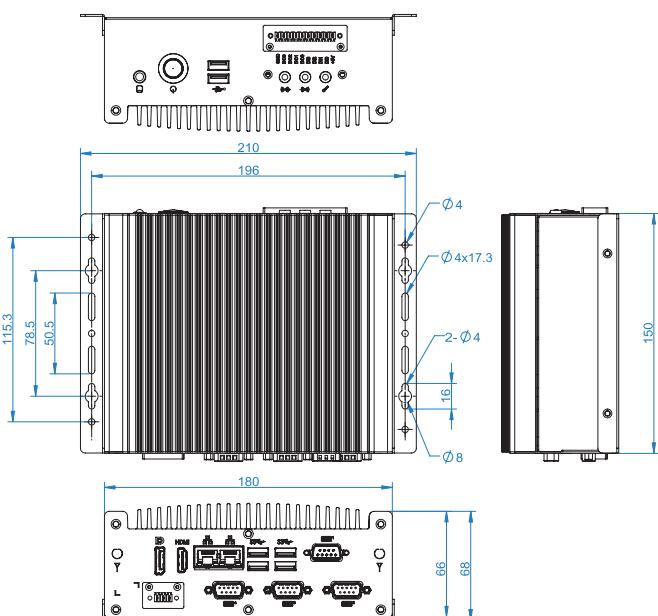




Rear I/O

Specifications

System Mainboard	IB918F-1605 /IB918F-1202 /IB918F-1606G / IB918F-1505G
CPU Type	AMD Embedded Ryzen™ Series SoC V1605B/ V1202B/ R1606G/ R1505G
System Speed	up to 3.6GHz
Memory	2x 8GB DDR4-2666 SO-DIMM Max.32GB, supports ECC
Front Panel External I/O	1x Audio Jack for Line-out/ Line-in/ MIC-in 1x Power LED/ 1x HDD LED/ 1x RST button/ 1x On/Off button 1x USB 3.0/2.0 by V1605B/ V1202B/ R1606G/ R1505G 3x DB9 for COM#2~4 (RS232)
Rear Panel External I/O	4 x USB 3.1 2x HDMI(2.0a) 1x DB9 for COM#1 (RS232/422/485) 2x LAN 1x Digital I/O (4-in/4-out) 1x 3-pin DC-in terminal block for 12V(-10%) ~ 24V(+10%) 2x Antenna holes
Expansion Slots	2x M.2 (E-Key / M-Key)
Storage	1x 2.5" HDD or SSD
Construction	Aluminum & steel
Chassis Color	Black
Mounting Type	Desktop or wall mount (wall mount kit included)
Dimensions	240mm (W) x 162mm (D) x 42mm (H) 9.44" (W) x 6.37" (D) x 1.65" (H)
Weight	1.7kg
Operating Temperature	0°C~45°C (32°F~113°F)
Storage Temperature	-20°C ~ 80°C (-4°F~176°F)
Relative Humidity	5%~90%@45°C (non-condensing)
Vibration	Operating : 3Grms / 5~500Hz
Shock	Operating : 20G / 11ms Non-operating : 40G / 11ms
Certification	CE/LVD/FCC Class B

Features

- Fanless system with IBASE IB918 3.5" Disk-Size SBC
- Onboard AMD Ryzen™ Embedded V1000 /R1000
- 2x DDR4 SO-DIMM, Max. 32GB, supports ECC
- Supports 2x M.2 sockets (E-Key / M-Key, NVMe)
- 12V(-10%) ~ 24V(+10%) DC-in Power Input
- 2x HDMI(2.0a), 2x Intel® Gigabit LAN
- 4 x COM ports, External GPIO
- 4 x USB3.1, 1x USB2.0

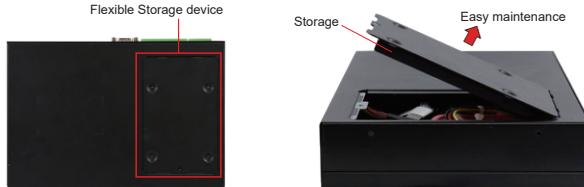

Ordering Information

ASB200-918-1605	Fanless chassis with IB918F-1605, AMD Ryzen™ Embedded V1605B QC APU 2.0GHz, 4x COM, 2x 8GB DDR4 memory, 1x 2.5" SATAIII 64GB TLC SSD, w/o 90W power adaptor
ASB200-918-1202	Fanless chassis with IB918F-1202, AMD Ryzen™ Embedded V1202B DC APU 2.3GHz, 4x COM, 2x 8GB DDR4 memory, 1x 2.5" SATAIII 64GB TLC SSD, w/o 90W power adaptor
ASB200-918-1606G	Fanless chassis with IB918F-1606G, AMD Ryzen™ Embedded R1606G DC APU 2.6GHz, 4x COM, 2x 8GB DDR4 memory, 1x 2.5" SATAIII 64GB TLC SSD, w/o 90W power adaptor
ASB200-918-1505G	Fanless chassis with IB918F-1505G, AMD Ryzen™ Embedded R1505G DC APU 2.4GHz, 4x COM, 2x 8GB DDR4 memory, 1x 2.5" SATAIII 64GB TLC SSD, w/o 90W power adaptor
90W power adaptor (optional)	90W (24V@3.75) power adaptor, DC-jack or bare wire type, Compatible with IEC62368-1/EN62368-1

ASB200-918

1 AGS Series

2 AMS Series

3 AMI Series

4 CMI Series

5 ASB Series

6 CSB Series

Comparison of ASB Series System Width

7.08-inch (180mm)



ASB200-916

7.08-inch (180mm)



ASB200-919

9.44-inch (240mm)



ASB200-918

Comparison of ASB Series System Height

1.65-inch (42mm)



ASB200-918

2.6-inch (66mm)




ASB200-919

2.79-inch (71mm)



ASB200-916

Dimensions and Drawing

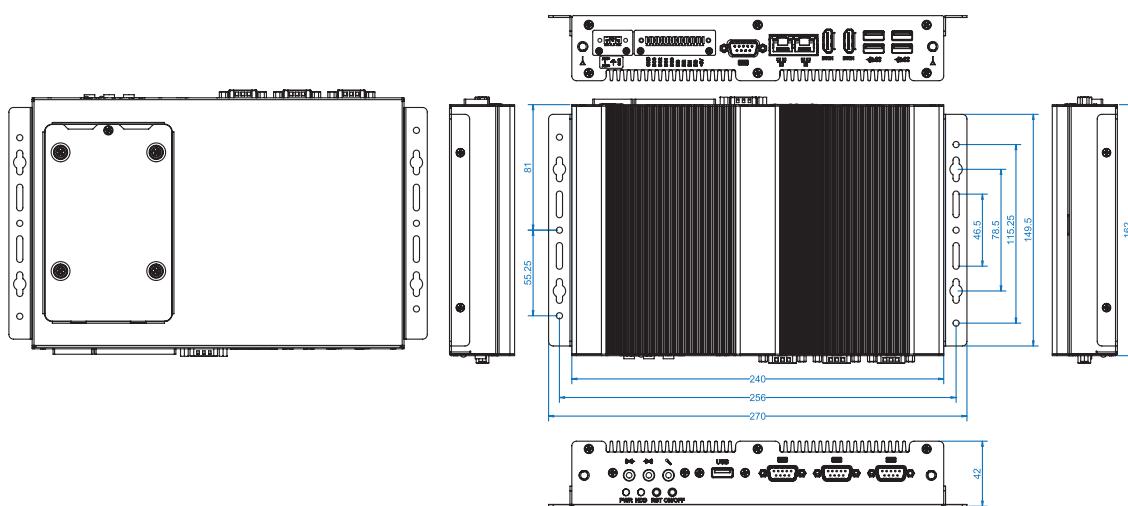



Rear I/O

Specifications

System Mainboard	IB919AF-8665/ IB919AF-8365/ IB919EF-8145/ IB919EF-4305
CPU Type	Intel® Core™ i7 8665UE Processor Intel® Core™ i5 8365UE Processor Intel® Core™ i3 8145UE Processor Intel® Celeron® 4305UE Processor
System Speed	up to 4.4GHz
Memory	2x 8GB DDR4-2666 SO-DIMM, Max.32GB
Front Panel External I/O	4x USB 3.1 2x DP 1x DB9 for COM#1 (RS232/422/485) 2x LAN
Rear Panel External I/O	1x Power button 1x Digital I/O (4-in/4-out) 2x Antenna holes 1x HDD LED 1x 3-pin DC-in terminal block for 12V(-10%) ~ 24V(+10%)
Expansion Slots	2x M.2 (E-Key, M-Key)
Storage	1x 2.5" HDD or SSD
Construction	Aluminum & steel
Chassis Color	Black
Mounting Type	Desktop or wall mount (wall mount kit included) Optional VESA mount kit
Dimensions	180mm (W) x 150mm (D) x 66mm (H) 7.08" (W) x 5.9" (D) x 2.6" (H)
Weight	1.5kg
Operating Temperature	0°C~45°C (32°F~113°F) *with airflow 0.9m/s
Storage Temperature	-20°C ~80°C (-4°F~176°F)
Relative Humidity	5%~90%@45°C (non-condensing)
Vibration	Operating: 3Grms / 5~500Hz
Shock	Operating : 20G / 11ms Non-operating : 40G / 11ms
Certification	CE/LVD/FCC Class B

Features

- Fanless system with IBASE IB919 3.5" Disk-Size SBC
- Onboard 8th Gen Intel® Core™ U-Series Processor
- Supports 2x M.2 sockets (E-Key, CNVi / M-Key, NVMe)
- 12V(-10%) ~ 24V(+10%) DC-in Power Input
- 2x DDR4 SO-DIMM, Max.32GB
- 4x USB 3.1, 2x Intel® Gigabit LAN
- 1x COM ports, External GPIO
- 2x DP (1 by Type-C), TPM (2.0)
- Optional VESA mount bracket



Ordering Information

ASB200-919-i7	Fanless chassis with IB919AF-8665, Intel® i7-8665UE 1.7GHz CPU, 1x COM, 2x 8GB DDR4 memory, 1x 2.5" SATAIII 64GB TLC SSD, w/o 90W power adaptor and VESA mount bracket
ASB200-919-i5	Fanless chassis with IB919AF-8365, Intel® i5-8365UE 1.6GHz CPU, 1x COM, 2x 8GB DDR4 memory, 1x 2.5" SATAIII 64GB TLC SSD, w/o 90W power adaptor and VESA mount bracket
ASB200-919-i3	Fanless chassis with IB919EF-8145, Intel® i3-8145UE 2.2GHz CPU, 1x COM, 2x 8GB DDR4 memory, 1x 2.5" SATAIII 64GB TLC SSD, w/o 90W power adaptor and VESA mount bracket
ASB200-919-CEL	Fanless chassis with IB919EF-4305, Intel® Celeron® 4305UE 2.0GHz CPU, 1x COM, 2x 8GB DDR4 memory, 1x 2.5" SATAIII 64GB TLC SSD, w/o 90W power adaptor and VESA mount bracket
90W power adaptor (optional)	90W (24V@3.75A) power adaptor, DC-jack or bare wire type compatible with IEC62368-1/EN62368-1
Optional Accessories	Wifi antenna kit [PN: SC2ASB2---0A1100R]

ASB200-919

1 AGS Series

2 AMS Series

3 AMI Series

4 CMI Series

5 ASB Series

6 CSB Series

Comparison of ASB Series System Width

7.08-inch (180mm)



ASB200-916

7.08-inch (180mm)



ASB200-919

9.44-inch (240mm)



ASB200-918

Comparison of ASB Series System Height

1.65-inch (42mm)



ASB200-918

2.6-inch (66mm)




ASB200-919

2.79-inch (71mm)



ASB200-916

Dimensions and Drawing

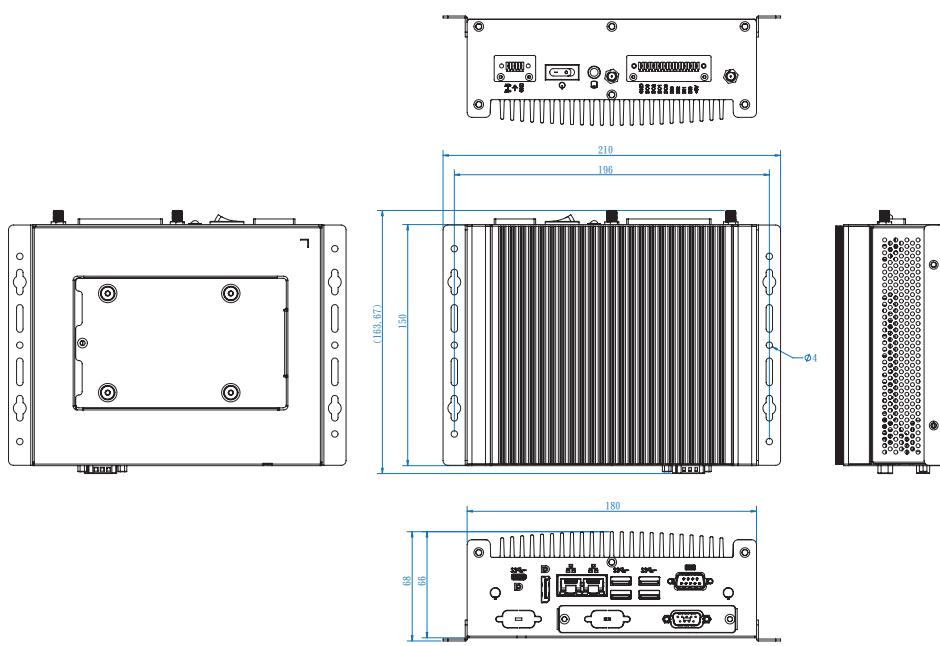




Specifications

System Mainboard	IB818 (F-1 Stepping)
CPU Type	Intel® Atom® Processors E3940/ E3930 & Pentium® N4200/ Celeron® N3350 Series
System Speed	Up to 2.5GHz
Memory	1x 4GB DDR3L-1866 SO-DIMM, Max. 8GB
Front Panel External I/O	1x Power LED 1x HDD LED 1x Power button 1x Reset button 2x USB 2.0 ports 1x Line-out, 1x Mic-in
Rear Panel External I/O	4x USB 3.0 port 1x HDMI 1x RS232/422/485 port for COM#1 3x RS232 ports for COM#2/COM#3/ COM#4 2x RJ45 Gigabit Ethernet port 1x 3-pin DC-in terminal block for 12V(-10%)~24V(+10%)
Expansion Slots	1x Full-size Mini PCI-E socket (USB 2.0 + SATA) 1x Half-size Mini PCI-E socket (USB 2.0)
Storage	1x 2.5" HDD or SSD (removable)
Construction	Aluminum & steel
Chassis Color	Black
Mounting Type	Desktop or wall mount (wall mount kit included)
Dimensions	172mm (W) x 111.6mm (D) x 53mm (H) 6.77" (W) x 4.39" (D) x 2.09" (H)
Weight	1.1kg
Operating Temperature	For E3940 CPU:-30°C~65°C (22°F~149°F) (With SSD) *With air flow For N-Series CPU:-10°C ~45°C(14°C~113°C) (With HDD) *With air flow
Storage Temperature	-40°C ~ 85°C (-40°F~185°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	Operating: 1.0 grms / 5~500Hz / random operation (with IEC 60068-2-64) Non-Operating: 2.0 grms / 5~500Hz / random operation (with IEC 60068-2-64)
Shock	Operating : 20G / 11ms Non-operating : 40G / 11ms)
Certification	CE / LVD / FCC Class B

Features


- Fanless system with IBASE IB818 3.5" Disk-Size SBC
- Supports Intel® Atom® Processors E3940/ E3930 & Pentium® N4200/ Celeron® N3350 Series
- **Wide-range operating temperature from -30°C to 65°C**
- 12V(-10%) ~ 24V(+10%) DC wide-range power input
- Wall mount kit included

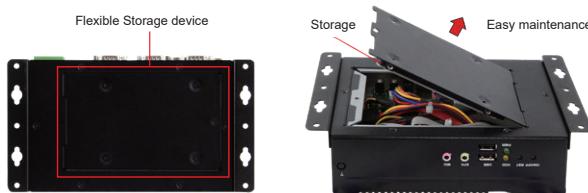

Ordering Information

CSB200-818-I40	Fanless system w/ Intel® Atom® E3940, 4x COM, 1x 4GB DDR3L industrial-grade memory, 1x 2.5" 64GB MLC industrial-grade SSD, w/o 60W power adaptor
CSB200-818-I30	Fanless system w/ Intel® Atom® E3930, 4x COM, 1x 4GB DDR3L industrial-grade memory, 1x 2.5" 64GB MLC industrial-grade SSD, w/o 60W power adaptor
CSB200-818-420	Fanless system w/ Intel® Atom® N4200, 4x COM, 1x 4GB DDR3L memory, 1x 2.5" 500 GB SATA HDD, w/o 60W power adaptor
CSB200-818-335	Fanless system w/ Intel® Atom® N3350, 4x COM, 1x 4GB DDR3L memory, 1x 2.5" 500GB SATA HDD, w/o 60W power adaptor
60W power adaptor (optional)	60W (12V@5A) power adaptor, DC-jack or bare wire type Compatible with IEC62368-1/EN62368-1

Dimensions and Drawing

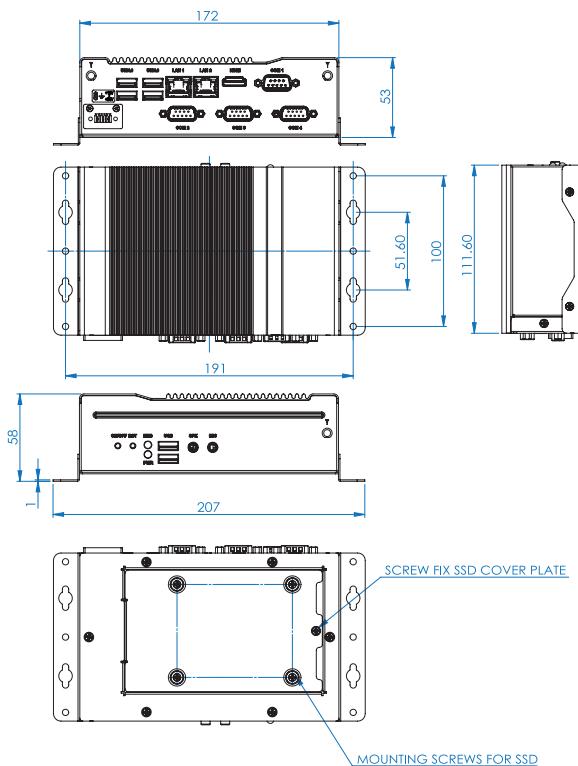




Specifications

System Mainboard	IB822
CPU Type	Intel® Pentium® Silver Processor J5040
System Speed	Up to 2.8GHz
Memory	1x 4GB DDR4 SO-DIMM, Max. 8GB
Front Panel External I/O	1x Power LED 1x HDD LED 1x Power button 1x Reset button 2x USB2.0 ports 1x Line-out 1x Mic-in 1x Antenna reserved
Rear Panel External I/O	4x USB 3.0 port 1x RS232/422/485 for COM#1 3x RS232 for COM#2~4 1x HDMI 1x DP 2x RJ-45 Gigabit Ethernet port 2x Antenna reserved 1x DC jack with lock or Terminal block 12V(±10%) DC-IN
Expansion Slots	1x M.2 (B-key, type: 2242) 1x M.2 (E-key, type: 2230)
Storage	1x 2.5" SATA HDD or SSD (removable)
Construction	Aluminum & Steel
Chassis Color	Black
Mounting Type	Desktop or wall mount (Wall mount kit included)
Dimensions	172mm (W) x 111.6mm (D) x 53mm (H) 6.77" (W) x 4.37" (D) x 2.08" (H)
Weight	1.1kgs
Operating Temperature	0°C~45°C (14°F~113°F) (HDD) *With air flow 0°C~50°C (32°F~122°F) (SSD) *With air flow
Storage Temperature	-40°C~85°C (-40°F~185°F)
Relative Humidity	5%~90%@45°C (non-condensing)
Vibration	Operating: 1.0 grms / 5~500Hz / random operation (with IEC 60068-2-64) Non-Operating: 2.0 grms / 5~500Hz / random operation (with IEC 60068-2-64)
Shock	Operating : 20G / 11ms Non-operating : 40G / 11ms
Certification	CE/ FCC Class B / LVD

Features


- Fanless system with IBASE IB822 3.5" Disk-Size SBC
 - Intel® Pentium® Silver Processor J5040
 - DC-Jack type or Terminal block type (by option)
 - Supports 1x 2.5" SATA HDD or SSD (removable)
 - Wall mount kit included

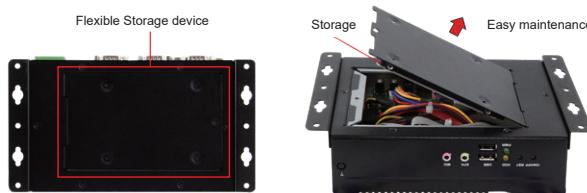

Ordering Information

CSB200-822-5040S	Fanless system with IB822-J5040 w/ Intel® Pentium® J5040, 4x COM, 1x 4GB DDR4 memory, 1x 2.5" 500GB HDD, desktop stand & mounting brackets, w/o 60W power adaptor, Terminal block power input
CSB200-822-5040S-DC	Fanless system with IB822-J5040 w/ Intel® Pentium® J5040, 4x COM, 1x 4GB DDR4 memory, 1x 2.5" 500GB HDD, desktop stand & mounting brackets, w/o 60W power adaptor, DC-Jack power input
60W power adaptor (optional)	60W (12V@5A) power adaptor, DC-jack or bare wire type, Compatible with IEC62368-1/EN62368-1

Dimensions and Drawing

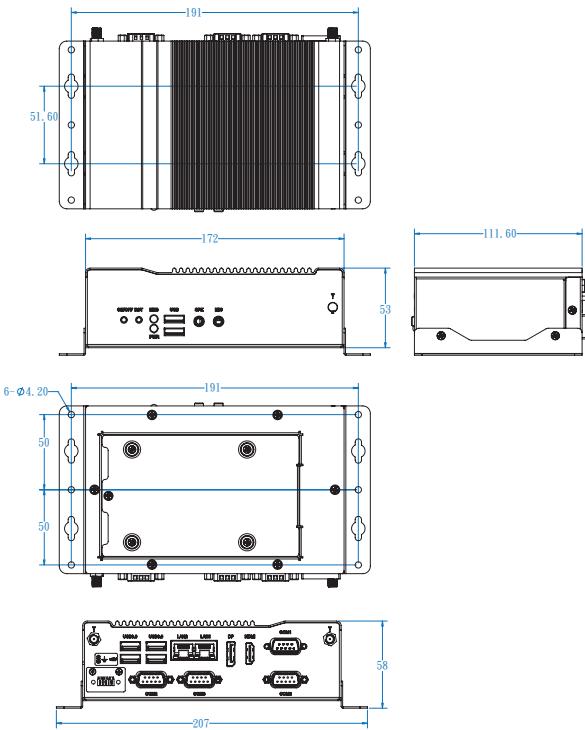

HEADQUARTERS

IBASE Technology Inc.
11F, No. 3-1, Yuan Qu St., Nankang,
Taipei 115, Taiwan, R.O.C.

廣積科技股份有限公司

台北市115南港區園區街3-1號11樓G棟
Tel: +886-2-2655-7588
Fax: +886-2-2655-7388
sales@ibase.com.tw
www.ibase.com.tw

WORLDWIDE OFFICES

European Headquarters

IBASE Europe (TMC Technology)
12 Wedgwood Court Stevenage,
Herts, SG1 4QR, United Kingdom
Tel: +44-1438-846090
Fax: +44-1438-842308
sales@ibase-europe.com
www.ibase-europe.com

Italy

IBASE Italy S.r.l.
Via Sant Antonio 1/A
28845 Domodossola, Verbania, Italy
Tel: +39-0324-47501
Fax: +39-0324-47501
info.italy@ibase-europe.com
www.ibase-europe.com

USA

IBASE Technology (USA), Inc.
1050 Stewart Drive, Sunnyvale,
CA 94085, U.S.A.
Tel: +1-408-992-0888
Fax: +1-408-992-0808
sales@ibase-usa.com
www.ibase-usa.com

Singapore

IBASE Singapore Pte Ltd.
10, Ubi Crescent #07-60,
Ubi Techpark (Lobby D),
Singapore 408564
Tel: +65-6842-5112
Fax: +65-6842-5113
sales@ibase-singapore.com
www.ibase-singapore.com

China

IBASE (Shanghai) Technology Inc.
2F, Building 3, No. 2005, HongMei
Road, 201103 Shanghai, China
上海广佳信息技术有限公司
中国上海市虹梅路2005号3号楼2层
邮编: 201103
Tel: +86-021-6090-5088
Fax: +86-021-6090-6388
sales@ibase.com.tw
www.ibase.com.tw

China

IBASE (Shanghai) Technology Inc.
Beijing Office
Room 1622, GuoFengMeiTang
Building 5, No. 106, KeXing West Road,
Changping District, 100029 Beijing, China
上海广佳信息技术有限公司-北京办事处
中国北京市昌平区回龙观科星西路106号
国风美唐5号商务楼1622室
邮编: 100029
Tel: +86-133-113-80499
sales@ibase.com.tw
www.ibase.com.tw

Japan

IBASE Japan Corp.
3F Bansei Muromachi Bldg., 4-3-12
Nihonbashi Muromachi, Chu-O ku,
Tokyo, Japan
IBASE ジャパン株式会社
東京都中央区日本橋室町4-3-12
バンセイ室町ビル3F
Tel: +81-3-6262-1303
Fax: +81-3-6262-6106
sales@ibase-japan.com
www.ibase-japan.com

India

IBASE India
sales@ibase-india.com
www.ibase-india.com



DOWNLOAD
INTELLIGENT SYSTEMS
CATALOG