

Datasheet

SATA Slim 2SR series

- Compliant with MIL-STD-810-F/G
- Data Security (QEraser/ SEraser/ Destroy/ Write Protect)
- Conformal coating (Optional)
- Excellent data transfer rate



Introduction

Innodisk's SATA Slim 2SR is compliant with the JEDEC MO-297 standards and SATA-IO mini SATA standards, which supports SATA II standard (3.0Gb/s). It comes with several data security functions, including SEraser, QEraser, Destroy, and Write Protect. Also, SATA Slim 2MR is compliant with MIL-STD-810 standards and thus it delivers resistance to shock, vibration and other critical scenario in harsh environment. The SATA Slim 2SR is an SLC-based flash device and is available in capacities from 8GB up to 128GB.


SATA Slim

2SR series

Drawing

Contact us for more information
about the SATA Slim 2SR

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

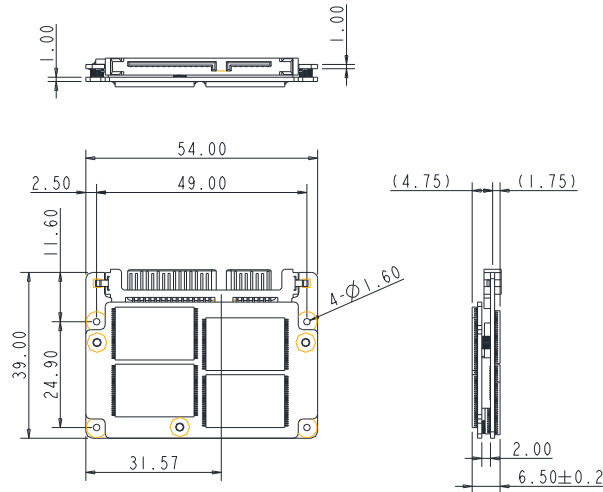

Specifications

Headquarters (Taiwan)

9F., No.100, Sec. 1, Xintai 5th Rd.,
Xizhi Dist., New Taipei City,
Taiwan (R.O.C.)
Tel: +886-2-26963000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-040-282-1818
Japan
jpsales@innodisk.com
+81-3-6661-9846
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2012 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

Interface	SATA II
Flash Type	SLC
Flash P/E cycle limit	100,000
Capacity	8GB~128GB
Max. Channels	8
Sequential R/W (MB/sec, max.)	185 / 145
Max. Power Consumption	2.1 W (5V x 420 mA)
Thermal Sensor	✓
External DRAM Buffer	✓
H/W Write Protect	-
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	54.0 X 39.0 X 6.5 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

20130614

Ordering Information

Operation Temp.	8GB	16GB	32GB	64GB	128GB
Standard Grade (0°C ~ +70°C)	DRSLM-08GJ21AC1EB	DRSLM-16GJ21AC1EB	DRSLM-32GJ21AC1EB	DRSLM-64GJ21AC1EB	DRSLM-A28J21AC1EB
Industrial Grade (-40°C ~ +85°C)	DRSLM-08GJ21AW1EB	DRSLM-16GJ21AW1EB	DRSLM-32GJ21AW1EB	DRSLM-64GJ21AW1EB	DRSLM-A28J21AW1EB

innodisk

www.innodisk.com