

SATADOM-SH Type C

3SE/ 3ME series

Customer: _____
Customer

Part Number: _____
Innodisk

Part Number: _____
Innodisk

Model Name: _____

Date: _____

Innodisk Approver	Customer Approver

**Total Solution For
Industrial Flash Storage**

Table of contents

LIST OF FIGURES 6

1. PRODUCT OVERVIEW 7

 1.1 INTRODUCTION OF INNODISK SATADOM-SH TYPE C 3SE/3ME 7

 1.2 PRODUCT VIEW AND MODELS 7

 1.3 SATA INTERFACE 7

2. PRODUCT SPECIFICATIONS..... 8

 2.1 CAPACITY AND DEVICE PARAMETERS 8

 2.2 PERFORMANCE..... 8

 2.3 ELECTRICAL SPECIFICATIONS..... 9

 2.3.1 *Power Requirement* 9

 2.3.2 *Power Consumption* 9

 2.4 ENVIRONMENTAL SPECIFICATIONS 9

 2.4.1 *Temperature Ranges* 9

 2.4.2 *Humidity*..... 9

 2.4.3 *Shock and Vibration* 9

 2.4.4 *Mean Time between Failures (MTBF)*..... 9

 2.5 CE AND FCC COMPATIBILITY 10

 2.6 RoHS COMPLIANCE 10

 2.7 RELIABILITY 10

 2.8 TRANSFER MODE 11

 2.9 PIN ASSIGNMENT 11

 2.10 MECHANICAL DIMENSIONS 11

 2.11 ASSEMBLY WEIGHT..... 12

 2.12 SEEK TIME 12

 2.13 HOT PLUG..... 12

 2.14 NAND FLASH MEMORY 12

3. THEORY OF OPERATION 13

 3.1 OVERVIEW..... 13

 3.2 SATA III CONTROLLER 13

 3.3 ERROR DETECTION AND CORRECTION 14

 3.4 WEAR-LEVELING 14

 3.5 BAD BLOCKS MANAGEMENT 14

 3.6 POWER CYCLING 14

 3.7 GARBAGE COLLECTION 14

4. INSTALLATION REQUIREMENTS 15

 4.1 SATADOM-SH TYPE C 3SE/3ME PIN DIRECTIONS 15

4.2 ELECTRICAL CONNECTIONS FOR SATADOM-SH TYPE C 3SE/3ME	15
4.3 DEVICE DRIVE	15
4.4 PIN7 VCC	15
4.5 POWER CABLE.....	16
5. PART NUMBER RULE	17

REVISION HISTORY

Revision	Description	Date
Preliminary	First Released	Dec., 2013
Rev. 1.0	Wording correction Add product picture	Jan., 2014
Rev. 1.1	Add power cable SPEC.	Feb., 2014
Rev. 1.2	Modify performance	Sep., 2014
Rev. 1.3	Add 64/128GB of 3ME Modify power consumption	Mar., 2015

List of Tables

TABLE 1: DEVICE PARAMETERS	8
TABLE 2: PERFORMANCE	8
TABLE 3: INNODISK SATADOM-SH TYPE C 3SE/3ME POWER REQUIREMENT	9
TABLE 4: POWER CONSUMPTION	9
TABLE 5: TEMPERATURE RANGE FOR SATADOM-SH TYPE C 3SE/3ME	9
TABLE 6: SHOCK/VIBRATION TESTING FOR SATADOM-SH TYPE C 3SE/3ME	9
TABLE 7: SATADOM-SH TYPE C 3SE/3ME MTBF	10
TABLE 8: INNODISK SATADOM-SH TYPE C 3SE/3ME PIN ASSIGNMENT	11

List of Figures

FIGURE 1: INNODISK SATADOM-SH TYPE C 3SE/3ME	7
FIGURE 2: INNODISK SATADOM-SH TYPE C 3SE/3ME BLOCK DIAGRAM	13
FIGURE 3: SIGNAL SEGMENT AND POWER SEGMENT	15

1. Product Overview

1.1 Introduction of Innodisk SATADOM-SH Type C 3SE/3ME

Innodisk Serial ATA Disk on Module (SATADOM) supports SATA III standard (6.0Gb/s) interface with excellent performance, and SATADOM-SH Type C 3SE/3ME is designed as the smallest form factor size that could enhance compatibility with various design applications. Particularly the 7th pin of standard SATA 7pin connector can optionally be the built-in power VCC pin. In other words, it could be connected directly to the SATA on-board socket on customers' system without additional power cable. Besides, the booting time for operation and the power consumption is less than hard disk drive (HDD), and can work under harsh environment compile with ATA protocol, no additional drives are required, and the SSD can be configured as a boot device or data storage device.

1.2 Product View and Models

Innodisk SATADOM-SH Type C 3SE/3ME is available in follow capacities within SLC flash ICs.

[SATADOM-SH Type C 3SE 1GB](#)

[SATADOM-SH Type C 3ME 4GB](#)

[SATADOM-SH Type C 3SE 2GB](#)

[SATADOM-SH Type C 3ME 8GB](#)

[SATADOM-SH Type C 3SE 4GB](#)

[SATADOM-SH Type C 3ME 16GB](#)

[SATADOM-SH Type C 3SE 8GB](#)

[SATADOM-SH Type C 3ME 32GB](#)

[SATADOM-SH Type C 3SE 16GB](#)

[SATADOM-SH Type C 3ME 64GB](#)

[SATADOM-SH Type C 3SE 32GB](#)

[SATADOM-SH Type C 3ME 128GB](#)

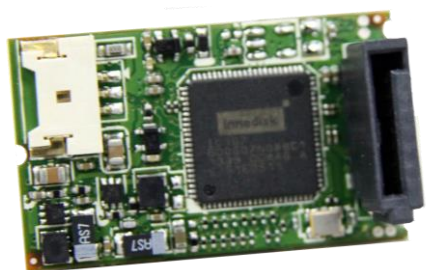


Figure 1: Innodisk SATADOM-SH Type C 3SE/3ME

1.3 SATA Interface

Innodisk SATADOM-SH Type C 3SE/3ME supports SATA III interface, and compliant with SATA I and SATA II.

2. Product Specifications

2.1 Capacity and Device Parameters

SATADOM-SH Type C 3SE/3ME device parameters are shown in Table 1.

Table 1: Device parameters

Capacity	LBA	Cylinders	Heads	Sectors	User Capacity(MB)
1GB	1974672	1959	16	63	964
2GB	3928176	3897	16	63	1,918
4GB	7835184	7773	16	63	3,825
8GB	15649200	15525	16	63	7,641
16GB	31277232	16383	16	63	15,272
32GB	62533296	16383	16	63	30,533
64GB	125045424	16383	16	63	61,057
128GB	250069680	16383	16	63	122,104

2.2 Performance

Burst Transfer Rate: 6.0Gbps

Table 2: Performance

SATADOM-SH Type C 3SE						
Capacity	1GB	2GB	4GB	8GB	16GB	32GB
Sequential Read (max.)	23 MB/sec	24 MB/sec	220 MB/sec	250 MB/sec	290 MB/sec	300 MB/sec
Sequential Write (max.)	9 MB/sec	18 MB/sec	50 MB/sec	60 MB/sec	120 MB/sec	120 MB/sec
SATADOM-SH Type C 3ME						
Capacity	4GB	8GB	16GB	32GB	64GB	128GB
Sequential Read (max.)	80 MB/sec	125 MB/sec	150 MB/sec	150 MB/sec	280 MB/sec	280 MB/sec
Sequential Write (max.)	10 MB/sec	20 MB/sec	35 MB/sec	40 MB/sec	80 MB/sec	80 MB/sec

Note: the information is based on CrystalDiskMark 3.01 with file size 1000MB test patent

2.3 Electrical Specifications

2.3.1 Power Requirement

Table 3: Innodisk SATADOM-SH Type C 3SE/3ME Power Requirement

Item	Symbol	Rating	Unit
Input voltage	V _{IN}	+5 DC +- 5%	V

2.3.2 Power Consumption

Table 4: Power Consumption

Mode	Power Consumption (mA)
Read	120 (max.)
Write	130 (max.)
Idle	100 (max.)
Pin 7 VCC Initial*	1000(max.)

Target: 32GB SATADOM-SH Type C 3ME

***To design in Pin7/8 VCC on motherboard, 5V with 1A power supply is requested.**

2.4 Environmental Specifications

2.4.1 Temperature Ranges

Table 5: Temperature range for SATADOM-SH Type C 3SE/3ME

Temperature	Range
Operating	Standard Grade: 0°C to +70°C
	Industrial Grade:-40°C to +85°C
Storage	-55°C to +95°C

2.4.2 Humidity

Relative Humidity: 10-95%, non-condensing

2.4.3 Shock and Vibration

Table 6: Shock/Vibration Testing for SATADOM-SH Type C 3SE/3ME

Reliability	Test Conditions	Reference Standards
Vibration	7 Hz to 2K Hz, 20G, 3 axes	IEC 68-2-6
Mechanical Shock	Duration: 0.5ms, 1500 G, 3 axes	IEC 68-2-27

2.4.4 Mean Time between Failures (MTBF)

Table 7 summarizes the MTBF prediction results for various SATADOM-SH Type C 3SE/3ME configurations. The analysis was performed using a RAM Commander™ failure rate prediction.

- **Failure Rate:** The total number of failures within an item population, divided by the total number of life units expended by that population, during a particular measurement interval under stated condition.
- **Mean Time between Failures (MTBF):** A basic measure of reliability for repairable items: The mean number of life units during which all parts of the item perform within their specified limits, during a particular measurement interval under stated conditions.

Table 7: SATADOM-SH Type C 3SE/3ME MTBF

Product	Condition	MTBF (Hours)
Innodisk SATADOM-SH Type C 3SE/3ME	Telcordia SR-332 GB, 25°C	>3,000,000

2.5 CE and FCC Compatibility

SATADOM-SH Type C 3SE/3ME conforms to CE and FCC requirements.

2.6 RoHS Compliance

SATADOM-SH Type C 3SE/3ME is fully compliant with RoHS directive.

2.7 Reliability

SATADOM-SH Type C 3SE	
Parameter	Value
Read Cycles	Unlimited Read Cycles
Wear-Leveling Algorithm	Support
Bad Blocks Management	Support
Error Correct Code	Support
TBW	
1GB	90 (Sequential write)
2GB	180 (Sequential write)
4GB	360 (Sequential write)
8GB	720 (Sequential write)
16GB	1440 (Sequential write)
32GB	2880 (Sequential write)

SATADOM-SH Type C 3ME	
Parameter	Value
Read Cycles	Unlimited Read Cycles
Wear-Leveling Algorithm	Support
Bad Blocks Management	Support
Error Correct Code	Support
TBW	
4GB	10.8 (Sequential write)
8GB	21.6 (Sequential write)
16GB	43.2 (Sequential write)

32GB	86.4 (Sequential write)
64GB	172.8 (Sequential write)
128GB	345.6 (Sequential write)

2.8 Transfer Mode

SATADOM-SH Type C 3SE/3ME support following transfer mode:

Serial ATA I 1.5Gbps/ Serial ATA II 3.0Gbps/ Serial ATA III 6.0Gbps

2.9 Pin Assignment

Innodisk SATADOM-SH Type C 3SE/3ME uses a standard SATA pin-out. See Table 8 for SATADOM-SH Type C 3SE/3ME pin assignment.


Table 8: Innodisk SATADOM-SH Type C 3SE/3ME Pin Assignment

Name	Type	Description
Pin 1	GND	Shielding
Pin 2	A+	Differential signal to A
Pin 3	A-	Differential signal to A-
Pin 4	GND	Shielding
Pin 5	B-	Differential signal to B-
Pin 6	B+	Differential signal to B
Pin 7	GND/VCC	Shielding/Power*

CAUTION

SATADOM Pin 7 with power supply version (PN end with F) is provided with different model and PN, which request specific M/B designed with 5V power supply through SATA port(7th Pin), and cannot use external cable for power supply!

2.10 Mechanical Dimensions

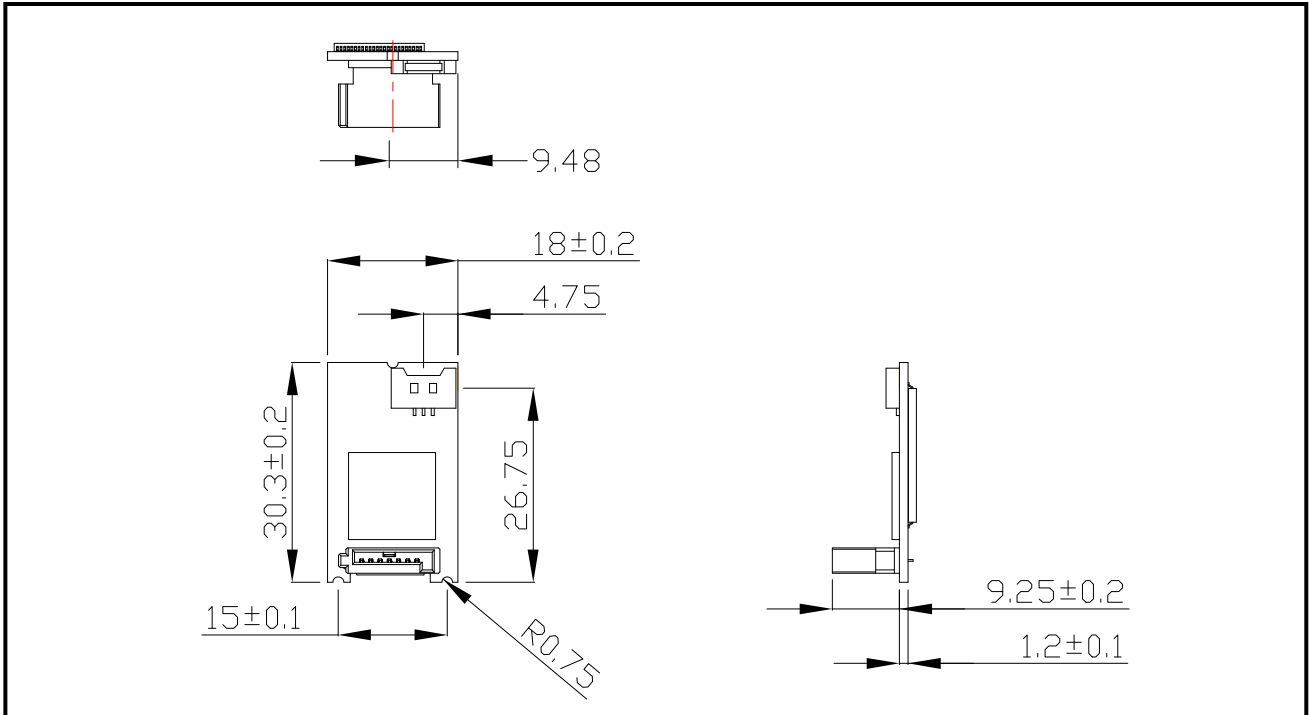

2.11 Assembly Weight

An Innodisk SATADOM-SH Type C 3SE/3ME within flash ICs, 32GB's weight is 7 grams approximately.

2.12 Seek Time

Innodisk SATADOM-SH Type C 3SE/3ME is not a magnetic rotating design. There is no seek or rotational latency required.

2.13 Hot Plug

The SSD support hot plug function and can be removed or plugged-in during operation. User has to avoid hot plugging the SSD which is configured as boot device and installed operation system.

Surprise hot plug : The insertion of a SATA device into a backplane (combine signal and power) that has power present. The device powers up and initiates an OOB sequence.

Surprise hot removal: The removal of a SATA device from a powered backplane, without first being placed in a quiescent state.

2.14 NAND Flash Memory

Innodisk SATADOM-SH Type C 3SE uses Single Level Cell (SLC) NAND flash memory, and SATADOM-SH 3ME uses Multi Level Cell (MLC) NAND flash memory.

3. Theory of Operation

3.1 Overview

Figure 2 shows the operation of Innodisk SATADOM-SH Type C 3SE/3ME from the system level, including the major hardware blocks.

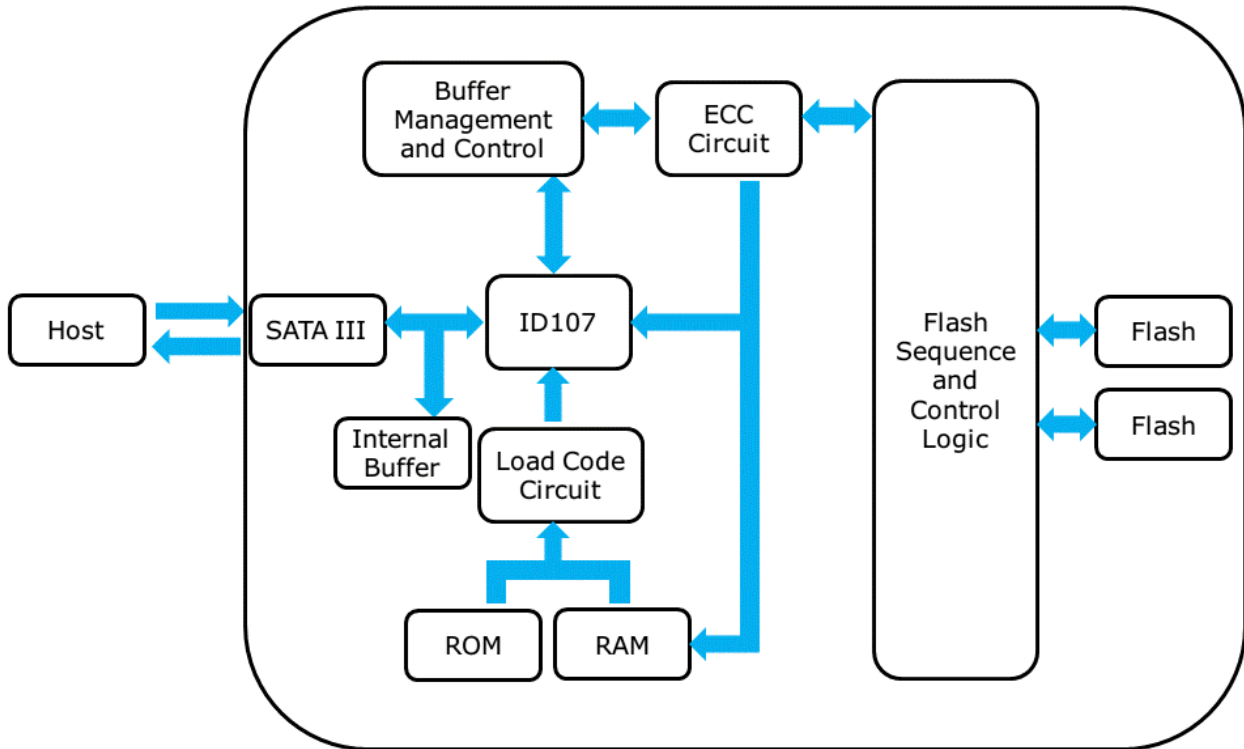


Figure 2: Innodisk SATADOM-SH Type C 3SE/3ME Block Diagram

Innodisk SATADOM-SH Type C 3SE/3ME integrates a SATA III controller and NAND flash memories. Communication with the host occurs through the host interface, using the standard ATA protocol. Communication with the flash device(s) occurs through the flash interface.

3.2 SATA III Controller

Innodisk SATADOM-SH Type C 3SE/3ME is designed with ID 107, a SATA III 6.0Gbps (Gen. 3) controller. The Serial ATA physical, link and transport layers are compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps/3.0Gbps/6.0Gbps data rate). The controller has 2 channels for flash interface.

3.3 Error Detection and Correction

Highly sophisticated Error Correction Code algorithms are implemented. The ECC unit consists of the Parity Unit (parity-byte generation) and the Syndrome Unit (syndrome-byte computation). This unit implements an algorithm that can correct 40 bits per 1024 bytes in an ECC block. Code-byte generation during write operations, as well as error detection during read operation, is implemented on the fly without any speed penalties.

3.4 Wear-Leveling

Flash memory can be erased within a limited number of times. This number is called the **erase cycle limit** or **write endurance limit** and is defined by the flash array vendor. The erase cycle limit applies to each individual erase block in the flash device.

Innodisk SATADOM-SH Type C 3SE/3ME uses a static wear-leveling algorithm to ensure that consecutive writes of a specific sector are not written physically to the same page/block in the flash. This spreads flash media usage evenly across all pages, thereby extending flash lifetime.

3.5 Bad Blocks Management

Bad Blocks are blocks that contain one or more invalid bits whose reliability are not guaranteed. The Bad Blocks may be presented while the SSD is shipped, or may develop during the life time of the SSD. When the Bad Blocks is detected, it will be flagged, and not be used anymore. The SSD implement Bad Blocks management, Bad Blocks replacement, Error Correct Code to avoid data error occurred. The functions will be enabled automatically to transfer data from Bad Blocks to spare blocks, and correct error bit.

3.6 Power Cycling

Innodisk's power cycling management is a comprehensive data protection mechanism that functions before and after a sudden power outage to SSD. Low-power detection terminates data writing before an abnormal power-off, while table-remapping after power-on deletes corrupt data and maintains data integrity. Innodisk's power cycling provides effective power cycling management, preventing data stored in flash from degrading with use.

3.7 Garbage Collection

Garbage collection is used to maintain data consistency and perform continual data cleansing on SSDs. It runs as a background process, freeing up valuable controller resources while sorting good data into available blocks, and deleting bad blocks. It also significantly reduces write operations to the drive, thereby increasing the SSD's speed and lifespan.

4. Installation Requirements

4.1 SATADOM-SH Type C 3SE/3ME Pin Directions

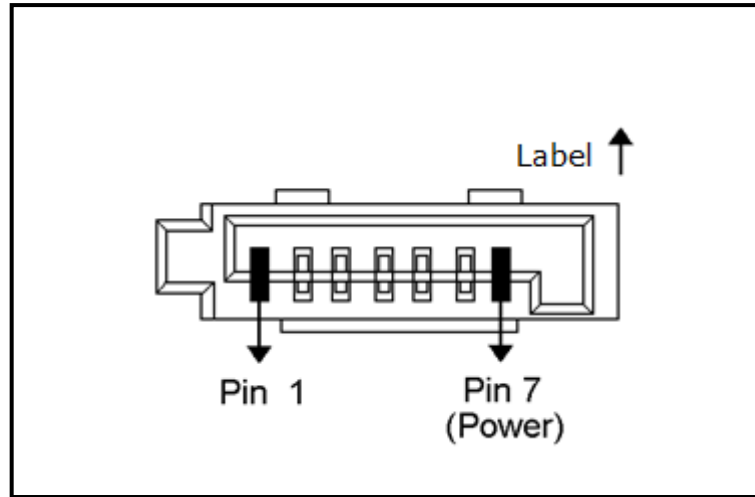


Figure 3: Signal Segment and Power Segment

4.2 Electrical Connections for SATADOM-SH Type C 3SE/3ME

A Serial ATA device may be either directly connected to a host or connected to a host through a cable. For connection via cable, the cable should be no longer than 1 meter. The SATA interface has a separate connector for the power supply. Please refer to the pin description for further details.

4.3 Device Drive

No additional device drives are required. The Innodisk SATADOM-SH Type C 3SE/3ME can be configured as a boot device.


4.4 Pin7 VCC

Innodisk SATADOM series products have an optional design to provide power supply through the 7th Pin of SATA connector, and customers DO NOT have to use the power cable for power supply. Such a cable-less design of SATADOM series products with Pin7 VCC brings more convenience to customers' system. The followings are the points customers have to be careful of while designing in SATADOM series products with Pin7 VCC.

SATADOM series products with Pin7 VCC is designed with a fuse (poly switch 500mA, 6V) on Pin7's circuit. Such a design could avoid any potential damage to customers' system.


To have the advantages of SATADOM series with Pin7 VCC, and to avoid any potential damage to customers'

board designed with VCC power supply, Innodisk suggests that customers MUST design their board with a fuse which should be designed before the SATA socket Pin7 VCC. In other words, customers are suggested NOT TO layout 5V VCC to SATA socket on board directly. A circuit diagram example to explain this is shown as below.

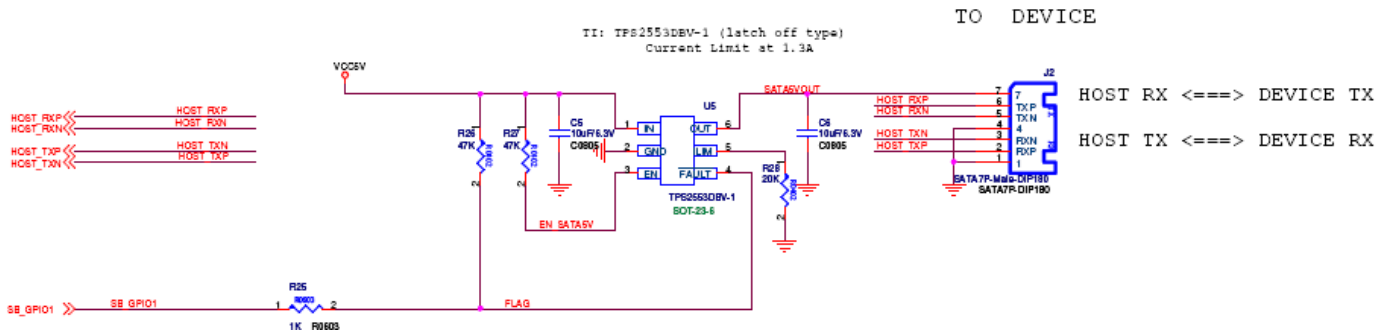

4.5 Power cable

A power cable is shipped with each SATADOM product, which has standard 4pins power connector and special 3 pins power connector for SATADOM. The male and female power connector of SATADOM have foolproof design to avoid misconnection, please check the connector and power polarity before power on.

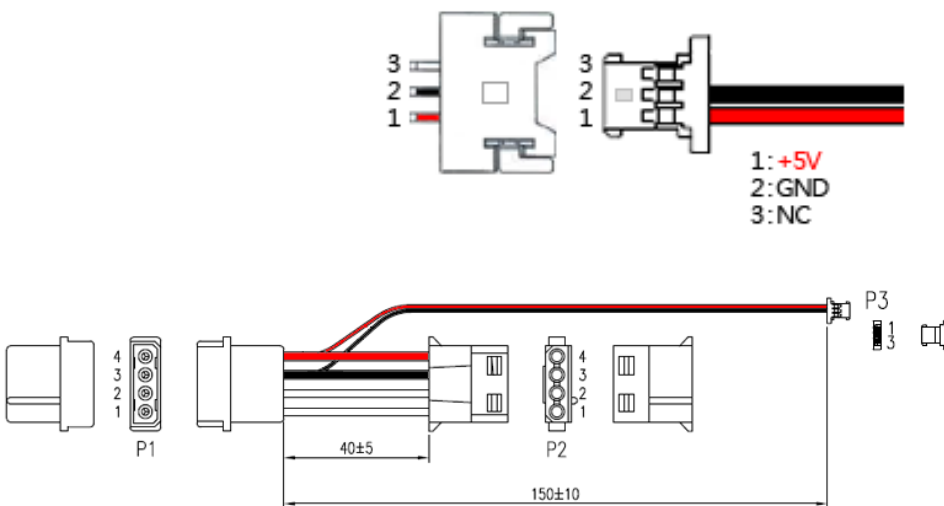

* PN end with F is SATADOM Pin 7 with power supply version, which doesn't provide power cable.

5. Part Number Rule

CODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	
	D	E	S	S	C	-	3	2	G	D	0	7	R	C	A	D	B	-	X	X	X	
Definition																						
Code 1st (Disk)											Code 14th (Operation Temperature)											
D : Disk											C: Standard Grade (0°C ~ +70°C)											
Code 2nd (Feature set)											W: Industrial Grade (-40°C ~ +85°C)											
E : Embedded series											Code 15th (Internal control)											
Code 3rd ~5th (Form factor)											A~Z: BGA PCB version. SATADOM-SH Type C 3SE 4~32GB SATADOM-SH Type C 3ME 64, 128GB											
											1~9: TSOP PCB version. SATADOM-SH Type C 3ME 4~32GB SATADOM-SH Type C 3SE 1,2GB											
SSC: SATADOM-SH Type C											Code 16th (Channel of data transfer)											
Code 7th ~9th (Capacity)											S: Single Channel											
01G:1GB			02G: 2GB			04G: 4GB			08G: 8GB			D: Dual Channels										
16G:16GB			32G: 32GB			64G:64GB			A28: 128GB													
Code 10th ~12th (Controller)																						
D07: ID107											Code 17th (Flash Type)											
											B: Toshiba SLC (SATADOM-SH Type C 3SE) C: Toshiba MLC (SATADOM-SH Type C 3ME)											
Code 13th (Flash mode)											Code 18th (pin7 type)											
S: Synchronous NAND.											F: Pin7 version (Optional)											
R: Synchronous NAND with Toshiba A19nm MLC											Code 19th~21st (Customize code)											
A: Asynchronous NAND.																						

Appendix

CE/FCC/RoHS

ISL International Standards Laboratory <http://www.isl.com.tw>

Certificate

Issue Date: September 11, 2014
Ref. Report No. ISL-14LE381CE

Product Name : SATADOM-SH type C 3ME/3SE
Model(s) : DESSC-XXXD07*#%※&
Brand : Innodisk
Responsible Party : Innodisk Corporation
Address : 5F.No.237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)

We, International Standards Laboratory, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in European Council Directive- EMC Directive 2004/108/EC. The device was passed the test performed according to :



Standards:

- EN 55022: 2010+AC2011 and CISPR 22: 2008 (modified)
- EN 61000-3-2: 2006+A1:2009 +A2:2009 and IEC 61000-3-2: 2005+A1:2008 +A2:2009
- EN 61000-3-3: 2013 and IEC 61000-3-3: 2013
- EN 55024: 2010 and CISPR 24: 2010
- EN 61000-4-2: 2009 and IEC 61000-4-2: 2008
- EN 61000-4-3: 2006+A1: 2008 +A2: 2010 and IEC 61000-4-3:2006+A1: 2007+A2: 2010
- EN 61000-4-4: 2004 +A1:2010 and IEC 61000-4-4: 2004 +A1:2010

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

International Standards Laboratory

Jim Chu
Jim Chu / Director

Hsi-Chih LAB:
No. 65, Gu Dai Keng Street, Hsi-Chih Dist.,
New Taipei City 221, Taiwan
Tel: 886-2-2646-2550; Fax: 886-2-2646-4641

Lung-Tan LAB:
No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.,
Lung-Tan Hsiang, Tao Yuan County 325, Taiwan
Tel: 886-3-407-1718; Fax: 886-3407-1738



Certificate

Issue Date: September 11, 2014
 Ref. Report No. ISL-14LE381FB

Product Name : SATADOM-SH type C 3ME/3SE
 Model(s) : DESSC-XXXD07*#%※&
 Brand : Innodisk
 Applicant : Innodisk Corporation
 Address : 5F.No.237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221,
 Taiwan (R.O.C.)

We, International Standards Laboratory, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified. (refer to Test Report if any modifications were made for compliance).




Standards:

FCC CFR Title 47 Part 15 Subpart B: 2012- Section 15.107 and 15.109
 ANSI C63.4-2009
 Industry Canada Interference-Causing Equipment Standard ICES-003 Issue 5: 2012

Class B

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

International Standards Laboratory

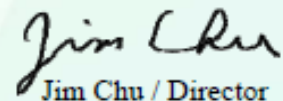
 Jim Chu / Director

Hsi-Chih LAB:
 No. 65, Gu Dai Keng Street, Hsi-Chih Dist.,
 New Taipei City 221, Taiwan
 Tel: 886-2-2646-2550; Fax: 886-2-2646-4641



Lung-Tan LAB:
 No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.,
 Lung-Tan Hsiang, Tao Yuan County 325, Taiwan
 Tel: 886-3-407-1718; Fax: 886-3-407-1738



innodisk

宜鼎國際股份有限公司 Innodisk Corporation

Tel:(02)7703-3000 Fax:(02) 7703-3555 Internet: <http://www.innodisk.com/>

REACH Declaration of Conformity

Manufacturer Product: All Innodisk EM Flash and Dram products

1.宜鼎國際股份有限公司（以下稱本公司）特此保證此售予貴公司之產品，皆符合歐盟化學品法案(Registration , Evaluation and Authorization of Chemicals ; REACH)之規定

(<http://www.echa.europa.eu/de/candidate-list-table> last updated: 16/05/2014)。所提供之產品包含：(1) 產品或產品所使用到的所有原物料；(2) 包裝材料；(3) 設計、生產及重工過程中所使用到的所有原物料。

We Innodisk Corporation hereby declare that our products are in compliance with the requirements according to the REACH Regulation

(<http://www.echa.europa.eu/de/candidate-list-table> last updated: 16/06/2014).

Products include : 1) Product and raw material used by the product ; 2) Packaging material ; 3) Raw material used in the process of design, production and rework

2.本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。

InnoDisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

立 保 證 書 人 (Guarantor)

Company name 公司名稱：InnoDisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人：Richard Lee 李鐘亮

Company Representative Title 公司代表人職稱：CEO 執行長

Date 日期：2014 / 07 / 29





宜鼎國際股份有限公司 Innodisk Corporation

Tel:(02)7703-3000 Fax:(02) 7703-3555 Internet: http://www.innodisk.com/

RoHS 自我宣告書 (RoHS Declaration of Conformity)

Manufacturer Product: All Innodisk EM Flash and Dram products

一、 宜鼎國際股份有限公司（以下稱本公司）特此保證售予貴公司之所有產品，皆符合歐盟 2011/65/EU 關於 RoHS 之規範要求。

Innodisk Corporation declares that all products sold to the company, are complied with European Union RoHS Directive (2011/65/EU) requirement

二、 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。

Innodisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

Name of hazardous substance	Limited of RoHS ppm (mg/kg)
Cd	< 100 ppm
Pb	< 1000 ppm
Hg	< 1000 ppm
Chromium VI (Cr+6)	< 1000 ppm
Polybromodiphenyl ether (PBDE)	< 1000 ppm
Polybrominated Biphenyls (PBB)	< 1000 ppm

立保證書人 (Guarantor)

Company name 公司名稱：Innodisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人：Richard Lee 李鐘亮

Company Representative Title 公司代表人職稱：CEO 執行長

Date 日期：2014 / 07 / 29

