

# Industrial SD Card

## SD 3.0 series (SLC)

Total Solution For  
Industrial Flash Storage

**Customer:** \_\_\_\_\_

**Customer**

**Part**

**Number:** \_\_\_\_\_

**Innodisk**

**Part**

**Number:** \_\_\_\_\_

**Innodisk**

**Model Name:** \_\_\_\_\_

**Date:** \_\_\_\_\_

Innodisk Approver	Customer Approver

## Table of contents

<b>LIST OF FIGURES .....</b>	<b>5</b>
<b>1. PRODUCT OVERVIEW .....</b>	<b>6</b>
<b>1.1 INTRODUCTION OF INNODISK INDUSTRIAL SD CARD 3.0 SERIES .....</b>	<b>6</b>
<b>1.2 PRODUCT VIEW AND MODELS .....</b>	<b>6</b>
<b>1.3 SD 3.0 INTERFACE .....</b>	<b>6</b>
<b>2. PRODUCT SPECIFICATIONS.....</b>	<b>7</b>
<b>2.1 CAPACITY AND DEVICE PARAMETERS.....</b>	<b>7</b>
<b>2.2 PERFORMANCE .....</b>	<b>7</b>
<b>2.3 ELECTRICAL SPECIFICATIONS .....</b>	<b>8</b>
<b>2.3.1 Power Requirement .....</b>	<b>8</b>
<b>2.3.2 Power Consumption.....</b>	<b>8</b>
<b>2.4 ENVIRONMENTAL SPECIFICATIONS .....</b>	<b>8</b>
<b>2.4.1 Temperature Ranges .....</b>	<b>8</b>
<b>2.4.2 Humidity .....</b>	<b>8</b>
<b>2.4.3 Shock and Vibration.....</b>	<b>8</b>
<b>2.4.4 Mean Time between Failures (MTBF) .....</b>	<b>8</b>
<b>2.5 CE AND FCC COMPATIBILITY .....</b>	<b>9</b>
<b>2.6 RoHS COMPLIANCE .....</b>	<b>9</b>
<b>2.7 RELIABILITY.....</b>	<b>9</b>
<b>2.8 TRANSFER MODE .....</b>	<b>9</b>
<b>2.9 PIN ASSIGNMENT .....</b>	<b>9</b>
<b>2.10 MECHANICAL DIMENSIONS .....</b>	<b>11</b>
<b>2.11 ASSEMBLY WEIGHT .....</b>	<b>11</b>
<b>2.12 SEEK TIME .....</b>	<b>11</b>
<b>2.13 HOT PLUG .....</b>	<b>11</b>
<b>2.14 NAND FLASH MEMORY .....</b>	<b>11</b>
<b>3.1 OVERVIEW .....</b>	<b>12</b>
<b>3.2 SD 3.0 CONTROLLER.....</b>	<b>12</b>
<b>3.3 ERROR DETECTION AND CORRECTION.....</b>	<b>12</b>
<b>3.4 WEAR-LEVELING .....</b>	<b>13</b>
<b>3.5 BAD BLOCKS MANAGEMENT.....</b>	<b>13</b>
<b>3.6 POWER FAILURE MANAGEMENT.....</b>	<b>13</b>
<b>3.7 GARBAGE COLLECTION .....</b>	<b>13</b>
<b>4. INSTALLATION REQUIREMENTS .....</b>	<b>14</b>
<b>4.1 INDUSTRIAL SD CARD PIN DIRECTIONS .....</b>	<b>14</b>
<b>4.2 DEVICE DRIVE .....</b>	<b>14</b>
<b>5. PART NUMBER RULE .....</b>	<b>15</b>

## REVISION HISTORY

Revision	Description	Date
Preliminary	First released	Mar., 2014
Rev. 1.0	Update device parameter	Apr., 2014
Rev. 1.1	Separate the TPS to SLC and MLC	June, 2014
Rev. 1.2	Modify the Code 13 <sup>th</sup> (Flash Mode) of Part Number Rule	June, 2014
Rev. 1.3	Modify TBW based on NAND Flash specifications	Feb., 2015
Rev. 1.4	Modify part number rule	June, 2015
Rev. 1.5	Modify part number rule	July. 2015
Rev. 1.6	Update to FW170601 (performance/power consumption mainly, ROHS/REACH renew)	March, 2018

## List of Tables

<b>TABLE 1: DEVICE PARAMETERS .....</b>	<b>7</b>
<b>TABLE 2: PERFORMANCE .....</b>	<b>7</b>
<b>TABLE 3: INNODISK INDUSTRIAL SD CARD POWER REQUIREMENT .....</b>	<b>8</b>
<b>TABLE 4: POWER CONSUMPTION.....</b>	<b>8</b>
<b>TABLE 5: TEMPERATURE RANGE FOR INDUSTRIAL SD CARD .....</b>	<b>8</b>
<b>TABLE 6: SHOCK/VIBRATION TESTING FOR INDUSTRIAL SD CARD .....</b>	<b>8</b>
<b>TABLE 7: INDUSTRIAL SD CARD MTBF .....</b>	<b>9</b>
<b>TABLE 8: INNODISK INDUSTRIAL SD CARD 3.0 SERIES PIN ASSIGNMENT .....</b>	<b>10</b>

## List of Figures

<b>FIGURE 1: INNODISK INDUSTRIAL SD CARD 3.0 SERIES .....</b>	<b>6</b>
<b>FIGURE 2: INNODISK INDUSTRIAL SD CARD 3.0 SERIES BLOCK DIAGRAM .....</b>	<b>12</b>
<b>FIGURE 3: SIGNAL SEGMENT AND POWER SEGMENT .....</b>	<b>14</b>

# 1. Product Overview

## 1.1 Introduction of Innodisk Industrial SD card 3.0 series

Innodisk industrial SD card 3.0 series are specifically designed for industrial PC and embedded applications. The 3.0 series SD card has latest firmware architecture and Flash algorithms, including superior wear leveling, read disturb management, and power fail management ensuring highest reliability and endurance.

Innodisk industrial SD card 3.0 series provide wide range capacities from 128MB to 32GB within SLC NAND Flash, and fully compliant to SD3.0, and SD2.0 specifications.

With its low power consumption and features above, Innodisk industrial SD card 3.0 series can be applied on industrial automation, SBC (single-board computer), medical equipment, infotainment, and mobile application.

## 1.2 Product View and Models

Innodisk Industrial SD card 3.0 series is available from 128MB up to 32GB capacities within SLC Flash IC.



**Figure 1: Innodisk Industrial SD card**

## 1.3 SD 3.0 Interface

Innodisk Industrial SD card 3.0 series support SD 3.0 interface, and backward compliant to SD 2.0 interface.

## 2. Product Specifications

### 2.1 Capacity and Device Parameters

Innodisk Industrial SD card device parameters are shown in Table 1.

**Table 1: Device parameters**

SLC		
Capacity	LBA	User Capacity(MB)
128MB	246784	120.5
256MB	486400	237
512MB	977408	477.25
1GB	1972736	963.25
2GB	3928064	1918
4GB	7834624	3825.5
8GB	15648768	7641
16GB	31277056	15272
32GB	62532608	30533

### 2.2 Performance

Burst Transfer Rate: up to 104 MB/s in SD 3.0 SDR104

**Table 2: Performance**

SLC									
Capacity	128MB	256MB	512MB	1GB	2GB	4GB	8GB	16GB	32GB
Class	4	6	10	10	10	10	10	10	10
Sequential Read (max.)	18 MB/sec	25 MB/sec	26 MB/sec	26 MB/sec	31 MB/sec	32 MB/sec	38 MB/sec	39 MB/sec	40 MB/sec
Sequential Write (max.)	4 MB/sec	8 MB/sec	14 MB/sec	12 MB/sec	23 MB/sec	20 MB/sec	32 MB/sec	32 MB/sec	33 MB/sec

Note: Base on CrystalDiskMark 5.1.2 with file size 1000MB

## 2.3 Electrical Specifications

### 2.3.1 Power Requirement

**Table 3: Innodisk Industrial SD card Power Requirement**

Item	Symbol	Rating	Unit
Input voltage	V <sub>IN</sub>	2.7~3.6	V

### 2.3.2 Power Consumption

**Table 4: Power Consumption**

Mode	Power Consumption (mA)
Read	72 (max.)
Write	93 (max.)
Idle	1 (max.)

\* Target: Industrial SD card 3.0 series SLC 32GB

## 2.4 Environmental Specifications

### 2.4.1 Temperature Ranges

**Table 5: Temperature range for Industrial SD card**

Temperature	Range
Operating	Standard Grade: -20°C to +85°C
	Industrial Grade: -40°C to +85°C
Storage	-55°C to +95°C

### 2.4.2 Humidity

Relative Humidity: 10-95%, non-condensing

### 2.4.3 Shock and Vibration

**Table 6: Shock/Vibration Testing for Industrial SD card**

Reliability	Test Conditions	Reference Standards
Vibration	7 Hz to 2K Hz, 20G, 3 axes	IEC 68-2-6
Mechanical Shock	Duration: 0.5ms, 1500 G, 3 axes	IEC 68-2-27

### 2.4.4 Mean Time between Failures (MTBF)

Table 7 summarizes the MTBF prediction results for various Industrial SD card configurations. The analysis was performed using a RAM Commander™ failure rate prediction.

- **Failure Rate:** The total number of failures within an item population, divided by the total

number of life units expended by that population, during a particular measurement interval under stated condition.

- Mean Time between Failures (MTBF):** A basic measure of reliability for repairable items: The mean number of life units during which all parts of the item perform within their specified limits, during a particular measurement interval under stated conditions.

**Table 7: Industrial SD card MTBF**

Product	Condition	MTBF (Hours)
Innodisk Industrial SD card 3.0 series	Telcordia SR-332 GB, 25°C	>3,000,000

## 2.5 CE and FCC Compatibility

Industrial SD card conforms to CE and FCC requirements.

## 2.6 RoHS Compliance

Industrial SD card is fully compliant with RoHS directive.

## 2.7 Reliability

Parameter	Value
Read Cycles	Unlimited Read Cycles
Wear-Leveling Algorithm	Support
Bad Blocks Management	Support
Error Correct Code	Support
TBW(Sequential Write)	SLC
128MB	6.75
256MB	13.5
512MB	27
1GB	54
2GB	108
4GB	216
8GB	432
16GB	864
32GB	1728


## 2.8 Transfer Mode

Industrial SD card 3.0 series support following transfer mode:

SD 3.0 / SD 2.0

## 2.9 Pin Assignment


Innodisk Industrial SD card 3.0 series compliant with standard SD SPEC., please refer to Table 8 for pin assignment.



Pin #	SD Mode			SPI Mode		
	Name	Type <sup>1</sup>	Description	Name	Type <sup>1</sup>	Description
1	CD/DAT3 <sup>2</sup>	I/O/PP <sup>3</sup>	Card Detect/Data Line [Bit 3]	CS	I <sup>3</sup>	Chip Select (Neg. True)
2	CMD	I/O/PP	Command/Response	DI	I	Data In
3	V <sub>SS1</sub>	S	Supply voltage ground	V <sub>SS</sub>	S	Supply voltage ground
4	V <sub>DD</sub>	S	Supply voltage	V <sub>DD</sub>	S	Supply voltage
5	CLK	I	Clock	SCLK	I	Clock
6	V <sub>SS2</sub>	S	Supply voltage ground	V <sub>SS2</sub>	S	Supply voltage ground
7	DAT0	I/O/PP	Data Line [Bit 0]	DO	O/PP	Data Out
8	DAT1 <sup>4</sup>	I/O/PP	Data Line [Bit 1]	RSV		
9	DAT2 <sup>5</sup>	I/O/PP	Data Line [Bit 2]	RSV		

**Table 8: Innodisk Industrial SD card 3.0 series Pin Assignment**

## 2.10 Mechanical Dimensions

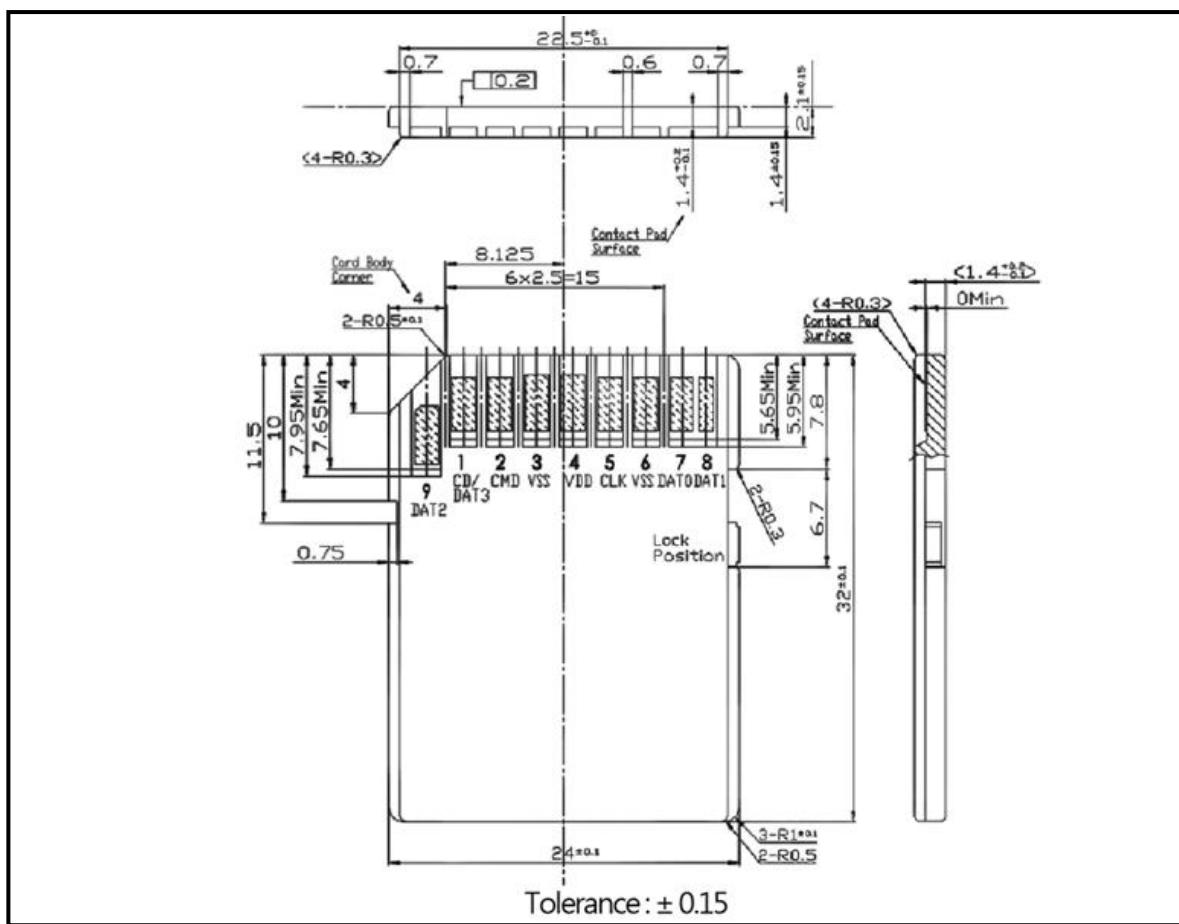

## 2.11 Assembly Weight

An Innodisk Industrial SD card 3.0 within SLC flash ICs, 16GB's weight is 2 grams approx.

## 2.12 Seek Time

Innodisk Industrial SD card is not a magnetic rotating design. There is no seek or rotational latency required.

## 2.13 Hot Plug

The SD card support hot plug function and can be removed or plugged-in during operation.


## 2.14 NAND Flash Memory

Innodisk Industrial SD card 3.0 series uses SLC (Single Level Cell) NAND flash memory, which is non-volatility, high reliability and high speed memory storage.

## 3. Theory of Operation

### 3.1 Overview

Figure 2 shows the operation of Innodisk Industrial SD card 3.0 series from the system level, including the major hardware blocks.

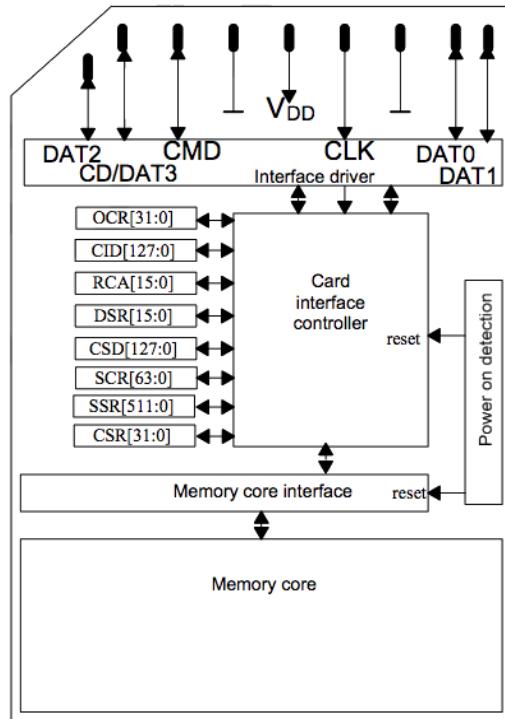

**Figure 2: Innodisk Industrial SD card 3.0 series Block Diagram**

Innodisk Industrial SD card 3.0 series integrates a SD 3.0 controller and NAND flash memories. Communication with the host occurs through the host interface, using the standard SD interface.

### 3.2 SD 3.0 Controller

Innodisk Industrial SD card 3.0 series is designed with a SD 3.0 controller, which has single channel for flash interface.

### 3.3 Error Detection and Correction

Highly sophisticated Error Correction Code algorithms are implemented. The ECC unit consists of the Parity Unit (parity-byte generation) and the Syndrome Unit (syndrome-byte computation). This unit implements an algorithm that can correct up to 96 bits per 1024 bytes in an ECC block. Code-byte generation during write operations, as well as error detection during read operation, is implemented on the fly without any speed penalties.

### 3.4 Wear-Leveling

Flash memory can be erased within a limited number of times. This number is called the **erase cycle limit** or **write endurance limit** and is defined by the flash array vendor. The erase cycle limit applies to each individual erase block in the flash device.

Innodisk Industrial SD card 3.0 series uses a global wear-leveling algorithm to ensure that consecutive writes of a specific sector are not written physically to the same page/block in the flash. This spreads flash media usage evenly across all pages, thereby extending flash lifetime.

### 3.5 Bad Blocks Management

Bad Blocks are blocks that contain one or more invalid bits whose reliability are not guaranteed. The Bad Blocks may be presented while the product is shipped, or may develop during the life time of the SD card. When the Bad Blocks is detected, it will be flagged, and not be used anymore. The SD card implement Bad Blocks management, Bad Blocks replacement, Error Correct Code to avoid data error occurred. The functions will be enabled automatically to transfer data from Bad Blocks to spare blocks, and correct error bit.

### 3.6 Power Failure Management

Innodisk industrial SD card 3.0 series has a power failure management feature to ensure data integrity, which is a comprehensive data protection mechanism that functions before and after a sudden power outage to SD card. Innodisk's power cycling provides effective power cycling management, preventing data stored in flash from degrading with use.

### 3.7 Garbage Collection

Garbage collection is used to maintain data consistency and perform continual data cleansing on SD card. It runs as a background process, freeing up valuable controller resources while sorting good data into available blocks, and deleting bad blocks. It also significantly reduces write operations to the drive, thereby increasing the SD's speed and lifespan.

## 4. Installation Requirements

### 4.1 Industrial SD card Pin Directions

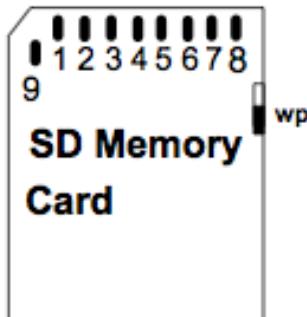


Figure 3: Signal Segment and Power Segment

### 4.2 Device Drive

No additional device drives are required.

## 5. Part Number Rule

CODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20					
	D	E	S	D	C	-	3	2	G	Y	8	1	A	C	2	S	B	-	X	X					
Description	Disk	Industrial SD card				Capacity		Category			Flash Mode	Operation Temp.	Internal Control	CH.	Flash	-	Customized Code								
<b>Definition</b>																									
<b>Code 1<sup>st</sup> (Disk)</b>										<b>Code 13<sup>th</sup> (Flash Mode)</b>															
D : Disk										A: Asynchronous flash															
<b>Code 2<sup>nd</sup> ~ 5<sup>th</sup> (Form Factor)</b>										<b>Code 14<sup>th</sup> (Operation Temperature)</b>															
ESDC: Industrial SD card 3.0 series										C: Standard Grade (-20°C ~ +85°C)															
<b>Code 7<sup>th</sup> ~9<sup>th</sup> (Capacity)</b>										W: Industrial Grade (-40°C ~ +85°C)															
128: 128MB					04G: 4GB					<b>Code 15<sup>th</sup> (Internal control)</b>															
256: 256MB					08G: 8GB					<b>Code 16<sup>th</sup> (Channel of data transfer)</b>															
512: 512MB					16G: 16GB					S: Single Channel															
01G: 1GB					32G: 32GB																				
02G: 2GB					<b>Code 17<sup>th</sup> (Flash Type)</b>																				
<b>Code 10<sup>th</sup> ~12<sup>th</sup> (Series)</b>										B: Toshiba SLC															
Y81: Industrial SD card 3.0 series										<b>Code 19<sup>th</sup>~20<sup>th</sup> (Customized Code)</b>															

**宜鼎國際股份有限公司  
Innodisk Corporation**

Tel:(02)7703-3000 Fax:(02) 7703-3555 Internet: <http://www.innodisk.com/>

**REACH Declaration of Conformity**

**Manufacturer Product: All Innodisk EM Flash and Dram products**

1. 宜鼎國際股份有限公司（以下稱本公司）特此保證此售予貴公司之產品，皆符合歐盟化學品法案(Registration , Evaluation and Authorization of Chemicals : REACH)之規定  
[\(<http://www.echa.europa.eu/de/candidate-list-table> last updated: 16/06/2014\)](http://www.echa.europa.eu/de/candidate-list-table)。所提供之產品包含：(1) 產品或產品所使用到的所有原物料；(2)包裝材料；(3)設計、生產及重工過程中所使用到的所有原物料。

We Innodisk Corporation hereby declare that our products are in compliance with the requirements according to the REACH Regulation

(<http://www.echa.europa.eu/de/candidate-list-table> last updated: 16/06/2014).

Products include : 1) Product and raw material used by the product ; 2) Packaging material ; 3) Raw material used in the process of design, production and rework

2. 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。

InnoDisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

**立 保 證 書 人 (Guarantor)**

Company name 公司名稱：InnoDisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人：Richard Lee 李鍾亮

Company Representative Title 公司代表人職稱：CEO 執行長

Date 日期：2014 / 07 / 29



**宜鼎國際股份有限公司  
Innodisk Corporation**

Page 1/1

Tel:(02)7703-3000 Fax:(02) 7703-3555 Internet: <http://www.innodisk.com/>

**RoHS 自我宣告書 (RoHS Declaration of Conformity)**

**Manufacturer Product: All Innodisk EM Flash and Dram products**

一、 宜鼎國際股份有限公司（以下稱本公司）特此保證售予貴公司之所有產品，皆符合歐盟 2011/65/EU 及 (EU) 2015/863 關於 RoHS 之規範要求。

Innodisk Corporation declares that all products sold to the company, are complied with European Union RoHS Directive (2011/65/EU) and (EU) 2015/863 requirement.

二、 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。

Innodisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

Name of hazardous substance	Limited of RoHS ppm (mg/kg)
鉛 (Pb)	< 1000 ppm
汞 (Hg)	< 1000 ppm
鎘 (Cd)	< 100 ppm
六價鉻 (Cr 6+)	< 1000 ppm
多溴聯苯 (PBBS)	< 1000 ppm
多溴二苯醚 (PBDEs)	< 1000 ppm
鄰苯二甲酸二(2-乙基己基)酯 (DEHP)	< 1000 ppm
鄰苯二甲酸丁酯苯甲酯 (BBP)	< 1000 ppm
鄰苯二甲酸二丁酯 (DBP)	< 1000 ppm
鄰苯二甲酸二異丁酯 (DIBP)	< 1000 ppm

**立 保 證 書 人 (Guarantor)**

Company name 公司名稱 : Innodisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人 : Randy Chien 簡川勝

Company Representative Title 公司代表人職稱 : Chairman 董事長

Date 日期 : 2017 / 01 / 18



Tel:(02)7703-3000 Fax:(02) 7703-3555 Internet: <http://www.innodisk.com/>

## REACH Declaration of Conformity

### Manufacturer Product: All Innodisk EM Flash and Dram products

1. 宜鼎國際股份有限公司（以下稱本公司）特此保證此售予貴公司之產品，皆符合歐盟化學品法案(Registration , Evaluation and Authorization of Chemicals ; (EC) No 1907/2006 REACH)以及附錄 XIV 中的限用物質之規定 (<http://www.echa.europa.eu/de/candidate-list-table> last updated: 12/01/2017 , SVHC's 173 )。

所提供之產品包含：(1) 產品或產品所使用到的所有原物料；(2)包裝材料；(3)設計、生產及重工過程中所使用到的所有原物料。

We Innodisk Corporation hereby declare that our products are in compliance with the requirements according to the (EC) No 1907/2006 REACH Regulation and restricted substances in Annex XIV (<http://www.echa.europa.eu/de/candidate-list-table> last updated: 12/01/2017 , SVHC's 173 ).

Products include : 1) Product and raw material used by the product ; 2) Packaging material ; 3) Raw material used in the process of design, production and rework.

2. 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。  
InnoDisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

### 立 保 證 書 人 (Guarantor)

Company name 公司名稱 : InnoDisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人 : Randy Chien 簡川勝

Company Representative Title 公司代表人職稱 : Chairman 董事長

Date 日期 : 2017 / 02 / 08



# Certificate

Issue Date: May 29, 2014  
 Ref. Report No. ISL-14LE220CE

Product Name : Industrial SD Card 3.0  
 Model(s) : D@SDC-XXXY81\*#1:-&  
 Brand : Innodisk  
 Responsible Party : Innodisk Corporation  
 Address : 5F No.237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221,  
 Taiwan (R.O.C.)

We, International Standards Laboratory, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in European Council Directive- EMC Directive 2004/108/EC. The device was passed the test performed according to :



**Standards:**

EN 55022: 2010 and CISPR 22: 2008 (modified)  
 EN 61000-3-2: 2006+A1:2009 +A2:2009 and IEC 61000-3-2: 2005+A1:2008 +A2:2009  
 EN 61000-3-3: 2013 and IEC 61000-3-3: 2013  
 EN 55024: 2010 and CISPR 24: 2010  
 EN 61000-4-2: 2009 and IEC 61000-4-2: 2008  
 EN 61000-4-3: 2006+A1: 2008 +A2: 2010 and  
 IEC 61000-4-3:2006+A1: 2007+A2: 2010

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

International Standards Laboratory

Jim Chen / Director


Hsi-Chih LAB:

No. 65, Gu Dai Keng Street, Hsi-Chih Dist.,  
 New Taipei City 221, Taiwan  
 Tel: 886-2-2646-2550; Fax: 886-2-2646-4641



Lung-Tan LAB:

No. 120, Lane 180, San Ho Tzu, Hsin Ho Rd.,  
 Lung-Tan Hsiang, Tao Yuan County 325, Taiwan  
 Tel: 886-3-3407-1718; Fax: 886-3407-1738



# Certificate

Issue Date: May 29, 2014  
 Ref. Report No. ISL-14LE220FB

Product Name : Industrial SD Card 3.0  
 Model(s) : D@SDC-XXXXY81\*#1-/-&  
 Brand : Innodisk  
 Applicant : Innodisk Corporation  
 Address : 5F. No.237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221,  
 Taiwan (R.O.C.)

We, International Standards Laboratory, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified. (refer to Test Report if any modifications were made for compliance).

**Standards:**



FCC CFR Title 47 Part 15 Subpart B: 2012- Section 15.107 and 15.109


ANSI C63.4-2009

Industry Canada Interference-Causing Equipment Standard ICES-003 Issue 5: 2012

**Class B**


I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

International Standards Laboratory

  
 Jim Chu / Director

Hsi-Chih LAB:

No. 65, Gu Dai Kang Street, Hsi-Chih Dist.,  
 New Taipei City 221, Taiwan  
 Tel: 886-2-2646-2550; Fax: 886-2-2646-4641



Lung-Tan LAB:

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.,  
 Lung-Tan Hsiang, Tao Yuan County 325, Taiwan  
 Tel: 886-3-407-1718; Fax: 886-3407-1738

