



DFI® NP951-B16C 3.5"

Specifications

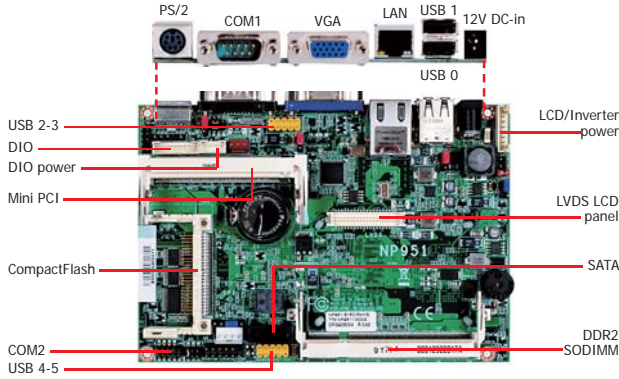

Top View

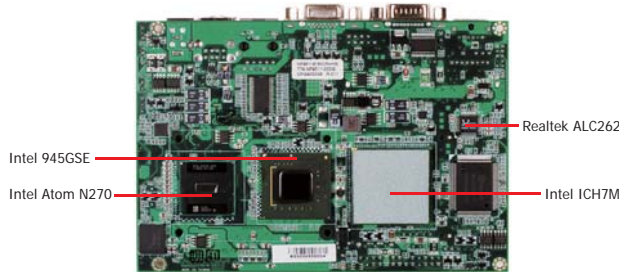


Bottom View




Features

CHIPSET	Intel® 945GSE/ICH7M
CPU	Intel® Atom™ N270
MEMORY	1 DDR2 SODIMM up to 2GB
EXPANSION	1 Mini PCI
DISPLAY OUTPUTS	1 VGA, 1 LVDS
LAN	1 Gigabit LAN port
COM	2 COM
USB	6 USB 2.0
STORAGE	1 SATA 2.0 1 CF
DIO	8-bit DIO
DIMENSIONS	146mm x 102mm (5.75" x 4.02")

Mechanical Drawing

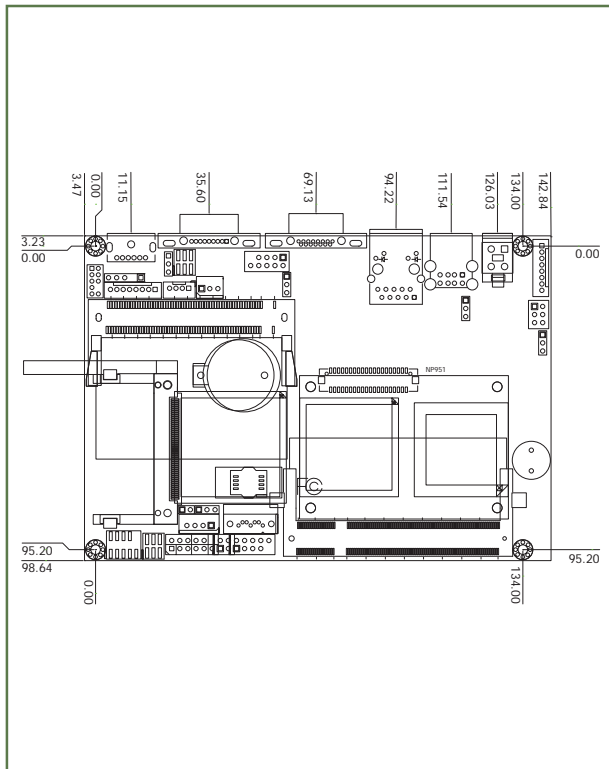

Block Diagram

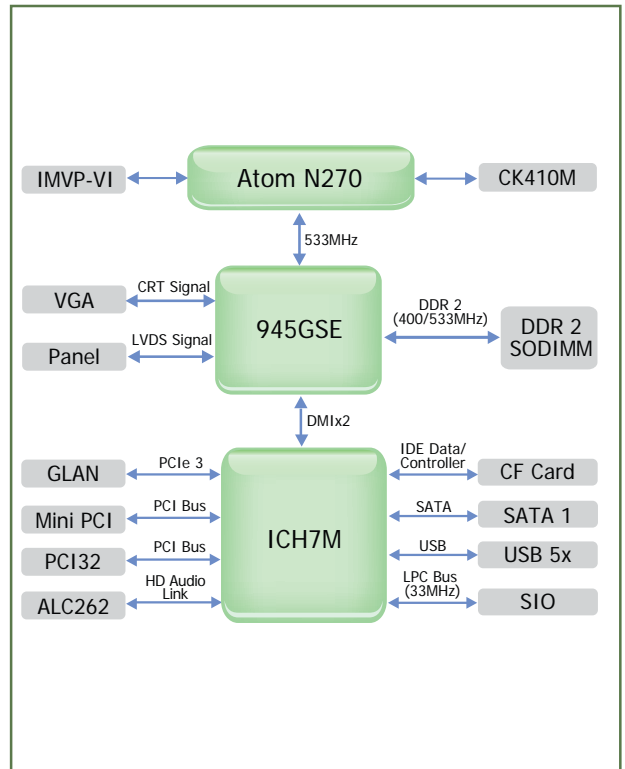

Specifications

PROCESSOR

- Intel® Atom™ N270 processor
- 1.6GHz core frequency, 1.10V voltage
- 2.5W thermal design power
- 512KB on-die second level cache
- 533MHz FSB
- 22x22 mm, 1.0 mm ball pitch and 437 balls FCBGA

CHIPSET

- Intel® chipset
 - Intel® 945GSE Graphics Memory Controller Hub (GMCH)
 - Intel® ICH7M I/O Controller Hub

SYSTEM MEMORY

- One 200-pin SODIMM socket (1.8V)
- Supports DDR2 400/533MHz
- Supports up to 2GB system memory

EXPANSION SLOTS

- 1 Mini PCI slot
- 1 CompactFlash socket

ONBOARD GRAPHICS FEATURES

- Intel® GMA 950
- 133/166MHz internal graphics core render frequency at 1.05V core voltage
- Supports 18-bit dual-channel LVDS
- VGA display resolution up to SXGA+ 1400x1050

ONBOARD AUDIO FEATURES

- Realtek ALC262 High Definition Audio
- Two 24-bit stereo DACs and three 20-bit stereo ADCs
- S/PDIF audio interface

ONBOARD LAN FEATURES

- One Realtek RTL8111C PCI Express Gigabit Ethernet controller
- Supports 10Mbps, 100Mbps and 1Gbps data transmission
- IEEE 802.3 (10/100Mbps) and IEEE 802.3ab (1Gbps) compliant

SERIAL ATA INTERFACE

- One Serial ATA interface supported which is compliant with SATA 1.0 specification (1.5Gbps interface)
- Two-mode operation supports legacy mode using I/O space or an AHCI mode using memory space
- SATA and PATA can be used in a combined function mode (When SATA is used with PATA, AHCI mode is not supported.)

REAR PANEL I/O PORTS

- 1 mini-DIN-6 port for PS/2 mouse and PS/2 keyboard ports
- 1 DC-in 12V jack or 4-pin ATX 12V power connector (optional)
- 1 DB-9 RS232 serial port
 - Pins 1 and 9 functions as RS232 signal or power (selectable via jumper)
- 1 DB-15 VGA port
- 1 RJ45 LAN port
- 2 USB 2.0/1.1 ports

BIOS

- Award BIOS
 - 8Mbit SPI BIOS

I/O CONNECTORS

- 2 connectors for 4 external USB 2.0/1.1 ports
- 1 connector for an external RS232/422/485 serial port
- 1 LVDS LCD panel connector
- 1 LCD/inverter power connector
- 1 8-bit Digital I/O connector
- 1 front audio connector for line-out and mic-in jacks
- 1 S/PDIF connector
- 1 Serial ATA connector
- 1 4-pin power connector for SATA drive
- 1 front panel connector
- 1 fan connector

ENERGY EFFICIENT DESIGN

- ACPI 2.0/1.0 specification
- Wake-On-Events include:
 - Wake-On-PS/2 Keyboard/Mouse
 - Wake up by mini PCI card
 - Wake-On-LAN
 - USB KB/MS wake up from S3
 - Wake-On-Ring
 - RTC timer to power-on the system
- Enhanced Intel® SpeedStep Technology
- AC power failure recovery

DAMAGE FREE INTELLIGENCE

- Monitors CPU/system temperature and overheat alarm
- Monitors CPU(V)/3.3V/5V/12V/VBAT(V) voltages and failure alarm
- Monitors CPU fan speed and failure alarm
- Read back capability that displays temperature, voltage and fan speed
- Watchdog timer function

POWER CONSUMPTION

- 20.37 W with N270 at 1.60GHz and 1x 1GHz DDR2 SODIMM

TEMPERATURE

- 0°C to 60°C

HUMIDITY

- 10% to 90%

DIMENSIONS

- 146mm (5.75") x 102mm (4.02")

CERTIFICATIONS

- CE
- FCC Class B
- UL
- Rohs

Packing List

- 1 NP951-B16C board
- 1 USB cable
- 1 Serial ATA data cable
- 1 Serial ATA power cable
- 1 COM port cable
- 1 PS/2 KB/Mouse cable
- 1 CD
- 1 QR (Quick Reference)

Optional Items

- USB port cable
- Serial ATA data cable
- Serial ATA power cable
- COM port cable