

Datasheet

mSATA 3MG2-P AES series

- SATA 6.0 Gb/s interface
- JEDEC MO-300 standard dimension
- High IOPS by on-board DRAM design
- Intelligent error recovery system
- iSMART disk health monitoring
- iData Guard for abnormal power failure
- Zero mechanical interference
- DEVSLP supported



Introduction

Innodisk mSATA 3MG2-P is designed with AES engine, which is built-in the controller. When controller receives the data package from host, AES engine encrypts the data package and save the encrypted data into NAND flash. Thus, unauthorized personal has no access to decrypt the data in NAND flash. Featuring L² architecture, the life span of the SSD is maximized by an evolved wear leveling algorithm. Furthermore, mSATA 3MG2-P supports TRIM for Windows 7, it can improves performance when deleting files.

mSATA 3MG2-P with AES not only performs unmatched performance, but also designed with Innodisk owned technical knowhow such as iData Guard to ensure the data integrity and highest levels of reliability.


mSATA

3MG2-P AES series

Contact us for more information about the mSATA 3MG2-P AES.

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

Diagram

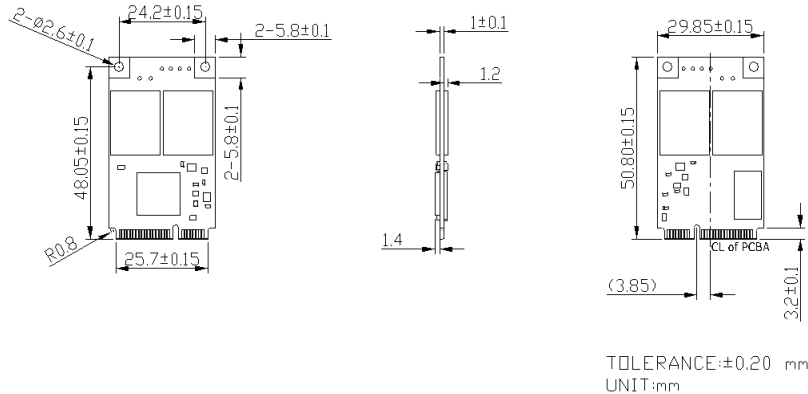

Specifications

Interface	SATA III
Flash Type	MLC
Capacity	8GB~512GB
Max. Channels	4
Sequential R/W (MB/sec, max.)*	530 / 370
4KB Random (QD32) R/W (IOPS)**	68,000/69,000
Max. Power Consumption	5.4W (3.3 V x 1.64 A)
Thermal Sensor	√
External DRAM Buffer	√
H/W Write Protect	Optional
ATA Security	√
S.M.A.R.T.	√
DEVSLP Mode	√ (min. power consumption 3mW)
Slumber Mode	√ (min. power consumption 30mW)
Dimension (WxLxH)	29.85 X 50.8 X 3.6 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours
* Sequential performance based on CystalDiskMark 3.01 with file size 1000MB	
** Random performance based on IOMeter with Queue Depth 32	

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City, Taiwan (R.O.C.)
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
esusales@innodisk.com
+31-(0)40-282-1818
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2016 Innodisk Corporation.
All right reserved. Specifications are subject to change without prior notice.

20160219

Ordering Information (Please refer to TPS for detail)

Operation Temp.	8GB	16GB	32GB	64GB	128GB	256GB	512GB
Standard Grade (0°C ~ +70°C)	DGMSR-08GD82BC1SC	DGMSR-16GD82BC1DC	DGMSR-32GD82BC1QC	DGMSR-64GD82BC1QC	DGMSR-A28D82BC1QC	DGMSR-B56D82BC1QC	DGMSR-C12D82BCBQC
Industrial Grade (-40°C ~ +85°C)	DGMSR-08GD82BW1SC	DGMSR-16GD82BW1DC	DGMSR-32GD82BW1QC	DGMSR-64GD82BW1QC	DGMSR-A28D82BW1QC	DGMSR-B56D82BW1QC	DGMSR-C12D82BWBQC

innodisk

www.innodisk.com