



外觀圖

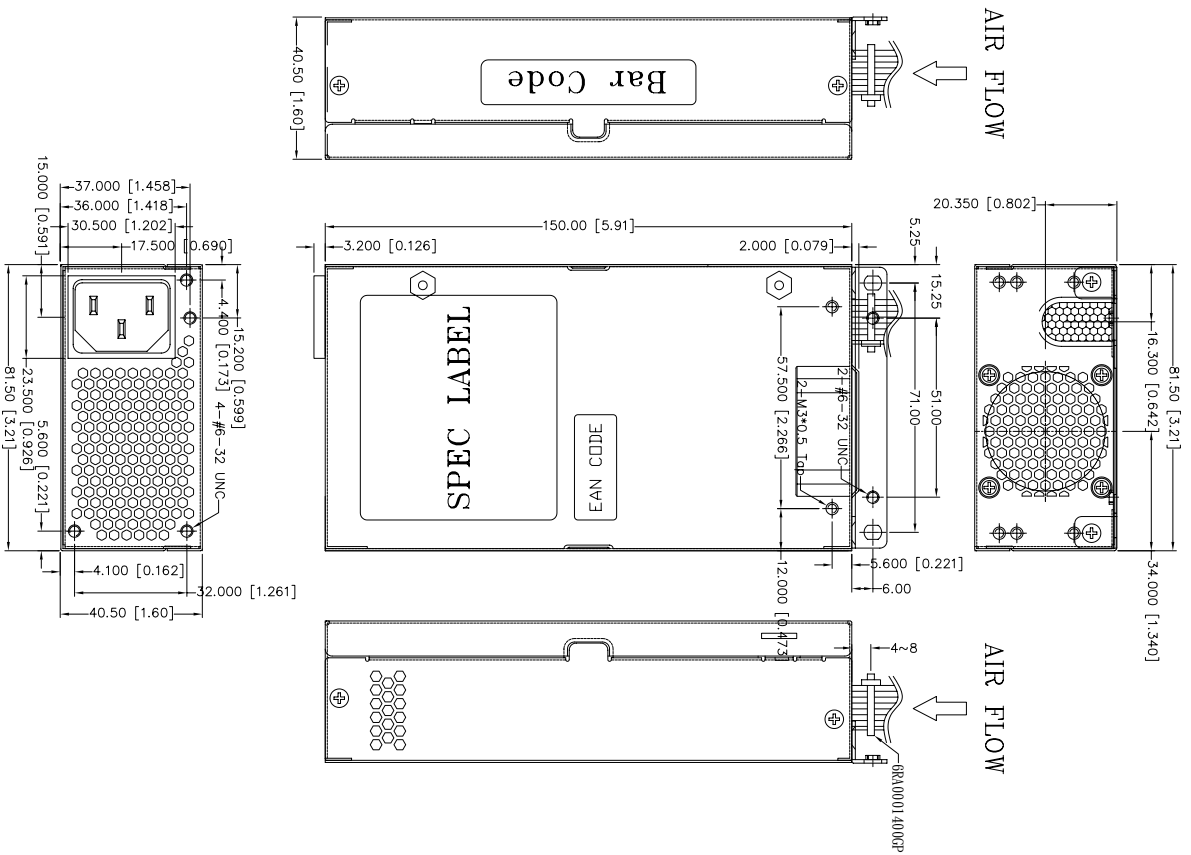

1 出線同 9PA1803566

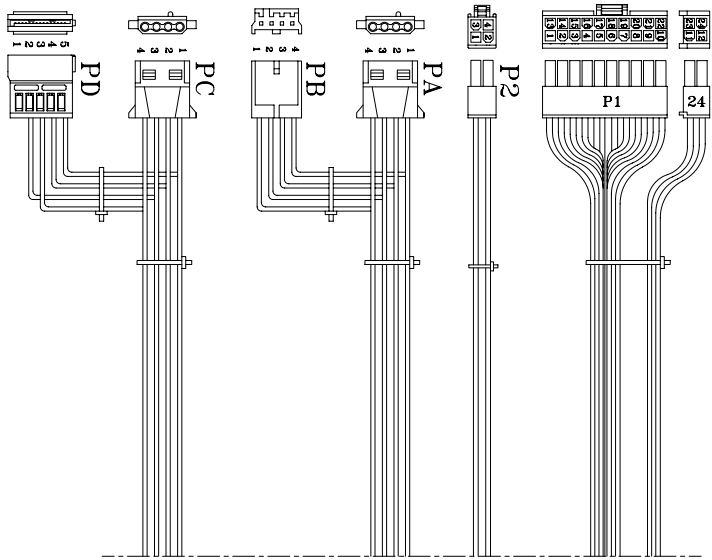

REF. D. NO.	REF. D. NO.	SIGNAL	WIRE COLOR	GAUGE	CONDUCTOR	LENGTH
1	1	+3.3V	ORANGE	20	WST P4-10022	200±15 mm
2	2	+3.3V	ORANGE	20	WST P4-10022	200±15 mm
3	3	COM	BLACK	20	WST P4-10022	200±15 mm
4	4	+5V	RED	20	WST P4-10022	200±15 mm
5	5	COM	BLACK	20	WST P4-10022	200±15 mm
6	6	+5V	RED	20	WST P4-10022	200±15 mm
7	7	COM	BLACK	20	WST P4-10022	200±15 mm
8	8	PM-OK	GRAY	22	WST P4-10022	200±15 mm
9	9	+5Vsb	PURPLE	20	WST P4-10022	200±15 mm
10	10	+12V	YELLOW	20	WST P4-10022	200±15 mm
11	11	+12V	YELLOW	20	WST P4-10022	200±15 mm
12	12	+3.3V	ORANGE	20	WST P4-10022	200±15 mm
13	13	+3.3V	ORANGE	20	WST P4-10022	200±15 mm
14	14	+3.3V	BROWN	22	WST P4-10022	200±15 mm
15	15	-12V	BLUES	22	WST P4-10022	200±15 mm
16	16	COM	BLACK	20	WST P4-10022	200±15 mm
17	17	PS-ON	GREEN	22	WST P4-10022	200±15 mm
18	18	COM	BLACK	20	WST P4-10022	200±15 mm
19	19	COM	BLACK	20	WST P4-10022	200±15 mm
20	20	COM	BLACK	20	WST P4-10022	200±15 mm
21	21	+5V	RED	20	WST P4-10022	200±15 mm
22	22	+5V	RED	20	WST P4-10022	200±15 mm
23	23	+5V	RED	20	WST P4-10022	200±15 mm
24	24	COM	BLACK	20	WST P4-10022	200±15 mm
1	1	COM	BLACK	20	WST P4-10022	250±15 mm
2	2	COM	BLACK	20	WST P4-10022	250±15 mm
3	3	+12V	YELLOW	20	WST P4-10022	250±15 mm
4	4	+12V	YELLOW	20	WST P4-10022	250±15 mm
1	1	+12V	YELLOW	20	WST P4-10022	150±10 mm
2	2	COM	BLACK	20	WST P4-10022	150±10 mm
3	3	COM	BLACK	20	WST P4-10022	150±10 mm
4	4	+5V	RED	20	WST P4-10022	150±10 mm
1	1	+12V	YELLOW	20	WST P4-10022	150±10 mm
2	2	COM	BLACK	20	WST P4-10022	150±10 mm
3	3	+5V	RED	20	WST P4-10022	150±10 mm
4	4	COM	BLACK	20	WST P4-10022	150±10 mm
5	5	+12V	YELLOW	20	WST P4-10022	150±10 mm

P/N: 9PA1806202

NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01]

UNIT:mm [inch]

MODEL NO. : FSP180-50FER(F660001)	TITLE: ASSY	SHEET: 1 OF 1	REV:01
R&D(2)	PE	DRAWN	DATE
		周書宇	NOV.25.2019
INTERIOR COUNTERSIGN:			