



# 外觀圖

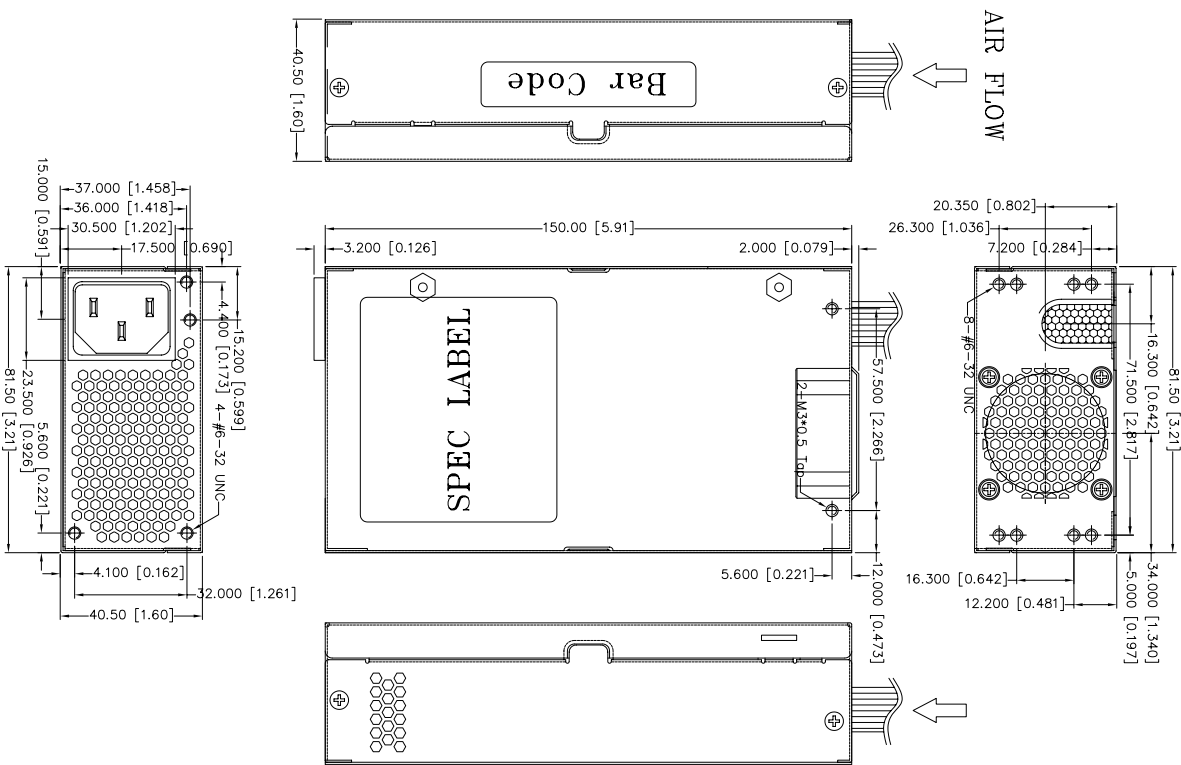

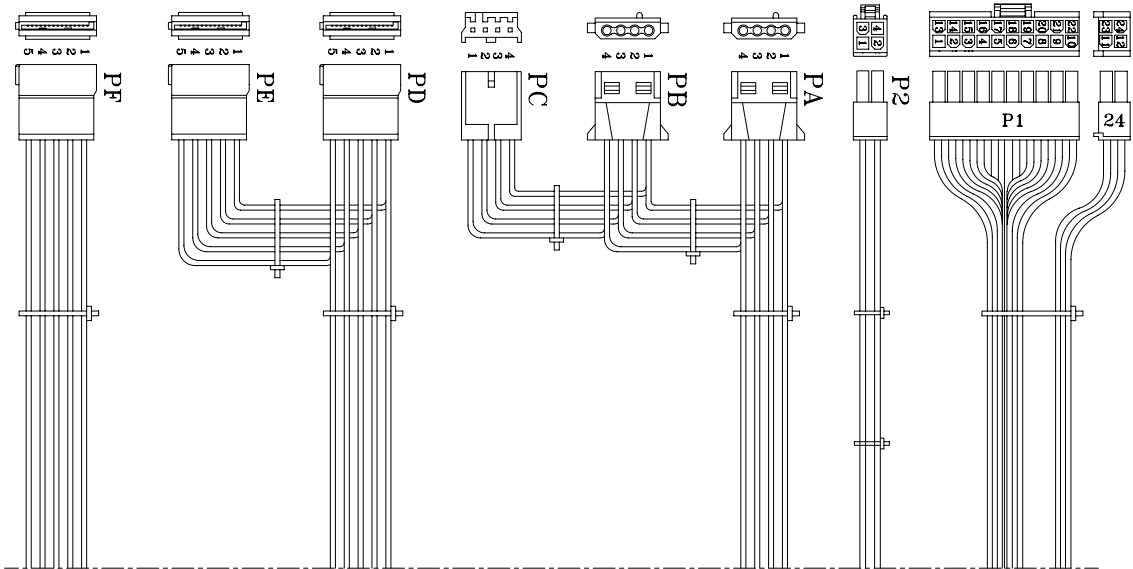

REP. D. NO.	PIN SIGNAL	WIRE COLOR	GAUGE TYPE	CONNECTOR WST	LENGTH
P1	1	+3.3V ORANGE	20	P8-14500RKLID	300±15 mm
	2	+3.3V ORANGE	20	P8-14500RKLID	300±15 mm
	3	COM BLACK	20	P8-14500RKLID	300±15 mm
	4	+5V RED	20	P8-14500RKLID or EQUIV.	300±15 mm
P2	1	+3.3V ORANGE	20	P8-14500RKLID	300±15 mm
	2	COM BLACK	20	P8-14500RKLID	300±15 mm
	3	+12V YELLOW	20	P8-14500RKLID	300±15 mm
	4	+5V RED	20	P8-14500RKLID or EQUIV.	300±15 mm
PA	1	+12V YELLOW	20	P4-10502	155±15 mm
	2	COM BLACK	20	P4-10502	155±15 mm
	3	+5V RED	20	P4-10502	155±15 mm
	4	+12V YELLOW	20	P4-10502	155±15 mm
PB	1	+5V RED	20	AMP	155±10 mm
	2	COM BLACK	22	AMP	155±10 mm
	3	COM BLACK	22	AMP	155±10 mm
	4	+5V RED	20	AMP	155±10 mm
PC	1	+3.3V ORANGE	20	SP-67582	100±10 mm
	2	COM BLACK	20	SP-67582	100±10 mm
	3	+5V RED	20	SP-67582	100±10 mm
	4	+12V YELLOW	20	SP-67582	100±10 mm
PD	1	+3.3V ORANGE	20	SP-67582	100±10 mm
	2	COM BLACK	20	SP-67582	100±10 mm
	3	+5V RED	20	SP-67582	100±10 mm
	4	+12V YELLOW	20	SP-67582	100±10 mm
PE	1	+3.3V ORANGE	20	SP-67582	100±10 mm
	2	COM BLACK	20	SP-67582	100±10 mm
	3	+5V RED	20	SP-67582	100±10 mm
	4	+12V YELLOW	20	SP-67582	100±10 mm
PF	1	+3.3V ORANGE	20	SP-67582	100±10 mm
	2	COM BLACK	20	SP-67582	100±10 mm
	3	+5V RED	20	SP-67582	100±10 mm
	4	COM BLACK	20	SP-67582	100±10 mm
	5	+12V YELLOW	20	SP-67582	100±10 mm

P/N.: 9PA250FK09

NOTE:

1. ALL THE LENGTH OF OUTPUT WIRES EXCLUDE HOUSING.
2. 公差: .XX=±0.5 [0.02]、.XXX=±0.25 [0.01]

UNIT:mm [inch]

MODEL NO. : FSP250-50FEB(F220001)	TITLE: ASSY	SHEET: 1 OF 1 REV:01
R&D(2)	PE	DATE
周書宇		FEB.03.2020
INTERIOR COUNTERSIGN:		