



PRELIMINARY
Subject to Change without notice

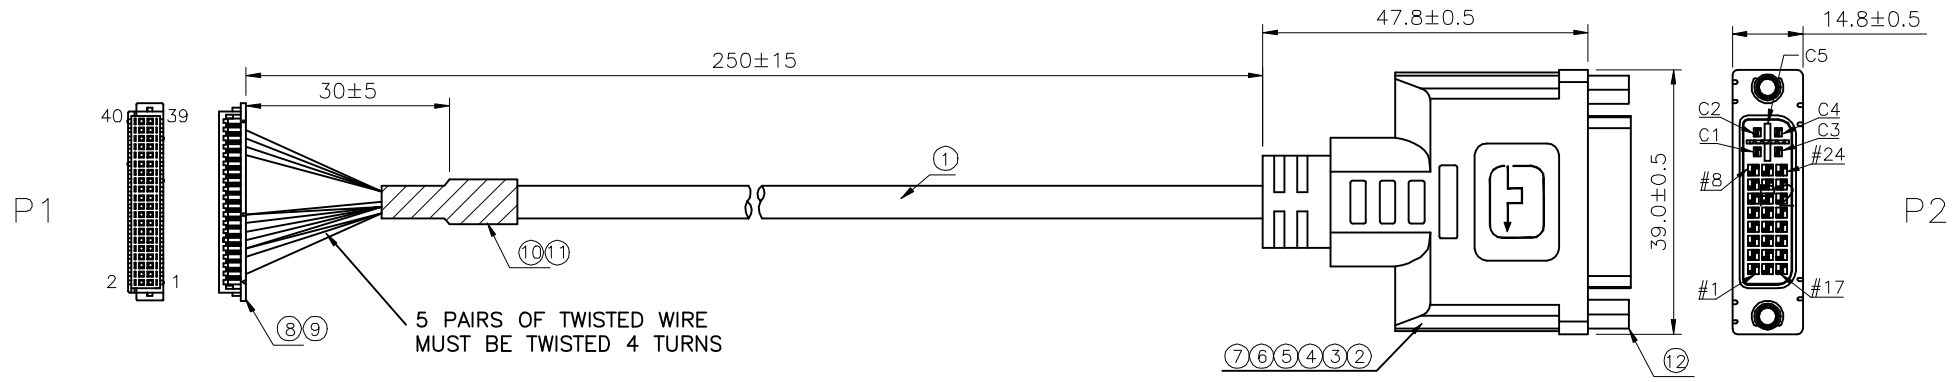

⑫	SCREW NUT	HEXAGONAL COPPER PILLAR, H5.8*11.8 UNC#4-40	1
⑪	H.S.T	BLACK, $\phi 6.0*20$ mm, HALOGEN-FREE AND RED-PHOSPHORUS-FREE	1
⑩	H.S.T	BLACK, $\phi 0.8*30$ mm, HALOGEN-FREE AND RED-PHOSPHORUS-FREE	1
⑨	TERMINAL	WL1255-T-T-S	1
⑧	HOUSING	WL1255-H-2*20P BROWN (DF13) 1.25 PITCH	1
⑦	FOIL-CU	FOIL-CU,8*20mm	1
⑥	FOIL-CU	FOIL-CU,34*60mm	1
⑤	H.S.T	BLACK, $\phi 2.0*16$ mm, THIN HALOGEN-FREE AND RED-PHOSPHORUS-FREE	1
④	OUTER MOLD	PVC 50P, COLOR:BLACK	A/R
③	INNER MOLD	PE	A/R
②	CONNECTOR	DVI24+4+KEY-F(HW) BACK RIVETING THROUGH HOLE NUTS	1
①	CABLE	UL20276 (30#*1P+D+AL+MY)*4C+30#*1P+28#*5C +AB BLACK OD=5.5mm	A/R
NO.	NO.	DESCRIPTION	QTY.

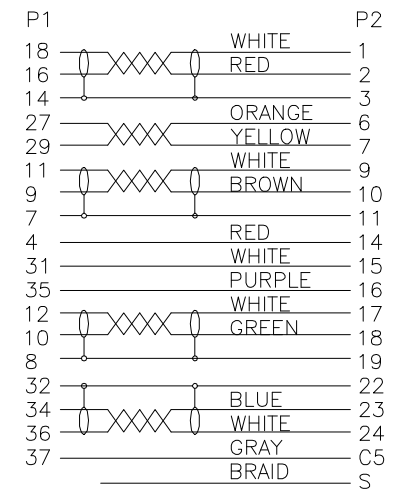

QUALITY SYMBOLS MAJOR Ⓜ CRITICAL Ⓢ GENERAL TOLERANCES (UNLESS SPECIFIED) XX. ± 0.50 X. ± 0.35 .X ± 0.25 .XX ± 0.15 ANGLES $\pm 2^\circ$	DRAWN BY Jake	DATE 2021/07/23	
	CHECKED BY	DATE	
APPROVED BY	DATE	TITLE CABLE DVI-I 24+5P MALE TO HSG 2*20P PITCH 1.25mm, L250mm	
UNITS mm		SIZE A4	RFQ NO. Q2010043
SCALE none	SHEET NO. 1 OF 1	REV A0	DWG NO. C-ACA01063002-001

A0	PROPOSAL RELEASED	---	Jake	Kim	2021/07/23
REV.		ECN NO.	NAME	CHECK	DATE
REVISIONS					