

# SDM-1115G4L

Intel® Smart Display Module with Intel® 11th Generation Core™ i3-1115G4 Processor



## Features

- Intel® Core™ i3-1115G4 Processor
- Dual Channel DDR4, 2 x SO-DIMMs
- 1 x GbE LAN Port
- 3 x USB3.2 Gen 1
- 1 x USB2.0
- Environment : Operation 0°C to +55°C
- Long life time support
- Support 4K/60Hz, HDCP v2.2

## Specifications

Form Factor	SDM-Large 175W x 100D (mm)
CPU	Intel® Core™ i3-1115G4 Processor 10nm SuperFin, 2 cores, 4 threads, up to 4.10 GHz TDP 28W
Socket	1 x FCBGA1449
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB Support Dual Channel DDR4 3200 MHz memory modules
Ethernet	1 x GbE LAN port (Intel® i219V)
Video	Integrated Graphics Processor - Intel® UHD Graphics: 1 x HDMI 2.0 (SDM), supporting a maximum resolution of 4096x2160 @60Hz 1 x Display Port (SDM), supporting a maximum resolution of 4096x2160 @60Hz 2 x HDMI 2.0 (Rear), supporting a maximum resolution of 4096x2160 @60Hz  (4 independent display outputs)
Audio	Intel® integrated Audio
Storage	—
RAID	—
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-key
Rear I/O	1 x RJ45 LAN port 2 x HDMI 2.0 3 x USB 3.2 Gen 1 1 x USB 2.0 1 x PWR LED 1 x HDD LED 2 x External Antenna Hole (Optional) 1 x Reset button 1 x Power button
TPM	1 x TPM header
OS Compatibility	Windows® 10 (x64)
Operating Properties	Operating temperature: 0°C to +55°C Operating humidity: 0%-90% (non-condensing) Non-operating temperature: -40°C to +85°C Non-operating humidity: 0%-95% (non-condensing)


## Application Scenarios

- Digital Signage
- Menu Board
- Video Wall
- Interactive Whiteboard

GIGAIPC reserves the right to modify or change technical data without prior notice.

## Dimension

Unit: mm

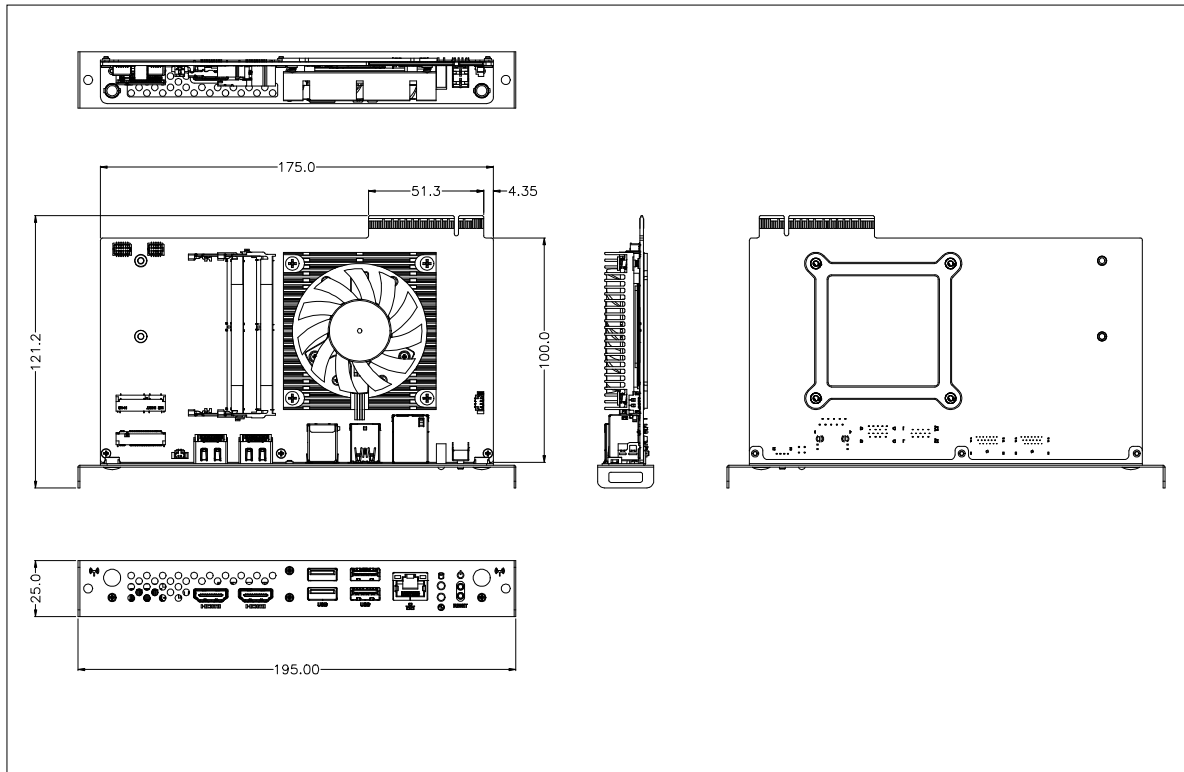

## Packing Content

- Box Packing Capacity: 10pcs
- Carton size: 465 x 351 x 217 (mm)
- Content:
  - Screw Kit with #0 Ziplock Bag Screw-Bind M3.0 x L5.0 NI x 2pcs (P/N: 25KSD-130053-S0R)

## Order Information

- SDM: 9MTGU3ALMR-SI (Box packing)

2021/10/01