


MSB-DP28H

Features

- Two DisplayPort input to Eight HDMI output video splitter box
- Easy and quick installation without driver
- Support EDID caching
- Active cooling, low power consumption, low-profile metal case
- Flexibly deploy multi-monitors video wall configuration with 4x2 or 8x1, support 1920x1200 per port

Specifications

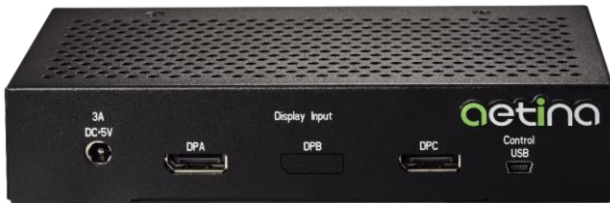

Display Support

Max. Displays per Board	8
Max. Digital Display Support	7680 x 2400 (4 x 2 mode) 15360 x 1200 (8 x 1 mode)
Display Connectors	8 x HDMI

I/O Interface

Input	DisplayPort 7680 x 1200
Output	HDMI 1920 x 1200

Thermal and Power Specs

Thermal	Active fan
Max. BOX Power Consumption (W)	15W

Dimensions

Form Factor	Low-profile metal case
Length	173 mm
Height	35 mm
Width	105 mm

Others

Operation System	Windows® 10
Other Technology	EDID caching
Operation Temperature(Standard)	0°C ~ 45°C
Storage Temperature	-20°C ~ 65°C

