

Datasheet

# M.2 (S80) 3IE4 series

- SATA III solution for industrial field
- Exclusive L<sup>3</sup> architecture
- DRAM-less, 100% data integrity
- Excellent random performance
- Supports TRIM/NCQ/SMART
- Compatible with M.2 2280-D2-B-M standard
- Designed with hardware LDPC ECC engine



## Introduction

Innodisk M.2 (S80) 3IE4 is characterized by **L<sup>3</sup> architecture with the latest SATA III** (6.0GHz) Marvell NAND controller. Innodisk's exclusive L<sup>3</sup> architecture is L<sup>2</sup> architecture multiplied LDPC (Low Density Parity Check). L<sup>2</sup> (Long Life) architecture is a 4K mapping algorithm that reduces WAF and features a real-time wear leveling algorithm to provide high performance and prolong lifespan with exceptional reliability.

Innodisk M.2 (S80) 3IE4 is designed for industrial field, and supports several standard features, including TRIM, NCQ, and S.M.A.R.T. In addition, Innodisk's exclusive industrial-oriented firmware provides a flexible customization service, making it perfect for a variety of industrial applications.

# M.2 (S80) 3IE4 series

## Diagram

Contact us for more information about the M.2 (S80) 3IE4.

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.


### Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan  
Tel: +886-2-7703-3000  
Email: sales@innodisk.com

### Branch Offices:

USA  
[usasales@innodisk.com](mailto:usasales@innodisk.com)  
+1-510-770-9421  
Europe  
[eusales@innodisk.com](mailto:eusales@innodisk.com)  
+31-40-3045-400  
Japan  
[jpsales@innodisk.com](mailto:jpsales@innodisk.com)  
+81-3-6667-0161  
China  
[sales\\_cn@innodisk.com](mailto:sales_cn@innodisk.com)  
+86-755-21673689  
[www.innodisk.com](http://www.innodisk.com)

© 2017 Innodisk Corporation.  
All right reserved. Specifications are subject to change without prior notice.

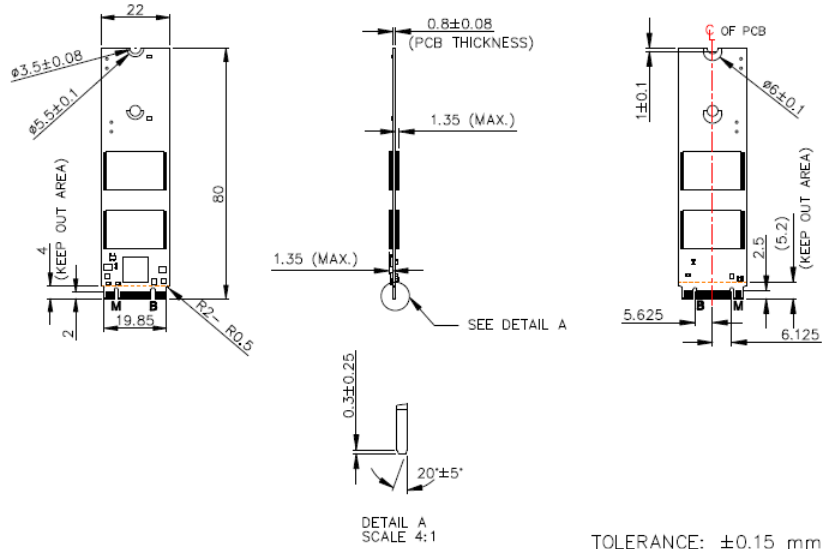

## Specifications

Interface	SATA III
Flash Type	iSLC
P/E cycle	20,000
Capacity	8GB~128GB
Max. Channels	2
Sequential R/W (MB/sec, max.)	530/210
Max. Power Consumption	0.9W (3.3V x 270 mA)
Thermal Sensor	√
External DRAM buffer	-
H/W Write Protect	Optional
ATA Security	√
S.M.A.R.T.	√
Dimension (WxLxH)	22.0 X 80.0 X 3.2 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

## Ordering Information

Operation Temp.	8GB	16GB	32GB	64GB	128GB
Standard Grade (0°C ~ +70°C)	DHM28-08GM41BC1SC DHM28-08GM41BC1DC	DHM28-16GM41BC1DC	DHM28-32GM41BC1DC	DHM28-64GM41BC1DC	DHM28-A28M41BC1DC
Industrial Grade (-40°C ~ +85°C)	DHM28-08GM41BW1SC DHM28-08GM41BW1DC	DHM28-16GM41BW1DC	DHM28-32GM41BW1DC	DHM28-64GM41BW1DC	DHM28-A28M41BW1DC