



全漢企業股份有限公司
FSP TECHNOLOGY INC.

台灣桃園市桃園區建國東路22號 統一編號：84239055
No. 22, Jianguo E. Rd., Taoyuan Dist., Taoyuan City 330, Taiwan (R.O.C)
TEL:+886-3-375-9888 Website:www.FSP-group.com
FAX:+886-3-375-6966 Email:sales@fsp-group.com.tw

SPECIFICATION



ESD14050296

FSP500-80MPD

Released Date:2015/07/27-14:41:38



全漢企業股份有限公司
FSP TECHNOLOGY INC.

SPECIFICATION

FSP500-80MPD

**Main Feature:
Active PFC Circuit
Full Range Input**

**JUL 22 , 2015
REV: 1.5**



全漢企業股份有限公司
FSP TECHNOLOGY INC.

MODEL: FSP500-80MPD

Revision History

<u>Rev</u>	<u>Description</u>	<u>Date</u>	<u>Author</u>
1.1	Update 5.3. VIBRATION & 5.4. SHOCK	10.6.2014	Karl
1.2	增加 115V Internal Non-Redundant	10.29.2014	Kelly
1.3	+12V2 minimum load → 0.05A	12.24.2014	Winnie (Karl)
1.4	7.1. RADIATED EMI add EMC Performance	6.18.2015	Joanna (Karl)
1.5	針對醫療類SPEC 調整及修正	7.22.2015	Joanna (Karl)

1. GENERAL DESCRIPTION

This series of AC/DC switching power supplies in a standard ATX form factor 140 x 150 x 86 mm are capable of delivering 400 watts continuous power. The special features are:

- Medical safety standard IEC 60601-1 compliance
- High efficiency meet 80PLUS GOLD requirement
- +12V2 minimum load comply with Intel HASWELL platform requirement
- Hi-Pot 1500Vac between output and Protect Earth.
- High altitude 5000 meters operation

2. INPUT ELECTRICAL SPECIFICATIONS

2.1 VOLTAGE RANGE

INPUT VOLTAGE	90 ~ 264 Vac
----------------------	--------------

2.2 INPUT FREQUENCY

INPUT FREQUENCY	47 ~ 63 Hz
------------------------	------------

2.3 INRUSH CURRENT

50A maxi.	115Vac cold start and 25°C
100A maxi.	230Vac cold start and 25°C

2.4 INPUT LINE CURRENT

115V	8.0 Amps – rms maximum
230V	4.0 Amps – rms maximum

2.5 Power Factor Correction: Active PFC 0.98 minimum at 264Vac input

2.6 EFFICIENCY

Efficiency meet 80PLUS GOLD requirement.

INPUT VOLTAGE	100% LOAD	50% LOAD	20% LOAD
115VAC	87%	90% / PFC .90	87%

Loading table for efficiency test.

LOADING	+12V1	+12V2	+12V3	+5V	+3.3V	-12V	+5Vsb
Full (100%)	10.37	10.37	10.37	11.88	14.26	0.48	2.88
Typical (50%)	5.19	5.19	5.19	5.94	7.13	0.24	1.44
Light (20%)	2.07	2.07	2.07	2.38	2.85	0.1	0.58

2.7 PS_ON#

PS_ON# is an active-low, TTL-compatible signal. When PS_ON# is pulled to TTL low, the power supply should turn on the five main DC output rails (+12V, +5V, +3.3V, -5V and -12V). When PS_ON# is pulled to TTL high or open-circuited, the DC output rails should not deliver current and should be held at zero potential with respect to ground.

An internal pull-up resistor & de-bounce circuitry is provided on PS_ON# to prevent it from oscillating on/off at startup when activated by a mechanical switch.

PS_ON# Signal Characteristics

PS_ON# Signal	Min.	Max.
V _{IL} , Input Low Voltage	0.0V	0.8V
I _{IL} , Input Low Current (V _{in} = 0.4V)		-1.6mA
V _{IH} , Input High Voltage (I _{in} = -200 μ A)	2.0V	
V _{IH} Open Circuit (I _{in} = 0)		5.25V

3. OUTPUT ELECTRICAL SPECIFICATIONS

3.1 OUTPUT RATING

Outputs Rating	Mini. Load	Maxi. Load	Load Regulation	Ripple & Noise ⁽²⁾
+3.3 V	0.1 A	24.0 A	$\pm 5\%$	50 mV _{P-P}
+ 5 V	0.1 A	20.0 A	$\pm 5\%$	50 mV _{P-P}
+12 V1	0.2 A	16.0 A	$\pm 5\%$	120 mV _{P-P}
+12 V2	0.05A	16.0 A	$\pm 5\%$	120 mV _{P-P}
+12 V3	0.1A	16.0A	$\pm 5\%$	120 mV _{P-P}
- 5 V ⁽¹⁾	0 A	0.2A	$\pm 5\%$	100 mV _{P-P}
-12 V	0 A	0.5 A	$\pm 5\%$	120 mV _{P-P}
+5 Vsb	0 A	3A	$\pm 5\%$	50 mV _{P-P}
+3.3 V & +5 V Combine Output Power			130W Maxi.	
+12V Total Output Current			38A Maxi.	
Total Output Power			500W	

Note:

- (1) Optional -5V output is upon request but not for standard model.
- (2) Ripple and noise measurements shall be made under all specified load conditions through a single pole low pass filter with 20MHz cutoff frequency. Outputs shall be bypassed at the connector with a 0.1 μ F ceramic disk capacitor and a 10 μ F electrolytic capacitor to simulate system loading.

CROSS REGULATION LOADING TABLE

Condition	+12V1	+12V2	+12V3	+5V	+3.3V	-12V	+5Vsb	-5V
1	10.37A	10.37A	10.37A	11.88A	14.26A	0.48A	2.88A	0A
2	1A	1A	1A	2A	24.0A	0.5A	3.0A	0.2A
3	16.0A	16.0A	6.0A	8A	0.1A	0.1A	0.1A	0A
4	1A	1A	1A	20.0A	0.1A	0.2A	0A	0A
5	5.19A	5.19A	5.19A	5.94A	7.13A	0.24A	1.44A	0A
6	16.0A	0.05A	0.1A	3A	0.1A	0.1A	0.1A	0.2A
7	0.2A	16.0A	0.1A	3A	0.1A	0.1A	0.1A	0A
8	0.2A	0.05A	16.0A	3A	0.1A	0.5A	0A	0A
9	2.07A	2.07A	2.07A	2.38A	2.85A	0.1A	0.58A	0A

3.2 HOLD-UP TIME

115V / 60Hz : 12 mSec. Minimum at 100% load.

230V / 50Hz : 17 mSec. Minimum at 100% load.

3.3 PROTECTION

3.3.1 OVER VOLTAGE PROTECTION

The Over voltage protection (OVP) will active if an internal fault occurs in PSU. The PSU will shut down and **latch off** when output voltage achieved as bellow table.

Output Rail	Limited Output Voltage
+ 3.3 V	3.7V ~ 4.8V
+5V	5.7V ~ 7.0V
+12V ₁ & +12V ₂	13.4V ~ 16.0V

3.3.2 SHORT CIRCUIT PROTECTION

Output short circuit is defined to be a short circuit load of less than 0.1 ohm. In the event of an output short circuit condition on +3.3V, +5V, +12V, -12V and -5V output, the PSU will shut down and **latch off** without damage. The PSU shall return to normal operation after the short circuit has been removed and require remove the AC mains input or the power switch has been turned off and on.

3.3.3 OVER CURRENT PROTECTION

Over current protection (OCP) is happened if output current is achieved at following output rails. PSU is shut down and **latch off** without damage if OCP happened. The PSU shall return to normal operation when the over current is removed and require remove the AC mains input or the power switch has been turned off and on to reset the PSU.

Output Rail	Limited Output Current
+5V	28A ~ 40A
+3.3V	30A ~ 45A
+12V ₁ & +12V ₂ & +12V ₃	20A ~ 30A

3.3.4 OVER TEMPERATURE PROTECTION

PSU is shut down and **latch off** without damage if over temperature happened. The PSU shall return to normal operation when the power supply is cooled down and require remove the AC mains input or the power switch has been turned off and on to reset the PSU.

3.4 POWER GOOD SIGNAL


The power good signal is a TTL compatible signal for the purpose of initiating an orderly star-up procedure under normal input operating conditions. This signal is asserted (low) until +5Vdc has reached 4.75 volts during power up. Characteristics:

TTL signal asserted (low state) : less than 0.5V while sinking 10mA.

TTL signal asserted (high state): greater than 4.75V while sourcing 500uA.

High state output impedance: less or equal to 1K ohm from output to common.

POWER GOOD @ 115/230V, FULL LOAD	100 ~ 500 mS.
POWER FAIL @ 115/230V, FULL LOAD	1 mS. minimum

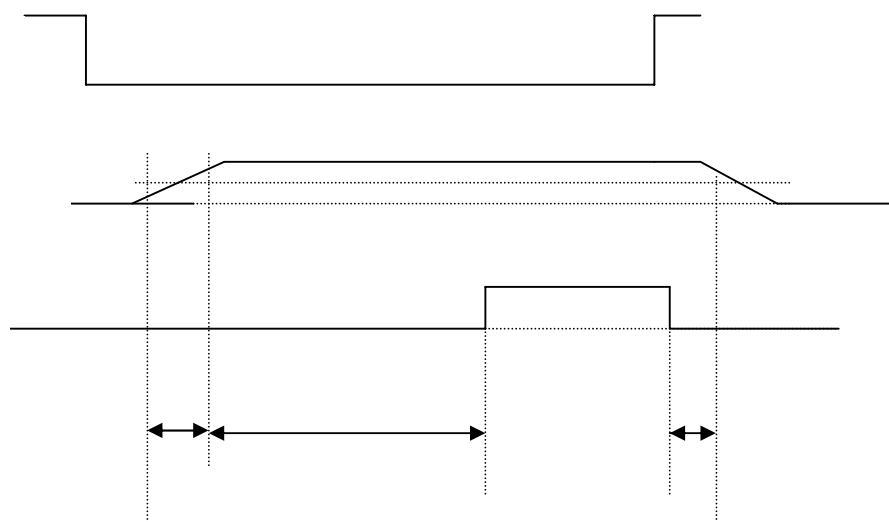


3.5 OUTPUT TRANSIENT LOAD RESPONSE

+5V and +12V must be within specification for a step change in current as specified below. The outputs will be tested one section at a time with all other sections at maximum load. The test transition will be from IA to IB and IB to IA. The step current will have a nominal transition time of 0.5 Amp per microsecond for +5V and 0.1 Amp per microsecond for +12V.

Transient Load Requirement

Output	Δ Step Load Size	Load Slew Rate	Capacitive Load
+3.3V	30% of max load	0.5 A/ μ s	6000 μ F
+5V	30% of max load	0.5 A/ μ s	6000 μ F
+12V1,V2,V3	30% of max load	1.0 A/ μ s	4700 μ F

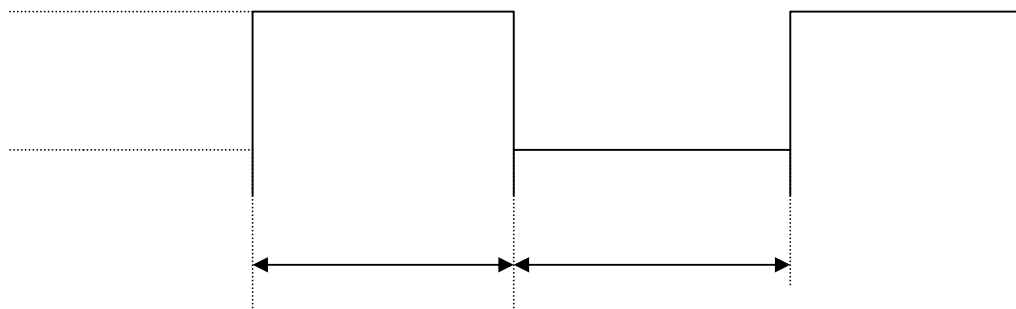

+5Vdc:

IA: 20.0 amps
 IB: 14.0 amps
 Volts variation: 400 mV max (p-p)
 Setting time: 10 ms max
 +12V1/3A,+12V2/3A,+12V3/3A,+3.3V/0.1A,+5VSB/0.1A,-12V/0.1A

+12V1dc, +12V2dc,+12V3dc

IA: 16.0 amps
 IB: 11.0 amps
 Volts variation: 550 mV max (p-p)
 Setting time: 10 ms max
 +5V/3A,+5VSB/0.1A,-12V/0.1A

+3.3Vdc:

IA: 24.0 amps
 IB: 16.8 amps
 Volts variation: 400 mV max (p-p)
 Setting time: 10 ms max
 +12V1/1A,+12V2/1A,+12V3/0.5A,+5VSB/0.1A,-12V/0.1

4. SAFETY

4.1 CERTIFICATE

CB IEC 60601-1
 UL, cUL ANSI/AAMI ES 60601-1
 TUV EN 60601-1
 CE

4.2 LEAKAGE CURRENT

Earth leakage current 250uA maximum at 264Vac, 63Hz input.

4.3 HIGH-POT VOLTAGE

Input to output: 4KV (2 MOPP)
 Input to PE 1.5KV (1 MOPP)
 Output to PE 1.5KV

5. ELECTROMAGNETIC COMPATIBILITY (IEC60601-1-2)

5.1 CONDUCTED EMI

EN55011:/EN55022 Class B conducted, Class B radiated
 FCC/VCCI: Class B conducted, Class B radiated

5.2 RADIATED EMI

EN61000-3-2: Harmonic distortion, Class D
 EN61000-3-3: Line flicker
 EN61000-4-2: ESD, ±8 KV air and ±6 KV contact
 EN61000-4-3: Radiated immunity, 3V/m
 EN61000-4-4: Fast transient/burst, ±2 KV
 EN61000-4-5: Surge, ±1 KV diff., ±2 KV com.
 EN61000-4-6: Conducted immunity, 3 Vrms
 EN61000-4-8: Magnetic field immunity, 3A/m
 EN61000-4-11: Voltage dip immunity, 30% reduction for 500 mS, 60% reduction for 100 mS, and >95% reduction for 10 ms.

6. ENVIRONMENTAL SPECIFICATION

6.1 TEMPERATURE

OPERATING	0 to +50 °C
STORAGE	-40 to +80 °C

6.2 HUMIDITY

OPERATING	5 ~85% RH, non-condensing
STORAGE	5 ~95% RH, non-condensing

6.3 VIBRATION

The subject power supply will withstand along three mutually perpendicular axes as the following imposed conditions without experiencing non-recoverable failure or deviation from specified output characteristics.

0.01g²/Hz at 5 Hz sloping to 0.02g²/Hz at 20 Hz, and maintaining 0.02g²/Hz from 20 Hz to 500 Hz. The area under the PSD curve is 3.13gRMS. The duration shall be 20 minutes per axis for all three axes on all samples.

7. MECHANICAL SPECIFICATION**7.1 MECHANICAL DRAWING**

The mechanical drawing of the subject power supply, which indicate the form factor, location of the mounting holes, location, the length of the connectors, and other physical specifications of the subject power supply. Please refer to the attachment drawing.

7.2 LABELLING

Label marking will be permanent, legible and complied with all agency requirements. Please refer to label drawing for the details.

7.3 FAN ACOUSTIC NOISE: 40 dB maximum at 100% load & rated input voltage.

7.4 WEIGHT: 1.8 Kg typical

8. RELIABILITY

The power supply have a minimum predicted MTBF (MIL-HDBK-217) of 200,000 hours of continuous operation at 25°C, maximum-output load, and nominal AC input voltage.