

AME185



► Features

- 18.5" 1366x768 LCD Touch Panel
- Projected Capacitive Multi-touch
- Support Emergency Button and Press Button on Front Bezel
- 1 DVI-I, 1 VGA
- Support Keyboard Holder



► Panel




Back View



Bottom View

► Dimensions

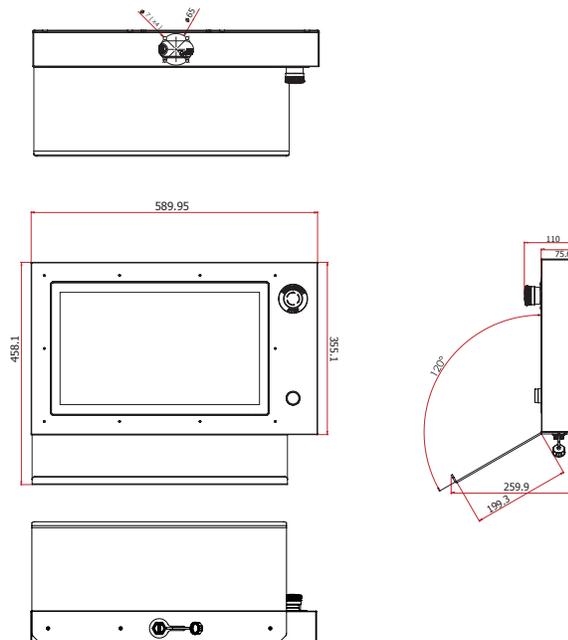

► Specifications

DISPLAY AND TOUCH SCREEN	Display	18.5" 1366x768 TFT LCD Panel with Capacitive/5-Wire Resistive Touch Screen
	Brightness	450 cd/m ²
	Contrast	1000:1
	Response Time	8ms
	Active Area	409.8mm x 230.4mm (H x V)
	View Angle	85°/85°/80°/80° (L/R/U/D)
	Backlight Lifetime	50,000 hours
Front I/O	Buttons	1 x Emergency Button 1 x Press Button 1 x Keyboard Holder
Bottom I/O	USB	1 x USB 2.0 1 x mini USB 2.0
	Display	1 x DVI-I 1 x VGA
POWER	Type	24V / 5A DC
	Connector	DC Jack
MECHANISM	Construction	Sheet Metal
	IP Rating	IP65 Front Panel Protection
	Mounting	Panel/VESA Mount
	Dimensions (W x H x D)	TBD
	Weight	TBD
ENVIRONMENT	Operating Temperature	0 to 50°C
	Storage Temperature	-20 to 60°C
	Relative Humidity	10 to 90% RH (non-condensing)
STANDARDS AND CERTIFICATIONS	Shock	TBD
	Vibration	TBD
	Certifications	TBD

► Packing List

• 1 AME185 Monitor
• 1 Power Cord
• 1 Quick Guide