

DESCRIPTION

The PM101 series of AC-DC switching power supplies in a package of 2 x 4 x 1.29 inches are capable of delivering 100 watts of continuous power at 7.5 CFM forced air cooling or 80 watts at convection cooling. The units are constructed on a printed circuit board. They are suited for medical applications, information technology and industrial applications. Approval to both IEC60601-1 and IEC62368-1 safety standards improves design-in time and reduces end equipment compliance costs.

FEATURES

- BF class insulation
- Operation altitude up to 5000 meters
- 2 x 4 inch footprint with 1.29 inch low profile
- Less than 175 μ A leakage current
- Wide input range 80-264 VAC
- Meet EN55011 /55032 and FCC Class B
- Short-circuit protection
- Compliant with RoHS requirements
- No load power consumption less than 0.15W

INPUT SPECIFICATIONS

Input voltage:	80-264 VAC
Power derating:	Derate linearly from 100% at 90VAC To 90% at 85VAC and 80% at 80VAC
Input frequency:	47-63 Hz
Input current:	2.0 A (rms) for 115 VAC 1.2 A (rms) for 230 VAC
Earth leakage current:	175 μ A max. @ 264 VAC, 63 Hz
Touch current:	100 μ A max. @ 264 VAC, 63 Hz


OUTPUT SPECIFICATIONS

Output voltage/current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	1% peak to peak maximum
Over voltage protection:	set at 112-140% of its nominal output voltage, latching by recycle input to reset
Short circuit protection:	Automatic recovery
Over temperature protection:	Latching by recycle input to reset.
Temperature coefficient:	All outputs $\pm 0.04\%$ / $^{\circ}$ C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 us after a 25% step load change

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	-20 $^{\circ}$ C to +70 $^{\circ}$ C
Storage temperature:	-40 $^{\circ}$ C to +85 $^{\circ}$ C
Relative humidity:	5% to 95% non-condensing
Temperature derating:	Derate from 100% at +50 $^{\circ}$ C linearly to 50% at +70 $^{\circ}$ C, applicable to convection and forced-air cooling conditions

PM101 SERIES

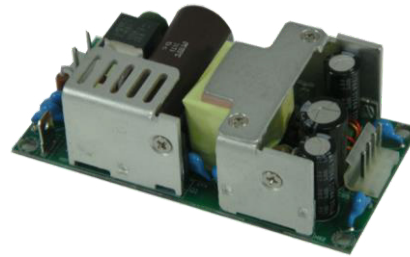

CE
RoHS

SAFETY STANDARD APPROVALS



UL ES 60601-1, CSA C22.2 No. 60601-1
File No. E178020



TÜV EN 60601-1



UL 62368-1, CSA C22.2 No. 62368-1



TÜV EN 62368-1

GENERAL SPECIFICATIONS

Switching frequency:	65 KHz (typical)
Efficiency:	See rating chart.
Hold-up time:	10 ms minimum at 100 W load and 115 VAC 10 ms minimum at 80 W load and 100 VAC
Line regulation:	$\pm 0.5\%$ maximum at full load
Inrush current:	80 A @ 115 VAC or 160 A @ 230 VAC, at 25 $^{\circ}$ C cold start
Withstand voltage:	4000 VAC from input to output, 1500 VAC from input to ground, 1500 VAC from output to ground
MTBF:	150,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per MIL-HDBK-217F
EMC Performance	
EN55011/ EN55032:	Class B conducted, class B radiated
EN61000-3-2:	Harmonic distortion, class A
EN61000-3-3:	Line flicker
EN60601-1-2, EN55024	
EN61000-4-2:	ESD, ± 15 KV air and ± 8 KV contact
EN61000-4-3:	Radiated immunity, 9-28 V/m
EN61000-4-4:	Fast transient/burst, ± 2 KV
EN61000-4-5:	Surge, ± 1 KV diff., ± 2 KV com
EN61000-4-6:	Conducted immunity, 10 Vrms
EN61000-4-8:	Magnetic field immunity, 30 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, 100% reduction for 10 ms

OUTPUT VOLTAGE/CURRENT RATING CHART




Model	Output							Efficiency (typical) 115/230 Vac
	V1	Min. load	Max. Current at convection	Max. Current at 7.5 CFM	Tol.	Ripple & Noise ⁽²⁾	Max. Power ⁽¹⁾	
PM101-12A	12 V	0 A	6.67 A	8.34 A	±2%	120 mV	80 W /100 W	87 /90%
PM101-13A	15 V	0 A	5.34 A	6.67 A	±2%	150 mV	80 W /100 W	87 /90%
PM101-13-1A	18 V	0 A	4.45 A	5.56 A	±2%	180 mV	80 W /100 W	87 /90%
PM101-14A	24 V	0 A	3.34 A	4.17 A	±2%	240 mV	80 W /100 W	88 /90%
PM101-15A	28 V	0 A	2.86 A	3.58 A	±2%	280 mV	80 W /100 W	88 /90%
PM101-16-1A	32 V	0 A	2.50 A	3.13 A	±2%	320 mV	80 W /100 W	88 /90%
PM101-17A	36 V	0 A	2.23A	2.78 A	±2%	360 mV	80 W /100 W	88 /90%
PM101-18A	48 V	0 A	1.67A	2.09A	±2%	480 mV	80 W /100 W	88 /90%

NOTES:

1. The first value of max. power is at convection cooling. The second value is with 7.5 CFM forced air provided by user.
2. Ripple and noise is maximum peak to peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum (or electrolytic) capacitor in parallel with a 0.1 µF ceramic capacitor across the output except model PM101-12A which is with a 22 µF tantalum (or electrolytic) capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

OUTPUT POWER DERATING CURVE

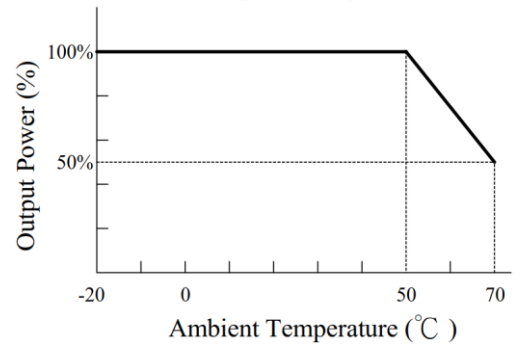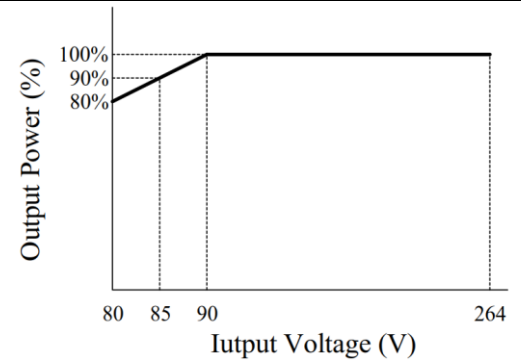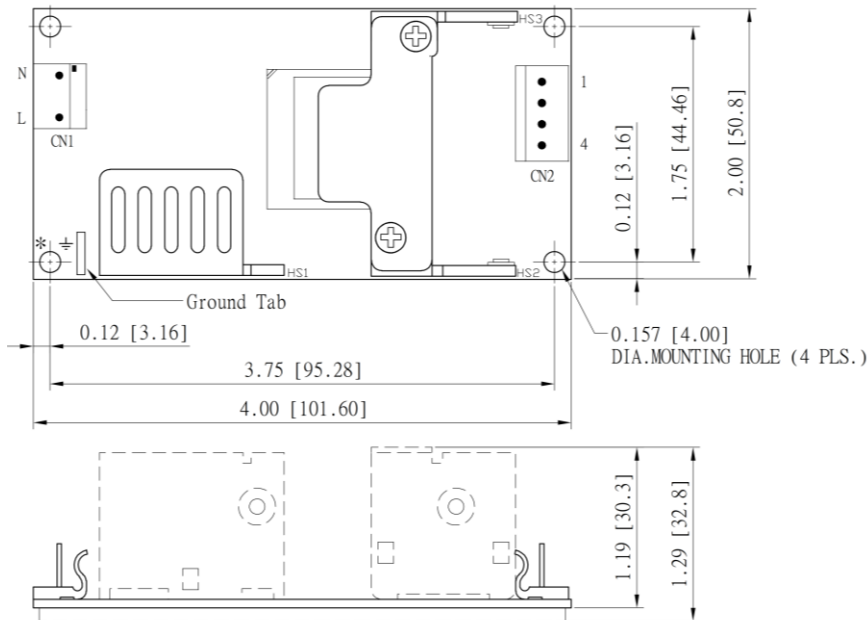

NOTES:

1. Dimensions shown in inches [mm]; tolerance 0.02 [0.5] maximum.
2. Input connector P1: Molex header 09-65-2038, mating with Molex housing 09-50-1031 or equivalent.
3. Output connector P2: Molex header 09-65-2048, mating with Molex housing 09-50-1041 or equivalent.
4. Ground tab is 0.25 [6.35] x 0.032 [0.8] fast-on connector.
5. To ensure compliance with level B emissions, connect the three "*" marked mounting holes with metallic standoffs to chassis.
6. Weight: 155 grams (0.34 lbs.) approx.

PIN CHART

Connect	CN1			CN2			
	1	2	3	1	2	3	4
PIN NO.	1	2	3	1	2	3	4
Polarity	Live	Void	Neutral	V1	V1	Common Return	Common Return