W22IW3S-SPA3

21.5" Intel® Core™ i5-8265U IP65 Stainless PCAP Chassis Panel PC



KEY FEATURES

- 8th Generation (Whiskey Lake) Intel® Core™ i5-8265U 1.6GHz (turbo to 3.9GHz)
- SUS 316/ AISI 316 stainless steel for food and chemical industries
- Sealed to IP65 for protection against water and dust
- A true flat, easy-to-clean front surface with edge-to-edge design
- Flat multi-touch panel pc with superior readability and P-Cap technology
- Various mounting solutions, Yoke mount and VESA mount
- Plenty of I/O s including USB 2.0, RS232 serial port and RJ45-10/100/1000 LAN ports
- Waterproof ports with adapter cables for external connectivity
- Support Glove / Rain mode, IP65 Stainless PCAP Chassis Panel PC
- Optical bonding (optional)



SPECIFICATIONS


Dienlay

Mechanical Dimension 541 x 337 x 56.2 mm Mounting VESA Mount Yoke Mount Enclosure Stainless Housing Cooling System Fanless design Environment Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature Temperature Storage Temperature 1P65	Display						
View Angles 89,89,89,89 Active Area 476.64x268.11 mm Touch / Glass Projected Capacitive Multi Touch Screen System Specification WLAN Support (Optional) BT Support (Optional) Processor Intel Core i5 -8265U 1.6GHz (up to 3.9GHz) Memory 1 x SO-DIMM, DDR4 2400 MHz, 4GB 8GB (Optional) 16GB (Optional)	Resolution	1920x1080	Size	21.5 inches			
System Specification	Contrast Ratio	3000:1	Panel Brightness	250 nits			
System Specification	View Angles	89,89,89,89	Active Area	476.64x268.11 mm			
WLAN Support (Optional) BT Support (Optional) Processor Intel Core i5 -8265U 1.6GHz (up to 3.9GHz) Memory 1 x SO-DIMM, DDR4 2400 MHz, 4GB 8GB (Optional) 16GB (Optional) 32GB (Optional) 32GB (Optional) 32GB (Optional) 32GB (Optional) 32GB (Optional) Storage 1 x M.2 2242 B-key SSD up to 512GB (Optional) M.2 2280 M-Key NVME SSD, up to 4TB (Optional) M.2 2280 M-Key NVME SSD, up to 4TB (Optional) Windows 10 IoT Enterprise (64 bit) (Optional Linux Ubuntu 20.04 (Optional) Mechanical Mounting VESA Mount Yoke Mount Enclosure Stainless Housing Cooling System Fanless design Environment Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature 0°C to 45°C Storage Temperature -20°C to 60°C IP rating IP 65	Touch / Glass	Projected Capacitive Multi Touch Screen					
Processor Intel Core i5 -8265U 1.6GHz (up to 3.9GHz) Memory I x SO-DIMM, DDR4 2400 MHz, 4GB 8GB (Optional) 16GB (Optional) 32GB (Optional) 32	System Specification						
Storage 1 x M.2 2242 B-key SSD 128GB M.2 2242 B-key SSD up to 512GB (Optional) 32GB (Optional) 42 2280 M-Key NVME SSD, up to 4TB (Opti	WLAN	Support (Optional)	ВТ	Support (Optional)			
M.2 2242 B-key SSD up to 512GB (Optional) M.2 2280 M-Key NVME SSD, up to 4TB (Optional) M.2 2280 M-Key NVME SSD, up to 4TB (Optional) Security TPM 2.0 Operating System Windows 10 IoT Enterprise (64 bit) (Optional Linux Ubuntu 20.04 (Optional) Mechanical Dimension 541 x 337 x 56.2 mm Mounting VESA Mount Yoke Mount Yoke Mount Enclosure Stainless Housing Cooling System Fanless design Environment Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature Temperature 10°C to 45°C 11°C to 45°C	Processor	Intel Core i5 -8265U 1.6GHz (up to 3.9GHz)	Memory	8GB (Optional) 16GB (Optional)			
Mechanical Dimension 541 x 337 x 56.2 mm Mounting VESA Mount Yoke Mount Enclosure Stainless Housing Cooling System Fanless design Environment Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature 0°C to 45°C Storage Temperature -20°C to 60°C IP rating IP65	Storage	M.2 2242 B-key SSD up to 512GB (Optional)	Ethernet controller	2 x Intel® Ethernet Controller			
Dimension 541 x 337 x 56.2 mm Mounting VESA Mount Yoke Mount Enclosure Stainless Housing Cooling System Fanless design Environment Operating Humidity Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature 0°C to 45°C Storage Temperature -20°C to 60°C IP rating IP65	Security	TPM 2.0	Operating System	Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 20.04 (Optional)			
Enclosure Stainless Housing Cooling System Fanless design Environment Operating Humidity 10% to 90% RH, Non-Condensing Temperature -20°C to 60°C IP rating Temperature 10% to 90% RH, Non-Condensing 10% to 90% RH, Non-	Mechanical						
Environment Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature Storage -20°C to 60°C IP rating IP65	Dimension	541 x 337 x 56.2 mm	Mounting				
Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature 0°C to 45°C Storage Temperature -20°C to 60°C IP rating IP65	Enclosure	Stainless Housing	Cooling System	Fanless design			
Temperature Storage -20°C to 60°C IP rating IP65 Temperature	Environment						
Temperature	Operating Humidity	10% to 90% RH, Non-Condensing		0°C to 45°C			
		-20°C to 60°C	IP rating	IP65			
Certification	Certification						
Certification CE, FCC	Certification	CE, FCC					
IO Ports	IO Ports						

USB Port	1x M12 Waterproof Connector for 2 x USB2.0	Serial Port	1 x M12 waterproof connector for RS232
LAN	1 x Waterproof Giga LAN RJ45 Connector	Indicator	1 x LED Indicator for power 1 x LED Indicator for storage
Control			
Button	1 x Power Button 1 x Reset Button		
Accessory			
Accessory	100~240V AC to DC Adapter with waterproof connector Power Cord External USB cable with waterproof connector External COM cable with waterproof connector External LAN cable with waterproof connector Waterproof caps Manual VESA screws		
Power			

Power Rating 12V DC (M12 type)

DIMENSIONS UNIT:MM

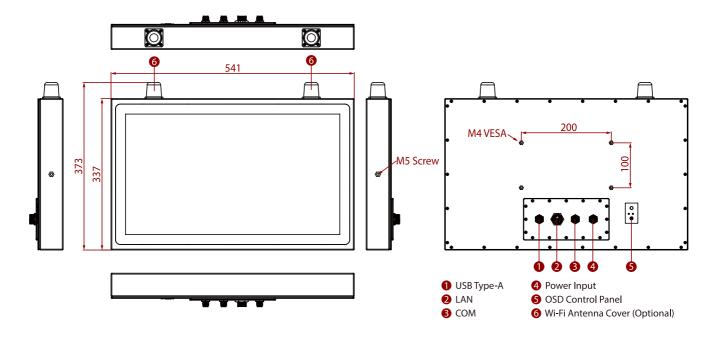

NOTE

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
- 3. All specifications are subject to change without prior notice.