

# R10L100-GCT2-C

## 10.4" USB Type-C Chassis Display



### KEY FEATURES


- 10.4", 1024 x 768
- USB Type-C connector
- Chassis
- VESA mount
- PCAP touch
- Front IP65



### SPECIFICATIONS

| Display             |                                                                        |                       |                                                                                                                                                            |
|---------------------|------------------------------------------------------------------------|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Resolution          | 1024x768                                                               | Size                  | 10.4 inches                                                                                                                                                |
| Contrast Ratio      | 1000:1                                                                 | Panel Brightness      | 350 nits                                                                                                                                                   |
| Display Color       | 16.2M Colors                                                           | View Angles           | 88,88,88,88                                                                                                                                                |
| Touch / Glass       | Projected Capacitive Multi Touch Screen<br>Protection Glass (Optional) |                       |                                                                                                                                                            |
| Environment         |                                                                        |                       |                                                                                                                                                            |
| Operating Humidity  | 10% to 90% (non-condensing)                                            | Operating Temperature | 0~50°C                                                                                                                                                     |
| Storage Temperature | -10~60°C                                                               |                       |                                                                                                                                                            |
| Certification       |                                                                        |                       |                                                                                                                                                            |
| Certification       | CE, FCC                                                                |                       |                                                                                                                                                            |
| IO Ports            |                                                                        |                       |                                                                                                                                                            |
| USB Port            | 1 x USB Type-C Connector                                               | Audio                 | 1 x Speaker (Optional)                                                                                                                                     |
| Mechanical          |                                                                        |                       |                                                                                                                                                            |
| Dimension           | 252.41 x 197.8 x 41.4 mm                                               | Mounting              | VESA Mount/ Panel Mount                                                                                                                                    |
| Enclosure           | Aluminum                                                               | Cooling System        | Fanless Design                                                                                                                                             |
| Accessory           |                                                                        |                       |                                                                                                                                                            |
| Accessory           | User Manual                                                            | Optional Accessory    | Lockable USB-C to Standard USB-C Cable (Optional)<br>Waterproof USB-C to Standard USB-C Cable (Optional)<br>Dual-side Lockable USB Type-C Cable (Optional) |
| Power               |                                                                        |                       |                                                                                                                                                            |
| Power Rating        | USB Type-C Alt mode (5V/3A)                                            |                       |                                                                                                                                                            |
| Control             |                                                                        |                       |                                                                                                                                                            |
| Button              | 5 Keys: -, +, Power, Esc, Enter                                        |                       |                                                                                                                                                            |

### DIMENSIONS UNIT:MM

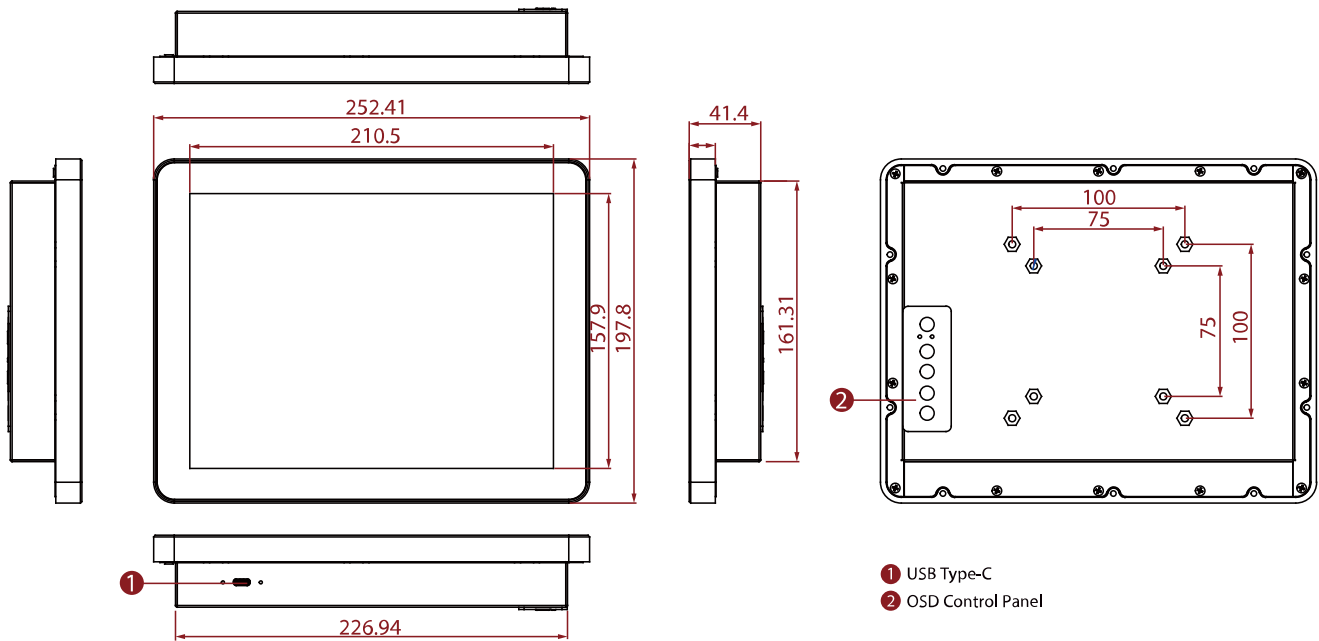

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.