

# 1.8" SATA SSD

## 3MG2-P Series

**Customer:** \_\_\_\_\_  
**Customer**  
**Part**  
**Number:** \_\_\_\_\_  
**Innodisk**  
**Part**  
**Number:** \_\_\_\_\_  
**Innodisk**  
**Model Name:** \_\_\_\_\_  
**Date:** \_\_\_\_\_

<b>Innodisk Approver</b>	<b>Customer Approver</b>

**Total Solution For  
Industrial Flash Storage**

# Table of Contents

<b>LIST OF FIGURES</b> .....	6
<b>1. PRODUCT OVERVIEW</b> .....	7
<b>1.1 INTRODUCTION OF INNODISK 1.8" SATA SSD 3MG2-P</b> .....	7
<b>1.2 PRODUCT VIEW AND MODELS</b> .....	7
<b>1.3 SATA INTERFACE</b> .....	7
<b>2. PRODUCT SPECIFICATIONS</b> .....	8
<b>2.1 CAPACITY AND DEVICE PARAMETERS</b> .....	8
<b>2.2 PERFORMANCE</b> .....	8
<b>2.3 ELECTRICAL SPECIFICATIONS</b> .....	8
<b>2.3.1 Power Requirement</b> .....	8
<b>2.3.2 Power Consumption</b> .....	9
<b>2.4 ENVIRONMENTAL SPECIFICATIONS</b> .....	9
<b>2.4.1 Temperature Ranges</b> .....	9
<b>2.4.2 Humidity</b> .....	9
<b>2.4.3 Shock and Vibration</b> .....	9
<b>2.4.4 Mean Time between Failures (MTBF)</b> .....	9
<b>2.5 CE AND FCC COMPATIBILITY</b> .....	10
<b>2.6 RoHS COMPLIANCE</b> .....	10
<b>2.7 RELIABILITY</b> .....	10
<b>2.8 TRANSFER MODE</b> .....	10
<b>2.9 PIN ASSIGNMENT</b> .....	10
<b>2.10 MECHANICAL DIMENSIONS</b> .....	11
<b>2.11 ASSEMBLY WEIGHT</b> .....	11
<b>2.12 SEEK TIME</b> .....	12
<b>2.13 HOT PLUG</b> .....	12
<b>2.14 NAND FLASH MEMORY</b> .....	12
<b>3. THEORY OF OPERATION</b> .....	13
<b>3.1 OVERVIEW</b> .....	13
<b>3.2 SATA III CONTROLLER</b> .....	13
<b>3.3 ERROR DETECTION AND CORRECTION</b> .....	14
<b>3.4 WEAR-LEVELING</b> .....	14
<b>3.5 BAD BLOCKS MANAGEMENT</b> .....	14
<b>3.6 POWER CYCLING</b> .....	14
<b>3.7 GARBAGE COLLECTION/TRIM</b> .....	14
<b>3.8 QERASER FUNCTION (OPTIONAL)</b> .....	15
<b>4. INSTALLATION REQUIREMENTS</b> .....	17

<b>4.1 1.8" SATA SSD 3MG2-P PIN DIRECTIONS.....</b>	<b>17</b>
<b>4.2 ELECTRICAL CONNECTIONS FOR 1.8" SATA SSD 3MG2-P .....</b>	<b>17</b>
<b>4.3 DEVICE DRIVE .....</b>	<b>17</b>
<b>5. PART NUMBER RULE .....</b>	<b>18</b>

## REVISION HISTORY

Revision	Description	Date
Preliminary	First Released	Feb., 2016
Rev 1.1	Update TBW & Power Consumption	Mar., 2017
Rev 1.2	Update Part number rule Toshiba MLC option	Feb., 2018
Rev 1.3	Remove Micron L95 Update 1TB Power Consumption & Performance	Sep., 2018.
Rev 1.4	Update 256GB & 512GB Power Performance Table Update 256GB & 512GB Power Performance Table	Mar., 2019,
Rev 1.5	Update PN rules	Jun., 2023
Rev 1.6	Revise Pin Assignment.	July, 2023

## List of Tables

<b>TABLE 1: DEVICE PARAMETERS</b> .....	8
<b>TABLE 2: PERFORMANCE</b> .....	8
<b>TABLE 3: INNODISK 1.8" SATA SSD 3MG2-P POWER REQUIREMENT</b> .....	8
<b>TABLE 4: POWER CONSUMPTION</b> .....	9
<b>TABLE 5: TEMPERATURE RANGE FOR 1.8" SATA SSD 3MG2-P</b> .....	9
<b>TABLE 6: SHOCK/VIBRATION TESTING FOR 1.8" SATA SSD 3MG2-P</b> .....	9
<b>TABLE 7: 1.8" SATA SSD 3MG2-P MTBF</b> .....	10
<b>TABLE 8: INNODISK 1.8" SATA SSD 3MG2-P PIN ASSIGNMENT</b> .....	10

## List of Figures

<b>FIGURE 1: INNODISK 1.8" SATA SSD 3MG2-P .....</b>	<b>7</b>
<b>FIGURE 2: INNODISK 1.8" SATA SSD 3MG2-P BLOCK DIAGRAM.....</b>	<b>13</b>
<b>FIGURE 3: SIGNAL SEGMENT AND POWER SEGMENT .....</b>	<b>17</b>

# 1. Product Overview

## 1.1 Introduction of Innodisk 1.8" SATA SSD 3MG2-P

Innodisk 1.8" SATA SSD 3MG2-P products provide high capacity flash memory Solid State Drive (SSD) that electrically complies with Serial ATA (SATA) standard. It supports SATA III standard (6.0GHz) with high performance. Innodisk 1.8" SATA SSD 3MG2-P is designed for industrial field, and supports several standard features, including NCQ, and S.M.A.R.T. The SSD has good performance with no latency time and small seek time. It effectively reduces the booting time of operation system and the power consumption is less than hard disk drive (HDD).

## 1.2 Product View and Models

Innodisk 1.8" SATA SSD 3MG2-P is available in follow capacities within MLC flash ICs.

[1.8" SATA SSD 3MG2-P 256GB](#)    [1.8" SATA SSD 3MG2-P 512GB](#)

[1.8" SATA SSD 3MG2-P 1TB](#)



**Figure 1: Innodisk 1.8" SATA SSD 3MG2-P**

## 1.3 SATA Interface

Innodisk 1.8" SATA SSD 3MG2-P supports SATA III interface, and compliant with SATA I and SATA II. SATA III interface can work with Serial Attached SCSI (SAS) host system, which is used in server computer. Innodisk 1.8" SATA SSD 3MG2-P is compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps /3.0Gbps/6.0Gbps data rate). SATA connector uses a 7-pin signal segment and a 9-pin power segment.

## 1.4 1.8-inch Form Factor

The Industry-standard 1.8-inch form factor is designed with metal material case, which is easy for installation because 1.8-inch is a commonly used form factor in industrial field. Innodisk 1.8" SATA SSD 3MG2-P has a compact design 54.0mm (W) x78.5mm (L) x 5.0mm (H).

## 2. Product Specifications

### 2.1 Capacity and Device Parameters

1.8" SATA SSD 3MG2-P device parameters are shown in Table 1.

**Table 1: Device parameters**

Capacity	LBA	Cylinders	Heads	Sectors	User Capacity(MB)
256GB	484490160	16383	16	63	236568
512GB	968959152	16383	16	63	473125
1TB	1937897136	16383	16	63	946239

### 2.2 Performance

Burst Transfer Rate: 6.0Gbps

**Table 2: Performance**

Capacity	256GB	512GB	1TB
Sequential Read* (max.) MB/sec	510	510	560
Sequential Write* (max.) MB/sec	340	420	450
4KB Random Read (QD32) IOPS	74000	72000	74,000
4KB Random Write (QD32) IOPS	80000	72000	75,000

Note: \* Sequential performance based on CrystalDiskMark 3.03 with file size 1000MB

### 2.3 Electrical Specifications

#### 2.3.1 Power Requirement

**Table 3: Innodisk 1.8" SATA SSD 3MG2-P Power Requirement**

Item	Symbol	Rating	Unit
Input voltage	V <sub>IN</sub>	+5 DC +- 5%	V



### 2.3.2 Power Consumption

**Table 4: Power Consumption (mA)**

Mode	256GB	512GB	1TB
Read	300 (max)	350 (max)	310 (max)
Write	550 (max)	850 (max)	650 (max)
Idle	76 (max)	120 (max)	78 (max)

\* Target: 1.8" SATA SSD 3MG2-P 256GB ~ 1TB

## 2.4 Environmental Specifications

### 2.4.1 Temperature Ranges

**Table 5: Temperature range for 1.8" SATA SSD 3MG2-P**

Temperature	Range
Operating	Standard Grade: 0°C to +70°C
	Industrial Grade: -40°C to +85°C
Storage	-40°C to +85°C

### 2.4.2 Humidity

Relative Humidity: 10-95%, non-condensing

### 2.4.3 Shock and Vibration

**Table 6: Shock/Vibration Testing for 1.8" SATA SSD 3MG2-P**

Reliability	Test Conditions	Reference Standards
Vibration	7 Hz to 2K Hz, 20G, 3 axes	IEC 68-2-6
Mechanical Shock	Duration: 0.5ms, 1500 G, 3 axes	IEC 68-2-27

### 2.4.4 Mean Time between Failures (MTBF)

Table 7 summarizes the MTBF prediction results for various 1.8" SATA SSD 3MG2-P configurations. The analysis was performed using a RAM Commander™ failure rate prediction.

- **Failure Rate:** The total number of failures within an item population, divided by the total number of life units expended by that population, during a particular measurement interval under stated condition.
- **Mean Time between Failures (MTBF):** A basic measure of reliability for repairable items: The mean number of life units during which all parts of the item perform within their specified limits, during a particular measurement interval under stated conditions.

**Table 7: 1.8" SATA SSD 3MG2-P MTBF**

Product	Condition	MTBF (Hours)
Innodisk 1.8" SATA SSD 3MG2-P	Telcordia SR-332 GB, 25°C	>3,000,000

### 2.5 CE and FCC Compatibility

1.8" SATA SSD 3MG2-P conforms to CE and FCC requirements.

### 2.6 RoHS Compliance

1.8" SATA SSD 3MG2-P is fully compliant with RoHS directive.

### 2.7 Reliability

Parameter	Value	
Read Cycles	Unlimited Read Cycles	
Flash endurance	3,000 P/E cycles	
Wear-Leveling Algorithm	Support	
Bad Blocks Management	Support	
Error Correct Code	Support	
<b>TBW* (Total Bytes Written)</b> Unit:TB		
<b>Capacity</b>	<b>Sequential workload</b>	<b>Client workload</b>
256GB	681.8	300
512GB	1364	600
1TB	2663	1172
Note: 1. Sequential: Mainly sequential write, tested by Vdbench 2. Client: Follow JESD218 Test method and JESD219A Workload, tested by ULINK. (The capacity lower than 64GB client workload is not specified in JEDEC219A, the values are estimated.) 3. Based on out-of-box performance.		

### 2.8 Transfer Mode

1.8" SATA SSD 3MG2-P support the following transfer modes,

Serial ATA III 6.0Gbps

Serial ATA II 3.0Gbps

Serial ATA I 1.5Gbps

### 2.9 Pin Assignment


Innodisk 1.8" SATA SSD 3MG2-P uses a standard SATA pin-out. See Table 8 for 1.8" SATA SSD 3MG2-P pin assignment.

**Table 8: Innodisk 1.8" SATA SSD 3MG2-P Pin Assignment**

Name	Type	Description
S1	GND	NA
S2	A+	Differential Signal Pair A
S3	A-	
S4	GND	NA

S5	B-	Differential Signal Pair B
S6	B+	
S7	GND	NA
<b>Key and Spacing separate signal and power segments</b>		
P1	R	Reserved
P2	R	Reserved
P3	GND	NA
P4	GND	NA
P5	V5	5V Power, Pre-charge
P6	V5	5V Power
P7	R	Reserved
Key	Key	Key
P8	Optional	Write Protect
P9	Optional	Quick Erase

## 2.10 Mechanical Dimensions

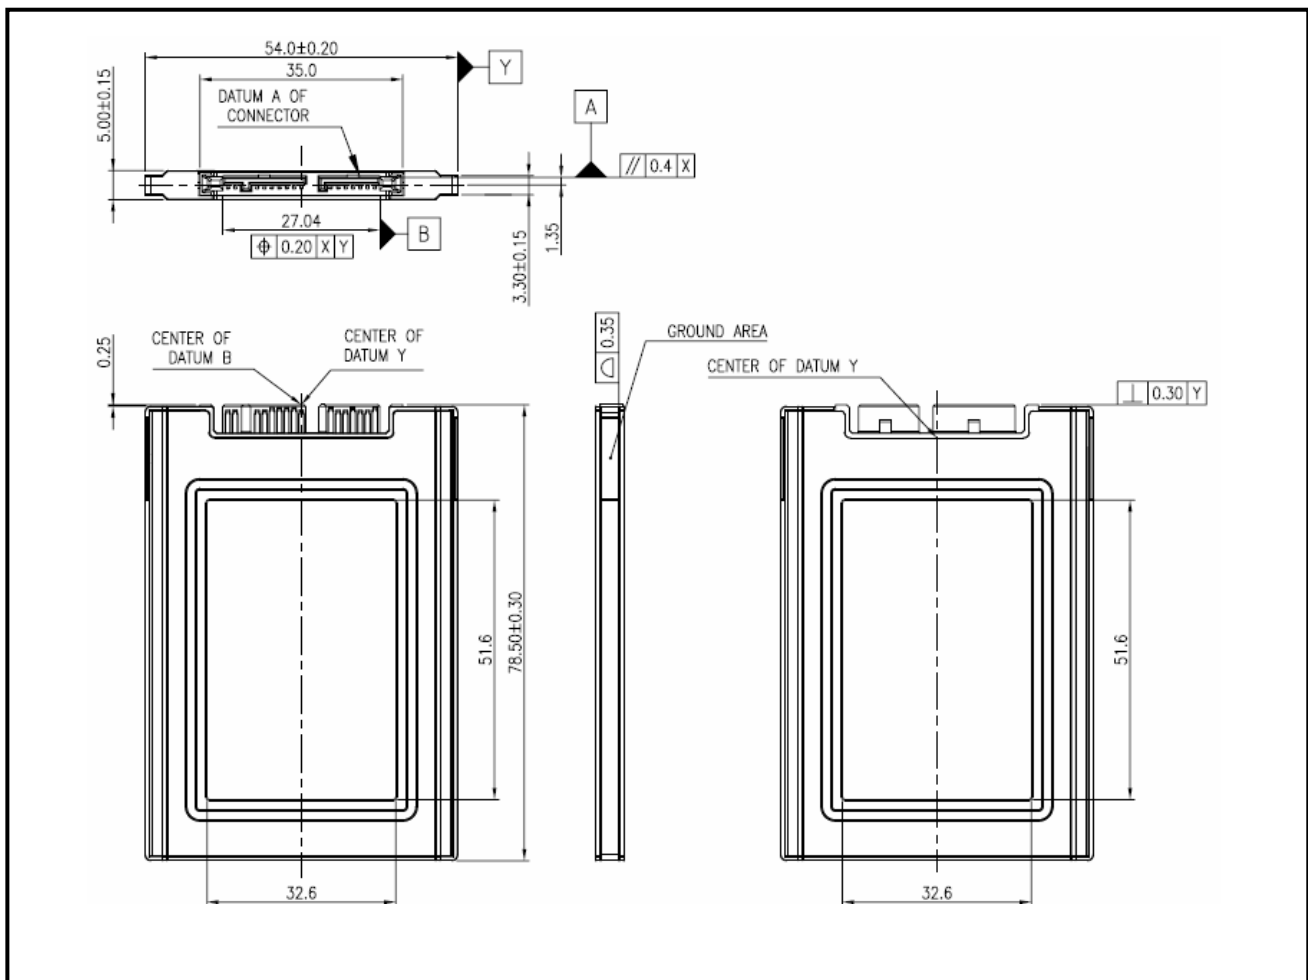

## 2.11 Assembly Weight

An Innodisk 1.8" SATA SSD 3MG2-P within MLC flash ICs, 1TB's weight is 33 grams approx. The total weight of SSD will be less than 60 grams.

## 2.12 Seek Time

Innodisk 1.8" SATA SSD 3MG2-P is not a magnetic rotating design. There is no seek or rotational latency required.

## 2.13 Hot Plug

The SSD support hot plug function and can be removed or plugged-in during operation. User has to avoid hot plugging the SSD which is configured as boot device and installed operation system.

Surprise hot plug : The insertion of a SATA device into a backplane (combine signal and power) that has power present. The device powers up and initiates an OOB sequence.

Surprise hot removal: The removal of a SATA device from a powered backplane, without first being placed in a quiescent state.


## 2.14 NAND Flash Memory

Innodisk 1.8" SATA SSD 3MG2-P uses Multi Level Cell (MLC) NAND flash memory, which is non-volatility, high reliability and high speed memory storage.

# 3. Theory of Operation

## 3.1 Overview

Figure 2 shows the operation of Innodisk 1.8" SATA SSD 3MG2-P from the system level, including the major hardware blocks.

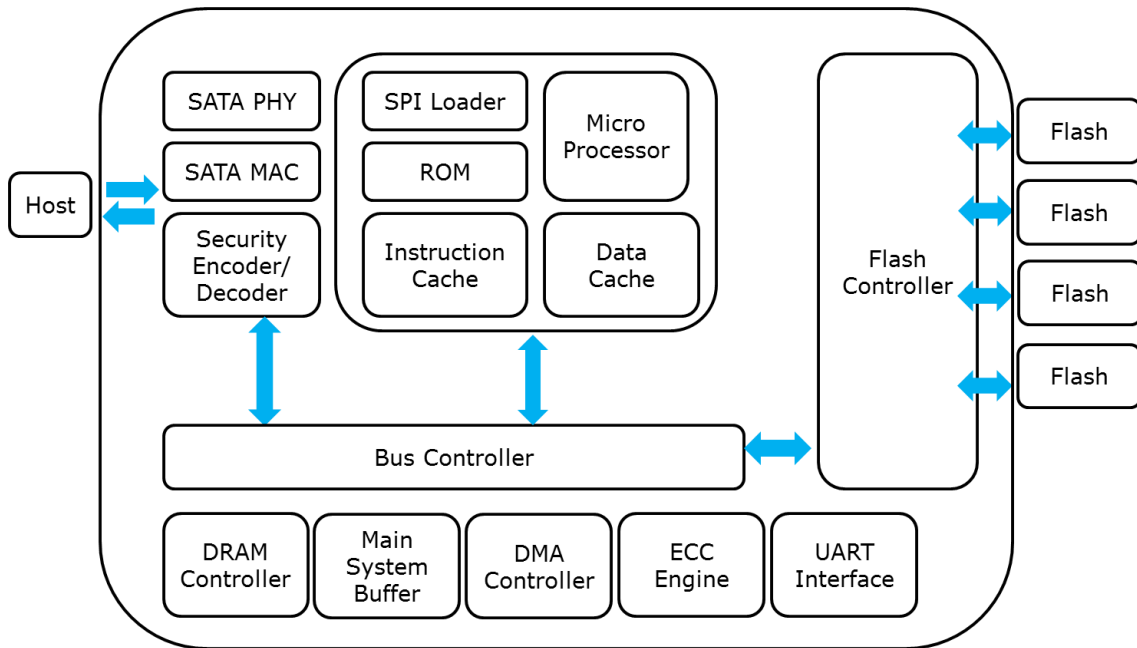

**Figure 2: Innodisk 1.8" SATA SSD 3MG2-P Block Diagram**

Innodisk 1.8" SATA SSD 3MG2-P integrates a SATA III controller and NAND flash memories. Communication with the host occurs through the host interface, using the standard ATA protocol. Communication with the flash device(s) occurs through the flash interface.

## 3.2 SATA III Controller

Innodisk 1.8" SATA SSD 3MG2-P is designed with ID 167, a SATA III 6.0Gbps (Gen. 3) controller, which supports external DDR3 DRAM. The Serial ATA physical, link and transport layers are compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps/3.0Gbps/6.0Gbps data rate). The controller has 4 channels for flash interface.

### 3.3 Error Detection and Correction

Highly sophisticated Error Correction Code algorithms are implemented. The ECC unit consists of the Parity Unit (parity-byte generation) and the Syndrome Unit (syndrome-byte computation). This unit implements an algorithm that can correct 66 bits per 1024 bytes in an ECC block. Code-byte generation during write operations, as well as error detection during read operation, is implemented on the fly without any speed penalties.

### 3.4 Wear-Leveling

Flash memory can be erased within a limited number of times. This number is called the **erase cycle limit** or **write endurance limit** and is defined by the flash array vendor. The erase cycle limit applies to each individual erase block in the flash device.

Innodisk 1.8" SATA SSD 3MG2-P uses a static wear-leveling algorithm to ensure that consecutive writes of a specific sector are not written physically to the same page/block in the flash. This spreads flash media usage evenly across all pages, thereby extending flash lifetime.

### 3.5 Bad Blocks Management

Bad Blocks are blocks that contain one or more invalid bits whose reliability are not guaranteed. The Bad Blocks may be presented while the SSD is shipped, or may develop during the life time of the SSD. When the Bad Blocks is detected, it will be flagged, and not be used anymore. The SSD implement Bad Blocks management, Bad Blocks replacement, Error Correct Code to avoid data error occurred. The functions will be enabled automatically to transfer data from Bad Blocks to spare blocks, and correct error bit.

### 3.6 Power Cycling

Innodisk's power cycling management is a comprehensive data protection mechanism that functions before and after a sudden power outage to SSD. Low-power detection terminates data writing before an abnormal power-off, while table-remapping after power-on deletes corrupt data and maintains data integrity. Innodisk's power cycling provides effective power cycling management, preventing data stored in flash from degrading with use.

### 3.7 Garbage Collection/TRIM

Garbage collection and TRIM technology is used to maintain data consistency and perform continual data cleansing on SSDs. It runs as a background process, freeing up valuable controller resources while sorting good data into available blocks, and deleting bad blocks. It also significantly reduces write operations to the drive, thereby increasing the SSD's speed and lifespan.

### 3.8 QEraser Function (Optional: Customized Firmware)

QEraser function is designed for emergency data erase in few seconds by providing ATA command.

#### 3.8.1 QEraser Command

Use to erase data blocks. When the command is issued, the flash is erased immediately. This command causes the SSD to erase all user data blocks, including any reallocated blocks, while retaining all other system data and bad block information.

**- Protocol: No Data**

**-Inputs**

**Table 9: Execute Quick Erase command for inputs information**

Register	7	6	5	4	3	2	1	0
Features	21h							
Sector Count	41h							
LBA Low	Na							
LBA Mid	Na							
LBA High	Na							
Device	1	1	1	0	Na			
Command	82h							

**-Normal Outputs**

**Table 10: Quick Erase command for normal output information**

Register	7	6	5	4	3	2	1	0
Error	Na							
Sector Count	Na							
LBA Low	Na							
LBA Mid	Na							
LBA High	Na							
Device	obs	Na	obs	DEV	Na	Na	Na	Na
Status	BSY	DRDY	DF	Na	DRQ	Na	Na	ERR

Device register-

**DEV** shall specify the selected device.

Status register

**BSY** will be cleared to zero indicating command completion

**DRDY** will be set to one.

**DF** (Device Fault) will be cleared to zero.

**DRQ** will be cleared to zero

**ERR** will be cleared to zero.



## 4. Installation Requirements

### 4.1 1.8" SATA SSD 3MG2-P Pin Directions

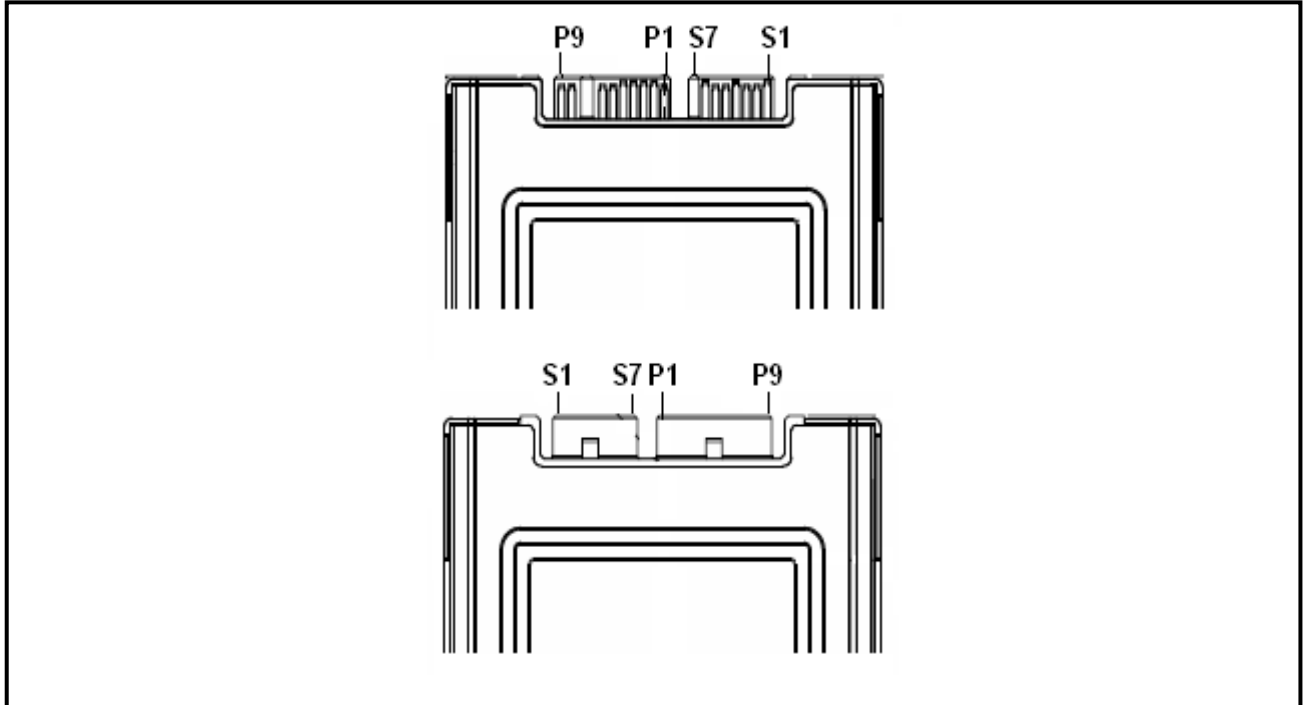


Figure 3: Signal Segment and Power Segment

### 4.2 Electrical Connections for 1.8" SATA SSD 3MG2-P

A Serial ATA device may be either directly connected to a host or connected to a host through a cable. For connection via cable, the cable should be no longer than 1meter. The SATA interface has a separate connector for the power supply. Please refer to the pin description for further details.

### 4.3 Device Drive

No additional device drives are required. Innodisk 1.8" SATA SSD 3MG2-P can be configured as a boot device.

## 5. Part Number Rule

CODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	D	G	S	1	8	-	0	1	T	D	8	1	B	C	B	Q	C	-	X	X
Definition																				
Code 1 <sup>st</sup> (Disk)											Code 13 <sup>th</sup> (Flash Mode)									
D : Disk											B: Toshiba 15nm MLC									
Code 2 <sup>nd</sup> ~ 5 <sup>th</sup> (Form Factor)											Code 14 <sup>th</sup> (Operation Temperature)									
GS18: 1.8" SATA SSD											C: Standard Grade (0°C~ +70°C)									
											W: Industrial Grade (-40°C~ +85°C)									
Code 7 <sup>th</sup> ~9 <sup>th</sup> (Capacity)											Code 15 <sup>th</sup> (Internal Control)									
B56: 256GB											A~Z: PCB version									
C12: 512GB																				
01T: 1TB																				
											Code 16 <sup>th</sup> (Channel of Data Transfer)									
											Q: Quad Channels									
Code 10 <sup>th</sup> ~12 <sup>th</sup> (Controller)											Code 17 <sup>th</sup> (Flash Type)									
D81: 3MG2-P Series											C: Toshiba MLC									
											Code 19 <sup>th</sup> ~20 <sup>th</sup> (Customized Code)									

# Appendix

## RoHS 自我宣告書 (RoHS Declaration of Conformity)

### Manufacturer Product: All Innodisk EM Flash and Dram products

- 一、 宜鼎國際股份有限公司（以下稱本公司）特此保證售予貴公司之所有產品，皆符合歐盟 2011/65/EU 及 (EU) 2015/863 關於 RoHS 之規範要求。

Innodisk Corporation declares that all products sold to the company, are complied with European Union RoHS Directive (2011/65/EU) and (EU) 2015/863 requirement.

- 二、 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。

Innodisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

Name of hazardous substance	Limited of RoHS ppm (mg/kg)
鉛 (Pb)	< 1000 ppm
汞 (Hg)	< 1000 ppm
鎘 (Cd)	< 100 ppm
六價鉻 (Cr 6+)	< 1000 ppm
多溴聯苯 (PBBs)	< 1000 ppm
多溴二苯醚 (PBDEs)	< 1000 ppm
鄰苯二甲酸二(2-乙基己基)酯 (DEHP)	< 1000 ppm
鄰苯二甲酸丁酯苯甲酯 (BBP)	< 1000 ppm
鄰苯二甲酸二丁酯 (DBP)	< 1000 ppm
鄰苯二甲酸二異丁酯 (DIBP)	< 1000 ppm

### 立保證書人 (Guarantor)

Company name 公司名稱： Innodisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人： Randy Chien 簡川勝

Company Representative Title 公司代表人職稱： Chairman 董事長

Date 日期： 2017 / 01 / 18



innodisk

宜鼎國際股份有限公司  
Innodisk Corporation

Tel: (02) 7703-3000 Fax: (02) 7703-3555 Internet: <http://www.innodisk.com/>

## REACH Declaration of Conformity

### Manufacturer Product: All Innodisk EM Flash and Dram products

1. 宜鼎國際股份有限公司（以下稱本公司）特此保證此售予貴公司之產品，皆符合歐盟化學品法案(Registration, Evaluation and Authorization of Chemicals; (EC) No 1907/2006 REACH) 以及附錄 XIV 中的限用物質之規定 (<http://www.echa.europa.eu/de/candidate-list-table> last updated: 12/01/2017, SVHC's 173)。

所提供之產品包含：(1) 產品或產品所使用到的所有原物料；(2) 包裝材料；(3) 設計、生產及重工過程中所使用到的所有原物料。

We Innodisk Corporation hereby declare that our products are in compliance with the requirements according to the (EC) No 1907/2006 REACH Regulation and restricted substances in Annex XIV (<http://www.echa.europa.eu/de/candidate-list-table> last updated: 12/01/2017, SVHC's 173).

Products include: 1) Product and raw material used by the product; 2) Packaging material; 3) Raw material used in the process of design, production and rework.

2. 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。InnoDisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

### 立保證書人 (Guarantor)

Company name 公司名稱：InnoDisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人：Randy Chien 簡川勝

Company Representative Title 公司代表人職稱：Chairman 董事長

Date 日期：2017 / 02 / 08



# Certificate

Issue Date: March 1, 2016  
Ref. Report No. ISL-16LE078CE

Product Name : 1.8" SATA SSD  
Model(s) : 1.8" SATA SSD 3\$\*#-&  
(\$:Flash type: (S:SLC,I:iSLC,M:MLC);  
\*:Product line: (E:Embedded, G:EverGreen, R:InnoRobust);  
#:Controller: (empty:106/107/167, 2:201/202, 3:108/109/170, 4~9:Others)  
&:Product feature: (P:with DRAM, empty:without DRAM)

Responsible Party : Innodisk Corporation  
Address : 5F., No.237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221,  
Taiwan (R.O.C.)

We, **International Standards Laboratory**, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in European Council Directive- EMC Directive 2004/108/EC (marketed before 2016/04/19) 2014/30/EU (marketed after 2016/04/20). The device was passed the test performed according to :



#### Standards:

EN 55022: 2010+AC2011 and CISPR 22: 2008 (modified)  
EN 61000-3-2:2014 and IEC 61000-3-2:2014  
EN 61000-3-3: 2013 and IEC 61000-3-3: 2013  
EN 55024: 2010 and CISPR 24: 2010  
EN 61000-4-2: 2009 and IEC 61000-4-2: 2008  
EN 61000-4-3: 2006+A1: 2008 +A2: 2010 and  
IEC 61000-4-3:2006+A1: 2007+A2: 2010  
EN 61000-4-4:2012 and IEC 61000-4-4:2012

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

**International Standards Laboratory**

W.H. Chang / Director

**Hsi-Chih LAB:**

No. 65, Gu Dai Keng Street, Hsi-Chih Dist.,  
New Taipei City 221, Taiwan  
Tel: 886-2-2646-2550; Fax: 886-2-2646-4641



**Lung-Tan LAB:**

No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,  
Tao Yuan City 325, Taiwan  
Tel: 886-3-407-1718; Fax: 886-3-407-1738





# Certificate

Issue Date: March 1, 2016  
Ref. Report No. ISL-16LE078FB

Product Name : 1.8" SATA SSD  
Model(s) : 1.8" SATA SSD 3\$\*#-&  
(\$:Flash type: (S:SLC,I:iSLC,M:MLC);  
\*:Product line: (E:Embedded, G:EverGreen, R:InnoRobust);  
#:Controller: (empty:106/107/167, 2:201/202, 3:108/109/170, 4~9:Others)  
&:Product feature: (P:with DRAM, empty:without DRAM)

Applicant : Innodisk Corporation  
Address : 5F., No.237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221,  
Taiwan (R.O.C.)

We, **International Standards Laboratory**, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified. (refer to Test Report if any modifications were made for compliance).



## Standards:

FCC CFR Title 47 Part 15 Subpart B: 2014- Section 15.107 and 15.109  
ANSI C63.4-2014  
Industry Canada Interference-Causing Equipment Standard ICES-003 Issue 6: 2016

## Class B

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

## International Standards Laboratory

W.H. Chang / Director

**Hsi-Chih LAB:**  
No. 65, Gu Dai Keng Street, Hsi-Chih Dist.,  
New Taipei City 221, Taiwan  
Tel: 886-2-2646-2550; Fax: 886-2-2646-4641



**Lung-Tan LAB:**  
No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,  
Tao Yuan City 325, Taiwan  
Tel: 886-3-407-1718; Fax: 886-3407-1738

