


Datasheet

# M.2 (P80) 3IE6 series With Innodisk NAND

- PCIe Gen. III x4, NVMe 1.3
- DRAM-less Solution
- Less Controller Heat
- Anti-Vibration mechanical design
- Hybrid Write Mode
- LDPC ECC engine supported.
- iPowerGuard Protection

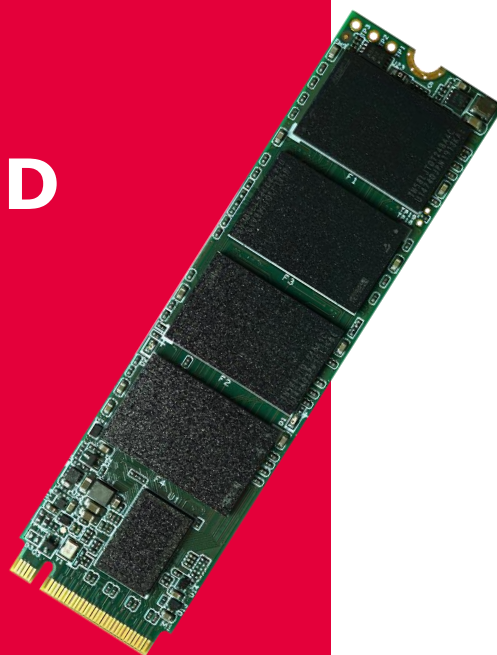

## Introduction

Innodisk M.2 (P80) 3IE6 is a NVM Express DRAM-less SSD designed with PCIe interface and industrial 3D TLC NAND Flash. M.2 (P80) 3IE6 supports PCIe Gen III x 4 and it is compliant with NVM 1.3 providing excellent top and also outstanding sustained performance. With sophisticated error detection and correction (ECC) functions, the module can ensure full End-to-End data path protection that secures the data transmission between host system and NAND Flash.

# M.2 (P80)

## 3IE6 series

Contact us for more information about the M2 (P80) 3IE6.

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.


### Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan  
Tel: +886-2-7703-3000  
Email: sales@innodisk.com

### Branch Offices:

USA  
[usasales@innodisk.com](mailto:usasales@innodisk.com)  
+1-510-770-9421  
Europe  
[eusales@innodisk.com](mailto:eusales@innodisk.com)  
+31-40-3045-400  
Japan  
[jpsales@innodisk.com](mailto:jpsales@innodisk.com)  
+81-3-6667-0161  
China  
[sales\\_cn@innodisk.com](mailto:sales_cn@innodisk.com)  
+86-755-21673689  
[www.innodisk.com](http://www.innodisk.com)

© 2023 Innodisk Corporation.  
All right reserved. Specifications are subject to change without prior notice.

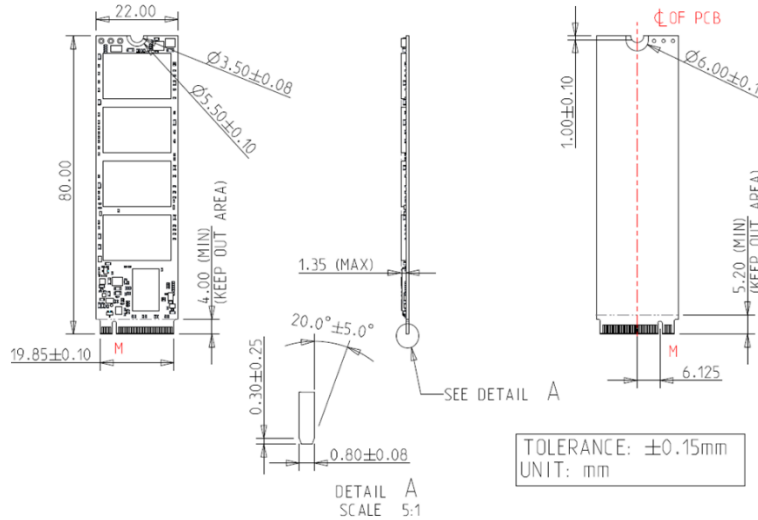

Interface	PCIe Gen. III x4
Flash Type	iSLC (3D TLC)
P/E cycle	100,000
Capacity	40GB~160GB
Max. Channels	4
Sequential R/W (MB/s, Max)	2,000/1,850
Max. Power Consumption (RMS)	3.6W
Thermal Sensor	√
External DRAM buffer	NA
H/W Write Protect	NA
iCell	NA
Dimension (WxLxH)	22.0 X 80.0 X 1.35 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Working Temperature: -40°C ~ +85°C MTBF: 3 million hours

## Ordering Information

Operation Temp.	40GB	80GB	160GB
Industrial Grade (-40°C ~ +85°C)	DHM28-40GDD1KCADL	DHM28-80GDD1KCAQL	DHM28-A60DD1KCAQL