

EACIEK20

Intel® Celeron® N6211 EAC Mini IoT Gateway



KEY FEATURES

- Intel® Celeron® Elkhart Lake N6211 Processor
- Fanless cooling system
- Compact size 100 x 70 x 31 mm (w/o mounting bracket)
- Expansion module design
- Various mounting options: desk, wall, VESA, DIN-Rail
- AWS IoT Greengrass Certified



SPECIFICATIONS

System Specification			
WLAN	Support (Optional)	BT	Support (Optional)
WWAN	WWAN (Optional)	Expansion Port	EACWSLT-222 WWAN Expansion Board (Single SIM Slot) EACWSLT-231 3-port RS232/422/485 w/ isolation EACWSLT-232 16-Channel Digital I/O w/ isolation EACWSLT-233 2-port CANBUS w/ isolation EACWLST-234 3 -port USB 2.0 EACWLST-235 2-port RS232/422/485 w/ isolation EACWLST-236 2-port Giga-LAN EACWLST-237 WWAN Expansion Board (Dual SIM Slot)
Processor	Intel® Celeron® N6211 (up to 3.0GHz) Intel® Celeron® N6210 (up to 2.6GHz) (Optional)	Memory	4GB LPDDR4 8GB LPDDR4 (Optional)
Storage	eMMC: Onboard 32 GB eMMC: Onboard 64 GB (Optional) eMMC: Onboard 128 GB (Optional) M.2 SSD: 128GB (Optional) M.2 SSD: 256GB (Optional) M.2 SSD: 512GB (Optional)	Ethernet controller	2 x Intel® Ethernet Controller
Security	TPM 2.0	Operating System	Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 22.04 (Optional)
Mechanical			
Dimension	100 (W) x 70 (H) x 31(D) mm(One layer) 100 (W) x 70 (H) x 61(D) mm(Double layer)	Weight	0.4 kg (One layer), 0.5 kg (Double layer)
Mounting	Desk Mounting and Wall Mounting VESA Mount (Optional) DIN-Rail Mount (Optional)	Enclosure	Metal Housing
Cooling System	Fanless design		
Environment			
Operating Humidity	30% to 90% RH, Non-Condensing	Operating Temperature	0°C to 55°C
Storage Temperature	-15°C to 70°C	Shock	Operating, IEC 60068-2-27
Vibration	Operating, IEC 60068-2-64	IP rating	IP30
Certification			
Certification	CE, FCC		

Microsoft Azure Certified for IoT
AWS IoT Greengrass Certified

IO Ports

Power Input	1 x 9~36V DC, 2-Pin Terminal Block	USB Port	2 x USB3.2 Gen2x1 (TypeA)
Video	1 x HDMI 2.0 (Optional)	Expansion Port	M.2 : 1 x M.2 2242 Key B slot for SSD or WiFi USB Wafer : 2 x USB Wafer
LAN	2 x Giga LAN RJ45 Connector	Indicator	1 x LED Indicator for power

Control

Button	1 x Power Button 1 x Reset Button
---------------	--------------------------------------

Accessory

Accessory	Quick Start Guide Terminal Block 2 Pin to 2.5Ø Female Adapter Cable 2 Pin Terminal Block Connector Open Wire DC Cable WLAN External Antenna (For WLAN sku) WWAN External Antenna (For WWAN sku) AC to DC Adapter 12V/36W (Optional) VESA Mounting Kit (Optional) DIN Rail Mounting Kit (Optional)
------------------	--


Power

Power Rating	9V~36V DC, 2-Pin Terminal Block	Adapter	12V 36W
---------------------	---------------------------------	----------------	---------

Ordering Information

Option	EACWSLT-222 WWAN Expansion Board (Single SIM Slot) (Optional) EACWSLT-231 3-port RS232/422/485 w/ isolation (Optional) EACWSLT-232 16-Channel Digital I/O w/ isolation (Optional) EACWSLT-233 2-port CANBUS w/ isolation (Optional) EACWSLT-234 4-port USB 2.0 (Optional) EACWSLT-235 2-port RS232/422/485 w/ isolation (Optional) EACWSLT-236 2-port Giga-LAN (Optional) EACWSLT-237 WWAN Expansion Board (Dual SIM Slot) (Optional)
---------------	--

DIMENSIONS UNIT:MM

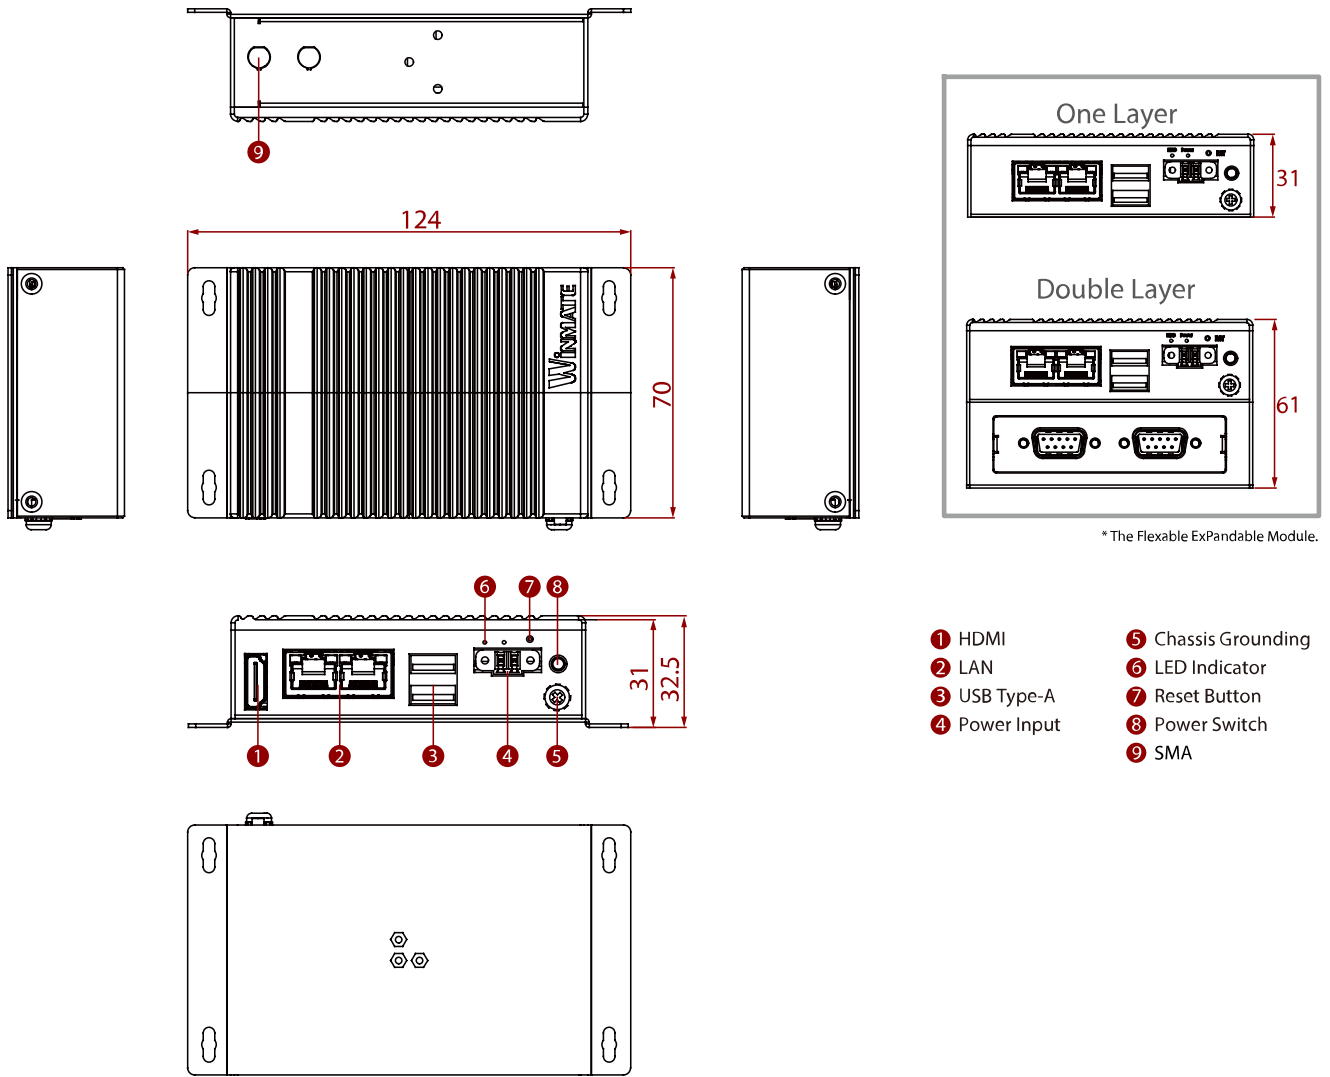

NOTE

- 1.This is a simplified drawing and some components are not marked in detail.
- 2.Please contact our sales representative if you need further product information.
- 3.All specifications are subject to change without prior notice.
- 4.The product shown in this datasheet is a standard model.For diagrams that contain customized or optional I/ O, please contact the Winmate Sales Team for more information.