

SATA Slim

3MG2-P Series

Customer: _____

Customer

Part

Number: _____

Innodisk

Part

Number: _____

Innodisk

Model Name: _____

Date: _____

Innodisk Approver	Customer Approver

Total Solution For
Industrial Flash Storage

Table of contents

LIST OF FIGURES	6
1. PRODUCT OVERVIEW	7
1.1 INTRODUCTION OF INNODISK SATA SLIM 3MG2-P	7
1.2 PRODUCT VIEW AND MODELS	7
1.3 SATA INTERFACE	8
1.4 CAPACITY	8
1.5 MO-297 FORM FACTOR	8
2. PRODUCT SPECIFICATIONS.....	9
2.1 CAPACITY AND DEVICE PARAMETERS.....	9
2.2 PERFORMANCE	10
2.3 ELECTRICAL SPECIFICATIONS	10
2.3.1 Power Requirement	10
2.3.2 Power Consumption.....	11
2.4 ENVIRONMENTAL SPECIFICATIONS	11
2.4.1 Temperature Ranges	11
2.4.2 Humidity	11
2.4.3 Shock and Vibration.....	11
2.4.4 Mean Time between Failures (MTBF)	11
2.5 CE AND FCC COMPATIBILITY	12
2.6 RoHS COMPLIANCE	12
2.7 RELIABILITY.....	12
2.8 TRANSFER MODE	12
2.9 PIN ASSIGNMENT	12
2.10 MECHANICAL DIMENSIONS	14
2.11 ASSEMBLY WEIGHT	14
2.12 SEEK TIME	14
2.13 HOT PLUG	14
2.14 NAND FLASH MEMORY	14
3. THEORY OF OPERATION	15
3.1 OVERVIEW	15
3.2 SATA III CONTROLLER	15
3.3 ERROR DETECTION AND CORRECTION.....	16
3.4 WEAR-LEVELING	16
3.5 BAD BLOCKS MANAGEMENT.....	16
3.6 iDATA GUARD.....	16
3.7 GARBAGE COLLECTION/TRIM.....	16
3.8 QERASER FUNCTION (OPTIONAL)	17

4. INSTALLATION REQUIREMENTS 19

4.1 SATA SLIM 3MG2-P PIN DIRECTIONS..... 19

4.2 ELECTRICAL CONNECTIONS FOR SATA SLIM 3MG2-P 19

4.3 DEVICE DRIVE 19

5. SMART FEATURE SET 20

6. PART NUMBER RULE 22

REVISION HISTORY

Revision	Description	Date
Preliminary	First Released	July, 2014
Rev 1.0	Update power consumption Add CE/FCC	Aug., 2014
Rev 1.1	Remove flash endurance	Jan., 2015
Rev 1.2	Add SMART feature set	May, 2015
Rev 1.3	Update performance	May, 2015
Rev 1.4	Support Micron MLC	Oct., 2015
Rev 1.5	Add Quick erase function (optional)	Nov., 2015
Rev 1.6	Add Toshiba 15nm	Dec., 2015
Rev 1.7	Add Toshiba 15nm 512GB performance Update power consumption	Aug., 2016
Rev 1.8	Update TBW information	March, 2017
Rev 1.9	Update LED signal information Update RoHS/ REACH declaration of conformity	Oct.,2017

List of Tables

TABLE 1: DEVICE PARAMETERS.....	9
TABLE 2: PERFORMANCE	10
TABLE 3: INNODISK SATA SLIM 3MG2-P POWER REQUIREMENT	10
TABLE 4: POWER CONSUMPTION	11
TABLE 5: TEMPERATURE RANGE FOR SATA SLIM 3MG2-P	11
TABLE 6: SHOCK/VIBRATION TESTING FOR SATA SLIM 3MG2-P	11
TABLE 7: SATA SLIM 3MG2-P MTBF.....	12
TABLE 8: INNODISK SATA SLIM 3MG2-P PIN ASSIGNMENT	13

List of Figures

FIGURE 1: INNODISK SATA SLIM 3MG2-P7

FIGURE 2: INNODISK SATA SLIM 3MG2-P BLOCK DIAGRAM15

FIGURE 3: SIGNAL SEGMENT AND POWER SEGMENT19

1. Product Overview

1.1 Introduction of Innodisk SATA Slim 3MG2-P

Innodisk SATA Slim 3MG2-P provides a totally brand new highly cost-effective SSD solution with good performance and longer lifespan. Customer can pay much less than SLC flash but embrace longer life and performance than current MLC flash IC based SSD solution. SATA Slim 3MG2-P is a perfect substitute for traditional HDD, which are applied with an evolved L2 Wear Leveling Architecture, and significantly improves SSD random data transfer rate and lifespan. Furthermore, SATA Slim 3MG2-P supports TRIM for windows 7, it can improves performance when deleting files. SATA Slim 3MG2-P provides high capacity flash memory within JEDEC MO-297 spec., which electrically compatible with Serial ATA (SATA) standard, and supports SATA III standard (6.0GHz) with high performance. It has good performance; no latency time and small seek time. It effectively reduces the booting time of operation system and the power consumption is less than hard disk drive (HDD).

1.2 Product View and Models

Innodisk SATA Slim 3MG2-P is available in follow capacities within MLC flash ICs.

SATA Slim 3MG2-P 08GB	SATA Slim 3MG2-P 64GB
SATA Slim 3MG2-P 16GB	SATA Slim 3MG2-P 128GB
SATA Slim 3MG2-P 32GB	SATA Slim 3MG2-P 256GB
SATA Slim 3MG2-P 512GB	



Figure 1: Innodisk SATA Slim 3MG2-P

1.3 SATA Interface

SATA Slim 3MG2-P supports SATA III interface, and backward compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps /3.0Gbps/6.0Gbps data rate)..

1.4 Capacity

Innodisk SATA Slim 3MG2-P provides unformatted 8GB, 16GB, 32GB, 64GB, 128GB, 256GB and 512GB capacities within MLC Flash IC.

1.5 MO-297 Form Factor

SATA Slim 3MG2-P has a compact design 54.0mm (W) x 39.0mm (L) x 4.0mm (H) without metal material case, and is easy for installation.

2. Product Specifications

2.1 Capacity and Device Parameters

SATA Slim 3MG2-P device parameters are shown in Table 1.

Table 1: Device parameters

Capacity	LBA	Cylinders	Heads	Sectors	User Capacity(MB)
8GB	13695696	13587	16	63	6,687
16GB	29323728	16383	16	63	14,318
32GB	60579792	16383	16	63	29,580
64GB	121138416	16383	16	63	59,150
128GB	242255664	16383	16	63	118,289
256GB	484490160	16383	16	63	236,567
512GB	968959152	16383	16	63	473,124

2.2 Performance

Burst Transfer Rate: 6.0Gbps

Table 2: Performance

	Capacity	8GB	16GB	32GB	64GB	128GB	256GB	512GB
Toshiba 19nm	Sequential Read (max.) MB/s	140	290	530	520	520	N/A	520
	Sequential Write (max.) MB/s	20	40	85	160	160		460
	4KB Random Read (QD32) IOPS	16,000	32,000	62,000	85,000	86,000		75,000
	4KB Random Write (QD32) IOPS	5,000	11,000	22,000	43,000	44,000		79,000
Toshiba 15nm	Sequential Read (max.) MB/s	140	140*	270**	520	520	530	520
	Sequential Write (max.) MB/s	25	25*	45**	90	180	350	460
	4KB Random Read (QD32) IOPS	14,800	14,200*	27,000**	52,900	75,300	75,900	75,300
	4KB Random Write (QD32) IOPS	6,600	6,000*	11,600**	23,700	46,700	83,400	77,700
Micron	Sequential Read (max.) MB/s	N/A		220	430	520	520	520
	Sequential Write (max.) MB/s			35	75	145	145	295
	4KB Random Read (QD32) IOPS			21,000	42,000	69,000	69,000	75,000
	4KB Random Write (QD32) IOPS			9,000	19,000	37,000	37,000	74,000

Note: Based on CrystalDiskMark 3.03 with file size 1000MB

*Toshiba 15nm 16GB is 1 channel.

**Toshiba 15nm 32GB is 2 channels.

2.3 Electrical Specifications

2.3.1 Power Requirement

Table 3: Innodisk SATA Slim 3MG2-P Power Requirement

Item	Symbol	Rating	Unit
Input voltage	V _{IN}	+5 DC +- 5%	V

2.3.2 Power Consumption

Table 4: Power Consumption

Mode	Power Consumption
Read	301 mA (max.)
Write	655 mA (max.)
Idle	114 mA (max.)
DEVSLP Mode	3mW (min.)
Slumber Mode	30mW (min.)

* Target: SATA Slim 3MG2-P 512GB (Toshiba 15nm)

2.4 Environmental Specifications

2.4.1 Temperature Ranges

Table 5: Temperature range for SATA Slim 3MG2-P

Temperature	Range
Operating	Standard Grade: 0°C to +70°C
	Industrial Grade: -40°C to +85°C
Storage	-55°C to +95°C

2.4.2 Humidity

Relative Humidity: 10-95%, non-condensing

2.4.3 Shock and Vibration

Table 6: Shock/Vibration Testing for SATA Slim 3MG2-P

Reliability	Test Conditions	Reference Standards
Vibration	7 Hz to 2K Hz, 20G, 3 axes	IEC 68-2-6
Mechanical Shock	Duration: 0.5ms, 1500 G, 3 axes	IEC 68-2-27

2.4.4 Mean Time between Failures (MTBF)

Table 7 summarizes the MTBF prediction results for various SATA Slim 3MG2-P configurations. The analysis was performed using a RAM Commander™ failure rate prediction.

- **Failure Rate:** The total number of failures within an item population, divided by the total number of life units expended by that population, during a particular measurement interval under stated condition.
- **Mean Time between Failures (MTBF):** A basic measure of reliability for repairable items: The mean number of life units during which all parts of the item perform within their specified limits, during a particular measurement interval under stated conditions.
-

Table 7: SATA Slim 3MG2-P MTBF

Product	Condition	MTBF (Hours)
Innodisk SATA Slim 3MG2-P	Telcordia SR-332 GB, 25°C	>3,000,000

2.5 CE and FCC Compatibility

SATA Slim 3MG2-P conforms to CE and FCC requirements.

2.6 RoHS Compliance

SATA Slim 3MG2-P is fully compliant with RoHS directive.

2.7 Reliability

Parameter	Value		
Read Cycles	Unlimited Read Cycles		
Flash endurance	3,000 P/E cycles		
Wear-Leveling Algorithm	Support		
Bad Blocks Management	Support		
Error Correct Code	Support		
TBW* (Total Bytes Written) Unit:TB			
Capacity	Sequential workload	Client workload	
8GB	21.3	9.4	
16GB	42.6	18.8	
32GB	85.2	37.5	
64GB	170.5	75	
128GB	340.9	150	
256GB	681.8	300	
512GB	1364	600	
Note:			
1. Sequential: Mainly sequential write, tested by Vdbench			
2. Client: Follow JESD218 Test method and JESD219A Workload, tested by ULINK. (The capacity lower than 64GB client workload is not specified in JEDEC219A, the values are estimated.)			
3. Based on out-of-box performance.			

2.8 Transfer Mode

SATA Slim 3MG2-P support following transfer mode:

Serial ATA III 6.0Gbps

Serial ATA II 3.0Gbps

Serial ATA I 1.5Gbps


2.9 Pin Assignment

Innodisk SATA Slim 3MG2-P uses a standard SATA pin-out. See Table 8 for SATA Slim 3MG2-P pin assignment.

Table 8: Innodisk SATA Slim 3MG2-P Pin Assignment

Name	Type	Description
S1	GND	NA
S2	A+	Differential Signal Pair A
S3	A-	
S4	GND	NA
S5	B-	Differential Signal Pair B
S6	B+	
S7	GND	NA
Key and Spacing separate signal and power segments		
P1	NC	NA
P2	NC	NA
P3	NC	NA
P4	GND	NA
P5	GND	NA
P6	GND	NA
P7	V5	5V Power, Pre-Charge
P8	V5	5V Power
P9	V5	5V Power
P10	GND	NA
P11	DAS/DSS	Device Activity Signal / Disable Staggered
P12	GND	NA
P13	NC	NA
P14	NC	NA
P15	NC	NA

2.10 Mechanical Dimensions

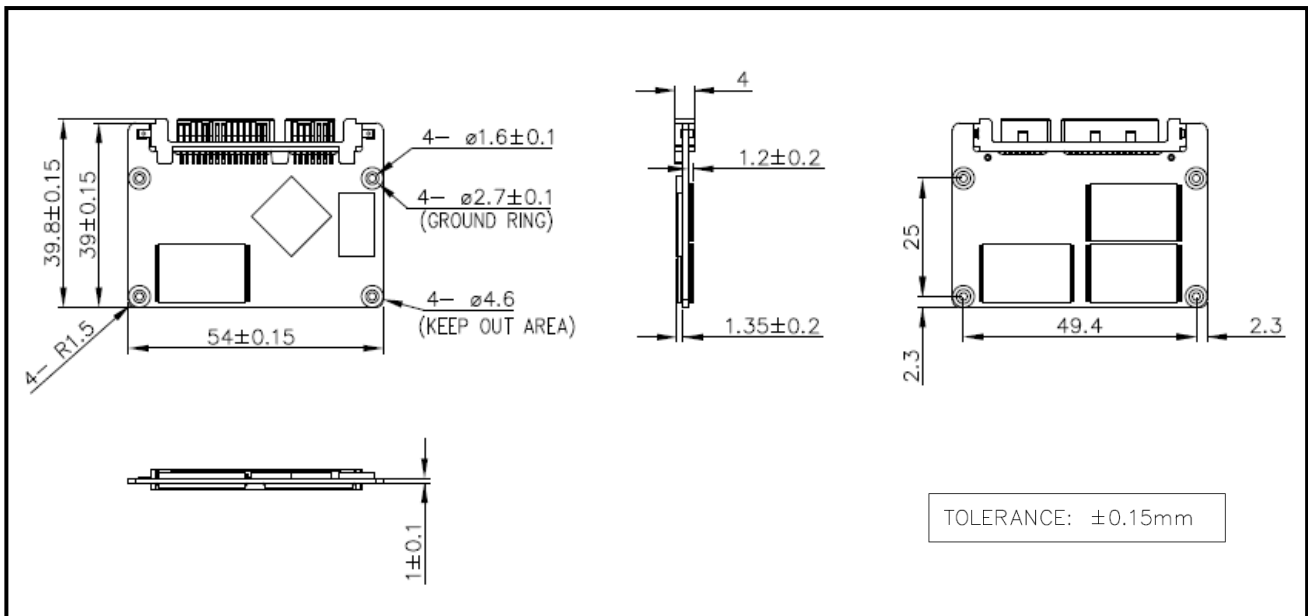

2.11 Assembly Weight

An Innodisk SATA Slim 3MG2-P within MLC flash ICs, 32GB's weight is 40 grams approx. The total weight of SSD will be less than 50 grams.

2.12 Seek Time

Innodisk SATA Slim 3MG2-P is not a magnetic rotating design. There is no seek or rotational latency required.

2.13 Hot Plug

The SSD support hot plug function and can be removed or plugged-in during operation. User has to avoid hot plugging the SSD which is configured as boot device and installed operation system.

Surprise hot plug : The insertion of a SATA device into a backplane (combine signal and power) that has power present. The device powers up and initiates an OOB sequence.

Surprise hot removal: The removal of a SATA device from a powered backplane, without first being placed in a quiescent state.

2.14 NAND Flash Memory

Innodisk SATA Slim 3MG2-P uses Multi Level Cell (MLC) NAND flash memory, which is non-volatility, high reliability which has 3,000 program/erase times and high speed memory storage.

3. Theory of Operation

3.1 Overview

Figure 2 shows the operation of Innodisk SATA Slim 3MG2-P from the system level, including the major hardware blocks.

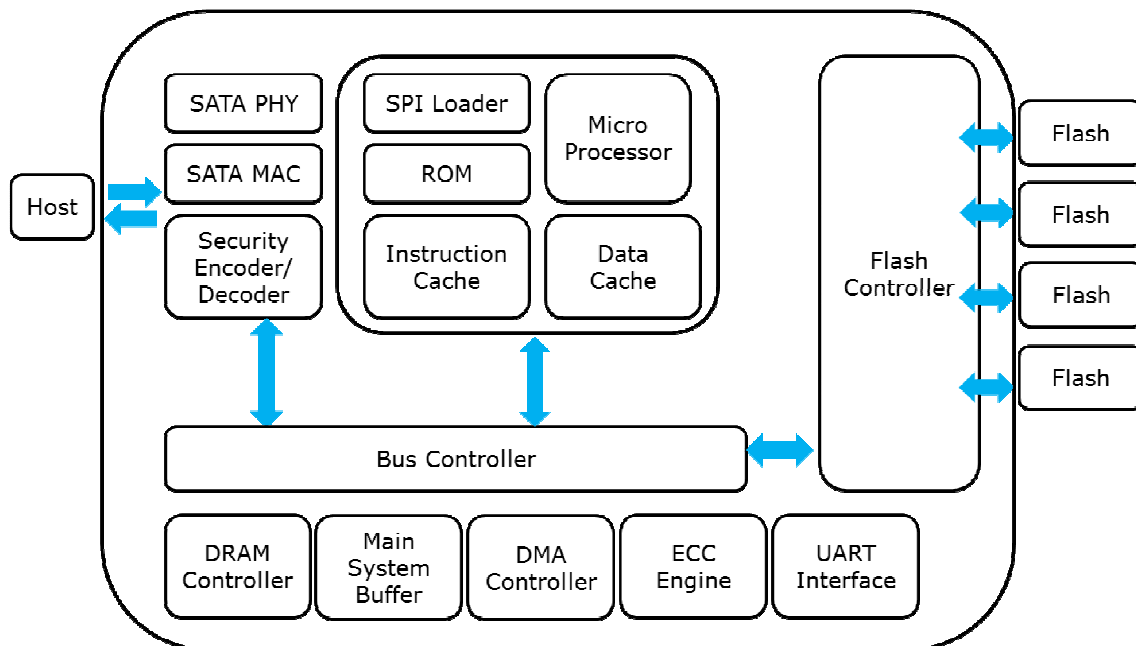


Figure 2: Innodisk SATA Slim 3MG2-P Block Diagram

Innodisk 2 SATA Slim 3MG2-P integrates a SATA III controller and NAND flash memories. Communication with the host occurs through the host interface, using the standard ATA protocol. Communication with the flash device(s) occurs through the flash interface.

3.2 SATA III Controller

Innodisk SATA Slim 3MG2-P is designed with ID 201, a SATA III 6.0Gbps (Gen. 3) controller, which supports external DDR3 DRAM. The Serial ATA physical, link and transport layers are compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps/3.0Gbps/6.0Gbps data rate). The controller has 4 channels for flash interface.

3.3 Error Detection and Correction

Highly sophisticated Error Correction Code algorithms are implemented. The ECC unit consists of the Parity Unit (parity-byte generation) and the Syndrome Unit (syndrome-byte computation). This unit implements an algorithm that can correct 66 bits per 1024 bytes in an ECC block. Code-byte generation during write operations, as well as error detection during read operation, is implemented on the fly without any speed penalties.

3.4 Wear-Leveling

Flash memory can be erased within a limited number of times. This number is called the **erase cycle limit** or **write endurance limit** and is defined by the flash array vendor. The erase cycle limit applies to each individual erase block in the flash device.

Innodisk SATA Slim 3MG2-P uses a static wear-leveling algorithm to ensure that consecutive writes of a specific sector are not written physically to the same page/block in the flash. This spreads flash media usage evenly across all pages, thereby extending flash lifetime.

3.5 Bad Blocks Management

Bad Blocks are blocks that contain one or more invalid bits whose reliability are not guaranteed. The Bad Blocks may be presented while the SSD is shipped, or may develop during the life time of the SSD. When the Bad Blocks is detected, it will be flagged, and not be used anymore. The SSD implement Bad Blocks management, Bad Blocks replacement, Error Correct Code to avoid data error occurred. The functions will be enabled automatically to transfer data from Bad Blocks to spare blocks, and correct error bit.

3.6 iData Guard

Innodisk's iData Guard is a comprehensive data protection mechanism that functions before and after a sudden power outage to SSD. Low-power detection terminates data writing before an abnormal power-off, while table-remapping after power-on deletes corrupt data and maintains data integrity. Innodisk's iData Guard provides effective power cycling management, preventing data stored in flash from degrading with use.

3.7 Garbage Collection/TRIM

Garbage collection and TRIM technology is used to maintain data consistency and perform continual data cleansing on SSDs. It runs as a background process, freeing up valuable controller resources while sorting good data into available blocks, and deleting bad blocks. It also significantly reduces write operations to the drive, thereby increasing the SSD's speed and lifespan.

3.8 QEraser Function (Optional)

QEraser function is designed for emergency data erase in few seconds by providing ATA command.

3.8.1 QEraser Command FAh-66h

Use to erase data blocks. When the command is issued, the flash is erased immediately. This command causes the SSD to erase all user data blocks, including any reallocated blocks, while retaining all other system data and bad block information.

- Protocol: No Data

-Inputs

Table 9: Execute Quick Erase command for inputs information

Register	7	6	5	4	3	2	1	0
Features	66h							
Sector Count	Na							
LBA Low	Na							
LBA Mid	Na							
LBA High	Na							
Device	obs	na	obs	DEV	Na			
Status	FAh							

-Normal Outputs

Table 10: Quick Erase command for normal output information

Register	7	6	5	4	3	2	1	0
Error	Na							
Sector Count	Na							
LBA Low	Na							
LBA Mid	Na							
LBA High	Na							
Device	Na	Na	Na	DEV	Na	Na	Na	Na
Status	BSY	DRDY	Na	DSC	Na	Na	Na	ERR

Device register-

DEV shall specify the selected device.

Status register

BSY will be cleared to zero indicating command completion

DRDY will be set to one.


DF (Device Fault) will be cleared to zero.

DRQ will be cleared to zero

ERR will be cleared to zero.

4. Installation Requirements

4.1 SATA Slim 3MG2-P Pin Directions

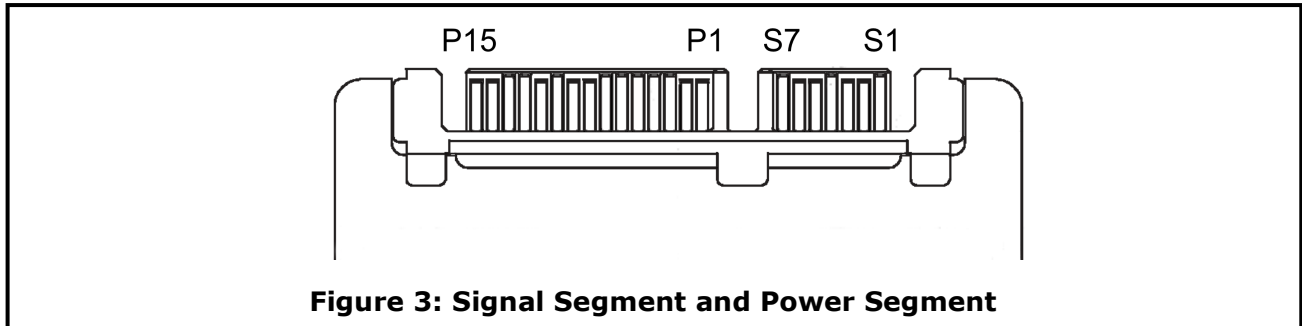

4.2 Electrical Connections for SATA Slim 3MG2-P

A Serial ATA device may be either directly connected to a host or connected to a host through a cable. For connection via cable, the cable should be no longer than 1meter. The SATA interface has a separate connector for the power supply. Please refer to the pin description for further details.

Additionally, Innodisk SATA Slim 3MG2-P provides LED signals which indicate power with red light, and DAS for green light.

4.3 Device Drive

No additional device drives are required. Innodisk SATA Slim 3MG2-P can be configured as a boot device.

5. SMART Feature Set

Innodisk 3MG2-P support the SMART command set and defines some vendor-specific data to report SMART attributes of SSD.

Value	Command
D0h	Read Data
D1h	Read Attribute Threshold
D2h	Enable/Disable Autosave
D3h	Save Attribute Values
D4h	Execute OFF-LINE Immediate
D5h	Read Log
D6h	Return Status
D8h	Enable SMART Operations
D9h	Disable SMART Operations
DAh	Return Status

5.1 SMART Attributes

Innodisk's 3MG2-P series SMART data attributes are listed in following table.

Attribute ID (hex)	Raw Attribute Value							Attribute Name
1 (01h)	MSB	00	00	00	00	00	00	Raw Read Error Rate
5 (05h)	LSB	MSB	00	00	00	00	00	Reallocated Sector Count
9 (09h)	LSB			MSB	00	00	00	Power-on Hours
12 (0Ch)	LSB			MSB	00	00	00	Power Cycle Count

160 (A0h)	LSB			MSB	00	00	00	Uncorrectable sector count when read/write
161 (A1h)	LSB	MSB	00	00	00	00	00	Number of valid spare block
163 (A3h)	LSB	MSB	00	00	00	00	00	Number of initial invalid block
164 (A4h)	LSB	MSB	00	00	00	00	00	Total erase count
165 (A5h)	LSB			MSB	00	00	00	Maximum erase count
166 (A6h)	LSB			MSB	00	00	00	Minimum erase count
167 (A7h)	LSB			MSB	00	00	00	Average erase count
168 (A8h)	LSB			MSB	00	00	00	Max erase count of spec
169 (A9h)	LSB			MSB	00	00	00	Reman Life (percentage)
175 (AFh)	LSB			MSB	00	00	00	Program fail count in worst die
176 (B0h)	LSB			MSB	00	00	00	Erase fail count in worst die
177 (B1h)	LSB			MSB	00	00	00	Total wear level count
178 (B2h)	LSB	MSB	00	00	00	00	00	Runtime invalid block count
181 (B5h)	LSB			MSB	00	00	00	Total program fail count
182 (B6h)	LSB	MSB	00	00	00	00	00	Total erase fail count
187 (BBh)	LSB			MSB	00	00	00	Uncorrectable error count
192 (C0h)	LSB	MSB	00	00	00	00	00	Power-Off Retract Count
194 (C2h)	MSB	00	00	00	00	00	00	Controlled temperature
195 (C3h)	LSB			MSB	00	00	00	Hardware ECC recovered
196 (C4h)	LSB			MSB	00	00	00	Reallocation event count
198 (C6h)	LSB			MSB	00	00	00	Uncorrectable error count off-line
199 (C7h)	LSB	MSB	00	00	00	00	00	UltraDMA CRC error count
225 (E1h)	LSB						MSB	Total LBAs written (each write unit = 32MB)
232 (E8h)	LSB	MSB	00	00	00	00	00	Available reserved space
241 (F1h)	LSB						MSB	Total LBAs written (each write unit = 32MB)
242 (F2h)	LSB						MSB	Total LBAs read (each write unit = 32MB)

6. Part Number Rule

CODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	D	G	S	L	M	-	3	2	G	D	8	1	S	C	1	Q	C	-	X	X
Description	Disk	SATA Slim 3MG2-P				Capacity			Category			Flash Mode	Operation Temp.	Internal Control	CH.	Flash	-	Customized Code		
Definition																				
Code 1 st (Disk)												Code 13 th (Flash Mode)								
D : Disk												S: Synchronous flash								
												B: Toshiba 15nm Synchronous flash								
Code 2 nd ~ 5 th (Form Factor)												Code 14 th (Operation Temperature)								
GSLM: SATA Slim 3MG2-P												C: Standard Grade (0℃ ~ +70℃)								
Code 7 th ~9 th (Capacity)												W: Industrial Grade (-40℃ ~ +85℃)								
08G: 8GB												Code 15 th (Internal control)								
16G: 16GB												1/A: PCB version								
32G: 32GB																				
64G: 64GB												Code 16 th (Channel of data transfer)								
A28: 128GB												S: Single Channel								
B56: 256GB												D: Dual Channels								
C12: 512GB												Q: Quad Channels								
Code 10 th ~12 th (Series)												Code 17 th (Flash Type)								
D81: ID201												C: Toshiba MLC								
												N: Micron MLC								
												Code 19 th ~20 th (Customized Code)								

Appendix

宜鼎國際股份有限公司 Innodisk Corporation

Tel: (02) 7703-3000 Fax: (02) 7703-3555 Internet: <http://www.innodisk.com/>

RoHS 自我宣告書 (RoHS Declaration of Conformity)

Manufacturer Product: All Innodisk EM Flash and Dram products

- 一、 宜鼎國際股份有限公司（以下稱本公司）特此保證售予貴公司之所有產品，皆符合歐盟 2011/65/EU 及 (EU) 2015/863 關於 RoHS 之規範要求。

Innodisk Corporation declares that all products sold to the company, are complied with European Union RoHS Directive (2011/65/EU) and (EU) 2015/863 requirement.

- 二、 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。

Innodisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

Name of hazardous substance	Limited of RoHS ppm (mg/kg)
鉛 (Pb)	< 1000 ppm
汞 (Hg)	< 1000 ppm
鎘 (Cd)	< 100 ppm
六價鉻 (Cr 6+)	< 1000 ppm
多溴聯苯 (PBBs)	< 1000 ppm
多溴二苯醚 (PBDEs)	< 1000 ppm
鄰苯二甲酸二(2-乙基己基)酯 (DEHP)	< 1000 ppm
鄰苯二甲酸丁酯苯甲酯 (BBP)	< 1000 ppm
鄰苯二甲酸二丁酯 (DBP)	< 1000 ppm
鄰苯二甲酸二異丁酯 (DIBP)	< 1000 ppm

立 保 證 書 人 (Guarantor)

Company name 公司名稱： Innodisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人： Randy Chien 簡川勝

Company Representative Title 公司代表人職稱： Chairman 董事長

Date 日期： 2017 / 01 / 18



宜鼎國際股份有限公司 Innodisk Corporation

Tel: (02) 7703-3000 Fax: (02) 7703-3555 Internet: <http://www.innodisk.com/>

REACH Declaration of Conformity

Manufacturer Product: All Innodisk EM Flash and Dram products

1. 宜鼎國際股份有限公司（以下稱本公司）特此保證此售予貴公司之產品，皆符合歐盟化學品法案(Registration, Evaluation and Authorization of Chemicals; (EC) No 1907/2006 REACH) 以及附錄 XIV 中的限用物質之規定 (<http://www.echa.europa.eu/de/candidate-list-table> last updated: 12/01/2017, SVHC's 173)。

所提供之產品包含：(1) 產品或產品所使用到的所有原物料；(2) 包裝材料；(3) 設計、生產及重工過程中所使用到的所有原物料。

We Innodisk Corporation hereby declare that our products are in compliance with the requirements according to the (EC) No 1907/2006 REACH Regulation and restricted substances in Annex XIV (<http://www.echa.europa.eu/de/candidate-list-table> last updated: 12/01/2017, SVHC's 173).

Products include: 1) Product and raw material used by the product; 2) Packaging material; 3) Raw material used in the process of design, production and rework.

2. 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。
InnoDisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

立 保 證 書 人 (Guarantor)

Company name 公司名稱： InnoDisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人： Randy Chien 簡川勝

Company Representative Title 公司代表人職稱： Chairman 董事長

Date 日期： 2017 / 02 / 08



Certificate

Issue Date: August 13, 2014
Ref. Report No. ISL-14LE340CE

Product Name : SATA Slim 3MG2-P
Model(s) : D@SLM-XXKD81*#%*&
Brand : Innodisk
Responsible Party : Innodisk Corporation
Address : 5F.No.237, Sec. 1, Datong Rd., Xizhi Dist.,
New Taipei City 221, Taiwan (R.O.C.)

We, International Standards Laboratory, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in European Council Directive- EMC Directive 2004/108/EC. The device was passed the test performed according to :

CE

Standards:
EN 55022: 2010+AC2011 and CISPR 22: 2008 (modified)
EN 61000-3-2: 2006+A1:2009 +A2:2009 and IEC 61000-3-2: 2005+A1:2008 +A2:2009
EN 61000-3-3: 2013 and IEC 61000-3-3: 2013
EN 55024: 2010 and CISPR 24: 2010
EN 61000-4-2: 2009 and IEC 61000-4-2: 2008
EN 61000-4-3: 2006+A1: 2008 +A2: 2010 and
IEC 61000-4-3:2006+A1: 2007+A2: 2010
EN 61000-4-4: 2004 +A1:2010 and IEC 61000-4-4: 2004 +A1:2010

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

International Standards Laboratory

Jim Chu
Jim Chu / Director

☐ Hsi-Chih LAB:
No. 65, Gu Dai Keng Street, Hsi-Chih Dist.,
New Taipei City 221, Taiwan
Tel: 886-2-2646-2550; Fax: 886-2-2646-4641

☒ Lung-Tan LAB:
No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.,
Lung-Tan Hsiang, Tao Yuan County 325, Taiwan
Tel: 886-3-407-1718; Fax: 886-3-407-1738

Certificate

Issue Date: August 13, 2014
Ref. Report No. ISL-14LE340FB

Product Name : SATA Slim 3MG2-P
Model(s) : D@SLM-XXXX81*#%*&
Brand : Innodisk
Applicant : Innodisk Corporation
Address : 3F.No.237, Sec. 1, Datong Rd., Xizhi Dist.,
New Taipei City 221, Taiwan (R.O.C.)

We, International Standards Laboratory, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified. (refer to Test Report if any modifications were made for compliance).



Standards:

FCC CFR Title 47 Part 15 Subpart B: 2012- Section 15.107 and 15.109
ANSI C63.4-2009
Industry Canada Interference-Causing Equipment Standard ICES-003 Issue 5: 2012

Class B

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

International Standards Laboratory

Jim Chu
Jim Chu / Director

☐ Hsi-Chih LAB:

No. 63, Gu Dai Keng Street, Hsi-Chih Dist.,
New Taipei City 221, Taiwan
Tel: 886-2-2646-2550; Fax: 886-2-2646-4641



☒ Lung-Tan LAB:

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.,
Lung-Tan Hsiang, Tao Yuan County 325, Taiwan
Tel: 886-3-407-1718; Fax: 886-3-407-1738

