

QBiX-JMB-CMLA47EHG-A1

Industrial system with Intel® Q470E Chipset, support for Intel® 10th Gen Processors and Discrete GFX card



Features

- System Size : 224W x 343D x 146H(mm) - Discrete GFX card support (Optional)
- Support Intel® 10th Gen Processor
- Dual Channel DDR4, 2 x SO-DIMMs
- DVI-D, VGA & DP ports for multiple display
- 4 x GbE LAN Ports
- 4 x COM Ports
- 10 x USB Ports

Graphic support	Integrated Graphics Processor - Intel® HD Graphics support: 1 x DP port, supporting a maximum resolution of 4096x2160 @60Hz 1 x DVI-D port, supporting a maximum resolution of 1920x1080 @60Hz 1 x VGA port, supporting a maximum resolution of 1920x1080 @60Hz (3 independent display outputs)
Audio	Realtek® Audio codec
Storage	4 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x4 & SATA 6Gb/s) 1 x 2230 M.2 E-Key 1 x Full-size mini PCIe with SIM slot 1 x PCIe slot -- Discrete riser card support
Front I/O	1 x Power Switch/Power/HDD LED 3 x Audio Jacks (Line in, Line out, Mic in) 1 x Display Port/1 x DVI-D/1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x COM Ports (RS-232) 4 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 6 x USB 2.0 1 x 4-pin Terminal Block 2 x External Antenna Holes (Optional)
Riser card (optional)	1 x PCIe x4 (Gen3 x4) 1 x PCIe x16 (Gen3 x16)
Power	+24V~48VDC (Full Range) -- Support discrete GFX card
Operation temperature	For Main system : Operating temperature: -20°C to 50°C (CPU TDP 65W) Operating temperature: -20°C to 60°C (CPU TDP 35W) For Full system : Depends on the Graphic cards installed in the system Operating humidity: 0-90% (non-condensing) Non-operating temperature: -40°C to 85°C Non-operating humidity: 0%-95% (non-condensing) Use wide temperature range memory and storage
Vibration During Operation	Operation: IEC 60068-2-64, 1 Grms, random, 5 ~ 500 Hz, 1 hr / Per Axis, with SSD/M.2 2280 & Without Graphics Cards Non-operation: IEC 60068-2-6, 2 G, Sine, 10 ~ 500 Hz, 1 Oct/min, 1 hr / Per Axis
Shock During Operation	Operation: IEC 60068-2-27, 50 G, half sine, 11 ms duration, With SSD


Specifications

Dimension	224W x 343D x 146H(mm) - Discrete GFX support (Optional)
CPU	Support for 10th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors in the LGA1200 package TDP under 65W
Chipset	Intel® Q470E Express Chipset
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB Support Dual channel DDR4 2933/2666 MHz memory modules
Ethernet	1 x GbE LAN Port (Intel® I219V) 3 x GbE LAN Ports (Intel® I211AT)

GIGAIPC reserves the right to modify or change technical data without prior notice.

Dimension

Unit: mm

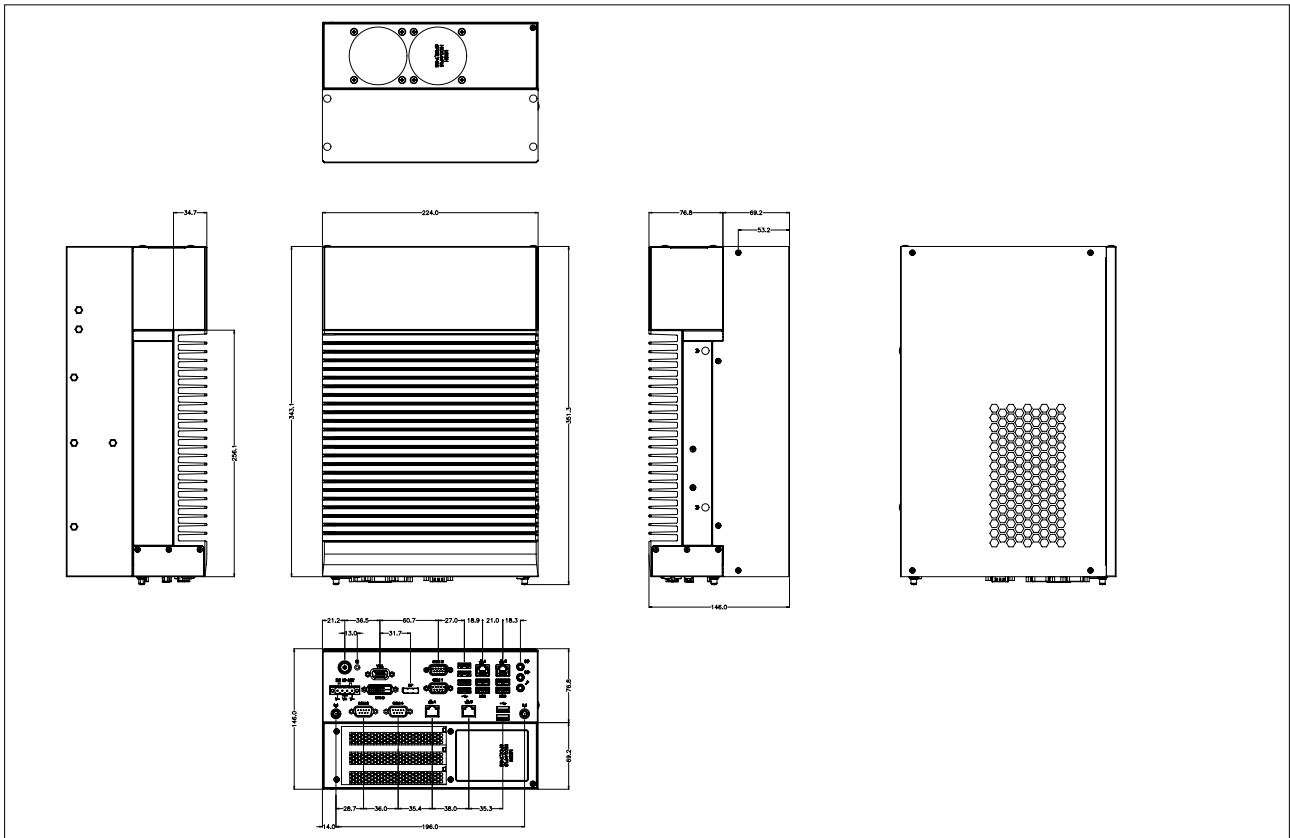

Packing Content

For Main system : 9BQJQ47EAMR-SI

- Carton size: 351 x 300 x 166 (mm)
 - Packing Capacity: 1pc
 - Including:
 - Terminal Blocks Male Plug x 1 (P/N: 25I00-2ESDV0-D2R)
 - Screw M3x4L x 16 (P/N : 25984G-1C014-S00)
- *Quantity of the HDD screws in the accessory kit may decreased based on actual HDD assemble quantity.

For Expansion slot kit : 6BQJH310APR-SI

- Carton size: 460 x 315 x 279 (mm)
- Packing Capacity: 1pc
- Including:
 - Screw #6-32x4L x11 (P/N: 25KS2-13004F-S0R)

Order Information

- System: 9BQJQ47EAMR-SI & 6BQJH310APR-SI (Box packing)
(Built in Components: Please contact with your sales representative for more information or e-mailed to : sales@gigaipc.com)

Optional Kit

- TPM 2.0 module P/N: 9CTM000NR-00

2023/12/22

GIGAIPC reserves the right to modify or change technical data without prior notice.