

# Apacer

The Most **Reliable**  
Storage For Industries

PH250-M280



### Overview

Apacer PH250-M280 is the fastest SSD designed as M.2 2280 mechanical dimensions which provides full compliance with PCIe Gen4 x4 interface and NVMe 2.0 specifications, allowing it to operate in power management modes and greatly save on power consumption. Built with a powerful PCIe controller that supports on-the-module ECC as well as efficient wear leveling scheme, PH250-M280 delivers exceptionally low latency and outstanding performance in data transfer. With the compact and high-speed storage, PH250-M280 is the ideal choice for larger, faster hosts deployed in a wide range of applications that require outstanding performance.



Utilizing 3D NAND for higher capacity up to 640GB and providing more power efficiency than 2D NAND, PH250-M280 is not only implemented with LDPC (Low Density Parity Check) ECC engine and SLC-liteX technology to extend SSD endurance with P/E cycles up to 100,000 times and increase data reliability, but also equipped with a built-in thermal sensor to monitor the temperature of the SSD via S.M.A.R.T commands and configured with thermal throttling to dynamically adjust frequency scaling to enhance data reliability and provide sustained performance while overheating. CoreGlacier is also available to keep temperatures low, while still allowing the drive to deliver high-speed performance. To increase product reliability and resistance to various thermal and mechanical shocks, PH250-M280 also provides Sidefill technology to ensure that products continue to operate normally in high vibration and under extreme environmental changes. For highly-intensive applications, End-to-End Data Protection ensures that data integrity can be assured at multiple points in the path to enable reliable delivery of data transfers.

In terms of security, Advanced Encryption Standard (AES) ensures data security and provides users with peace of mind knowing their data is safeguarded against unauthorized use at all times. PH250-M280 also adopts the latest page mapping file translation layer and comes with various implementations including flash block management, DataDefender, TRIM, power saving modes, Hyper Cache technology, over-provisioning, SMART Read Refresh, and NVMe secure erase. With exceptional performance, trustable reliability, and enhanced data protection, PH250-M280 is definitely the ideal storage or cache solution for a variety of applications ranging from industrial, imaging, computing to enterprise markets.


## Feature

- Low-Density Parity-Check (LDPC) Code
- Global Wear Leveling
- Flash bad-block management
- Flash Translation Layer: Page Mapping
- DataDefender™
- S.M.A.R.T.
- TRIM
- SLC-liteX (P/E cycle: 100K)
- SMART Read Refresh™
- NVMe Secure Erase

## Specifications

<b>Model</b>	PH250-M280
<b>Interface</b>	PCIe Gen4 x4
<b>Connector</b>	Double-sided: M.2 2280 M key
<b>Form Factor</b>	M.2 2280
<b>NAND Flash Type</b>	3D TLC
<b>Capacity</b>	160GB~640GB
<b>External DRAM</b>	No
<b>Sequential Read Performance (MB/sec)</b>	Up to 3,74
<b>Sequential Write Performance (MB/sec)</b>	Up to 3,240
<b>ECC Engine</b>	Low-Density Parity-Check (LDPC) Code
<b>IOPs (4K Random Write)</b>	627K
<b>Standard Operating Temperature ( °C )</b>	0 ~ +70
<b>Extended Operating Temperature ( °C )</b>	-40 ~ +85
<b>Storage Temperature ( °C )</b>	-55 ~ +100
<b>Thermal sensor</b>	Yes
<b>Shock</b>	Operation: Acceleration, 50(G)/11(ms)/half sine (compliant with MIL-STD-202G) Non-operation: Acceleration, 1500(G)/0.5(ms)/half sine (compliant with MIL-STD-883K)
<b>Vibration</b>	Operation: 7.69 Grms, 20~2000 Hz/random (compliant with MIL-STD-810G) Non-operation: 4.02 Grms, 15~2000 Hz/random (compliant with MIL-STD-810G)
<b>Operating Voltage</b>	3.3V ± 5%
<b>Power Consumption</b>	Active mode: 1325 mA / Idle mode: 235mA
<b>Dimension (L x W x H )</b>	22.00 x 80.00 x 4.08 (max.) (mm)
<b>MTBF (hours)</b>	>3,000,000

## Mechanical Specification

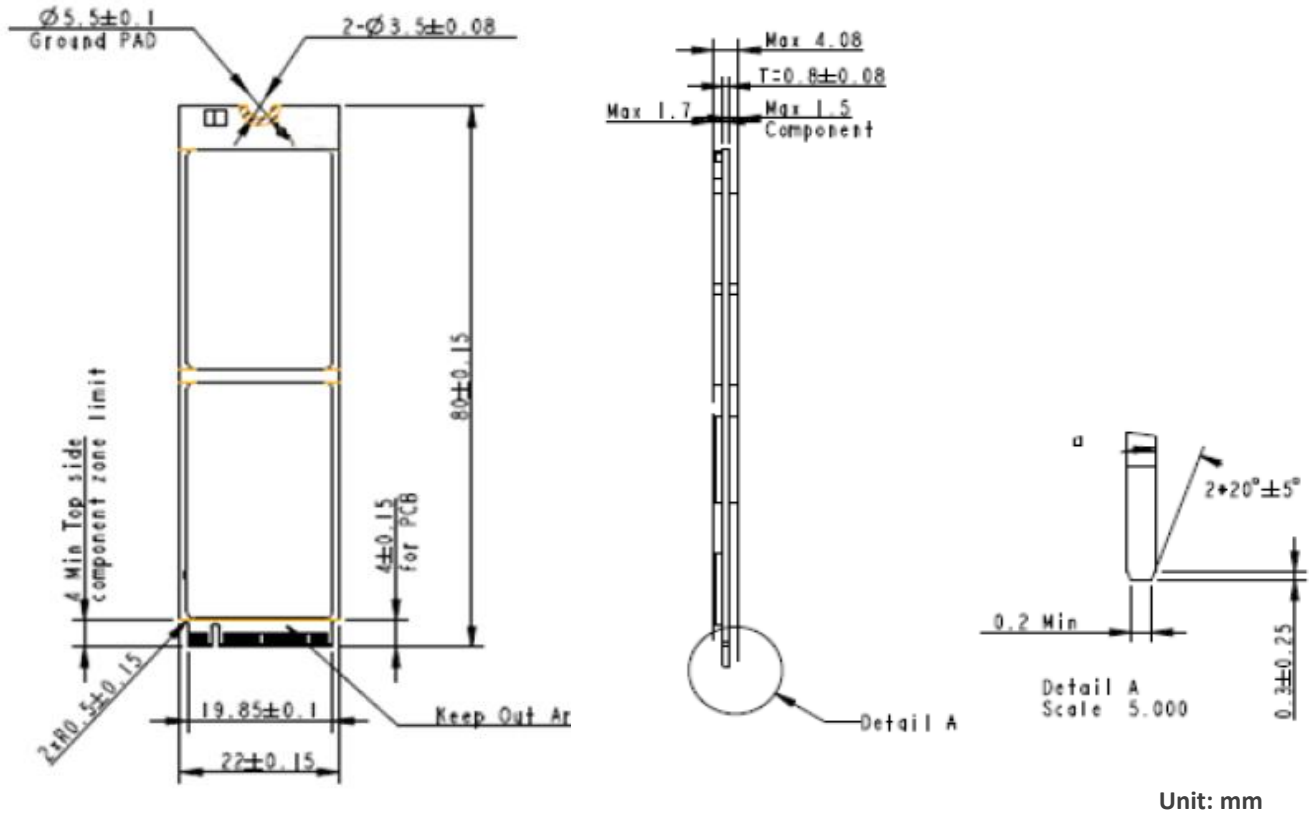

For more information,  
contact your Apacer representative

### Global Presence

Taiwan (Headquarters)  
Apacer Technology Inc.  
Tel: +886-2-2267-8000  
Fax: +886-2-2267-2261

Europe  
Apacer Technology B.V.  
Tel: +31-40-267-0000  
Fax: +31-40-290-0686

U.S.A.  
Apacer Memory America, Inc.  
Tel: +1-408-518-8699  
Fax: 1-510-249-9551

Shanghai  
Apacer Electronic(Shanghai)  
Co., Ltd.  
Tel: +86-21-6228-9939

Japan  
Apacer Technology Corp.  
Tel: +81-3-5419-2668  
Fax: +81-3-5419-0018

India  
Apacer Technologies Pvt. Ltd.  
Tel: +91-80-41529061~3  
Fax: +91-80-41700215