

QBIP-4200C (MZAPLDS)

3.5" SubCompact Embedded Motherboard with Intel® N4200 Processor, Dual Channel DDR3L memory, 4 x COM, 1 x SATA 6Gb/s, 6 x USB



Features

- 3.5" SBC
- Intel® Pentium® N4200 Processor
- Dual Channel DDR3L, 2 x SO-DIMMs
- 2 x GbE LAN Ports
- 1 x SATA 6Gb/s Port
- M.2 with SATA 6Gb/s
- HDMI, D-sub, LVDS ports for multiple display
- 1 x COM Port (RS-232/422/485 & RI/5V/12V)
- 3 x COM Ports (RS-232)

Audio	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s port
Raid	—
Expansion Slots	1 x 2242 M.2 M-Key (SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1 + USB2.0) -- support 3G/4G module
Internal I/O	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA Power header 1 x System fan header 1 x Front panel header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232) 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x Backlight control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header 1 x Buzzer header
Rear I/O	1 x Headphone Jack 1 x HDMI 1 x VGA 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1
TPM	1 x TPM header
OS Compatibility	Windows® 10 (x64)
Operating Properties	Operating temperature: 0°C to +60°C Operating humidity: 0~90% (non-condensing) Non-operating temperature: -40°C to +85°C Non-operating humidity: 0%~95% (non-condensing)

Specifications


Form Factor	3.5" SBC 146W x 101.7Dmm
CPU	Intel® Pentium® N4200 Processor 14nm, 4 cores, 4 threads, up to 2.50 GHz TDP 6W
Socket	1 x FCBGA1296
Chipset	—
Memory	2 x DDR3L SO-DIMM sockets, Max. Capacity 8 GB Support Dual channel DDR3L 1866 MHz memory module
Ethernet	2 x GbE LAN Ports (Intel® I211AT)
Video	Integrated Graphics Processor -Intel® HD Graphics 505 1 x HDMI 1.4 port, supporting a maximum resolution of 3840x2160 @30Hz 1 x VGA port, supporting a maximum resolution of 2560x1600 @60Hz (with compatible displays) 1 x LVDS port, supporting a maximum resolution of 1920x1080 @60Hz (3 independent display outputs)

- ※ Conditional DC-input 9V support with :
- (1) SATA_PWR support 5V only
 - (2) LVDS backlight cannot support
 - (3) Total power consumption under 50W

GIGAIPC reserves the right to modify or change technical data without prior notice.

Dimension

Unit: mm

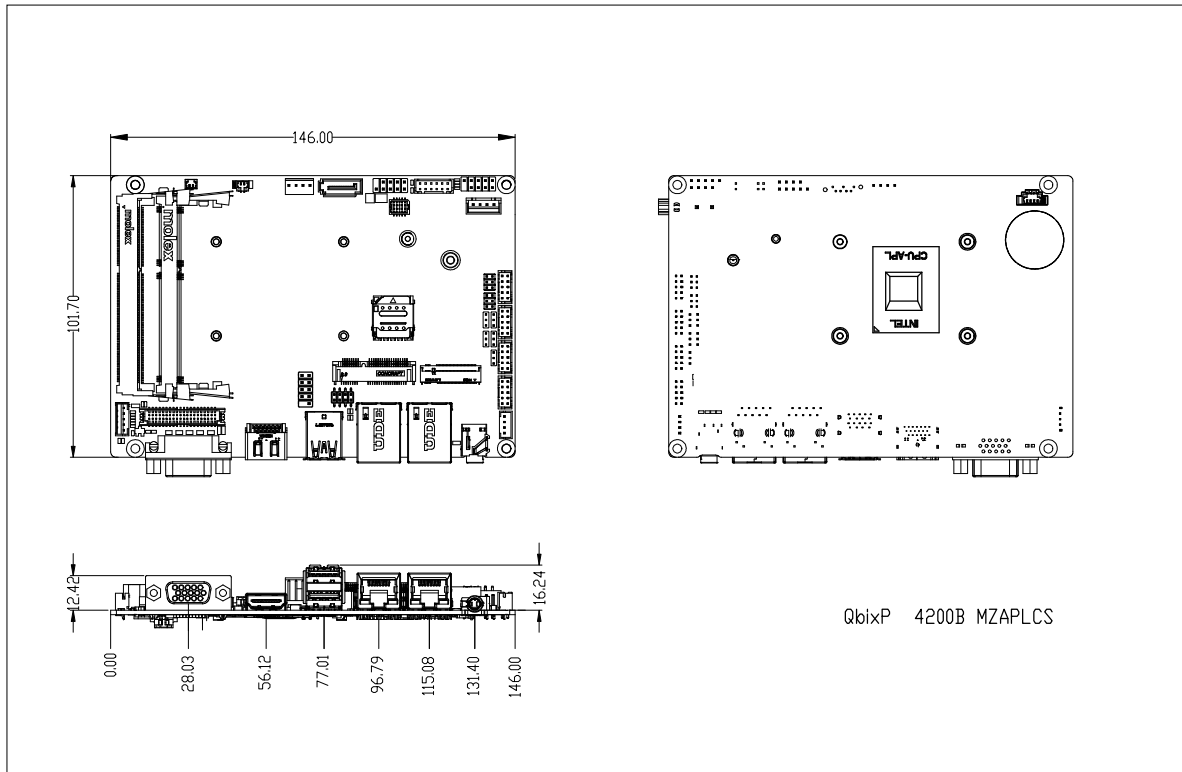

Packing Content

- Carton size: 384 x 251 x 211 (mm)
- Packing Capacity: 20pcs
- Single Box size: 168 x 112 x 34 (mm)
- Including:
 - SATA power Cable x 1 (P/N: 25CRI-200B02-K1R)

Order Information

- Motherboard : 9MZAPLDSMR-SI (Box Packing)

Optional Kit

- Fanless Heatsink P/N: 25ST1-153109-A7R
- Heat spreader P/N: 25ST5-CBAB00-A8R
- TPM 2.0 module P/N: 9CTM000NR-00
- TPM Cable P/N: 25CRZ-100600-S9R

2023/03/03

GIGAIPC reserves the right to modify or change technical data without prior notice.