


Apacer


The Most **Reliable**
Storage For Industries

PV19E-25M U.3

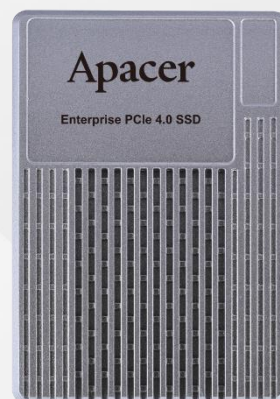

Overview

PV19E-25M U.3 Solid State Disk (SSD) delivers all the advantages of flash disk technology with PCIe Gen4 x4 interface, including being fully compliant with standard U.2/U.3 form factor, providing low power consumption compared to traditional hard drive and hot-swapping when removing/replacing/upgrading flash disks. PV19E-25M delivers outstanding performance up to 7,000 MB/s (for sequential read) and 6,800 MB/s (for sequential write) based on eTLC NAND flash with the DDR4. Moreover, the power consumption of U.2/ U.3 (15mm) SSD is much lower than traditional hard drives, making it the best embedded solution for new platforms.

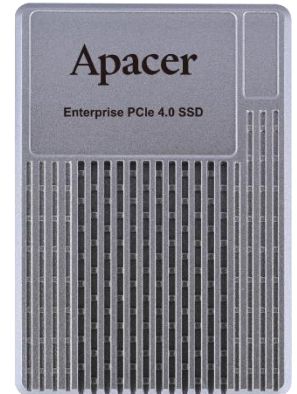


Feature

- Enterprise SSD PV19E-25M
- Core Power
- QoS 99.9%
- Warranty 5 years
- DWPD>1
- Low-Density Parity-Check (LDPC) Code
- Global Wear Leveling
- Flash bad-block management
- Flash Translation Layer: Page Mapping
- S.M.A.R.T.
- TRIM
- Over-provisioning
- SMART Read Refresh™
- NVMe Secure Erase
- Namespace

Specifications

Model	PV19E-25M
Interface	PCIe Gen4 x4
Connector	U.3 (SFF-TA-1001)
Form Factor	U.3 15mm
NAND Flash Type	3D eTLC
Capacity	1920GB~15360GB
External DRAM	Yes
Sequential Read Performance (MB/sec)	Up to 7000
Sequential Write Performance (MB/sec)	Up to 6800
Sustained Read Performance (MB/sec)	Up to 6600
Sustained Write Performance (MB/sec)	Up to 3800
ECC Engine	Low-Density Parity-Check (LDPC) Code
IOPs (4K Random Write)	190K
Random R/W latency	0/15 μ s
Random R/W QoS	0.10/0.02 ms
Standard Operating Temperature (°C)	0 ~ + 70
Storage Temperature (°C)	-55 ~ + 100
Thermal sensor	Yes
Shock	Operation: Acceleration, 50(G)/11(ms)/half sine (compliant with MIL-STD-202G) Non-operation: Acceleration, 1,500(G)/0.5(ms)/half sine (compliant with MIL-STD-883K)
Vibration	Operation: 7.69 Grms, 20~2000 Hz/random (compliant with MIL-STD-810G) Non-operation: 4.02 Grms, 15~2000 Hz/random (compliant with MIL-STD-810G)
Operating Voltage	12V \pm 10%
WHQL certified	Win Server 2019
Power Consumption	Active mode: 20.8 W/Idle mode: 7.43 W
Inrush current	1.5A
Dimension (L x W x H)	100.10 x 69.85 x 14.65, unit: mm
MTBF (hours)	>3,000,000

Mechanical Specification

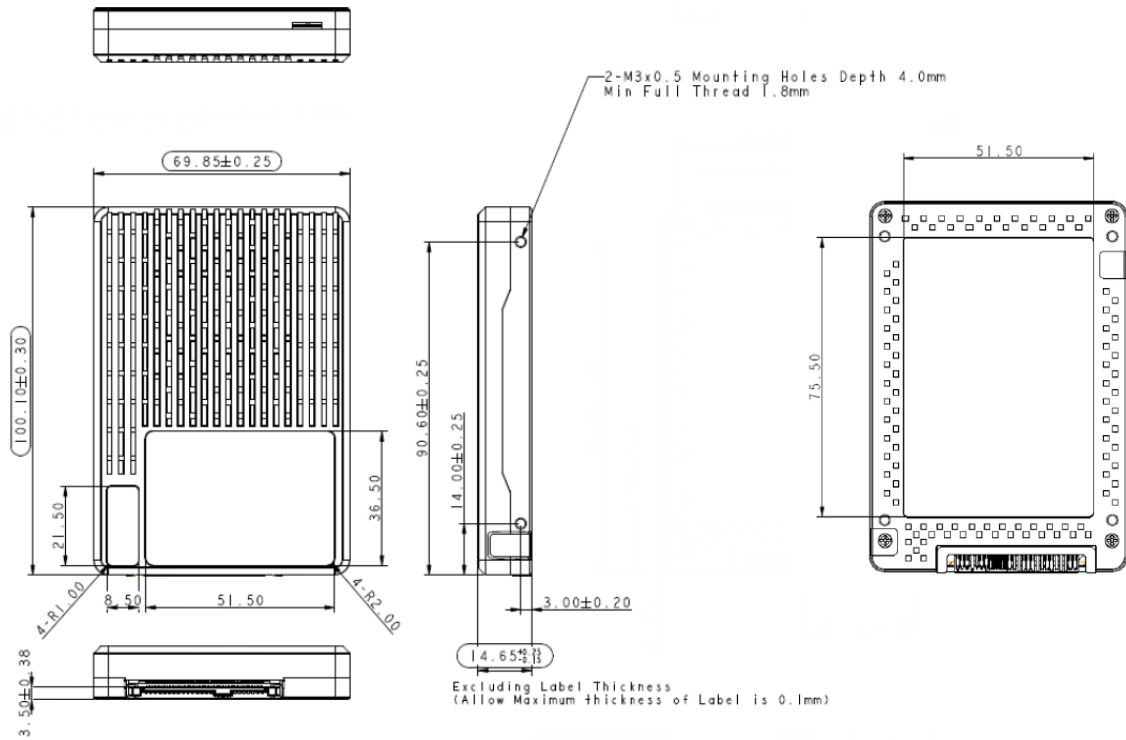

Unit: mm

For more information,
contact your Apacer representative

Global Presence

Taiwan (Headquarters)
Apacer Technology Inc.
Tel: +886-2-2267-8000
Fax: +886-2-2267-2261

Europe
Apacer Technology B.V.
Tel: +31-40-267-0000
Fax: +31-40-290-0686

U.S.A.
Apacer Memory America, Inc.
Tel: +1-408-518-8699
Fax: 1-510-249-9551

China
Apacer Electronic(Shanghai)
Co., Ltd.
Tel: +86-21-6228-9939

Japan
Apacer Technology Corp.
Tel: +81-3-5419-2668
Fax: +81-3-5419-0018

India
Apacer Technologies Pvt. Ltd.
Tel: +91-80-41529061~3
Fax: +91-80-41700215