

EGPL-T101

M.2 2280 to single

10GbE LAN Module

Customer:

Customer

Part Number:

Innodisk

Part Number:

Innodisk

Model Name:

Date:

Innodisk	Customer
Approver	Approver

Table of Contents

- TABLE OF CONTENTS I**
- REVISION HISTORYII**
- LIST OF TABLES 1**
- LIST OF FIGURES 2**
- 1. PRODUCT INTRODUCTION 3**
 - 1.1. OVERVIEW 3
 - 1.2. FEATURES 3
- 2. PRODUCT SPECIFICATIONS 5**
 - 2.1. DEVICE PARAMETERS 5
 - 2.2. ELECTRICAL SPECIFICATIONS 5
 - 2.2.1.POWER REQUIREMENT 5
 - 2.2.2.POWER CONSUMPTION 5
 - 2.3. ENVIRONMENTAL SPECIFICATIONS 5
 - 2.3.1.TEMPERATURE RANGES 5
 - 2.3.2.HUMIDITY 6
 - 2.3.3.SHOCK AND VIBRATION 6
 - 2.3.4.MEAN TIME BETWEEN FAILURE (MTBF) 6
 - 2.4. CE AND FCC COMPATIBILITY 6
 - 2.5. ROHS COMPLIANCE 6
 - 2.6. HARDWARE..... 7
 - 2.6.1.LAYOUT 7
 - 2.6.2.PIN DEFINE 8
 - 2.6.3.I/O CONNECTOR MECHANICAL DRAWING & PIN DEFINES 9
 - 2.6.4.EGPL-T101 MECHANICAL DRAWING13
 - 2.6.5.CABLE MECHANICAL DRAWING.....14
 - 2.6.6.PACKING LIST14
 - 2.7. SOFTWARE SUPPORT.....14
- 3. INSTALLATION GUIDE 15**
- 4. APPEDIX 16**
- CONTACT US..... 21**

REVISION HISTORY

Revision	Description	Date
1.0	First Released	Jan, 2022
1.1	Modify M.2 config pin define	Feb, 2022

List of Tables

TABLE 1: DEVICE PARAMETERS 5

TABLE 2: POWER REQUIREMENT..... 5

TABLE 3: POWER CONSUMPTION 5

TABLE 4: TEMPERATURE RANGES..... 5

TABLE 5: SHOCK AND VIBRATION 6

TABLE 6: MEAN TIME BETWEEN FAILURE (MTBF)..... 6

TABLE 7: M.2 2280 PCB LAYOUT LEGEND..... 7

TABLE 8: DAUGHTER BOARD PCB LAYOUT LEGEND 7

TABLE 9: M.2 B-M KEY PIN DEFINE 8

TABLE 10: WIRE TO BOARD SMD 20P CONNECTOR PIN DEFINE 10

TABLE 11: RJ45 LAN LED TABLE..... 12

List of Figures

FIGURE 1: BLOCK DIAGRAM 3

FIGURE 2: M.2 2280 BOARD PICTURE..... 4

FIGURE 3: MOUNTING HOLE DAUGHTER BOARD PICTURE (EGPL-T101-C1) 4

FIGURE 4: WIRE TO BOARD SMD 20P CONNECTOR DRAWING 9

FIGURE 5: RJ45 CONNECTOR DRAWING 11

FIGURE 6: EGPL-T101 M.2 BOARD DRAWING 13

FIGURE 7: EGPL-T101 RJ45 DAUGHTER BOARD DRAWING 13

FIGURE 8: BOARD TO BOARD LAN CABLE DRAWING..... 14

1. Product Introduction

1.1. Overview

Innodisk EGPL-T101 is designed with M.2 2280 form factor with B/M key, EGPL-T101 supports PCIe Gen 3.0 with dual lane to single 10 GbE LAN, optimized for higher performance and lower power, which brings you a flexible expansion solution for embedded systems.

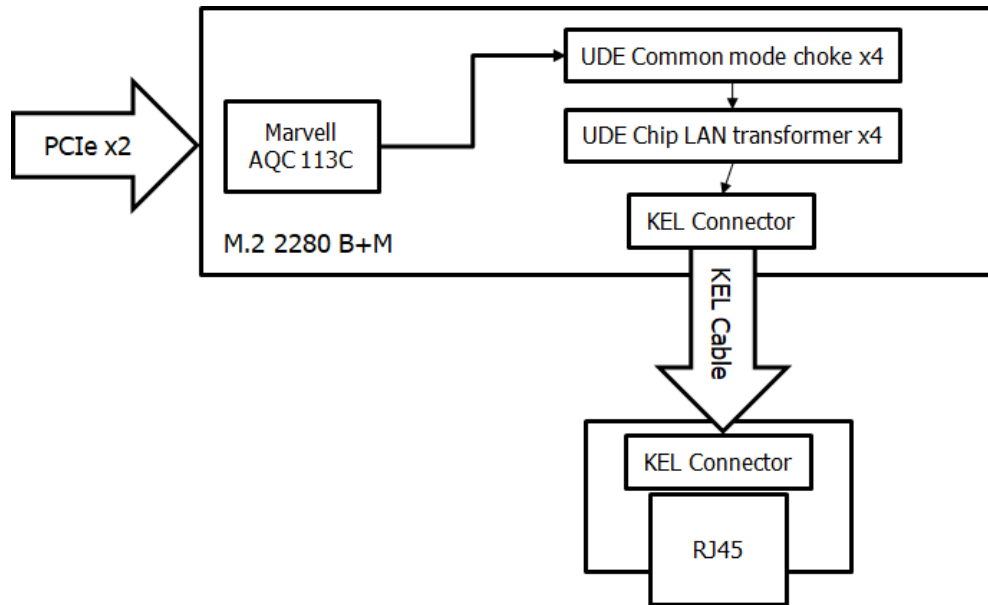


Figure 1: Block Diagram

1.2. Features

- Marvell AQtion Ethernet Controller
- Support 10G/5G/2.5G/1000M/100M/10M LAN speed
- Lowest power and smallest 10GbE expansion solution
- Support x2/x1 PCI Express with Gen3/Gen2
- Tiny daughter board with high speed shielding cable
- Complies with EN61000-4-2 (ESD) Air-15kV, Contact-8kV
- Operation temperature 0°C to +55°C support
- 30μ" golden finger, 3-year warranty
- Industrial design, manufactured in Innodisk Taiwan



Figure 2: M.2 2280 Board Picture

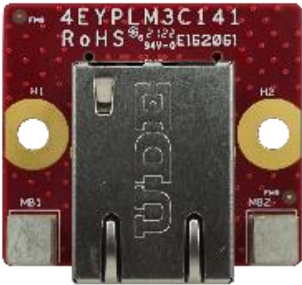


Figure 3: Mounting Hole Daughter Board Picture (EGPL-T101-C1)

2. Product Specifications

2.1. Device Parameters

Table 1: Device Parameters

Form Factor	M.2 2280 B-M
Input I/F	PCI Express 3.0 x 2
Output I/F	10GbE LAN x 1
Output Connector	RJ45 x 1
Dimension (WxLxH)	M.2 Board: 22 x 80 x 14.5 mm Daughter Board: 31.75 x 28 x 17.7

2.2. Electrical Specifications

2.2.1. Power Requirement

Table 2: Power Requirement

Item	Connector	Rating
Input voltage	M.2 Golden Finger	+3.3 DC +-5%

2.2.2. Power Consumption

Table 3: Power Consumption

RMS (mA)	MAX(mA)	Voltage (V)
724.8	762	3.3

2.3. Environmental Specifications

2.3.1. Temperature Ranges

Table 4: Temperature Ranges

Temperature	Range
Operating	0°C to +55°C
Storage	-55°C to +95°

2.3.2. Humidity

Relative Humidity: 10-95%, non-condensing

2.3.3. Shock and Vibration

Table 5: Shock and Vibration

Reliability	Test Conditions	Reference Standards
Vibration	7 Hz to 2K Hz, 20G, 3 axes	IEC 68-2-6
Mechanical Shock	Duration: 0.5ms, 1500 G, 3 axes	IEC 68-2-27

2.3.4. Mean Time between Failure (MTBF)

Reliability prediction methodology provides the basis for reliability evaluation and analysis. The purpose of the prediction is to predict the life time of the product in units of failure rate and MTBF.

Table 6: Mean Time between Failure (MTBF)

Product	Condition	MTBF (Hours)
EGPL-T101	The analysis is at 25°C ambient temperature by Telcordia SR-332, Issues 4, Method I, Case 3 under Ground Benign, Controlled environment, 50% operation stress	11,259,017

2.4. CE and FCC Compatibility

EGPL-T101 conforms to CE and FCC requirements.

2.5. RoHS Compliance

EGPL-T101 is fully compliant with RoHS directive.

2.6. Hardware

2.6.1. Layout

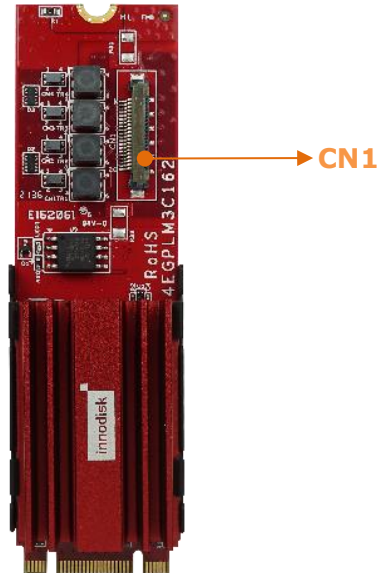


Table 7: M.2 2280 PCB Layout Legend

Label	Connector Type	Function
CN1	WAFER SMD/20P/90D P:0.5mm H2.75mm	GbE LAN Signal LED Signal

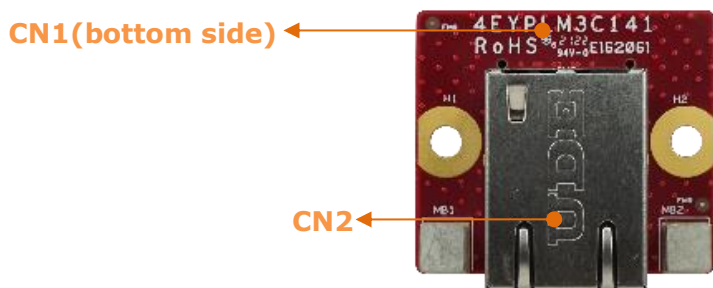


Table 8: Daughter Board PCB Layout Legend

Label	Connector Type	Function
CN1	WAFER SMD/20P/90D P:0.5mm H2.75mm	GbE LAN Signal LED Signal

CN2	10GbE RJ45 DIP/1X1/90D 8P8C w/LED:GO-GO Tab/D	GbE LAN Port LED Indicator
------------	---	-------------------------------

2.6.2. Pin Define

Table 9: M.2 B-M Key Pin Define

Signal Name	Pin #	Pin #	Signal Name
		75	CONFIG_2 (GND)
3.3V	74	73	GND
3.3V	72	71	GND
3.3V	70	69	CONFIG_1 (NC)
NC	68	67	NC
Module Key M			
NC	58		
NC	56	57	GND
PEWAKE#	54	55	REFCLKp
CLKREQ#	52	53	REFCLKn
PERST#	50	51	GND
NC	48	49	PERp0
NC	46	47	PERn0
NC	44	45	GND
SMB_DATA	42	43	PETp0
SMB_CLK	40	41	PETn0
NC	38	39	GND
NC	36	37	PERp1
NC	34	35	PERn1
NC	32	33	GND
NC	30	31	PETp1
NC	28	29	PETn1
NC	26	27	GND
NC	24	25	NC
NC	22	23	NC

NC	20	21	CONFIG_0 (GND)
Module Key B			
NC	10	11	NC
NC	8	9	NC
NC	6	7	NC
3.3V	4	5	NC
3.3V	2	3	GND
		1	CONFIG_3 (GND)

2.6.3. I/O Connector Mechanical Drawing & Pin Defines

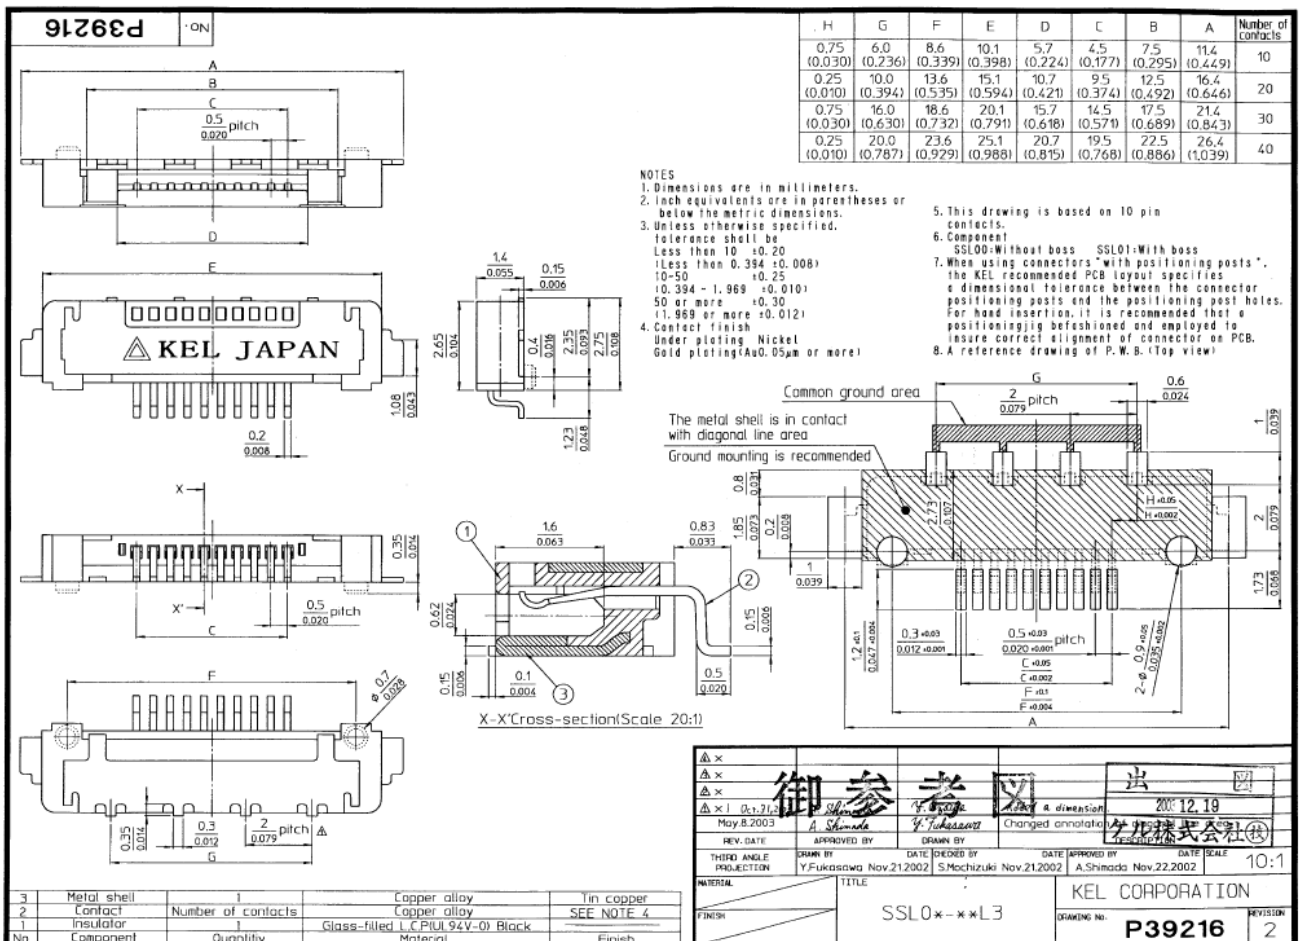


Figure 4: Wire to Board SMD 20P Connector Drawing

Table 10: Wire to Board SMD 20P Connector Pin Define

Pin #	Signal Name
1	LED_A2
2	LED_A1
3	LED_A0
4	3.3V
5	GND
6	P0_D_N_CN
7	P0_D_P_CN
8	GND
9	GND
10	P0_C_N_CN
11	P0_C_P_CN
12	GND
13	GND
14	P0_B_N_CN
15	P0_B_P_CN
16	GND
17	GND
18	P0_A_N_CN
19	P0_A_P_CN
20	GND


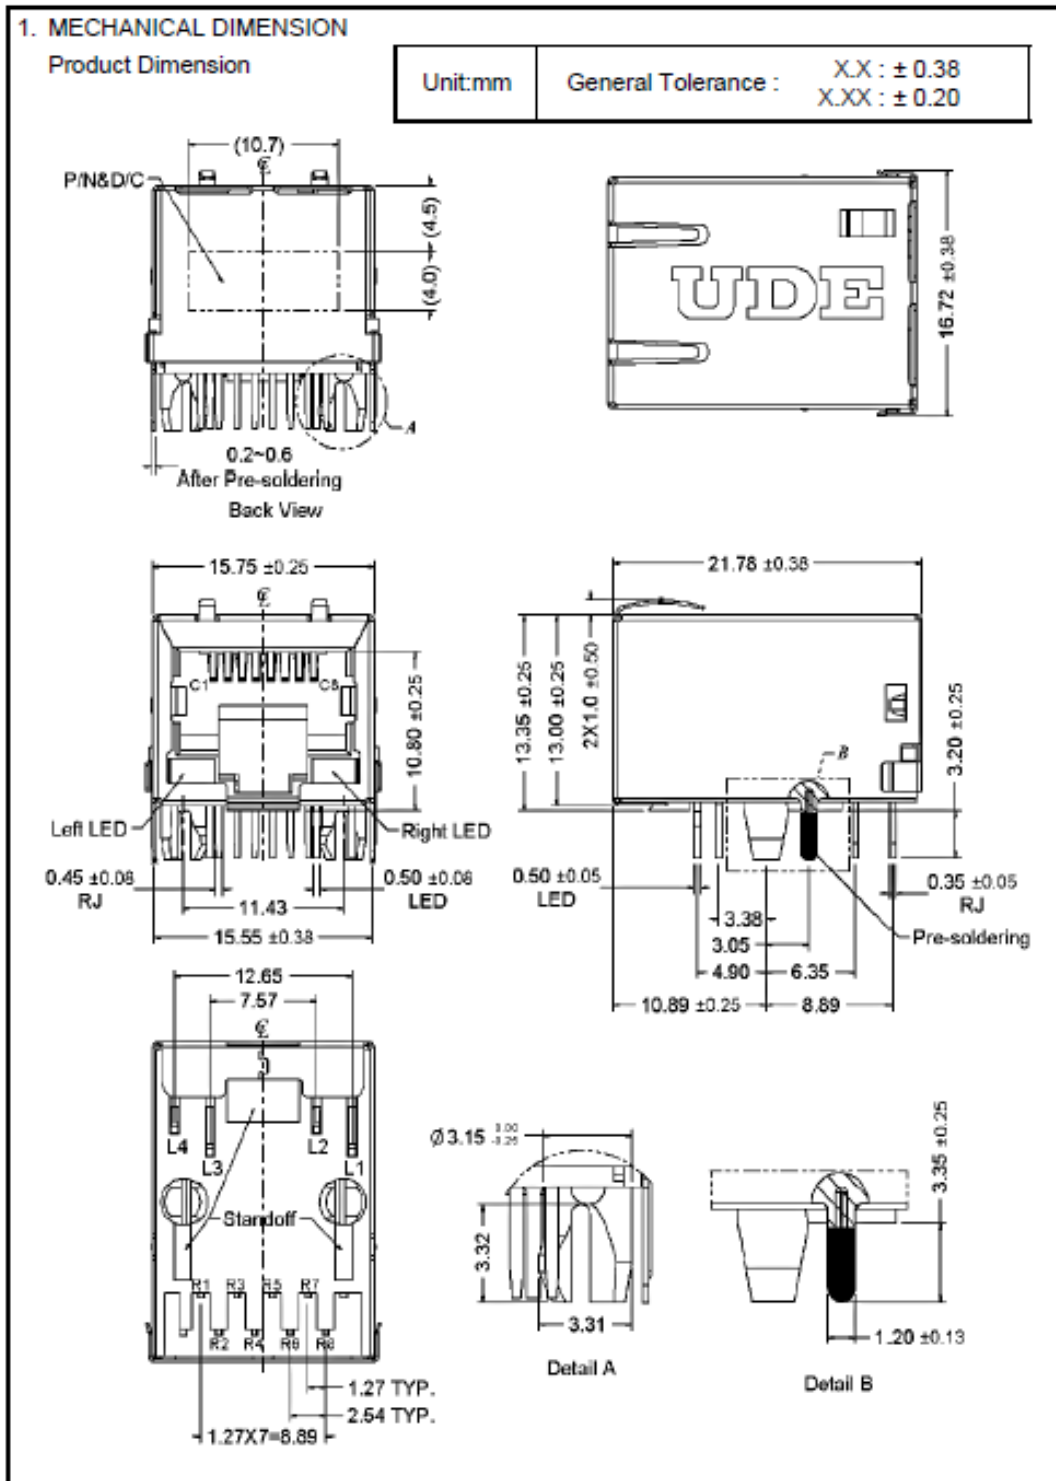


Figure 5: RJ45 Connector Drawing

Table 11: RJ45 LAN LED Table

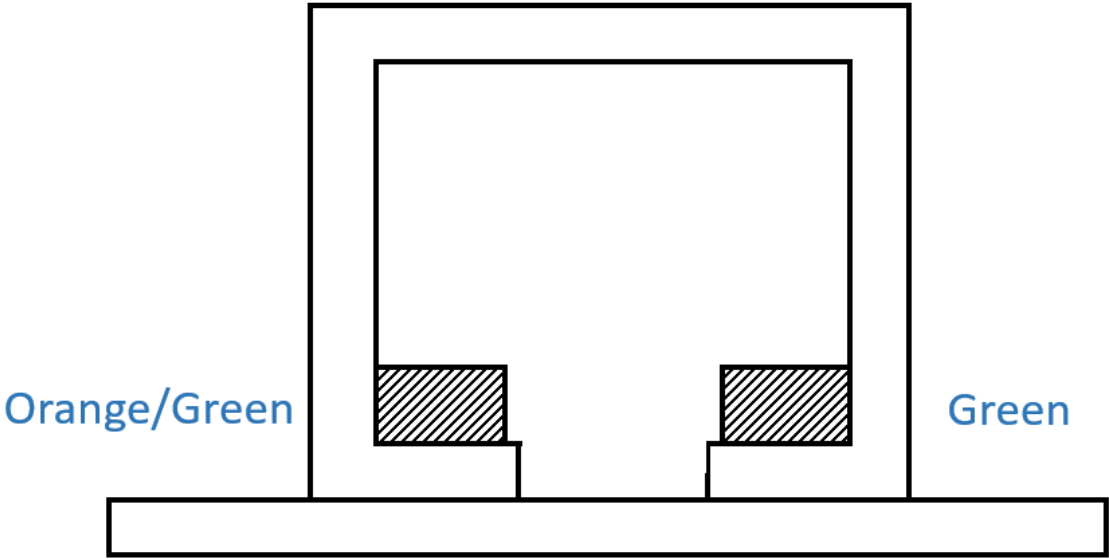

Speed	Orange/Green (Status)	Green (Active/Link)
Others	Green	Flash
10G	Orange	Flash

2.6.4. EGPL-T101 Mechanical Drawing

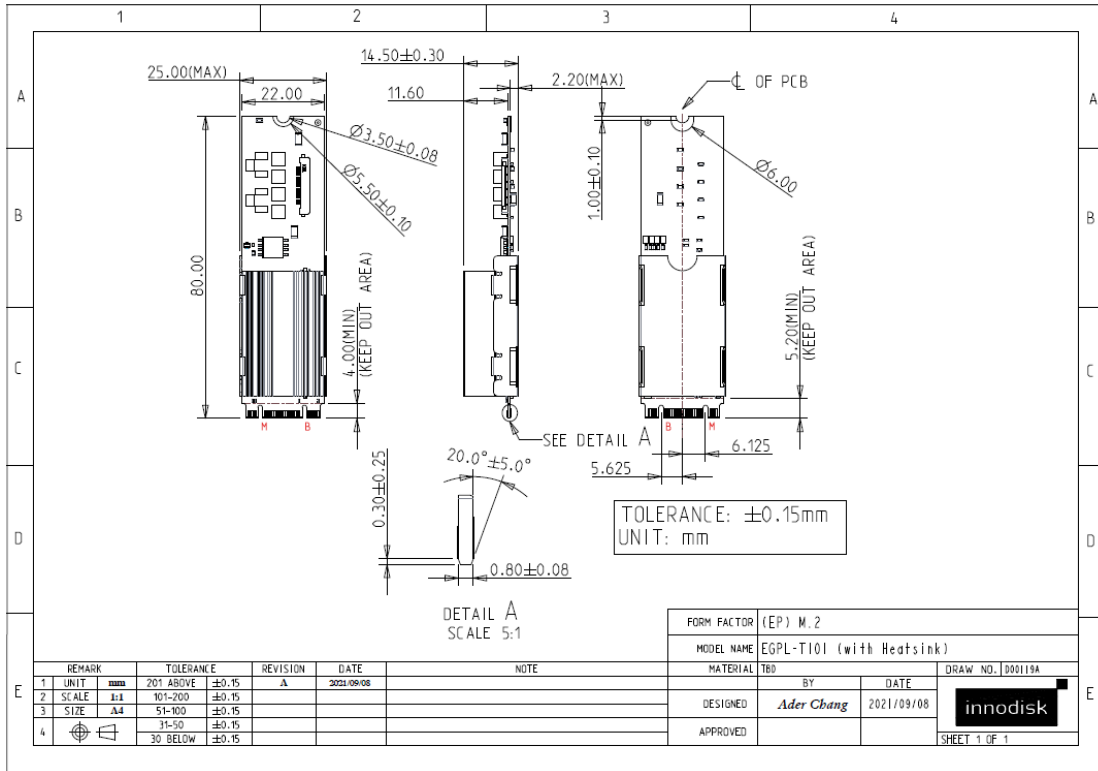


Figure 6: EGPL-T101 M.2 Board Drawing

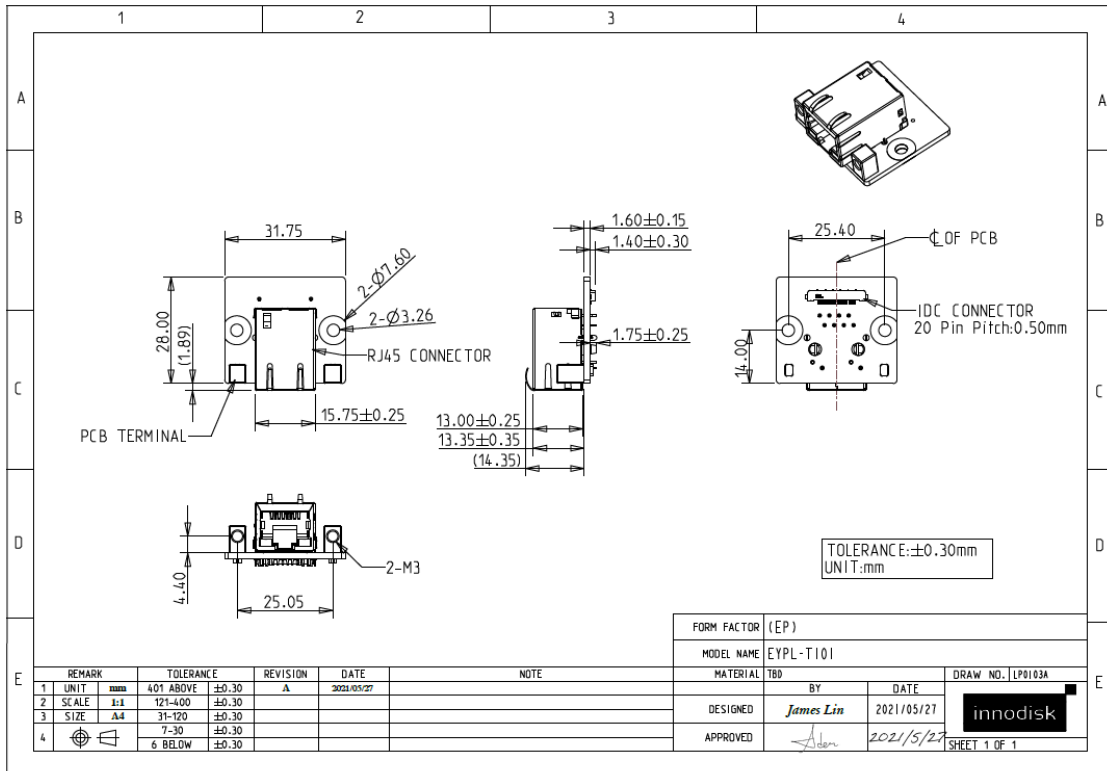


Figure 7: EGPL-T101 RJ45 Daughter Board Drawing

2.6.5. Cable Mechanical Drawing

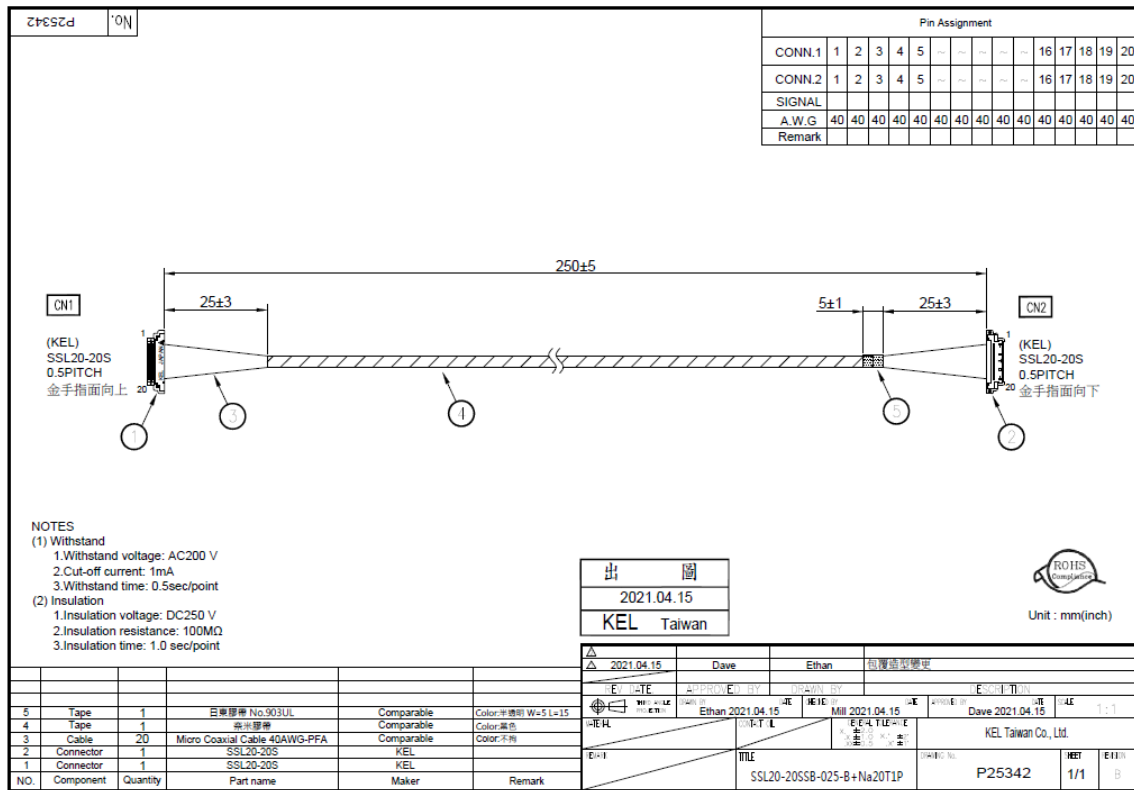


Figure 8: Board to Board LAN Cable Drawing

2.6.6. Packing List

- EGPL-T101 M.2 Board x 1
- EGPL-T101 Daughter Board x 1
- Board to Board LAN Cable x 1

2.7. Software Support

- Microsoft Windows System 10 and later releases
- Linux Kernel 3.10 and later releases

3. Installation Guide

Please download driver from Myinnodisk or Innodisk official web site.

<https://myinnodisk.innodisk.com/myinnodisk/Login.aspx>

<https://www.innodisk.com/en/products/embedded-peripheral/communication/egpl-t101>

4. Appedix

innodisk

宜鼎國際股份有限公司 Innodisk Corporation REACH Declaration

Tel: (02) 7703-3000 Fax: (02) 7703-3555 Internet: <http://www.innodisk.com/>

We hereby confirm that the product(s) delivered to

Innodisk P/N	Description
All Innodisk EP Products	

- contain(s) no hazardous substances or constituents exceeding the defined threshold 0.1 % by weight in homogenous material if not otherwise specified, as described in the candidate list table currently including 191 substances and shown on the ECHA website (<http://echa.europa.eu/de/candidate-list-table>).
- contain(s) one or more hazardous substances or constituents exceeding 0.1 % by weight in homogenous material if not otherwise specified in candidate list table. Where the threshold value is exceeded, the substances in question are to be declared in accompanying Appendix A & B.

Guarantor

Company name 公司名稱： Innodisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人： Randy Chien 簡川勝

Company Representative Title 公司代表人職稱： Chairman 董事長

Date 日期： 2018 / 07 / 27



RoHS 自我宣告書 (RoHS Declaration of Conformity)

Manufacturer Product: All Innodisk EP products

- 一、 宜鼎國際股份有限公司（以下稱本公司）特此保證售予貴公司之所有產品，皆符合歐盟 2011/65/EU 及(EU) 2015/863 關於 RoHS 之規範要求。

Innodisk Corporation declares that all products sold to the company, are complied with European Union RoHS Directive (2011/65/EU) and (EU) 2015/863 requirement.

- 二、 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。

Innodisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

Name of hazardous substance	Limited of RoHS ppm (mg/kg)
鉛 (Pb)	< 1000 ppm
汞 (Hg)	< 1000 ppm
鎘 (Cd)	< 100 ppm
六價鉻 (Cr 6+)	< 1000 ppm
多溴聯苯 (PBBs)	< 1000 ppm
多溴二苯醚 (PBDEs)	< 1000 ppm
鄰苯二甲酸二(2-乙基己基)酯 (DEHP)	< 1000 ppm
鄰苯二甲酸丁酯苯甲酯 (BBP)	< 1000 ppm
鄰苯二甲酸二丁酯 (DBP)	< 1000 ppm
鄰苯二甲酸二異丁酯 (DIBP)	< 1000 ppm


立 保 證 書 人 (Guarantor)




Company name 公司名稱：Innodisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人：Randy Chien 簡川勝

Company Representative Title 公司代表人職稱：Chairman 董事長

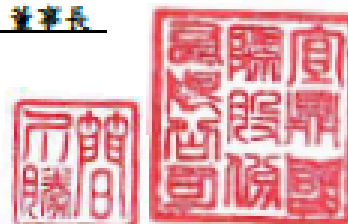Date 日期：2018 / 07 / 01



Innodisk		
<h1>CERTIFICATE OF CONFORMITY</h1>		BUREAU VERITAS
Product	: M.2 to Single 10GbE LAN Module	
Brand	: Innodisk	
Test Model	: E%PL-T101	
Series Model	: E%PL-T101	
	%: Form factor: (2: 2.5"SSD,3:DDR3 DIMM,D:Dongle,G:NGFF_M.2,H:mPCIe Half,L:PCIe Low profile,M:mPCIe,S:PCIe Standard,X:Multi,Z:Others)	
Applicant	: Innodisk Corporation	
Report No.	: FDBDBO-WTW-P21115055	
<p>We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, declare that the equipment above has been tested in our facility and found compliance with the requirement limits of applicable standards. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate under the standards herein specified.</p>		
<hr/>		
47 CFR FCC Part 15, Subpart B, Class B		
<hr/>		
ANSI C63.4:2014		
<hr/>		
		
Jim Hsiang / Associate Technical Manager		
2021/12/23		
<p>No. 47-2, 14th Ling, Chia Pau VII, Lin Kou Dist., New Taipei City, Taiwan Tel: 886-2-26052180 Fax: 886-2-26051924 http://www.bureauveritas-adt.com E-Mail: service.adt@tw.bureauveritas.com</p>		
		

Innodisk

CERTIFICATE OF CONFORMITY



Product : M.2 to Single 10GbE LAN Module

Brand : Innodisk

Test Model : E%PL-T101

Series Model: : E%PL-T101
 %: Form factor: (2: 2.5"SSD,3:DDR3
 DIMM,D:Dongle,G:NGFF_M.2,H:mPCIe Half,L:PCIe Low
 profile,M:mPCIe,S:PCIe Standard,X:Multi,Z:Others)

Applicant : Innodisk Corporation

Report No. : CEBDBO-WTW-P21115055

CE

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, declare that the equipment above has been tested in our facility and found compliance with the requirement limits of applicable standards, in accordance with the Directive 2014/30/EU. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate under the standards herein specified.

EN 55032:2015 +A11:2020, Class B
 EN 61000-3-2:2014 (Not applicable)
 EN 61000-3-3:2013 (Not applicable)
 EN 55035:2017 +A11:2020
 EN 61000-4-2:2009 / IEC 61000-4-2:2008 ED. 2.0
 EN 61000-4-3:2006 +A1:2008 +A2:2010 / IEC 61000-4-3:2010 ED. 3.2
 EN 61000-4-4:2012 / IEC 61000-4-4:2012 ED. 3.0
 EN 61000-4-5:2014 +A1:2017 / IEC 61000-4-5:2017 ED. 3.1 (Not applicable)
 EN 61000-4-6:2014+AC:2015 / IEC 61000-4-6:2013 ED. 4.0
 EN 61000-4-8:2010 / IEC 61000-4-8:2009 ED. 2.0
 EN 61000-4-11:2004 +A1: 2017 / IEC 61000-4-11:2017 ED. 2.1 (Not applicable)

NOTE: The above EN/IEC basic standards are applied with latest version if customer has no special requirement.



 Jim Hsiang / Associate Technical Manager
 2021/12/23




No. 47-2, 14th Ling, Chia Pau VII, Lin Kou Dist., New Taipei City, Taiwan
 Tel: 886-2-26052180 Fax: 886-2-26051924
<http://www.bureauveritas-adt.com> E-Mail: service.adt@tw.bureauveritas.com

Innodisk

CERTIFICATE OF CONFORMITY


**BUREAU
VERITAS**




Product : M.2 to Single 10GbE LAN Module
Brand : Innodisk
Test Model : E%PL-T101
Series Model: : E%PL-T101
 %: Form factor: (2: 2.5"SSD,3:DDR3
 DIMM,D:Dongle,G:NGFF_M.2,H:mPCIe Half,L:PCIe Low
 profile,M:mPCIe,S:PCIe Standard,X:Multi,Z:Others)


Applicant : Innodisk Corporation
Report No. : CEBDBO-WTW-P21115055

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, declare that the equipment above has been tested in our facility and found compliance with the requirement limits of applicable standards, in accordance with the Electromagnetic Compatibility Regulations 2016 (S.I. 2016/1091). The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate under the standards herein specified.

EN 55032:2015 +A11:2020, Class B
 EN 61000-3-2:2014 (Not applicable)
 EN 61000-3-3:2013 (Not applicable)
 EN 55035:2017 +A11:2020
 EN 61000-4-2:2009 / IEC 61000-4-2:2008 ED. 2.0
 EN 61000-4-3:2006 +A1:2008 +A2:2010 / IEC 61000-4-3:2010 ED. 3.2
 EN 61000-4-4:2012 / IEC 61000-4-4:2012 ED. 3.0
 EN 61000-4-5:2014 +A1:2017 / IEC 61000-4-5:2017 ED. 3.1 (Not applicable)
 EN 61000-4-6:2014+AC:2015 / IEC 61000-4-6:2013 ED. 4.0
 EN 61000-4-8:2010 / IEC 61000-4-8:2009 ED. 2.0
 EN 61000-4-11:2004 +A1: 2017 / IEC 61000-4-11:2017 ED. 2.1 (Not applicable)

NOTE: The above EN/IEC basic standards are applied with latest version if customer has no special requirement.


 Jim Hsiang / Associate Technical Manager
 2021/12/23



No. 47-2, 14th Ling, Chia Pau VII, Lin Kou Dist., New Taipei City, Taiwan
 Tel: 886-2-26052180 Fax: 886-2-26051924
<http://www.bureauveritas-adt.com> E-Mail: service.adt@tw.bureauveritas.com

Contact us

Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Tel: +886-2-77033000

Email: sales@innodisk.com

Branch Offices:

USA

usasales@innodisk.com

+1-510-770-9421

Europe

eusales@innodisk.com

+31-40-3045-400

Japan

jpsales@innodisk.com

+81-3-6667-0161

China

sales_cn@innodisk.com

+86-755-2167-3689

www.innodisk.com

© 2022 Innodisk Corporation.

All right reserved. Specifications are subject to change without prior notice.

February 8, 2022