

R15L100-67C3-P(HB)

15" G-WIN IP67 Series P-CAP Display



KEY FEATURES

- High Quality 15" Panel, 1024 x 768 resolution, 1000 nits
- P-cap multi touch screen Optical Bonding with Panel to increase the clarity and transparency
- Optional True Flat 5 Wire Resistive Touch Optical Bonding with Panel
- Optional Anti-Reflective Protection Glass Optical Bonding with Panel
- Dust/ Water proof design with VESA mount Full IP67 Monitor
- Aluminum Die-Casting Housing with Anti-Corrosion Treatments
- Build in ambient Light sensor
- -10 to 55°C wide operating temperature
- Wide Range 9 to 36V DC Input with isolation. Optional for Ignition On/Off delay



SPECIFICATIONS

| Display | | | |
|----------------------------|---|------------------------------|--|
| Resolution | 1024x768 | Size | 15.0 inches |
| Contrast Ratio | 2000:1 | Panel Brightness | 1000.0 nits |
| Display Color | 16.2M Colors | View Angles | 88,88,88,88 |
| Active Area | 304.1x228.1 mm | Touch / Glass | Projected Capacitive Multi Touch Screen Bonding With Panel True Flat Resistive Touch Screen Bonding With Panel (Optional) True Flat Protection Glass Bonding With Panel (Optional) |
| Mechanical | | | |
| Dimension | 379.4 x 278.4 x 58 mm | Weight | 3.8 kg |
| Mounting | VESA Mount | Enclosure | Aluminum Housing Pre finish: Surtec 650, Type II, Class 3 Coating: Polyester powder coating |
| Cooling System | Fanless design | | |
| Environment | | | |
| Operating Humidity | 10% to 90% RH, Non-Condensing | Operating Temperature | -10°C to 55°C -40°C to 70°C (with intelligent heater) |
| Storage Temperature | -30°C to 70°C | Shock | MIL-STD-810G Method 516.6 Procedure I |
| Vibration | MIL-STD-810G Method 514.6 Procedure I | IP rating | IP67 |
| Certification | | | |
| Certification | CE, FCC | | |
| IO Ports | | | |
| Power Input | 1 x M12 waterproof connector for 9~36V DC | USB Port | 1x M12 type connector for Touchscreen via USB signal |
| Serial Port | 1 x M12 type connector for Touchscreen via RS232 signal (Optional) 1 x M12 type connector for RS232 Remote | Video | 1x M12 type connector for VGA input 1x Waterproof connector for HDMI input |

Control (Optional)

Indicator 1 x LED Indicator for power
1 x LED Indicator for lock/unlock status

Control

Button 1 x "Power" key to power on the device.
1 x "+" key to increase screen brightness.
1 x "-" key to decrease screen brightness.
1 x "Menu" key can Automatically or manually adjusts brightness of the display screen
1 x Day / Night Mode button
1 x LED indicator brightness adjustment button
1 x Ambient Light sensor

Accessory


Accessory External open wire Power cable with waterproof connector
External USB cable with waterproof connector for Touch
External VGA cable with waterproof connector
External HDMI cable with waterproof connector
Waterproof caps
VESA screws

Optional Accessory 100~240V AC to DC 50W Adapter with power cord (Optional)
External RS232 cable with waterproof connector for Remote Control (Optional)

Ordering Information

Option R15L100-67C3-P(HB) for Resistive Touch (Optional)
R15L100-67C3-P(HB) for Anti Reflective Protection Glass (Optional)

DIMENSIONS UNIT:MM

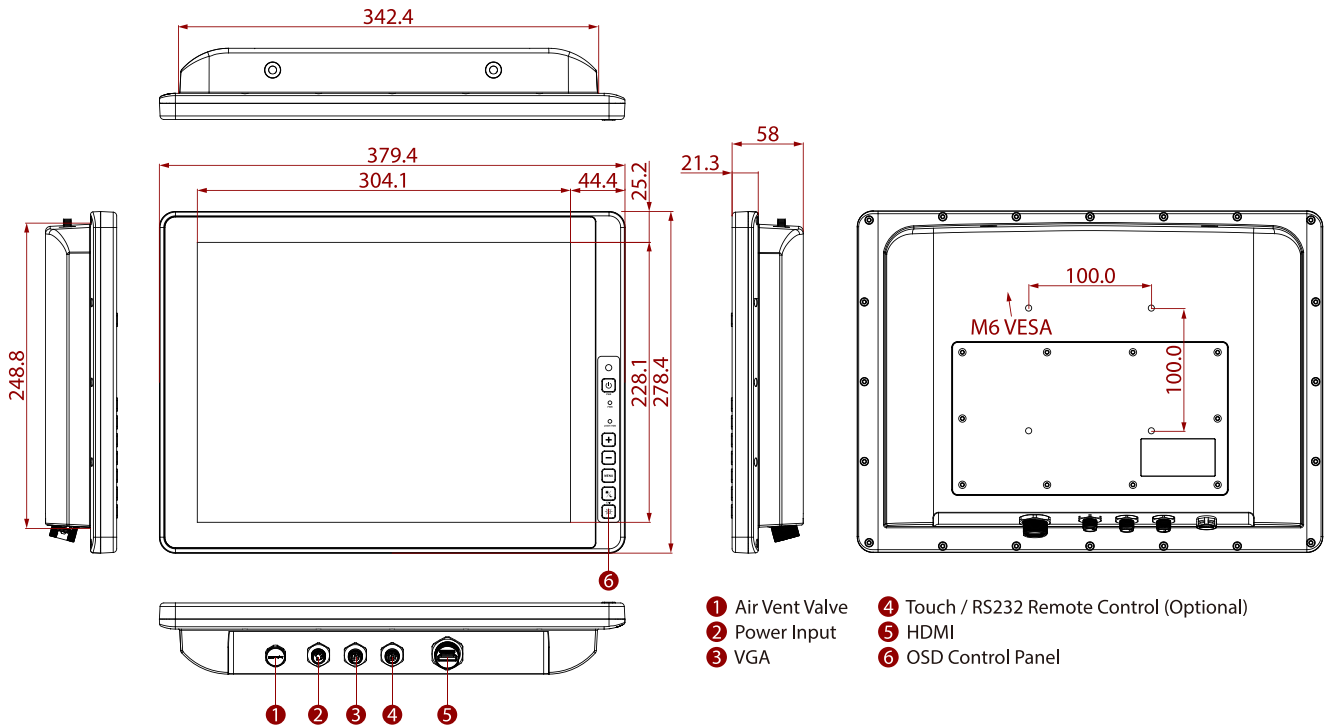

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.