



MODEL:
TANK-610-BW

**Fanless Embedded System with Intel® Celeron® N3160 processor,
VGA, HDMI, Two Gigabit Ethernet, Four USB 3.0,
RS-232/422/485, RoHS Compliant**

User Manual

Revision

Date	Version	Changes
May 25, 2021	1.03	Updated Section 2.2: Packing List
November 27, 2017	1.02	Add Chapter 4: System Motherboard
April 10, 2017	1.01	Add Appendix E: Watchdog Timer
June 6, 2016	1.00	Initial release

Copyright

COPYRIGHT NOTICE

The information in this document is subject to change without prior notice in order to improve reliability, design and function and does not represent a commitment on the part of the manufacturer.

In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

TRADEMARKS

All registered trademarks and product names mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective owners.

Manual Conventions



WARNING

Warnings appear where overlooked details may cause damage to the equipment or result in personal injury. Warnings should be taken seriously.



CAUTION

Cautionary messages should be heeded to help reduce the chance of losing data or damaging the product.



NOTE

These messages inform the reader of essential but non-critical information. These messages should be read carefully as any directions or instructions contained therein can help avoid making mistakes.



HOT SURFACE

This symbol indicates a hot surface that should not be touched without taking care.

Table of Contents

1 INTRODUCTION.....	1
1.1 OVERVIEW.....	2
1.2 FEATURES.....	2
1.3 TECHNICAL SPECIFICATIONS	3
1.4 FRONT PANEL.....	5
1.5 REAR PANEL.....	6
1.6 DIMENSIONS.....	7
2 UNPACKING	8
2.1 UNPACKING.....	9
2.2 PACKING LIST.....	9
2.3 OPTIONAL ITEMS	10
3 INSTALLATION	11
3.1 ANTI-STATIC PRECAUTIONS	12
3.2 INSTALLATION PRECAUTIONS	12
3.3 HARD DISK DRIVE (HDD) INSTALLATION.....	13
3.4 WIRELESS LAN MODULE INSTALLATION (OPTIONAL).....	15
3.5 MOUNTING THE SYSTEM	18
3.5.1 <i>Mounting with Mounting Brackets</i>	18
3.5.2 <i>Mounting with VESA Mount Kit (Optional)</i>	19
3.6 AT/ATX MODE SELECTION	20
3.6.1 <i>AT Power Mode</i>	21
3.6.2 <i>ATX Power Mode</i>	21
3.7 RESET THE SYSTEM	22
3.8 POWERING ON/OFF THE SYSTEM	22
4 SYSTEM MOTHERBOARD	24
4.1 OVERVIEW.....	25
4.1.1 <i>Layout</i>	25
4.2 INTERNAL PERIPHERAL CONNECTORS	26

4.2.1 Battery Connector (BAT1)	26
4.2.2 BIOS Programming Connector (SPI1)	26
4.2.3 Digital I/O Connector (DIO1)	27
4.2.4 Debug Connector (DEBUGCN1)	27
4.2.5 FPC Connector (CNI)	27
4.2.6 EC Programming Connector (JSPI1)	28
4.2.7 Keyboard/Mouse Connector (KB_MS_CN1)	28
4.2.8 SATA 6Gb/s Drive Connectors (SATA1)	28
4.2.9 SATA Power Connector (SATA_PWR2)	28
4.2.10 USB 2.0 Connectors (USB1)	29
4.2.11 USB 2.0 Connectors (USB2)	29
4.3 EXTERNAL INTERFACE PANEL CONNECTORS	29
4.3.1 Audio Jack (JAUDIO1)	30
4.3.2 Ethernet and USB2.0 Connectors (USB_LAN1)	30
4.3.3 Ethernet and USB2.0 Connectors (USB_LAN2)	31
4.3.4 HDMI Connector (HDMI1)	32
4.3.5 Power Connector (DC_IN1)	32
4.3.6 Power Connector (DC_IN2)	32
4.3.7 RS-232 Serial Port Connector (COM1-2)	33
4.3.8 RS-232 Serial Port Connector (COM3-4)	33
4.3.9 RS-232 Serial Port Connector (COM7-8)	33
4.3.10 RS-232 Serial Port Connector (COM5-6)	34
4.3.11 VGA Connector (VGA1)	35
4.4 JUMPER SETTINGS	35
4.4.1 AT/ATX Mode Select Switch (AT_SEL1)	35
4.4.2 Clear CMOS Button (J_CMOS1)	36
4.4.3 M-SATA Auto-detect Jumper (MIMI_SW1)	36
4.4.4 System Reset Button (RST1)	36
5 BIOS	37
5.1 INTRODUCTION	38
5.1.1 Starting Setup	38
5.1.2 Using Setup	38
5.1.3 Getting Help	39
5.1.4 Unable to Reboot after Configuration Changes	39

TANK-610-BW Embedded System

5.1.5 BIOS Menu Bar.....	39
5.2 MAIN.....	40
5.3 ADVANCED.....	41
5.3.1 ACPI Settings.....	42
5.3.2 F81866 Super IO Configuration.....	43
5.3.2.1 Serial Port n Configuration.....	43
5.3.2.1.1 Serial Port 1 Configuration.....	44
5.3.2.1.2 Serial Port 2 Configuration.....	45
5.3.2.1.3 Serial Port 3 Configuration.....	46
5.3.2.1.4 Serial Port 4 Configuration.....	47
5.3.2.1.5 Serial Port 5 Configuration.....	48
5.3.2.1.6 Serial Port 6 Configuration.....	49
5.3.3 H/W Monitor.....	50
5.3.4 IT8528SEC Super IO Configuration.....	51
5.3.4.1 Serial Port n Configuration.....	52
5.3.4.1.1 Serial Port 7 Configuration.....	52
5.3.4.1.2 Serial Port 8 Configuration.....	53
5.3.5 RTC Wake Settings.....	54
5.3.6 Serial Port Console Redirection.....	56
5.3.6.1 Console Redirection Settings.....	57
5.3.7 iEi Feature.....	59
5.3.8 CPU Configuration.....	60
5.3.9 SATA Configuration.....	62
5.3.10 USB Configuration.....	63
5.4 CHIPSET.....	64
5.4.1 North Bridge Configuration.....	65
5.4.1.1 Intel IGD Configuration.....	65
5.4.2 South Bridge Configuration.....	67
5.5 SECURITY.....	68
5.6 BOOT.....	69
5.7 EXIT.....	71
A REGULATORY COMPLIANCE.....	73
B SAFETY PRECAUTIONS.....	78
B.1 SAFETY PRECAUTIONS.....	79

<i>B.1.1 General Safety Precautions</i>	79
<i>B.1.2 Anti-static Precautions</i>	80
<i>B.1.3 Product Disposal</i>	81
B.2 MAINTENANCE AND CLEANING PRECAUTIONS	81
<i>B.2.1 Maintenance and Cleaning</i>	82
<i>B.2.2 Cleaning Tools</i>	82
C BIOS OPTIONS	83
D WATCHDOG TIMER	86
E HAZARDOUS MATERIALS DISCLOSURE	89
<i>E.1 RoHS II DIRECTIVE (2015/863/EU)</i>	90
<i>E.2 CHINA RoHS</i>	91

List of Figures

Figure 1-1: TANK-610-BW	2
Figure 1-2: TANK-610-BW Front Panel	5
Figure 1-3: TANK-610-BW Rear Panel	6
Figure 1-4: Physical Dimensions (millimeters).....	7
Figure 3-1: Remove Retention Screws (Bottom Panel)	13
Figure 3-2: HDD Bracket Retention Screws	14
Figure 3-3: Inserting the HDD	14
Figure 3-4: Knockout Holes for Wireless Antenna.....	15
Figure 3-5: PCIe Mini Slot Location	15
Figure 3-6: Removing the Retention Screw	16
Figure 3-7: Inserting the WLAN Module	16
Figure 3-8: Securing WLAN Module and Connecting RF Cables	17
Figure 3-9: Securing SMA Connector and External Antenna Installation	17
Figure 3-10: Mounting Bracket Retention Screws	18
Figure 3-11: Wall-mounting Bracket	19
Figure 3-12: Mount the Embedded System.....	20
Figure 3-13: AT/ATX Switch Location.....	21
Figure 3-14: Reset Button Location.....	22
Figure 3-15: Power Button	23
Figure 4-1: System Motherboard (Front).....	25
Figure 4-2: System Motherboard (Rear).....	25

List of Tables

Table 1-1: Technical Specifications.....	4
Table 2-1: Package List.....	10
Table 2-2: Optional Items.....	10
Table 4-1: Peripheral Interface Connectors.....	26
Table 4-2: Battery Connector Pinouts (BAT1).....	26
Table 4-3: BIOS Programming Connector Pinouts (SPI1).....	26
Table 4-4: Digital I/O Connector Pinouts (DIO1).....	27
Table 4-5: Debug Connector Pinouts (DEBUGCN1).....	27
Table 4-6: FPC Connector Pinouts (CN1).....	27
Table 4-7: EC Programming Connector Pinouts (JSPI1).....	28
Table 4-8: Keyboard/Mouse Connector Pinouts (KB_MS_CN1).....	28
Table 4-9: SATA 6Gb/s Drive Connectors Pinouts (SATA1).....	28
Table 4-10: SATA Power Connector Pinouts (SATA_PWR2).....	28
Table 4-11: USB 2.0 Connectors Pinouts (USB1).....	29
Table 4-12: USB 2.0 Connectors Pinouts (USB2).....	29
Table 4-13: Rear Panel Connectors.....	30
Table 4-14: Audio Jack Pinouts (JAUDIO1).....	30
Table 4-15: Ethernet and USB2.0 Connectors Pinouts (USB_LAN1).....	31
Table 4-16: Ethernet and USB2.0 Connectors Pinouts (USB_LAN2).....	31
Table 4-17: HDMI Connector Pinouts (HDMI1).....	32
Table 4-18: Power Connector Pinouts (DC_IN1).....	32
Table 4-19: Power Connector Pinouts (DC_IN2).....	32
Table 4-20: RS-232 Serial Port Connector Pinouts (COM1-2).....	33
Table 4-21: RS-232 Serial Port Connector Pinouts (COM3-4).....	33
Table 4-22: RS-232 Serial Port Connector Pinouts (COM3-4).....	34
Table 4-23: RS-232 Serial Port Connector Pinouts (COM5-6).....	34
Table 4-24: VGA Connector Pinouts (VGA1).....	35
Table 4-25: Buttons, Jumper and Switch.....	35
Table 4-26: AT/ATX Mode Select Switch (AT_SEL1).....	35
Table 4-27: Clear CMOS Button (J_CMOS1).....	36

TANK-610-BW Embedded System

Table 4-28: M-SATA Auto-detect Jumper (MIMI_SW1)	36
Table 4-29: System Reset Button (RST1).....	36
Table 5-1: BIOS Navigation Keys	39

BIOS Menus

BIOS Menu 1: Main	40
BIOS Menu 2: Advanced	41
BIOS Menu 3: ACPI Configuration	42
BIOS Menu 4: F81866 Super IO Configuration	43
BIOS Menu 5: Serial Port n Configuration Menu	43
BIOS Menu 6: Hardware Health Configuration	50
BIOS Menu 7: Secondary Super IO Configuration	51
BIOS Menu 8: Serial Port n Configuration Menu	52
BIOS Menu 9: RTC Wake Settings	55
BIOS Menu 10: Serial Port Console Redirection	56
BIOS Menu 11: Console Redirection Settings	57
BIOS Menu 12: iEi Feature	59
BIOS Menu 13: CPU Configuration	60
BIOS Menu 14: IDE Configuration	62
BIOS Menu 15: USB Configuration	63
BIOS Menu 16: Chipset	64
BIOS Menu 17: Host Bridge	65
BIOS Menu 18: Graphics Configuration	65
BIOS Menu 19: South Bridge	67
BIOS Menu 20: Security	68
BIOS Menu 21: Boot	69
BIOS Menu 22: Exit	71

Chapter

1

Introduction

1.1 Overview



Figure 1-1: TANK-610-BW

The TANK-610-BW is a fanless embedded system for wide range temperature environments. It is powered by the Intel® Celeron® N3160 processor and supports two 204-pin DDR3L 1.35V SDRAM SO-DIMMs (system max 8GB). The TANK-610-BW supports dual independent display via one VGA port and one HDMI port. The TANK-610-BW has two GbE LAN ports, four USB 3.0 ports, six RS-232 connectors via DB-9 and two RS-232/422/485 connectors via DB-9.

1.2 Features

The TANK-610-BW features are listed below:

- Intel® Celeron® N3160 processor
- Multiple COM ports: six RS-232 and two RS-232/422/485
- VGA and HDMI dual independent display
- mSATA and one 2.5" SATA storage device
- Wide range temperature

TANK-610-BW Embedded System

1.3 Technical Specifications

The TANK-610-BW technical specifications are listed in **Table 1-1**.

Specifications	
Chassis	
Color	Black C + Silver
Dimension (WxDxH)	184 x 200.6 x 58.2 mm
System Fan	Fanless
Chassis Construction	Extruded aluminum alloy
Motherboard	
CPU	Intel® Celeron® N3160 processor (up to 2.24GHz, quad-core, 2MB cache, TDP=6W)
Chipset	SoC
System Memory	2 x 204-pin DDR3L 1.35V SDRAM SO-DIMM (system max: 8GB)
Storage	
Hard Drive	1 x 2.5" SATA 6Gb/s HDD/SSD Bay
mSATA	1 x mSATA (SATA2 signal)
I/O interfaces	
USB 3.0	4 x USB 3.0
Ethernet	2 x RJ-45 PCIe GbE by Intel® I210-IT
COM Port	6 x RS-232 2 x RS-232/422/485
Display	1 x VGA 1 x HDMI
Resolution	VGA: Up to 2560 x 1600 HDMI: Up to 3840 x 2160
Audio	1 x Line-out 1 x Mic-in

Specifications	
Wireless	1 x 802.11 b/g/n (optional)
Expansions	1 x Full-size PCIe Mini slot (supports mSATA, co-lay SATA) 1 x Half-size PCIe Mini slot
Power	
Power Input	DC jack: 9 V~36 V DC
Power Consumption	12 V@1.49 A (Intel® Celeron® N3160 with 4 GB DDR3L memory)
Reliability	
Mounting	Wall mount, VESA 100
Operating Temperature	-40°C ~ 60°C with air flow (SSD), 10% ~ 95%, non-condensing
Storage Temperature	-40°C ~ 80°C
Operating Shock	Half-sine wave shock 5G, 11ms, 100 shocks per axis
Operating Vibration	MIL-STD-810F 514.6C-1 (with SSD)
Weight (Net/Gross)	2.2 kg / 3 kg
Safety/EMC	CE / FCC
OS	
Supported OS	Microsoft® Windows 8 Embedded, Microsoft® Windows® Embedded Standard 7 E

Table 1-1: Technical Specifications

TANK-610-BW Embedded System

1.4 Front Panel

The front panel of the TANK-610-BW has the following features (Figure 1-2):

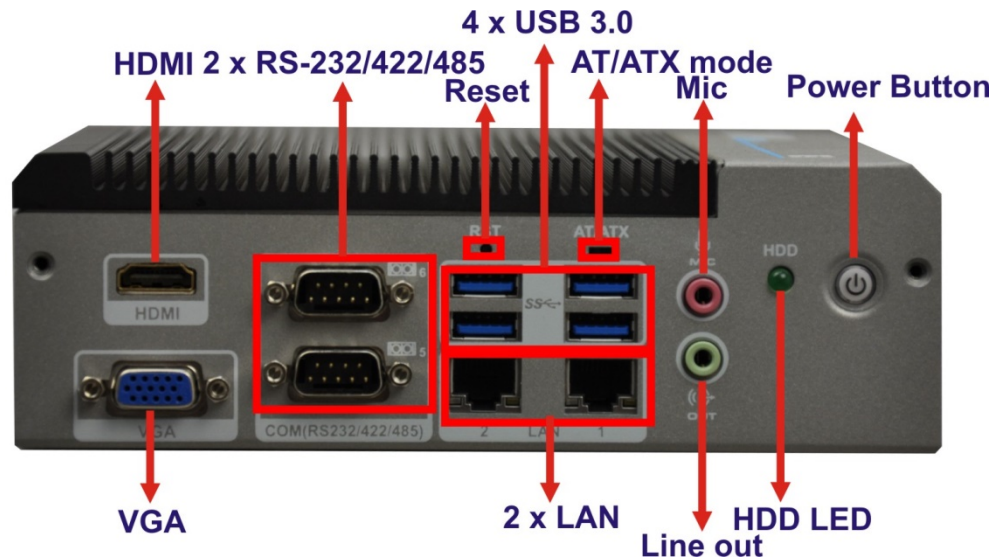


Figure 1-2: TANK-610-BW Front Panel

Connectors and buttons on the front panel include the following:

- 1 x AT/ATX mode switch
- 1 x HDD LED
- 1 x HDMI port
- 2 x LAN ports by RJ-45
- 1 x Line-out port (green)
- 1 x Mic-in port (pink)
- 1 x Power button
- 1 x Reset button
- 2 x RS-232/422/485 serial ports by DB-9
- 4 x USB 3.0 ports
- 1 x VGA port

1.5 Rear Panel

The rear panel of the TANK-610-BW has the following features (**Figure 1-2**):

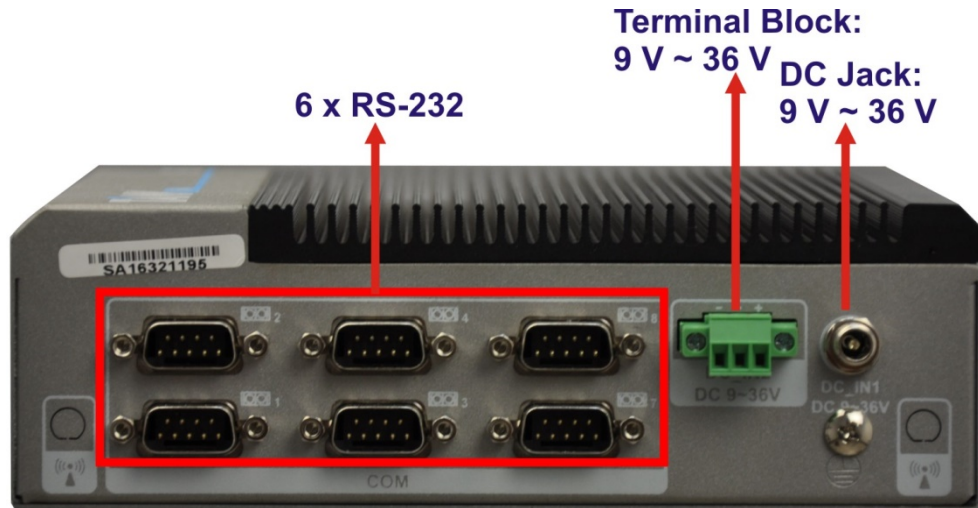


Figure 1-3: TANK-610-BW Rear Panel

Connectors and buttons on the front panel include the following:

- 1 x 9 V ~ 36 V DC Jack
- 6 x RS-232 serial ports by DB-9
- 1 x 9 V ~ 36 V Terminal Block

TANK-610-BW Embedded System

1.6 Dimensions

The physical dimensions are shown below:

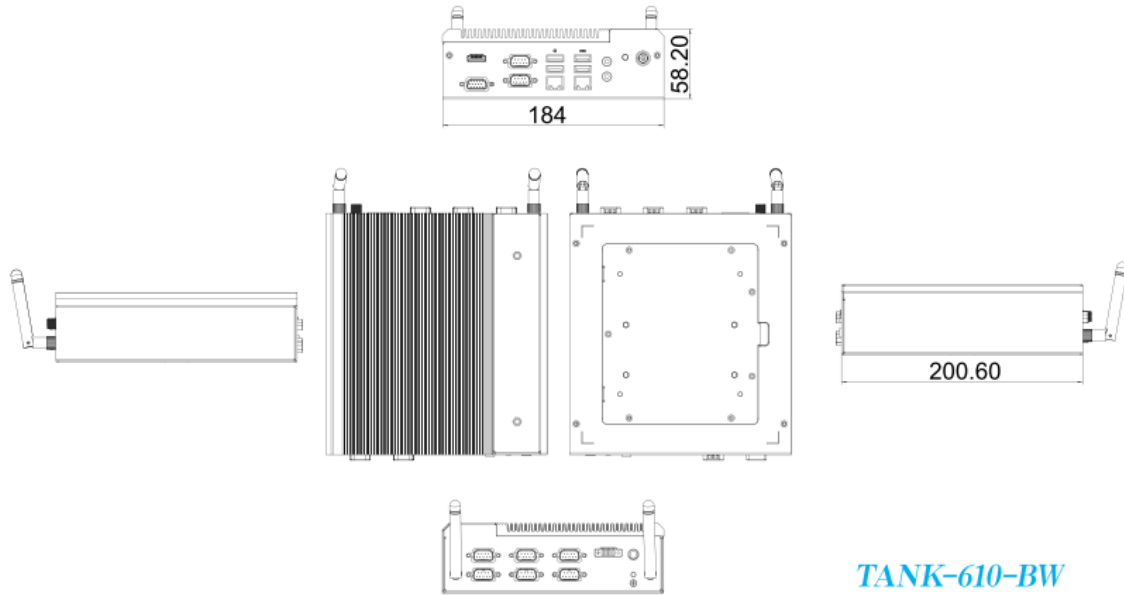


Figure 1-4: Physical Dimensions (millimeters)

Chapter

2

Unpacking

TANK-610-BW Embedded System

2.1 Unpacking

To unpack the embedded system, follow the steps below:

- Step 1:** Use box cutters, a knife or a sharp pair of scissors that seals the top side of the external (second) box.
- Step 2:** Open the external (second) box.
- Step 3:** Use box cutters, a knife or a sharp pair of scissors that seals the top side of the internal (first) box.
- Step 4:** Lift the system out of the boxes.
- Step 5:** Remove both polystyrene ends, one from each side.
- Step 6:** Make sure all the components listed in the packing list are present.


2.2 Packing List



NOTE:

If any of the components listed in the checklist below are missing, do not proceed with the installation. Contact the IEI reseller or vendor the TANK-610-BW was purchased from or contact an IEI sales representative directly by sending an email to sales@ieiworld.com.

The TANK-610-BW is shipped with the following components:

Quantity	Item and Part Number	Image
1	TANK-610-BW	






Quantity	Item and Part Number	Image
1	Power Adapter	
1	Power Cord	
4	Wall Mounting Bracket Screws	
2	Wall Mounting Brackets	
4	Screw Set	

Table 2-1: Package List

2.3 Optional Items

The following are optional component(s) which may be separately purchased:



<p>AFLWK-19 (VESA 100 mount kit)</p>	
<p>EMB-WIFI-KIT01-R11 (1T1R Wi-Fi module kit for embedded system , IEEE802.11b/g/n, 1 x Wi-Fi module, 2 x RF cable, 2 x Antenna, RoHs)</p>	

Table 2-2: Optional Items

Chapter

3

Installation

3.1 Anti-static Precautions

**WARNING:**

Failure to take ESD precautions during the maintenance of the TANK-610-BW may result in permanent damage to the TANK-610-BW and severe injury to the user.

Electrostatic discharge (ESD) can cause serious damage to electronic components, including the WAFER series motherboard and the power module. (Dry climates are especially susceptible to ESD.) It is therefore critical that whenever the TANK-610-BW is opened and any electrical component handled, the following anti-static precautions are strictly adhered to.

- **Wear an anti-static wristband:** Wearing a simple anti-static wristband can help to prevent ESD from damaging the board.
- **Self-grounding:** Before handling the board, touch any grounded conducting material. During the time the board is handled, frequently touch any conducting materials that are connected to the ground.
- **Use an anti-static pad:** When configuring the TANK-610-BW, place it on an anti-static pad. This reduces the possibility of ESD damaging the TANK-610-BW.

3.2 Installation Precautions

During installation, be aware of the precautions below:

- **Read the user manual:** The user manual provides a complete description of the TANK-610-BW, installation instructions and configuration options.
- **DANGER! Disconnect Power:** Power to the TANK-610-BW must be disconnected during the installation process, or before any attempt is made to access the rear panel. Electric shock and personal injury might occur if the rear panel of the TANK-610-BW is opened while the power cord is still connected to an electrical outlet.

TANK-610-BW Embedded System

- **Qualified Personnel:** The TANK-610-BW must be installed and operated only by trained and qualified personnel. Maintenance, upgrades, or repairs may only be carried out by qualified personnel who are familiar with the associated dangers.
- **Air Circulation:** Make sure there is sufficient air circulation when installing the TANK-610-BW. The TANK-610-BW's cooling vents must not be obstructed by any objects. Blocking the vents can cause overheating of the TANK-610-BW. Leave at least 5 cm of clearance around the TANK-610-BW to prevent overheating.
- **Grounding:** The TANK-610-BW should be properly grounded. The voltage feeds must not be overloaded. Adjust the cabling and provide external overcharge protection per the electrical values indicated on the label attached to the back of the TANK-610-BW.

3.3 Hard Disk Drive (HDD) Installation

To install the hard drive, please follow the steps below:

- Step 1:** Remove seven retention screws from the bottom panel, as shown in **Figure 3-1**.

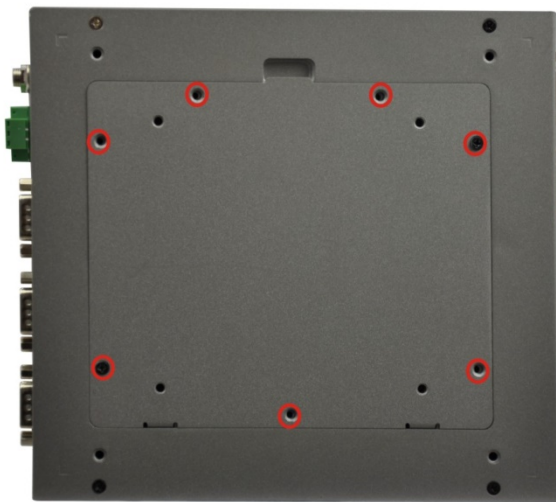


Figure 3-1: Remove Retention Screws (Bottom Panel)

- Step 2:** Remove the bottom cover from the device. (**Figure 3-2**)



Figure 3-2: HDD Bracket Retention Screws

Step 3: Slide the HDD to the HDD bracket and secure the HDD to the HDD bracket using four retention screws (**Figure 3-3**).



Figure 3-3: Inserting the HDD

Step 4: Reinstall the bottom cover.

TANK-610-BW Embedded System

3.4 Wireless LAN Module Installation (Optional)

To install the optional wireless LAN (WLAN) module, please follow the steps below.

Step 1: Remove the bottom surface. See **Section 3.3**.

Step 2: Remove the two knockout holes for antenna installation. The two knockout holes are located on the rear panel of the TANK-610-BW as shown in **Figure 3-4**.



Figure 3-4: Knockout Holes for Wireless Antenna

Step 3: Locate the PCIe Mini slot (Figure 3-5).

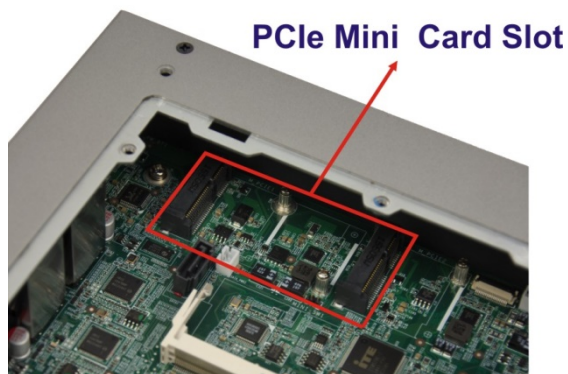


Figure 3-5: PCIe Mini Slot Location

Step 4: Remove the retention screw. Remove the retention screw for half-size card installation as shown in **Figure 3-6**.

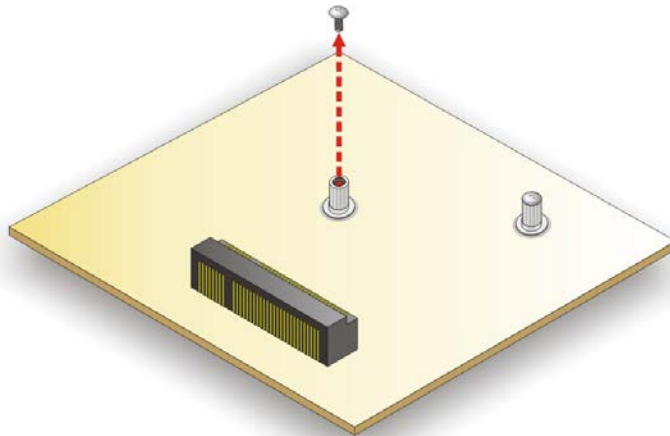


Figure 3-6: Removing the Retention Screw

Step 5: **Insert into the socket at an angle.** Line up the notch on the WLAN module with the notch on the slot. Slide the WLAN module into the slot at an angle of about 20° (Figure 3-7).

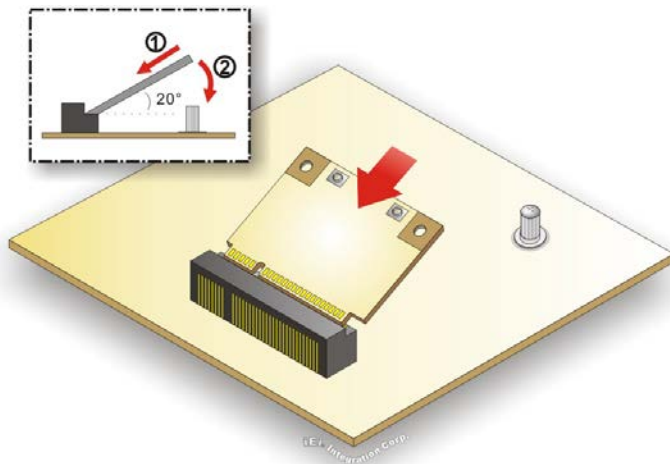


Figure 3-7: Inserting the WLAN Module

Step 6: **Secure the WLAN module.** Secure the WLAN module with the retention screw previously removed (Figure 3-8).

Step 7: **Connect the two RF cables** to the antenna connectors on the WLAN module (Figure 3-8).

TANK-610-BW Embedded System

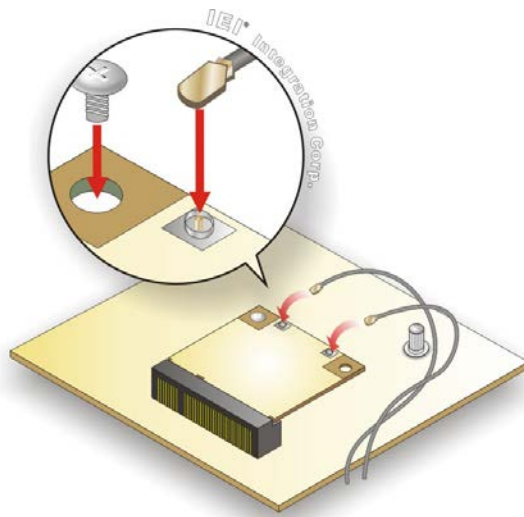


Figure 3-8: Securing WLAN Module and Connecting RF Cables

Step 8: Remove the nut and washer from the SMA connector at the other end of the RF cable.

Step 9: Insert the SMA connector to the antenna connector holes on the rear panel.

Step 10: Secure the SMA connector by inserting the washer and tightening it with nut.

Step 11: Install the external antenna.

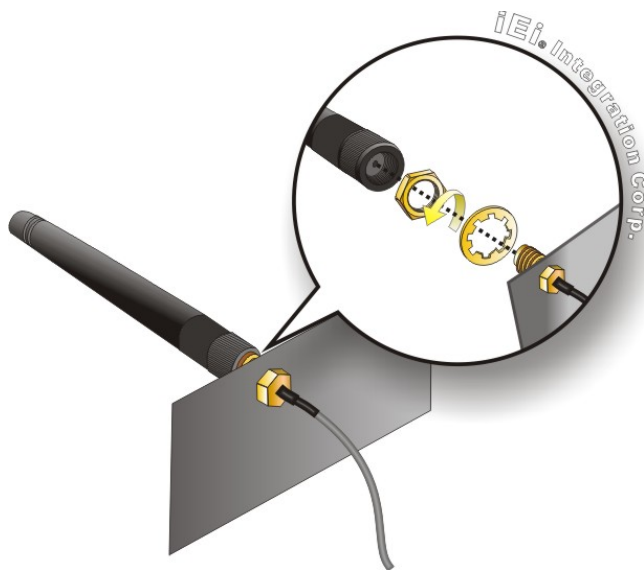


Figure 3-9: Securing SMA Connector and External Antenna Installation

3.5 Mounting the System

There are two ways to mount the TANK-610-BW. The mounting instructions are described below.

3.5.1 Mounting with Mounting Brackets

To mount the embedded system onto a wall or some other surface using the two mounting brackets, please follow the steps below.

- Step 1:** Turn the embedded system over to face the bottom panel upwards.
- Step 2:** Align the two retention screw holes in each bracket with the corresponding retention screw holes on the bottom panel (**Figure 3-10**).

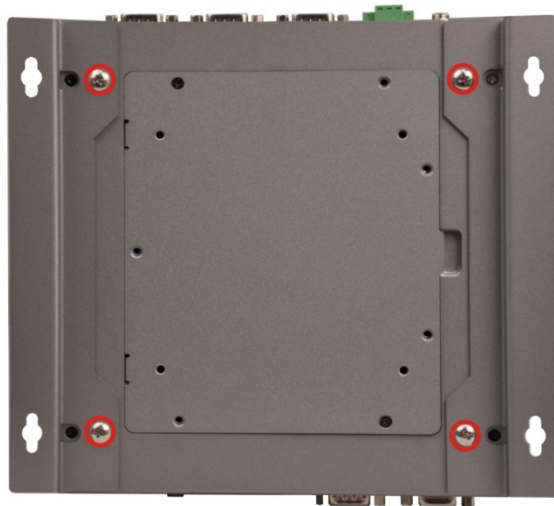


Figure 3-10: Mounting Bracket Retention Screws

- Step 3:** Secure the brackets to the system by inserting two retention screws into each bracket (**Figure 3-10**).
- Step 4:** Drill holes in the intended installation surface.
- Step 5:** Align the mounting holes in the sides of the mounting brackets with the predrilled holes in the mounting surface.
- Step 6:** Insert four retention screws, two in each bracket, to secure the system to the wall.

TANK-610-BW Embedded System

3.5.2 Mounting with VESA Mount Kit (Optional)

To mount the embedded system onto a wall using the optional VESA 100 wall mount kit, follow the steps below.

- Step 1:** Select the location on the wall for the wall-mounting bracket.
- Step 2:** Carefully mark the locations of the four bracket screw holes on the wall.
- Step 3:** Drill four pilot holes at the marked locations on the wall for the bracket retention screws.
- Step 4:** Align the wall-mounting bracket screw holes with the pilot holes.
- Step 5:** Secure the mounting-bracket to the wall by inserting the retention screws into the four pilot holes and tightening them (**Figure 3-11**).

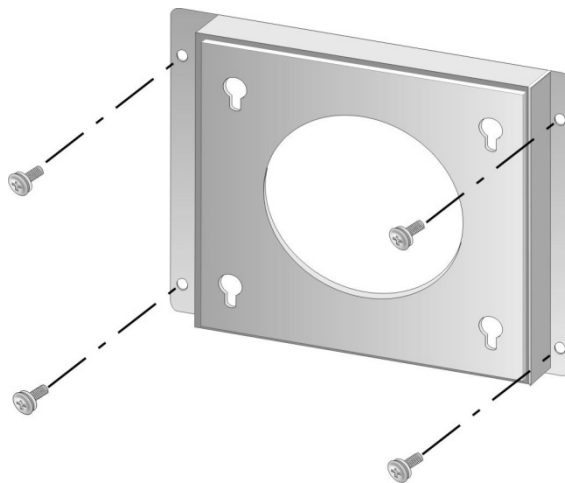


Figure 3-11: Wall-mounting Bracket

- Step 6:** Insert the four monitor mounting screws provided in the wall mounting kit into the four screw holes on the bottom panel of the system and tighten until the screw shank is secured against the bottom panel (**Figure 3-12**).
- Step 7:** Align the mounting screws on the TANK-610-BW bottom panel with the mounting holes on the bracket.
- Step 8:** Carefully insert the screws through the holes and gently pull the monitor downwards until the TANK-610-BW rests securely in the slotted holes (**Figure**

3-12). Ensure that all four of the mounting screws fit snugly into their respective slotted holes.

**NOTE:**

In the diagram below the bracket is already installed on the wall.

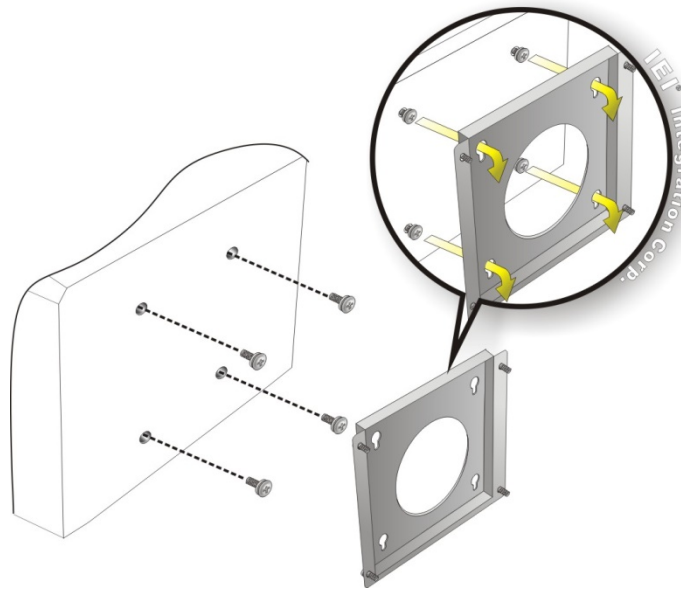


Figure 3-12: Mount the Embedded System

3.6 AT/ATX Mode Selection

AT or ATX power mode can be used on the TANK-610-BW. The selection is made through an AT/ATX switch located on the bottom panel. To select AT mode or ATX mode, follow the steps below.

Step 1: Locate the AT/ATX switch on the bottom panel (**Figure 3-13**).

TANK-610-BW Embedded System

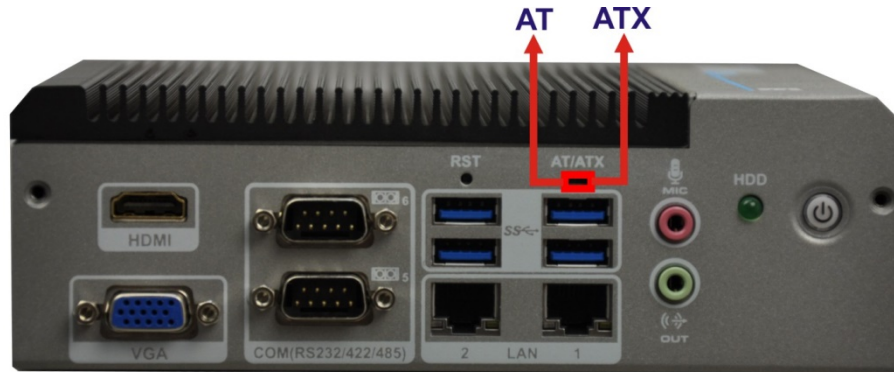


Figure 3-13: AT/ATX Switch Location

Step 2: Adjust the AT/ATX switch.

3.6.1 AT Power Mode

With the AT mode selected, the power is controlled by a central power unit rather than a power switch. The TANK-610-BW system turns on automatically when the power is connected. The AT mode benefits a production line to control multiple systems from a central management center and other applications including:

- ATM
- Self-service kiosk
- Plant environment monitoring system
- Factory automation platform
- Manufacturing shop flow

3.6.2 ATX Power Mode

With the ATX mode selected, the TANK-610-BW system goes in a standby mode when it is turned off. The system can be easily turned on via network or a power switch in standby mode. Remote power control is perfect for advertising applications since the broadcasting time for each system can be set individually and controlled remotely. Other possible application includes

- Security surveillance
- Point-of-Sale (POS)
- Advertising terminal

3.7 Reset the System

The reset button enables user to reboot the system when the system is turned on. To reboot the system, follow the steps below.

Step 1: Locate the reset button on the bottom panel (**Figure 3-14**).



Figure 3-14: Reset Button Location

Step 2: Press the reset button.

3.8 Powering On/Off the System



WARNING:

Make sure a power supply with the correct input voltage is being fed into the system. Incorrect voltages applied to the system may cause damage to the internal electronic components and may also cause injury to the user.

- **Power on** the system: press the power button for 3 seconds
- **Power off** the system: press the power button for 6 seconds

TANK-610-BW Embedded System



Power Button

Figure 3-15: Power Button

Chapter

4

System Motherboard

TANK-610-BW Embedded System

4.1 Overview

This chapter details all the jumpers and connectors of the system motherboard.

4.1.1 Layout

The figures below show all the connectors and jumpers of the system motherboard. The Pin 1 locations of the on-board connectors are also indicated in the diagram below.

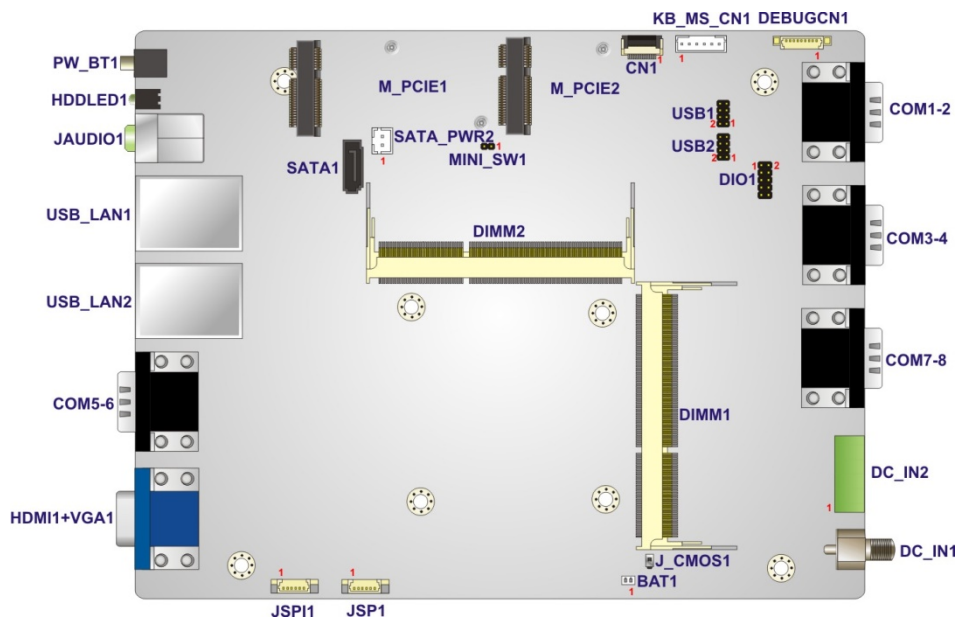


Figure 4-1: System Motherboard (Front)

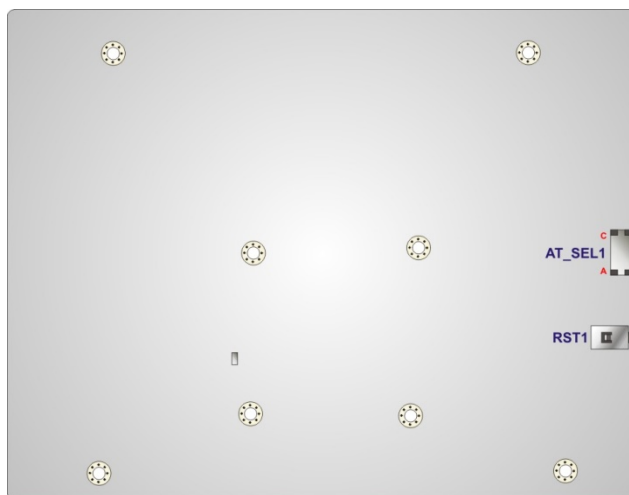


Figure 4-2: System Motherboard (Rear)

4.2 Internal Peripheral Connectors

The table below shows a list of the internal peripheral interface connectors on the system motherboard. Pinouts of these connectors can be found in the following sections.

Connector	Type	Label
Battery connector	2-pin wafer	BAT1
BIOS programming connector	6-pin wafer	SPI1
Digital I/O connector	10-pin header	DIO1
Debug connector	9-pin wafer	DEBUGCN1
FPC connector	20-pin FPC connector	CN1
EC programming connector	6-pin wafer	JSPI1
Keyboard/mouse connector	6-pin wafer	KB_MS_CN1
SATA 6Gb/s drive connectors	7-pin SATA connector	SATA1
SATA power connector	2-pin wafer	SATA_PWR2
USB 2.0 Connectors	8-pin header	USB1, USB2

Table 4-1: Peripheral Interface Connectors

4.2.1 Battery Connector (BAT1)

PIN NO.	DESCRIPTION
1	VBATT
2	GND

Table 4-2: Battery Connector Pinouts (BAT1)

4.2.2 BIOS Programming Connector (SPI1)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	SPI_VCC	2	SPI_2N_CS#
3	SPI_2N_MISO	4	SPI_2N_CLK
5	SPI_2N_MOSI	6	GND

Table 4-3: BIOS Programming Connector Pinouts (SPI1)

TANK-610-BW Embedded System

4.2.3 Digital I/O Connector (DIO1)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	2	P5V
3	DOUT3	4	DOUT2
5	DOUT1	6	DOUT0
7	DIN3	8	DIN2
9	DIN1	10	DIN0

Table 4-4: Digital I/O Connector Pinouts (DIO1)

4.2.4 Debug Connector (DEBUGCN1)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	BUF_PLT_RST#	2	CLK_PCI_DBG
3	GND	4	LPC_AD3
5	LPC_AD2	6	LPC_AD1
7	LPC_ADO	8	LPC_FRAME#
9	P3V3		

Table 4-5: Debug Connector Pinouts (DEBUGCN1)

4.2.5 FPC Connector (CN1)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	KSI0	2	KSO0
3	KSO1	4	KSO2
5	KSO3	6	KSO4
7	KSO5	8	KSO6
9	KSO7	10	KSO8
11	KSO9	12	KSO10
13	KSO12	14	KSI1
15	KSO11	16	KSI2
17	KSI3	18	GND
19	GND	20	GND

Table 4-6: FPC Connector Pinouts (CN1)

4.2.6 EC Programming Connector (JSPI1)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+V3.3M_SPI_CON_EC	2	SPI_CS#0_CN_EC
3	SPI_SO_SW_EC	4	SPI_CLK_SW_EC
5	SPI_SI_SW_EC	6	GND

Table 4-7: EC Programming Connector Pinouts (JSPI1)

4.2.7 Keyboard/Mouse Connector (KB_MS_CN1)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+5V_KBMS	2	MSDATA
3	MSCLK	4	KBDATA
5	KBCLK	6	KBGND

Table 4-8: Keyboard/Mouse Connector Pinouts (KB_MS_CN1)

4.2.8 SATA 6Gb/s Drive Connectors (SATA1)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	GND	2	SATA0_T_TX+
3	SATA0_T_TX-	4	GND
5	SATA0_T_RX-	6	SATA0_T_RX+
7	GND		

Table 4-9: SATA 6Gb/s Drive Connectors Pinouts (SATA1)

4.2.9 SATA Power Connector (SATA_PWR2)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+5V	2	GND

Table 4-10: SATA Power Connector Pinouts (SATA_PWR2)

TANK-610-BW Embedded System

4.2.10 USB 2.0 Connectors (USB1)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+VCC_USB34	2	GND
3	-DATA_USB3	4	+DATA_USB4
5	+DATA_USB3	6	-DATA_USB4
7	GND	8	+VCC_USB34

Table 4-11: USB 2.0 Connectors Pinouts (USB1)

4.2.11 USB 2.0 Connectors (USB2)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+VCC_USB12	2	GND
3	-DATA_USB1	4	+DATA_USB2
5	+DATA_USB1	6	-DATA_USB2
7	GND	8	+VCC_USB12

Table 4-12: USB 2.0 Connectors Pinouts (USB2)

4.3 External Interface Panel Connectors

The table below shows a list of the external interface panel connectors on the system motherboard. Pinouts of these connectors can be found in the following sections.

Connector	Type	Label
Audio jack (mic, line-out)	Audio jack	JAUDIO1
Ethernet and USB2.0 connectors	RJ-45, USB 2.0 port	USB_LAN1, USB_LAN2
HDMI connector	Type A	HDMI1
Power connector	DC jack	DC_IN1
Power connector	3-pin terminal block	DC_IN2
RS-232/422/485 serial port connectors	DB-9	COM5-6
RS-232 serial port connectors	DB-9	COM1-2, COM3-4, COM7-8

Connector	Type	Label
RS-232 serial port connectors	DB-78	CN2
VGA connector	DB-15	VGA1

Table 4-13: Rear Panel Connectors

4.3.1 Audio Jack (JAUDIO1)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	Analog_GND	2	LMIC1-L
3	Analog_GND	4	MIC1-JD
5	LMIC1-R	22	LINE_OUTL
23	Analog_GND	24	FRONT-JD
25	LINE_OUTR		

Table 4-14: Audio Jack Pinouts (JAUDIO1)

4.3.2 Ethernet and USB2.0 Connectors (USB_LAN1)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
R1	1_5VLAN1	R2	TRD1P0
R3	TRD1N0	R4	TRD1P1
R5	TRD1N1	R6	TRD1P2
R7	TRD1N2	R8	TRD1P3
R9	TRD1N3	R10	GND
L1	L1_100-	L2	L1_1000-
L3	L1_LINK_ACT-	L4	+V3.3LAN1
G1	GND_IOL1	G2	GND_IOL1
G3	GND_IOL1	G4	GND_IOL1
G5	GND_IOL1	G6	GND_IOL1
G7	GND_IOL1	G8	GND_IOL1
U1	+USB3_PWR1	U2	USB20_C_N0
U3	USB20_C_P0	U4	GND
U5	USB3_RX1_DN	U6	USB3_RX1_DP
U7	GND	U8	USB3_TX1_DN_C

TANK-610-BW Embedded System

U9	USB3_TX1_DP_C	U10	+USB3_PWR1
U11	USB20_C_N1	U12	USB20_C_P1
U13	GND	U14	USB3_RX2_DN
U15	USB3_RX2_DP	U16	GND
U17	USB3_TX2_DN_C	U18	USB3_TX2_DP_C

Table 4-15: Ethernet and USB2.0 Connectors Pinouts (USB_LAN1)

4.3.3 Ethernet and USB2.0 Connectors (USB_LAN2)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
R1	1_5VLAN2	R2	TRD2P0
R3	TRD2N0	R4	TRD2P1
R5	TRD2N1	R6	TRD2P2
R7	TRD2N2	R8	TRD2P3
R9	TRD2N3	R10	GND
L1	L2_100-	L2	L2_1000-
L3	L2_LINK_ACT-	L4	+V3.3LAN2
G1	GND_IOL2	G2	GND_IOL2
G3	GND_IOL2	G4	GND_IOL2
G5	GND_IOL2	G6	GND_IOL2
G7	GND_IOL2	G8	GND_IOL2
U1	+USB3_PWR2	U2	USB20_C_N2
U3	USB20_C_P2	U4	GND
U5	USB3_RX3_DN	U6	USB3_RX3_DP
U7	GND	U8	USB3_TX3_DN_C
U9	USB3_TX3_DP_C	U10	+USB3_PWR2
U11	USB20_C_N3	U12	USB20_C_P3
U13	GND	U14	USB3_RX4_DN
U15	USB3_RX4_DP	U16	GND
U17	USB3_TX4_DN_C	U18	USB3_TX4_DP_C

Table 4-16: Ethernet and USB2.0 Connectors Pinouts (USB_LAN2)

4.3.4 HDMI Connector (HDMI1)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	HDMI1_DATA2_C	2	GND
3	HDMI1_DATA2#_C	4	HDMI1_DATA1_C
5	GND	6	HDMI1_DATA1#_C
7	HDMI1_DATA0_C	8	GND
9	HDMI1_DATA0#_C	10	HDMI1_CLK_C
11	GND	12	HDMI1_CLK#_C
13	NC	14	NC
15	HDMI1_SCL	16	HDMI1_SDA
17	GND	18	HDMI1_PWR
19	HDMI1_HPD		

Table 4-17: HDMI Connector Pinouts (HDMI1)

4.3.5 Power Connector (DC_IN1)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	DC_IN	2	GND
3	GND		

Table 4-18: Power Connector Pinouts (DC_IN1)

4.3.6 Power Connector (DC_IN2)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	DC_IN	2	GND
3	GND		

Table 4-19: Power Connector Pinouts (DC_IN2)

4.3.7 RS-232 Serial Port Connector (COM1-2)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	-NDCD1	2	NSIN1
3	NSOUT1	4	-NDTR1
5	GND	6	-NDSR1
7	-NRTS1	8	-NCTS1
9	-XRI1	10	-NDCD2
11	NSIN2	12	NSOUT2
13	-NDTR2	14	GND
15	-NDSR2	16	-NRTS2
17	-NCTS2	18	-XRI2

Table 4-20: RS-232 Serial Port Connector Pinouts (COM1-2)

4.3.8 RS-232 Serial Port Connector (COM3-4)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	-NDCD3	2	NSIN3
3	NSOUT3	4	-NDTR3
5	GND	6	-NDSR3
7	-NRTS3	8	-NCTS3
9	-XRI3	10	-NDCD4
11	NSIN4	12	NSOUT4
13	-NDTR4	14	GND
15	-NDSR4	16	-NRTS4
17	-NCTS4	18	-XRI4

Table 4-21: RS-232 Serial Port Connector Pinouts (COM3-4)

4.3.9 RS-232 Serial Port Connector (COM7-8)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	-NDCD3	2	NSIN3
3	NSOUT3	4	-NDTR3
5	GND	6	-NDSR3

7	-NRTS3	8	-NCTS3
9	-XRI3	10	-ND44
11	NSIN4	12	NSOUT4
13	-NDTR4	14	GND
15	-NDSR4	16	-NRTS4
17	-NCTS4	18	-XRI4

Table 4-22: RS-232 Serial Port Connector Pinouts (COM3-4)

4.3.10 RS-232 Serial Port Connector (COM5-6)

PIN NO.	RS-232	RS-422	RS-485
1	COM5_DCD#	TXD422#	TXD485#
2	COM5_SIN#	TXD422+	TXD485+
3	COM5_SOUT#	RXD422+	NA
4	COM5_DTR#	RXD422#	NA
5	GND	NA	NA
6	COM5_DSR#	NA	NA
7	COM5_RTS#	NA	NA
8	COM5_CTS#	NA	NA
9	COM5_RI#	NA	NA
10	COM6_DCD#	TXD422#	TXD485#
11	COM6_SIN#	TXD422+	TXD485+
12	COM6_SOUT#	RXD422+	NA
13	COM6_DTR#	RXD422#	NA
14	GND	NA	NA
15	COM6_DSR#	NA	NA
16	COM6_RTS#	NA	NA
17	COM6_CTS#	NA	NA
18	COM6_RI#	NA	NA

Table 4-23: RS-232 Serial Port Connector Pinouts (COM5-6)

TANK-610-BW Embedded System

4.3.11 VGA Connector (VGA1)

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	VGA1_BR	2	VGA1_BG
3	VGA1_BB	4	NC
5	GND	6	GND
7	GND	8	GND
9	VGA1_VCC	10	VGA1_PLUG#
11	NC	12	VGA1_DDC_SDA_C
13	VGA1_HSYNC	14	VGA1_VSYNC
15	VGA1_DDC_SCL_C		

Table 4-24: VGA Connector Pinouts (VGA1)

4.4 Jumper Settings

The buttons, jumper and switch on the system motherboard are listed in **Table 4-25**.

Connector	Type	Label
AT/ATX Mode select switch	switch	AT_SEL1
Clear CMOS button	button	J_CMOS1
M-SATA auto-detect jumper	2-pin header	MIMI_SW1
System reset button	button	RST1

Table 4-25: Buttons, Jumper and Switch

4.4.1 AT/ATX Mode Select Switch (AT_SEL1)

Setting	Description
Short A-B	AT Mode (Default)
Short B-C	ATX Mode

Table 4-26: AT/ATX Mode Select Switch (AT_SEL1)

4.4.2 Clear CMOS Button (J_CMOS1)

Setting	Description
Open	Normal Operation (Default)
Push	Clear CMOS Setup

Table 4-27: Clear CMOS Button (J_CMOS1)

4.4.3 M-SATA Auto-detect Jumper (MIMI_SW1)

Setting	Description
Open	Auto detect
Short	Disable M-SATA

Table 4-28: M-SATA Auto-detect Jumper (MIMI_SW1)

4.4.4 System Reset Button (RST1)

Setting	Description
Open	Normal Operation (Default)
Push	System Restart

Table 4-29: System Reset Button (RST1)

Chapter

5

BIOS

5.1 Introduction

The BIOS is programmed onto the BIOS chip. The BIOS setup program allows changes to certain system settings. This chapter outlines the options that can be changed.

5.1.1 Starting Setup

The UEFI BIOS is activated when the computer is turned on. The setup program can be activated in one of two ways.

1. Press the **DEL** or **F2** key as soon as the system is turned on or
2. Press the **DEL** or **F2** key when the “**Press DEL or F2 to enter SETUP**” message appears on the screen.

If the message disappears before the **DEL** or **F2** key is pressed, restart the computer and try again.

5.1.2 Using Setup

Use the arrow keys to highlight items, press **ENTER** to select, use the PageUp and PageDown keys to change entries, press **F1** for help and press **ESC** to quit. Navigation keys are shown in.

Key	Function
Up arrow	Move to previous item
Down arrow	Move to next item
Left arrow	Move to the item on the left hand side
Right arrow	Move to the item on the right hand side
+	Increase the numeric value or make changes
-	Decrease the numeric value or make changes
Page Up key	Increase the numeric value or make changes
Page Dn key	Decrease the numeric value or make changes

TANK-610-BW Embedded System

Key	Function
Esc key	Main Menu – Quit and not save changes into CMOS Status Page Setup Menu and Option Page Setup Menu -- Exit current page and return to Main Menu
F1	General help, only for Status Page Setup Menu and Option Page Setup Menu
F2	Previous values
F3	Load optimized defaults
F4	Save changes and Exit BIOS

Table 5-1: BIOS Navigation Keys

5.1.3 Getting Help

When **F1** is pressed a small help window describing the appropriate keys to use and the possible selections for the highlighted item appears. To exit the Help Window press **Esc** or the **F1** key again.

5.1.4 Unable to Reboot after Configuration Changes

If the computer cannot boot after changes to the system configuration is made, CMOS defaults. Use the jumper described in Chapter 2.

5.1.5 BIOS Menu Bar

The **menu bar** on top of the BIOS screen has the following main items:

- Main – Changes the basic system configuration.
- Advanced – Changes the advanced system settings.
- Chipset – Changes the chipset settings.
- Boot – Changes the system boot configuration.
- Security – Sets User and Supervisor Passwords.
- Save & Exit – Selects exit options and loads default settings.

The following sections completely describe the configuration options found in the menu items at the top of the BIOS screen and listed above.

5.2 Main

The **Main** BIOS menu (**BIOS Menu 1**) appears when the **BIOS Setup** program is entered. The **Main** menu gives an overview of the basic system information.

```

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.
Main  Advanced  Chipset  Boot  Security  Save & Exit
-----
BIOS Information
BIOS Vendor                American Megatrends
Core Version                5.11
Compliancy                 UEFI 2.4; PI 1.3
Project Version            SEN3AR01.ROM
Build Date and Time        03/11/2016 09:21:54

iWDD Vendor                ICP
iWDD Version               SE64ER10.bin

CPU Configuration
Microcode Patch            403

Memory Information
Total Memory                2048 MB (LPDDR3)

TXE Information
Sec RC Version              00.05.00.00
TXE FW Version              02.00.02.2092

System Date                 [Fri 04/22/2016]
System Time                 [15:10:27]

Set the Date. Use Tab to
switch between Data
elements.

-----
<->: Select Screen
^ v: Select Item
Enter: Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
ESC: Exit

Version 2.17.1249. Copyright (C) 2016 American Megatrends, Inc.
  
```

BIOS Menu 1: Main

The Main menu lists the following system details:

- BIOS Information
- iWDD Information
- CPU Information
- Memory Information
- TXE Information

The Main menu has two user configurable fields:

The System Overview field also has two user configurable fields:

TANK-610-BW Embedded System

→ System Date [xx/xx/xx]

Use the **System Date** option to set the system date. Manually enter the day, month and year.

→ System Time [xx:xx:xx]

Use the **System Time** option to set the system time. Manually enter the hours, minutes and seconds.

5.3 Advanced

Use the **Advanced** menu (**BIOS Menu 2**) to configure the CPU and peripheral devices through the following sub-menus:



WARNING!

Setting the wrong values in the sections below may cause the system to malfunction. Make sure that the settings made are compatible with the hardware.

```

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.
Main  Advanced  Chipset  Boot  Security  Save & Exit
-----
> ACPI Settings
> F81866 Super IO Configuration
> Hardware Monitor
> IT8528SEC Super IO Configuration
> RTC Wake Settings
> Serial Port Console Redirection
> iEi Feature
> CPU Configuration
> SATA Configuration
> USB Configuration


System ACPI Parameters
-----
<->: Select Screen
↑ ↓: Select Item
EnterSelect
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
ESC: Exit

Version 2.17.1249. Copyright (C) 2016 American Megatrends, Inc.
    
```

BIOS Menu 2: Advanced

5.3.1 ACPI Settings

The **ACPI Settings** menu (**BIOS Menu 3**) configures the Advanced Configuration and Power Interface (ACPI) options.

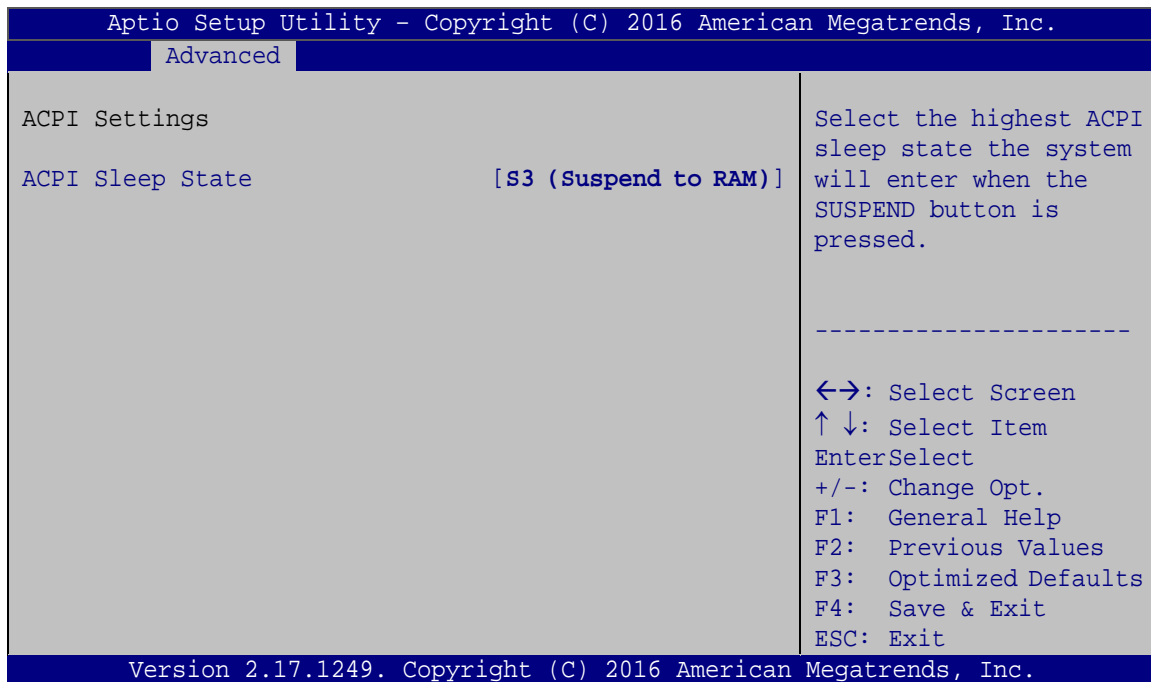

BIOS Menu 3: ACPI Configuration

→ ACPI Sleep State [S1 (CPU Stop Clock)]

Use the **ACPI Sleep State** option to specify the sleep state the system enters when it is not being used.

- **Suspend Disabled** Disable the suspend function.
- **S3 only (Suspend to RAM)** **DEFAULT** The caches are flushed and the CPU is powered off. Power to the RAM is maintained. The computer returns slower to a working state, but more power is saved.

TANK-610-BW Embedded System

5.3.2 F81866 Super IO Configuration

Use the **F81866 Super IO Configuration** menu (**BIOS Menu 4**) to set or change the configurations for the serial ports.

```

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.
  Advanced
F81866 Super IO Configuration                               Set Parameters of Serial
                                                           Port 1 (COMA)
F81866 Super IO Chip                                     F81866
> Serial Port 1 Configuration
> Serial Port 2 Configuration
> Serial Port 3 Configuration
> Serial Port 4 Configuration
> Serial Port 5 Configuration
> Serial Port 6 Configuration
                                                           -----
                                                           ←→: Select Screen
                                                           ↑ ↓: Select Item
                                                           EnterSelect
                                                           +/-: Change Opt.
                                                           F1:  General Help
                                                           F2:  Previous Values
                                                           F3:  Optimized Defaults
                                                           F4:  Save & Exit
                                                           ESC: Exit
Version 2.17.1249. Copyright (C) 2016 American Megatrends, Inc.

```

BIOS Menu 4: F81866 Super IO Configuration

5.3.2.1 Serial Port n Configuration

Use the **Serial Port n Configuration** menu (**BIOS Menu 5**) to configure the serial port n.

```

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.
  Advanced
Serial Port n Configuration                               Enable or Disable Serial
                                                           Port (COM)
Serial Port                                             [Enabled]
Device Settings                                         IO=3F8h; IRQ=4
Change Settings                                         [Auto]
                                                           -----
                                                           ←→: Select Screen
                                                           ↑ ↓: Select Item
                                                           EnterSelect
                                                           +/-: Change Opt.
                                                           F1:  General Help
                                                           F2:  Previous Values
                                                           F3:  Optimized Defaults
                                                           F4:  Save & Exit
                                                           ESC: Exit
Version 2.17.1249. Copyright (C) 2016 American Megatrends, Inc.

```

BIOS Menu 5: Serial Port n Configuration Menu

5.3.2.1.1 Serial Port 1 Configuration

➔ **Serial Port [Enabled]**

Use the **Serial Port** option to enable or disable the serial port.

- ➔ **Disabled** Disable the serial port
- ➔ **Enabled DEFAULT** Enable the serial port

➔ **Change Settings [Auto]**

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- ➔ **Auto DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- ➔ **IO=3F8h; IRQ=4** Serial Port I/O port address is 3F8h and the interrupt address is IRQ4
- ➔ **IO=3F8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- ➔ **IO=2F8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 2F8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- ➔ **IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 3E8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- ➔ **IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 2E8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12

TANK-610-BW Embedded System

5.3.2.1.2 Serial Port 2 Configuration

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled** Disable the serial port
- **Enabled** **DEFAULT** Enable the serial port

→ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- **IO=2F8h; IRQ=3** Serial Port I/O port address is 2F8h and the interrupt address is IRQ3
- **IO=3F8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- **IO=2F8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 2F8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- **IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- **IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 2F8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12

5.3.2.1.3 Serial Port 3 Configuration

➔ **Serial Port [Enabled]**

Use the **Serial Port** option to enable or disable the serial port.

- ➔ **Disabled** Disable the serial port
- ➔ **Enabled DEFAULT** Enable the serial port

➔ **Change Settings [Auto]**

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- ➔ **Auto DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- ➔ **IO=3E8h; IRQ=7** Serial Port I/O port address is 3E8h and the interrupt address is IRQ7
- ➔ **IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 3E8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- ➔ **IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 2E8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- ➔ **IO=2F0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 2F0h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- ➔ **IO=2E0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 2E0h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12

TANK-610-BW Embedded System

5.3.2.1.4 Serial Port 4 Configuration

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled** Disable the serial port
- **Enabled** **DEFAULT** Enable the serial port

→ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- **IO=2E8h; IRQ=7** Serial Port I/O port address is 2E8h and the interrupt address is IRQ7
- **IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 3E8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- **IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 2E8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- **IO=2F0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 2F0h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- **IO=2E0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 2E0h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12

5.3.2.1.5 Serial Port 5 Configuration

➔ **Serial Port [Enabled]**

Use the **Serial Port** option to enable or disable the serial port.

- ➔ **Disabled** Disable the serial port
- ➔ **Enabled** **DEFAULT** Enable the serial port

➔ **Change Settings [Auto]**

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- ➔ **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- ➔ **IO=2E0h; IRQ=7** Serial Port I/O port address is 2E0h and the interrupt address is IRQ7
- ➔ **IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 3E8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- ➔ **IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 2E8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- ➔ **IO=2F0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 2F0h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- ➔ **IO=2E0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 2E0h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12

➔ **Device Mode [RS232]**

Use the **Device Mode** option to select the serial port mode.

TANK-610-BW Embedded System

- ➔ **RS232** **DEFAULT** Enables serial port RS-232 support.
- ➔ **RS422** Enables serial port RS-422 support.
- ➔ **RS485** Enables serial port RS-485 support.

5.3.2.1.6 Serial Port 6 Configuration

➔ **Serial Port [Enabled]**

Use the **Serial Port** option to enable or disable the serial port.

- ➔ **Disabled** Disable the serial port
- ➔ **Enabled** **DEFAULT** Enable the serial port

➔ **Change Settings [Auto]**

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- ➔ **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- ➔ **IO=2F0h; IRQ=7** Serial Port I/O port address is 2F0h and the interrupt address is IRQ7
- ➔ **IO=3E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 3E8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- ➔ **IO=2E8h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 2E8h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- ➔ **IO=2F0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12** Serial Port I/O port address is 2F0h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12

TANK-610-BW Embedded System

→ IO=2E0h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12

Serial Port I/O port address is 2E0h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12


→ Device Mode [RS232]

Use the **Device Mode** option to select the serial port mode.

- RS232 DEFAULT Enables serial port RS-232 support.
- RS422 Enables serial port RS-422 support.
- RS485 Enables serial port RS-485 support.

5.3.3 H/W Monitor

The **H/W Monitor** menu (**BIOS Menu 6**) shows the operating temperature, fan speeds and system voltages.

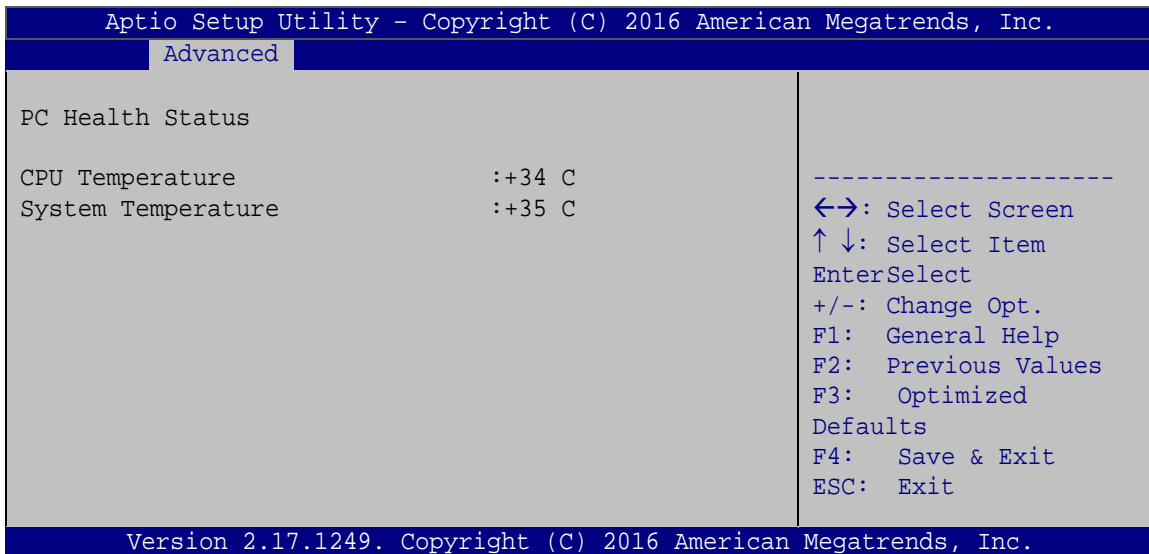

```

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.
Advanced
PC Health Status
CPU Temperature          :+34 C
System Temperature      :+35 C

-----
<->: Select Screen
↑ ↓: Select Item
Enter>Select
+/-: Change Opt.
F1:  General Help
F2:  Previous Values
F3:  Optimized
Defaults
F4:  Save & Exit
ESC: Exit

Version 2.17.1249. Copyright (C) 2016 American Megatrends, Inc.
  
```

BIOS Menu 6: Hardware Health Configuration

→ PC Health Status

The following system parameters and values are shown. The system parameters that are monitored are:

TANK-610-BW Embedded System

- System Temperatures:
 - CPU Temperature
 - System Temperature

5.3.4 IT8528SEC Super IO Configuration

Use the **IT8528SEC Super IO Configuration** menu (**BIOS Menu 7**) to set or change the configurations for the serial ports.

```

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.
  Advanced
IT8519 Super IO Configuration
Super IO Chip                IT8528SEC
> Serial Port 7 Configuration
> Serial Port 8 Configuration

Set Parameters of Serial
Port 7 (COMA)


-----
<->: Select Screen
↑ ↓: Select Item
EnterSelect
+/-: Change Opt.
F1:  General Help
F2:  Previous Values
F3:  Optimized Defaults
F4:  Save & Exit
ESC: Exit

Version 2.17.1249. Copyright (C) 2016 American Megatrends, Inc.
  
```

BIOS Menu 7: Secondary Super IO Configuration

5.3.4.1 Serial Port n Configuration

Use the **Serial Port n Configuration** menu (**BIOS Menu 8**) to configure the serial port n.

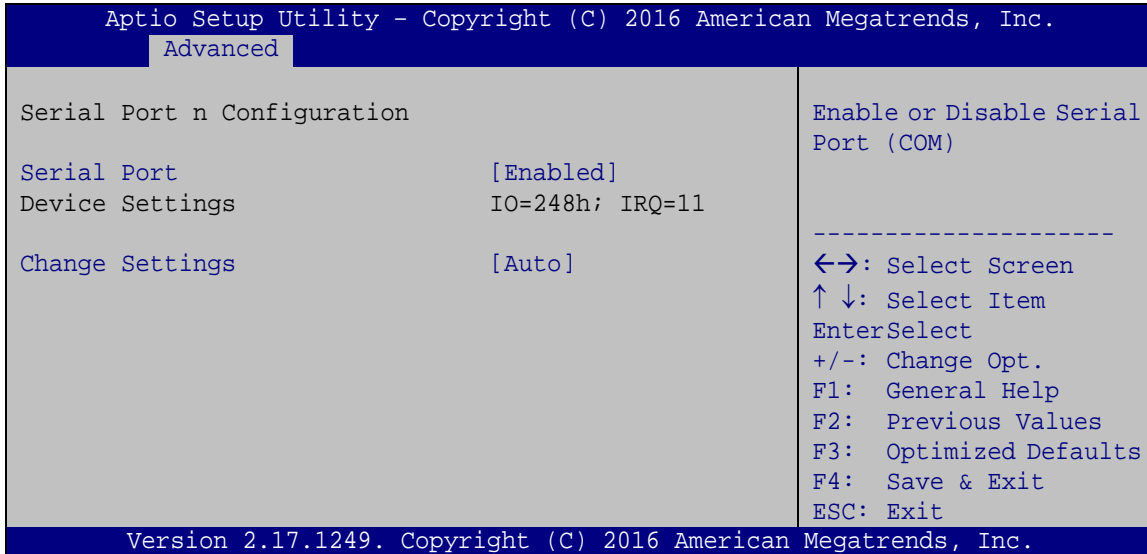

BIOS Menu 8: Serial Port n Configuration Menu

5.3.4.1.1 Serial Port 7 Configuration

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled** Disable the serial port
- **Enabled** **DEFAULT** Enable the serial port

→ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.

TANK-610-BW Embedded System

- ➔

IO=248h; IRQ=7	Serial Port I/O port address is 248h and the interrupt address is IRQ7
-----------------------	--
- ➔

IO=248h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12	Serial Port I/O port address is 248h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
--	---
- ➔

IO=258h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12	Serial Port I/O port address is 258h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
--	---
- ➔

IO=268h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12	Serial Port I/O port address is 268h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
--	---
- ➔

IO=278h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12	Serial Port I/O port address is 278h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
--	---

5.3.4.1.2 Serial Port 8 Configuration

➔ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- ➔

Disabled		Disable the serial port
-----------------	--	-------------------------
- ➔

Enabled	DEFAULT	Enable the serial port
----------------	----------------	------------------------

➔ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- ➔

Auto	DEFAULT	The serial port IO port address and interrupt address are automatically detected.
-------------	----------------	---


TANK-610-BW Embedded System

- IO=258h; IRQ=7
Serial Port I/O port address is 258h and the interrupt address is IRQ7
- IO=248h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12
Serial Port I/O port address is 248h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- IO=258h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12
Serial Port I/O port address is 258h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- IO=268h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12
Serial Port I/O port address is 268h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12
- IO=278h; IRQ=3, 4, 5, 6, 7, 9, 10, 11, 12
Serial Port I/O port address is 278h and the interrupt address is IRQ3, 4, 5, 6, 7, 9, 10, 11, 12

5.3.5 RTC Wake Settings

The **RTC Wake Settings** menu (**BIOS Menu 9**) configures RTC wake event.

TANK-610-BW Embedded System

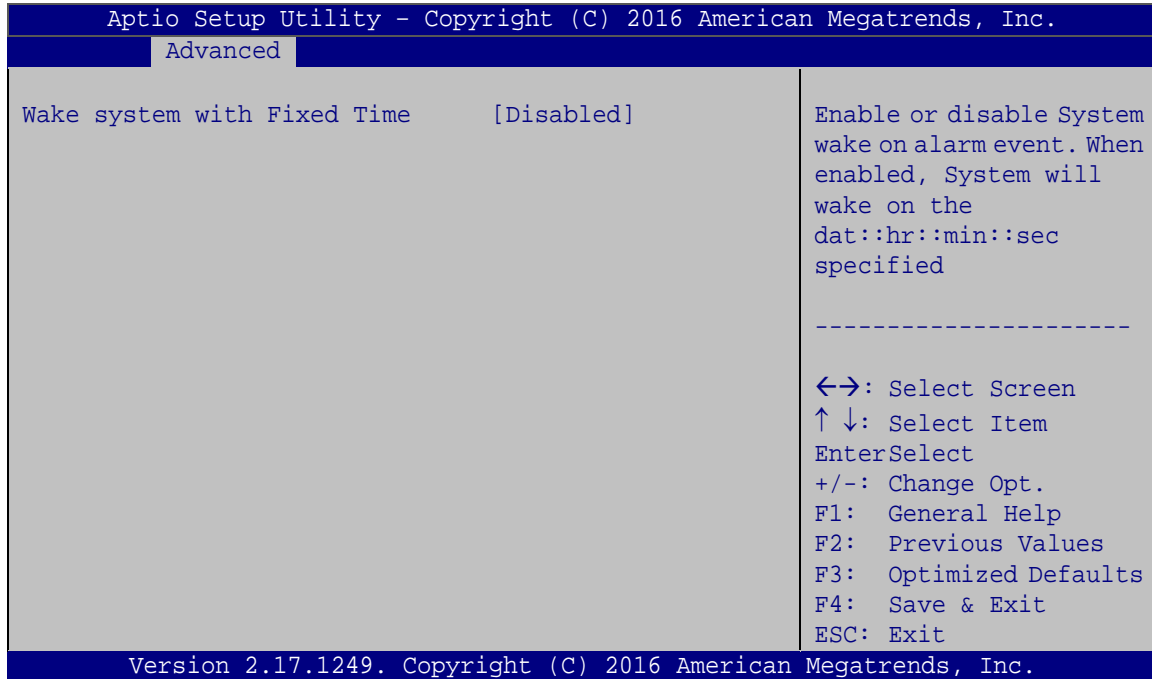

BIOS Menu 9: RTC Wake Settings

→ Wake System with Fixed Time [Disabled]

Use the **Wake System with Fixed Time** option to specify the time the system should be roused from a suspended state.

→ **Disabled** **DEFAULT** The real time clock (RTC) cannot generate a wake event

→ **Enabled** If selected, the following appears with values that can be selected:

*Wake up every day

*Wake up date

*Wake up hour


*Wake up minute

*Wake up second

After setting the alarm, the computer turns itself on from a suspend state when the alarm goes off.

5.3.6 Serial Port Console Redirection

The **Serial Port Console Redirection** menu (**BIOS Menu 10**) allows the console redirection options to be configured. Console redirection allows users to maintain a system remotely by re-directing keyboard input and text output through the serial port.

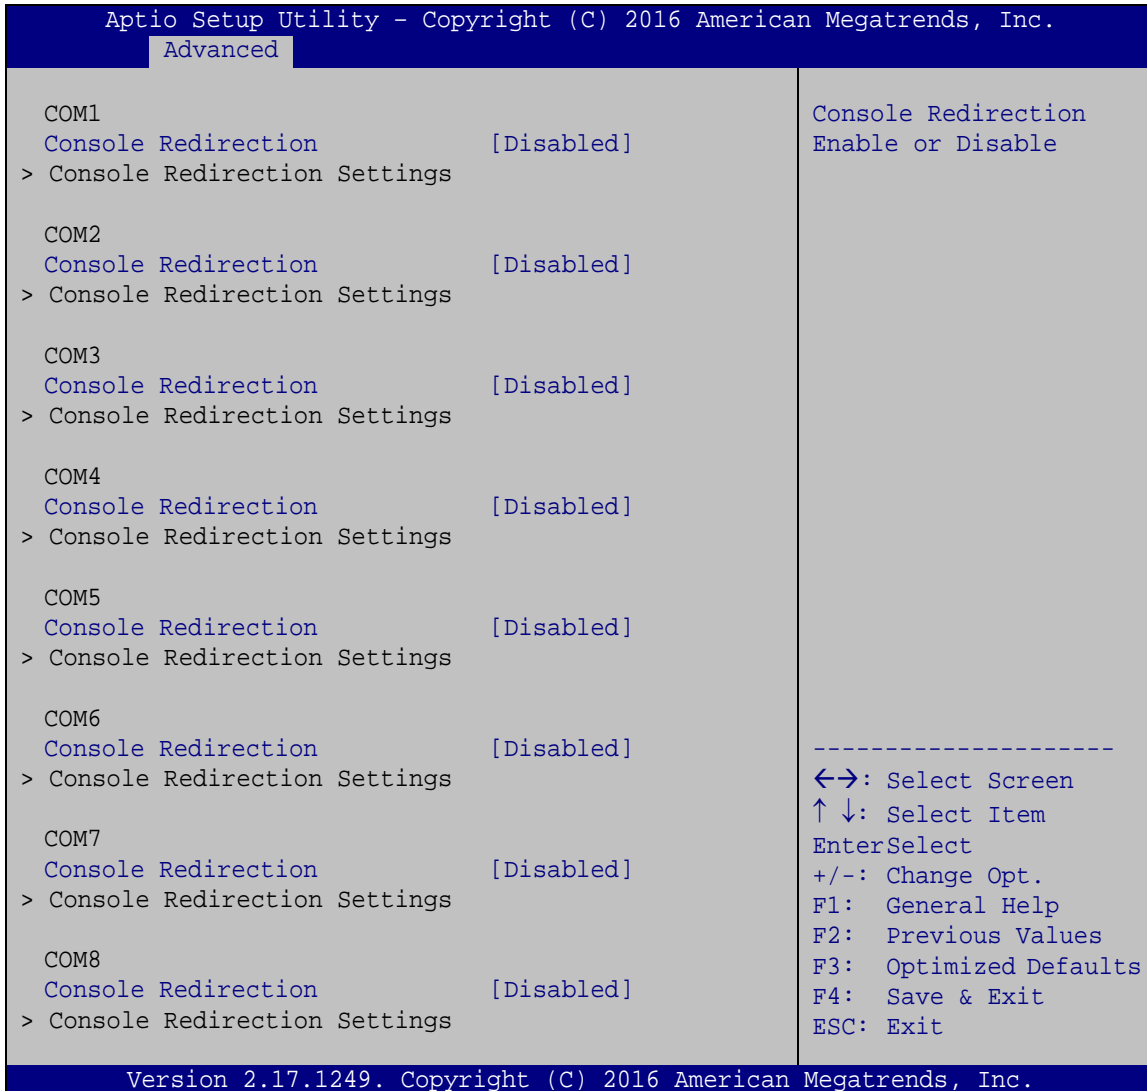

BIOS Menu 10: Serial Port Console Redirection

→ Console Redirection [Disabled]

Use **Console Redirection** option to enable or disable the console redirection function.

→ **Disabled** **DEFAULT** Disabled the console redirection function

TANK-610-BW Embedded System

- ➔ **Enabled** Enabled the console redirection function

5.3.6.1 Console Redirection Settings

The **Console Redirection Settings** menu (**BIOS Menu 11**) allows the console redirection options to be configured. The option is active when Console Redirection option is enabled.

```

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.
  Advanced
COM1
Console Redirection Settings

Terminal Type          [ANSI]
Bits per second       [115200]
Data Bits              [8]
Parity                 [None]
Stop Bits              [1]

Emulation: ANSI:
Extended ASCII char set.
VT100: ASCII char set.
VT100+: Extends VT100 to
support color, function
keys, etc. VT-UTF8: Uses
UTF8 encoding to map
Unicode chars onto 1 or
more bytes.

-----
<->: Select Screen
↑ ↓: Select Item
Enter>Select
+/-: Change Opt.
F1:  General Help
F2:  Previous Values
F3:  Optimized
Defaults
F4:  Save & Exit
ESC: Exit

Version 2.17.1249. Copyright (C) 2016 American Megatrends, Inc.
  
```

BIOS Menu 11: Console Redirection Settings

- ➔ **Terminal Type [ANSI]**

Use the **Terminal Type** option to specify the remote terminal type..

- ➔ **VT100** The target terminal type is VT100
- ➔ **VT100+** The target terminal type is VT100+
- ➔ **VT-UTF8** The target terminal type is VT-UTF8
- ➔ **ANSI** **DEFAULT** The target terminal type is ANSI

→ Bits per second [115200]

Use the **Bits per second** option to specify the transmission speed of the serial port.

- | | | |
|-----------------|----------------|----------------------------------|
| → 9600 | | The transmission speed is 9600 |
| → 19200 | | The transmission speed is 19200 |
| → 38400 | | The transmission speed is 38400 |
| → 57600 | | The transmission speed is 57600 |
| → 115200 | DEFAULT | The transmission speed is 115200 |

→ Data Bits [8]

Use the **Data Bits** option to specify the number of data bits.

- | | | |
|------------|----------------|--------------------------|
| → 7 | | Sets the data bits at 7. |
| → 8 | DEFAULT | Sets the data bits at 8. |

→ Parity [None]

Use the **Parity** option to specify the parity bit that can be sent with the data bits for detecting the transmission errors.

- | | | |
|----------------|----------------|---|
| → None | DEFAULT | No parity bit is sent with the data bits. |
| → Even | | The parity bit is 0 if the number of ones in the data bits is even. |
| → Odd | | The parity bit is 0 if the number of ones in the data bits is odd. |
| → Mark | | The parity bit is always 1. This option does not provide error detection. |
| → Space | | The parity bit is always 0. This option does not provide error detection. |

TANK-610-BW Embedded System


→ Stop Bits [1]

Use the **Stop Bits** option to specify the number of stop bits used to indicate the end of a serial data packet. Communication with slow devices may require more than 1 stop bit.

- 1 **DEFAULT** Sets the number of stop bits at 1.
- 2 Sets the number of stop bits at 2.

5.3.7 iEi Feature

Use the **iEi Feature** menu (错误! 未找到引用源。) to configure the iEi features.

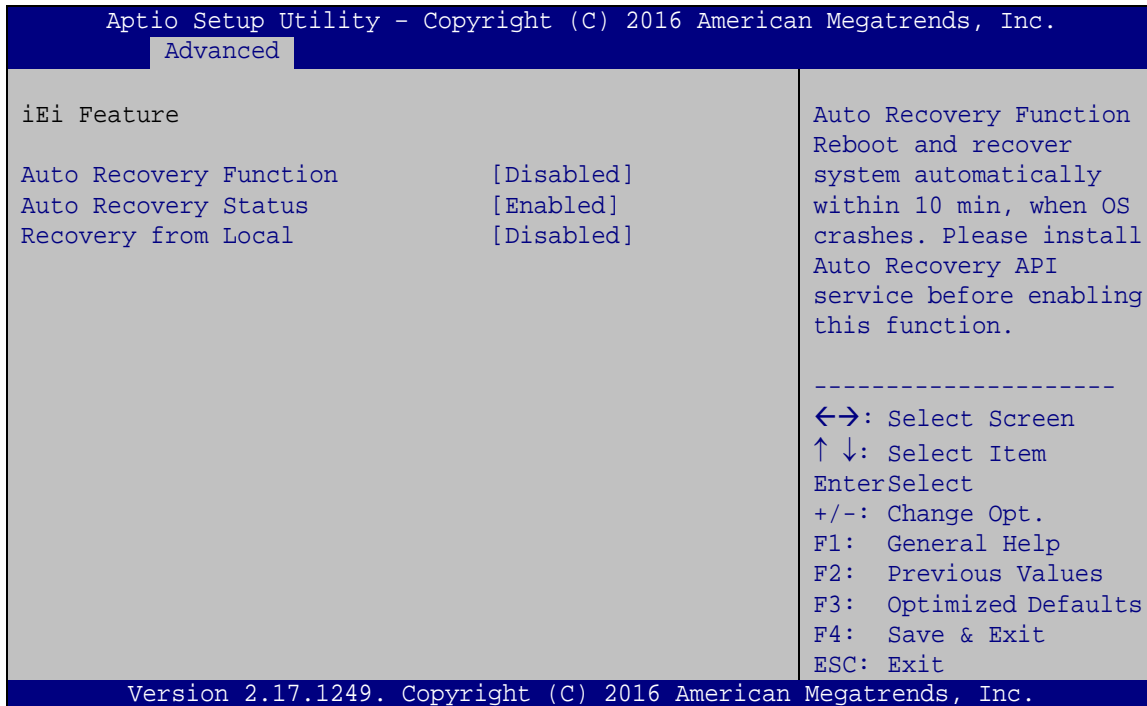

BIOS Menu 12: iEi Feature

→ Auto Recovery Function [Disabled]

Use **Auto Recovery Function** option to enable or disable the auto recovery function.

- **Disabled** **DEFAULT** Disabled the auto recovery function
- **Enabled** Enabled the auto recovery function

→ Auto Recovery Status [Enabled]

Use **Auto Recovery Status** option to enable or disable the auto recovery status.

- **Disabled** **DEFAULT** Disabled the auto recovery status.
- **Enabled** Enabled the auto recovery status.

→ Recovery from Local [Disabled]

Use **Recovery from Local** option to enable or disable recovery from local function..

- **Disabled** **DEFAULT** Disabled the recovery from local function..
- **Enabled** Enabled the recovery from local function..

5.3.8 CPU Configuration

Use the **CPU Configuration** menu (**BIOS Menu 13**) to enter the **CPU Information** submenu or enable Intel Virtualization Technology.

```

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.
  Advanced
CPU Configuration
Intel(R) Celeron(R) CPU N3160 @ 1.60GHz
CPU Signature                406c4
Microcode Patch              403
Max CPU Speed                 1600 MHz
Min CPU Speed                 480 MHz
Processor Cores               4
Intel HT Technology           Not Supported
Intel VT-X Technology         Supported

L1 Data Cache                 24 KB x 4
L1 Code Cache                 32 KB x 4
L2 Cache                      1024 KB x 2
L3 Cache                      Not Present
64-bit                        Supported

Intel Virtualization Technology [Disabled]

When enabled, a VMM can utilize the additional hardware capabilities provided by Vanderpool Technology.

-----
<->: Select Screen
↑ ↓: Select Item
Enter>Select
+/-: Change Opt.
F1: General Help
F2: Previous Values
F3: Optimized Defaults
F4: Save & Exit
ESC: Exit


Version 2.17.1249. Copyright (C) 2016 American Megatrends, Inc.
  
```

BIOS Menu 13: CPU Configuration

The CPU Configuration menu (**BIOS Menu 13**) lists the following CPU details:

5.3.9 SATA Configuration

Use the **SATA Configuration** menu (**BIOS Menu 14**) to change and/or set the configuration of the SATA devices installed in the system.

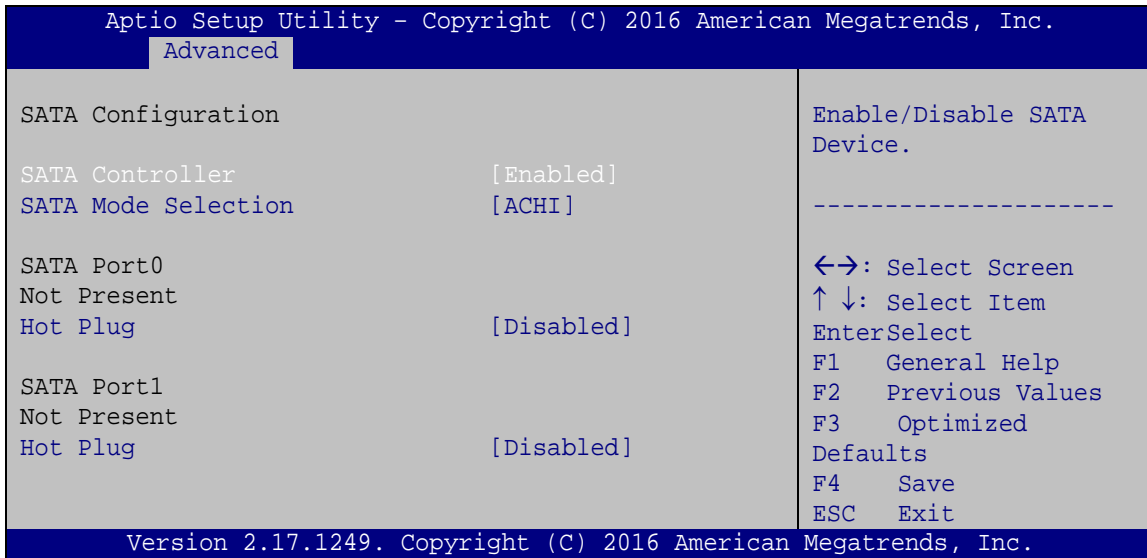

BIOS Menu 14: IDE Configuration

→ SATA Controller [Enabled]

Use the **SATA Controller** option to enable or disable the SATA device.

- **Disabled** Disables the SATA device.
- **Enabled** DEFAULT Enables the SATA device.

→ SATA Mode Selection [AHCI]

Use the **SATA Mode Selection** option to configure SATA devices as normal IDE devices.

- **AHCI** DEFAULT Configures SATA devices as AHCI device.

→ Hot Plug [Disabled]

Use the **Hot Plug** option to configure the port as Hot Pluggable.


- **Disabled** DEFAULT Disables the port as Hot Pluggable.

TANK-610-BW Embedded System

- ➔ **Enabled** Enables the port as Hot Pluggable.

5.3.10 USB Configuration

Use the **USB Configuration** menu (**BIOS Menu 15**) to read USB configuration information and configure the USB settings.

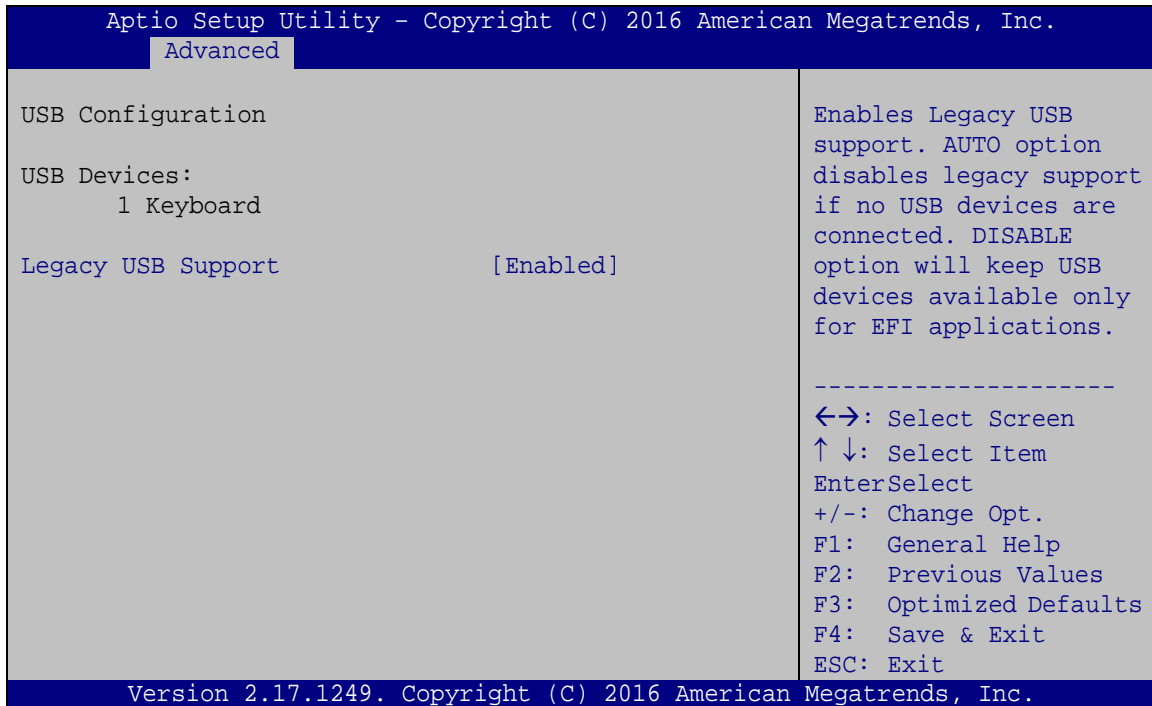

BIOS Menu 15: USB Configuration

➔ **USB Devices**

The **USB Devices** field lists the USB devices that are enabled on the system

➔ **Legacy USB Support [Enabled]**

Use the **Legacy USB Support** BIOS option to enable USB mouse and USB keyboard support. Normally if this option is not enabled, any attached USB mouse or USB keyboard does not become available until a USB compatible operating system is fully booted with all USB drivers loaded. When this option is enabled, any attached USB mouse or USB keyboard can control the system even when there is no USB driver loaded onto the system.

- ➔ **Enabled** **DEFAULT** Legacy USB support enabled
- ➔ **Disabled** Legacy USB support disabled
- ➔ **Auto** Legacy USB support disabled if no USB devices are connected

5.4 Chipset

Use the **Chipset** menu (**BIOS Menu 16**) to access the Host Bridge and South Bridge configuration menus.



WARNING!

Setting the wrong values for the Chipset BIOS selections in the Chipset BIOS menu may cause the system to malfunction.

```

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.
Main   Advanced  Chipset  Boot   Security  Save & Exit
-----
> North Bridge
> South Bridge

Host Bridge Parameters
-----
<->: Select Screen
↑ ↓: Select Item
EnterSelect
+/-: Change Opt.
F1:  General Help
F2:  Previous Values
F3:  Optimized Defaults
F4:  Save & Exit
ESC: Exit

Version 2.17.1249. Copyright (C) 2016 American Megatrends, Inc.
    
```

BIOS Menu 16: Chipset

TANK-610-BW Embedded System

5.4.1 North Bridge Configuration

Use the **North Bridge** menu (**BIOS Menu 17**) to configure the north bridge chipset..

```

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.
  Chipset
> Intel IGD Configuration
Memory Information
Total Memory                2048 MB (LPDDR3)
Memory Slot0                2048 MB (LPDDR3)
Memory Slot2                Not Present

Config Intel IGD Settings.
-----
<=>: Select Screen
↑↓: Select Item
Enter>Select
F1  General Help
F2  Previous Values
F3  Optimized
Defaults
F4  Save
ESC Exit

Version 2.17.1249. Copyright (C) 2016 American Megatrends, Inc.

```

BIOS Menu 17: Host Bridge

5.4.1.1 Intel IGD Configuration

Use the **Intel IGD Configuration** menu to configure the video device connected to the system.

```

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.
  Chipset
Intel IGD Configuration
Primary Display              [Auto]
Primary IGFX Boot Display   [Auto]
DVMT Pre-Allocated          [32M]
DVMT Total Gfx Mem          [256M]

Select which of IGD/PCI Graphics device should be Primary Display.
-----
<=>: Select Screen
↑↓: Select Item
Enter>Select
F1  General Help
F2  Previous Values
F3  Optimized
Defaults
F4  Save
ESC Exit

Version 2.17.1249. Copyright (C) 2016 American Megatrends, Inc.

```

BIOS Menu 18: Graphics Configuration

→ Primary Display [Auto]

Use the **Primary Display** option to select the primary graphics controller the system uses. The following options are available:

- Auto **Default**
- IGD
- PCIe

→ Primary IGFX Boot Display [Auto]

Use the **Primary IGFX Boot Display** option to select the display device used by the system when it boots. Configuration options are listed below.

- Auto **DEFAULT**
- HDMI
- CRT

→ DVMT Pre-Allocated [32MB]

Use the **DVMT Pre-Allocated** option to set the amount of system memory allocated to the integrated graphics processor when the system boots. The system memory allocated can then only be used as graphics memory, and is no longer available to applications or the operating system. Configuration options are listed below:

- 32M **Default**
- 64M
- 96M
- 128M
- 160M
- 192M
- 224M
- 256M
- 288M
- 320M
- 352M
- 384M
- 416M

TANK-610-BW Embedded System

- 448M
- 480M
- 512M

→ DVMT Total Gfx Mem [256M]

Use the **DVMT Total Gfx Mem** option to select DVMT5.0 total graphic memory size used by the internal graphic device. The following options are available:

- 128M
- 256M **Default**
- MAX

5.4.2 South Bridge Configuration

Use the **South Bridge** menu (**BIOS Menu 19**) to configure the south bridge chipset.

```

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.
Chipset
-----
Auto Power Button Status      [Enabled(AT)]
Audio Controller              [Enabled]
Control Detection of the Azalia device.
Disabled = Azalia will be unconditionally disabled
Enabled = Azalia will be unconditionally enabled
Auto = Azalia will be enabled if present, disabled otherwise.

-----
←→: Select Screen
↑↓: Select Item
Enter>Select
F1  General Help
F2  Previous Values
F3  Optimized
Defaults
F4  Save
ESC Exit

Version 2.17.1249. Copyright (C) 2016 American Megatrends, Inc.
    
```

BIOS Menu 19:South Bridge


→ Audio Controller [Enabled]

Use the **Audio Controller** option to enable or disable the High Definition Audio controller.

- **Disabled** The onboard High Definition Audio controller is disabled
- **Enabled** **DEFAULT** The onboard High Definition Audio controller automatically detected and enabled

5.5 Security

Use the **Security** menu (**BIOS Menu 20**) to set system and user passwords.

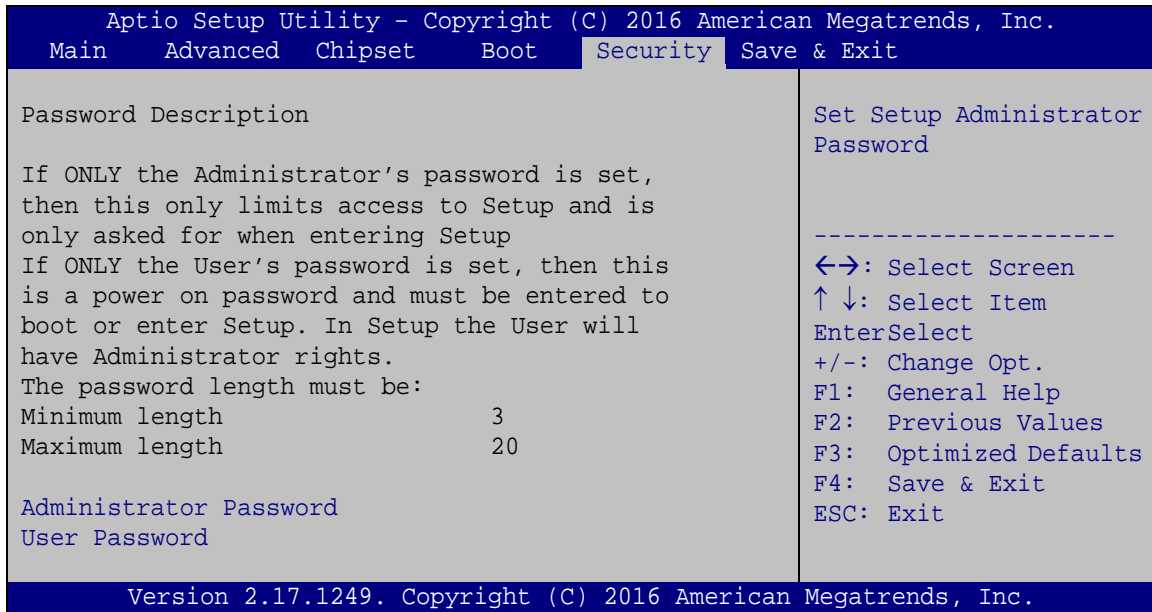

BIOS Menu 20: Security

→ Administrator Password

Use the **Administrator Password** to set or change an administrator password.


→ User Password

Use the **User Password** to set or change a user password.

TANK-610-BW Embedded System

5.6 Boot

Use the **Boot** menu (**BIOS Menu 21**) to configure system boot options.

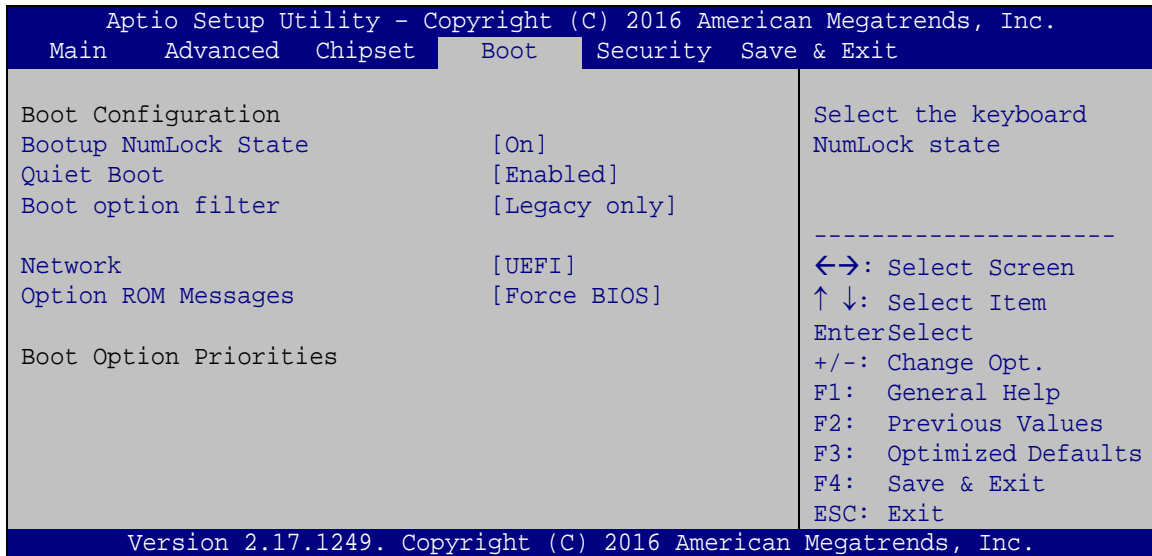

BIOS Menu 21: Boot

→ Bootup NumLock State [On]

Use the **Bootup NumLock State** BIOS option to specify if the number lock setting must be modified during boot up.

→ **On** **DEFAULT** Allows the Number Lock on the keyboard to be enabled automatically when the computer system boots up. This allows the immediate use of the 10-key numeric keypad located on the right side of the keyboard. To confirm this, the Number Lock LED light on the keyboard is lit.

→ **Off** Does not enable the keyboard Number Lock automatically. To use the 10-keys on the keyboard, press the Number Lock key located on the upper left-hand corner of the 10-key pad. The Number Lock LED on the keyboard lights up when the Number Lock is engaged.

→ Quiet Boot [Enabled]

Use the **Quiet Boot** BIOS option to select the screen display when the system boots.

- **Disabled** Normal POST messages displayed
- **Enabled** **DEFAULT** OEM Logo displayed instead of POST messages

→ Boot Option filter [Legacy only]

Use the **Boot Option filter** option to control legacy/UEFI ROMs priority.

- **UEFI and Legacy** Sets ROMs priority to UEFI and legacy
- **Legacy only** **DEFAULT** Sets ROMs priority to legacy only
- **UEFI only** Sets ROMs priority to UEFI only

→ Network [UEFI]

Use the **Network** option to controls the execution of UEFI and Legacy PXE OpROM.

- **Do not launch** Ignore UEFI and Legacy PXE OpROM.
- **UEFI** **DEFAULT** Boot from UEFI devices.
- **Legacy** Boot from legacy devices.

→ Option ROM Messages [Force BIOS]

Use the **Option ROM Messages** option to set the Option ROM display mode.

- **Force BIOS** **DEFAULT** Sets display mode to force BIOS.
- **Keep Current** Sets display mode to current.

TANK-610-BW Embedded System

5.7 Exit

Use the **Exit** menu (**BIOS Menu 22**) to load default BIOS values, optimal failsafe values and to save configuration changes.

```

Aptio Setup Utility - Copyright (C) 2016 American Megatrends, Inc.
Main   Advanced   Chipset   Boot   Security   Save & Exit
-----
Save Changes and Reset
Discard Changes and Reset

Restore Defaults
Save as User Defaults
Restore User Defaults

Exit the system after
saving the changes.

-----
<->: Select Screen
↑ ↓: Select Item
Enter>Select
+/-: Change Opt.
F1:  General Help
F2:  Previous Values
F3:  Optimized Defaults
F4:  Save & Exit
ESC: Exit

Version 2.17.1249. Copyright (C) 2016 American Megatrends, Inc.

```

BIOS Menu 22:Exit

→ Save Changes and Reset

Use the **Save Changes and Reset** option to save the changes made to the BIOS options and to exit the BIOS configuration setup program.

→ Discard Changes and Reset

Use the **Discard Changes and Reset** option to exit the system without saving the changes made to the BIOS configuration setup program.

→ Restore Defaults

Use the **Restore Defaults** option to load the optimal default values for each of the parameters on the Setup menus. **F3 key can be used for this operation.**

→ **Save as User Defaults**

Use the **Save as User Defaults** option to save the changes done so far as user defaults.

→ **Restore User Defaults**

Use the **Restore User Defaults** option to restore the user defaults to all the setup options.

Appendix

A

Regulatory Compliance

DECLARATION OF CONFORMITY

This equipment is in conformity with the following EU directives:

- EMC Directive 2014/30/EU
- Low-Voltage Directive 2014/35/EU
- RoHS II Directive 2015/863/EU

If the user modifies and/or install other devices in the equipment, the CE conformity declaration may no longer apply.

If this equipment has telecommunications functionality, it also complies with the requirements of the R&TTE Directive 1999/5/EC.

English

IEI Integration Corp declares that this equipment is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Български [Bulgarian]

IEI Integration Corp. декларира, че този оборудване е в съответствие със съществените изисквания и другите приложими правила на Директива 1999/5/EC.

Česky [Czech]

IEI Integration Corp tímto prohlašuje, že tento zařizení je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.

Dansk [Danish]

IEI Integration Corp erklærer herved, at følgende udstyr overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.

Deutsch [German]

IEI Integration Corp, erklärt dieses Gerät entspricht den grundlegenden Anforderungen und den weiteren entsprechenden Vorgaben der Richtlinie 1999/5/EU.

Eesti [Estonian]

IEI Integration Corp deklareerib seadme seadme vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.

Español [Spanish]

IEI Integration Corp declara que el equipo cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.

TANK-610-BW Embedded System

Ελληνική [Greek]

IEI Integration Corp ΔΗΛΩΝΕΙ ΟΤΙ ΕΞΟΠΛΙΣΜΟΣ ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.

Français [French]

IEI Integration Corp déclare que l'appareil est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.

Italiano [Italian]

IEI Integration Corp dichiara che questo apparecchio è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.

Latviski [Latvian]

IEI Integration Corp deklarē, ka iekārta atbilst būtiskajām prasībām un citiem ar to saistītajiem noteikumiem Direktīvas 1999/5/ΕΚ.

Lietuvių [Lithuanian]

IEI Integration Corp deklaruoja, kad šis įranga atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.

Nederlands [Dutch]

IEI Integration Corp dat het toestel in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.

Malti [Maltese]

IEI Integration Corp jiddikjara li dan prodott jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn relevanti li hemm fid-Direttiva 1999/5/EC.

Magyar [Hungarian]

IEI Integration Corp nyilatkozik, hogy a berendezés megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.

Polski [Polish]

IEI Integration Corp oświadcza, że wyrobu jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.

Português [Portuguese]

IEI Integration Corp declara que este equipamento está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.

Româna [Romanian]

IEI Integration Corp declară că acest echipament este în conformitate cu cerințele esențiale și cu celelalte prevederi relevante ale Directivei 1999/5/CE.

Slovensko [Slovenian]

IEI Integration Corp izjavlja, da je ta opreme v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.

Slovensky [Slovak]

IEI Integration Corp týmto vyhlasuje, že zariadenia spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.

Suomi [Finnish]

IEI Integration Corp vakuuttaa täten että laitteet on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.

Svenska [Swedish]

IEI Integration Corp förklarar att denna utrustningstyp står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

ROHS STATEMENT



The label on the product indicates this product complies to European (EU) Restriction of Hazardous Substances (RoHS) that set maximum concentration limits on hazardous materials used in electrical and electronic equipment.

TANK-610-BW Embedded System

FCC WARNING



This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body.

CHINA ROHS



The label on the product indicates the estimated “Environmentally Friendly Use Period” (EFUP). This is an estimate of the number of years that these substances would “not leak out or undergo abrupt change.” This product may contain replaceable sub-assemblies/ components which have a shorter EFUP such as batteries and lamps. These components will be separately marked.

Appendix

B

Safety Precautions

TANK-610-BW Embedded System



WARNING:

The precautions outlined in this chapter should be strictly followed. Failure to follow these precautions may result in permanent damage to the TANK-610-BW.

B.1 Safety Precautions

Please follow the safety precautions outlined in the sections that follow:

B.1.1 General Safety Precautions

Please ensure the following safety precautions are adhered to at all times.

- **Follow the electrostatic precautions** outlined below whenever the TANK-610-BW is opened.
- **Make sure the power is turned off and the power cord is disconnected** whenever the TANK-610-BW is being installed, moved or modified.
- **Do not apply voltage levels that exceed the specified voltage range.** Doing so may cause fire and/or an electrical shock.
- **Electric shocks can occur** if the TANK-610-BW chassis is opened when the TANK-610-BW is running.
- **Do not drop or insert any objects** into the ventilation openings of the TANK-610-BW.
- **If considerable amounts of dust, water, or fluids enter the TANK-610-BW,** turn off the power supply immediately, unplug the power cord, and contact the TANK-610-BW vendor.
- **DO NOT:**
 - Drop the TANK-610-BW against a hard surface.
 - Strike or exert excessive force onto the system.
 - Touch any of the system with a sharp object
 - In a site where the ambient temperature exceeds the rated temperature

B.1.2 Anti-static Precautions

**WARNING:**

Failure to take ESD precautions during the installation of the TANK-610-BW may result in permanent damage to the TANK-610-BW and severe injury to the user.

Electrostatic discharge (ESD) can cause serious damage to electronic components, including the TANK-610-BW. Dry climates are especially susceptible to ESD. It is therefore critical that whenever the TANK-610-BW is opened and any of the electrical components are handled, the following anti-static precautions are strictly adhered to.

- ***Wear an anti-static wristband:*** Wearing a simple anti-static wristband can help to prevent ESD from damaging any electrical component.
- ***Self-grounding:*** Before handling any electrical component, touch any grounded conducting material. During the time the electrical component is handled, frequently touch any conducting materials that are connected to the ground.
- ***Use an anti-static pad:*** When configuring or working with an electrical component, place it on an anti-static pad. This reduces the possibility of ESD damage.
- ***Only handle the edges of the electrical component:*** When handling the electrical component, hold the electrical component by its edges.

TANK-610-BW Embedded System

B.1.3 Product Disposal




CAUTION:

Risk of explosion if battery is replaced by an incorrect type. Only certified engineers should replace the on-board battery.

Dispose of used batteries according to instructions and local regulations.

- Outside the European Union - If you wish to dispose of used electrical and electronic products outside the European Union, please contact your local authority so as to comply with the correct disposal method.
- Within the European Union - The device that produces less waste and is easier to recycle is classified as electronic device in terms of the European Directive 2012/19/EU (WEEE), and must not be disposed of as domestic garbage.



EU-wide legislation, as implemented in each Member State, requires that waste electrical and electronic products carrying the mark (left) must be disposed of separately from normal household waste. This includes monitors and electrical accessories, such as signal cables or power cords. When you need to dispose of your device, please follow the guidance of your local authority, or ask the shop where you purchased the product. The mark on electrical and electronic products only applies to the current European Union Member States.

Please follow the national guidelines for electrical and electronic product disposal.

B.2 Maintenance and Cleaning Precautions

When maintaining or cleaning the TANK-610-BW, please follow the guidelines below.

B.2.1 Maintenance and Cleaning

Prior to cleaning any part or component of the TANK-610-BW, please read the details below.

- The interior of the TANK-610-BWX does not require cleaning. Keep fluids away from the TANK-610-BW interior.
- Be cautious of all small removable components when vacuuming the TANK-610-BW.
- Turn the TANK-610-BW off before cleaning the TANK-610-BW.
- Never drop any objects or liquids through the openings of the TANK-610-BW.
- Be cautious of any possible allergic reactions to solvents or chemicals used when cleaning the TANK-610-BW.
- Avoid eating, drinking and smoking within vicinity of the TANK-610-BW.

B.2.2 Cleaning Tools

Some components in the TANK-610-BW may only be cleaned using a product specifically designed for the purpose. In such case, the product will be explicitly mentioned in the cleaning tips. Below is a list of items to use when cleaning the TANK-610-BW.

- **Cloth** – Although paper towels or tissues can be used, a soft, clean piece of cloth is recommended when cleaning the TANK-610-BW.
- **Water or rubbing alcohol** – A cloth moistened with water or rubbing alcohol can be used to clean the TANK-610-BW.
- **Using solvents** – The use of solvents is not recommended when cleaning the TANK-610-BW as they may damage the plastic parts.
- **Vacuum cleaner** – Using a vacuum specifically designed for computers is one of the best methods of cleaning the TANK-610-BW. Dust and dirt can restrict the airflow in the TANK-610-BW and cause its circuitry to corrode.
- **Cotton swabs** - Cotton swabs moistened with rubbing alcohol or water are excellent tools for wiping hard to reach areas.
- **Foam swabs** - Whenever possible, it is best to use lint free swabs such as foam swabs for cleaning.

Appendix

C

BIOS Options

Below is a list of BIOS configuration options in the BIOS chapter.

➔	System Date [xx/xx/xx]	41
➔	System Time [xx:xx:xx]	41
➔	ACPI Sleep State [S1 (CPU Stop Clock)]	42
➔	Serial Port [Enabled].....	44
➔	Change Settings [Auto]	44
➔	Serial Port [Enabled].....	45
➔	Change Settings [Auto]	45
➔	Serial Port [Enabled].....	46
➔	Change Settings [Auto]	46
➔	Serial Port [Enabled].....	47
➔	Change Settings [Auto]	47
➔	Serial Port [Enabled].....	48
➔	Change Settings [Auto]	48
➔	Device Mode [RS232].....	48
➔	Serial Port [Enabled].....	49
➔	Change Settings [Auto]	49
➔	Device Mode [RS232].....	50
➔	PC Health Status	50
➔	Serial Port [Enabled].....	52
➔	Change Settings [Auto]	52
➔	Serial Port [Enabled].....	53
➔	Change Settings [Auto]	53
➔	Wake System with Fixed Time [Disabled]	55
➔	Console Redirection [Disabled]	56
➔	Terminal Type [ANSI].....	57
➔	Bits per second [115200].....	58
➔	Data Bits [8]	58
➔	Parity [None].....	58
➔	Stop Bits [1].....	59
➔	Auto Recovery Function [Disabled].....	59
➔	Auto Recovery Status [Enabled]	60
➔	Recovery from Local [Disabled].....	60
➔	Intel Virtualization Technology [Disabled]	61

TANK-610-BW Embedded System

➔ SATA Controller [Enabled].....	62
➔ SATA Mode Selection [AHCI].....	62
➔ Hot Plug [Disabled].....	62
➔ USB Devices.....	63
➔ Legacy USB Support [Enabled].....	63
➔ Primary Display [Auto].....	66
➔ Primary IGFX Boot Display [Auto].....	66
➔ DVMT Pre-Allocated [32MB].....	66
➔ DVMT Total Gfx Mem [256M].....	67
➔ Audio Controller [Enabled].....	68
➔ Administrator Password.....	68
➔ User Password.....	68
➔ Bootup NumLock State [On].....	69
➔ Quiet Boot [Enabled].....	70
➔ Boot Option filter [Legacy only].....	70
➔ Network [UEFI].....	70
➔ Option ROM Messages [Force BIOS].....	70
➔ Save Changes and Reset.....	71
➔ Discard Changes and Reset.....	71
➔ Restore Defaults.....	71
➔ Save as User Defaults.....	72
➔ Restore User Defaults.....	72

Appendix

D

Watchdog Timer

TANK-610-BW Embedded System



NOTE:

The following discussion applies to DOS. Contact IEI support or visit the IEI website for drivers for other operating systems.

The Watchdog Timer is a hardware-based timer that attempts to restart the system when it stops working. The system may stop working because of external EMI or software bugs. The Watchdog Timer ensures that standalone systems like ATMs will automatically attempt to restart in the case of system problems.

A BIOS function call (INT 15H) is used to control the Watchdog Timer.

INT 15H:

AH – 6FH Sub-function:	
AL – 2:	Sets the Watchdog Timer's period.
BL:	Time-out value (Its unit-second is dependent on the item "Watchdog Timer unit select" in CMOS setup).

Table E-1: AH-6FH Sub-function

Call sub-function 2 to set the time-out period of Watchdog Timer first. If the time-out value is not zero, the Watchdog Timer starts counting down. When the timer value reaches zero, the system resets. To ensure that this reset condition does not occur, calling sub-function 2 must periodically refresh the Watchdog Timer. However, the watchdog timer is disabled if the time-out value is set to zero.

A tolerance of at least 10% must be maintained to avoid unknown routines within the operating system (DOS), such as disk I/O that can be very time-consuming.

**NOTE:**

The Watchdog Timer is activated through software. The software application that activates the Watchdog Timer must also deactivate it when closed. If the Watchdog Timer is not deactivated, the system will automatically restart after the Timer has finished its countdown.

EXAMPLE PROGRAM:

```
; INITIAL TIMER PERIOD COUNTER
```

```
;
```

```
W_LOOP:
```

```
;
```

```
MOV      AX, 6F02H      ;setting the time-out value  
MOV      BL, 30         ;time-out value is 48 seconds  
INT      15H
```

```
;
```

```
; ADD THE APPLICATION PROGRAM HERE
```

```
;
```

```
CMP      EXIT_AP, 1     ;is the application over?  
JNE      W_LOOP        ;No, restart the application
```

```
MOV      AX, 6F02H     ;disable Watchdog Timer  
MOV      BL, 0         ;  
INT      15H
```

```
;
```

```
; EXIT ;
```


Appendix

E

Hazardous Materials Disclosure

E.1 RoHS II Directive (2015/863/EU)

The details provided in this appendix are to ensure that the product is compliant with the RoHS II Directive (2015/863/EU). The table below acknowledges the presences of small quantities of certain substances in the product, and is applicable to RoHS II Directive (2015/863/EU).

Please refer to the following table.

Part Name	Toxic or Hazardous Substances and Elements									
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (CR(VI))	Polybrominated Biphenyls (PBB)	Polybrominated Diphenyl Ethers (PBDE)	Bis(2-ethylhexyl) phthalate (DEHP)	Butyl benzyl phthalate (BBP)	Dibutyl phthalate (DBP)	Diisobutyl phthalate (DIBP)
Housing	O	O	O	O	O	O	O	O	O	O
Printed Circuit Board	O	O	O	O	O	O	O	O	O	O
Metal Fasteners	O	O	O	O	O	O	O	O	O	O
Cable Assembly	O	O	O	O	O	O	O	O	O	O
Fan Assembly	O	O	O	O	O	O	O	O	O	O
Power Supply Assemblies	O	O	O	O	O	O	O	O	O	O
Battery	O	O	O	O	O	O	O	O	O	O
<p>O: This toxic or hazardous substance is contained in all of the homogeneous materials for the part is below the limit requirement in Directive (EU) 2015/863.</p> <p>X: This toxic or hazardous substance is contained in at least one of the homogeneous materials for this part is above the limit requirement in Directive (EU) 2015/863.</p>										

TANK-610-BW Embedded System

E.2 China RoHS

此附件旨在确保本产品符合中国 RoHS 标准。以下表格标示此产品中某有毒物质的含量符合中国 RoHS 标准规定的限量要求。

本产品上会附有“环境友好使用期限”的标签，此期限是估算这些物质“不会有泄漏或突变”的年限。本产品可能包含有较短的环境友好使用期限的可替换元件，像是电池或灯管，这些元件将会单独标示出来。

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (CR(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
壳体	○	○	○	○	○	○
印刷电路板	○	○	○	○	○	○
金属螺帽	○	○	○	○	○	○
电缆组装	○	○	○	○	○	○
风扇组装	○	○	○	○	○	○
电力供应组装	○	○	○	○	○	○
电池	○	○	○	○	○	○

○: 表示该有毒有害物质在该部件所有物质材料中的含量均在 SJ/T11364-2014 與 GB/T26572-2011 标准规定的限量要求以下。

X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 SJ/T11364-2014 與 GB/T26572-2011 标准规定的限量要求。