

2.5" SATA SSD

3TG6-P Series

with Innodisk NAND

Customer: _____

Customer

Part

Number: _____

Innodisk

Part

Number: _____

Innodisk

Model Name: _____

Date: _____

Innodisk Approver	Customer Approver

Features:

- SATA III
- Innodisk 3D TLC NAND
- 2.5" SATA SSD
- Standard & Wide-temperature
- iPower Guard
- iData Guard
- Dynamic Thermal Management

Performance:

- Sequential Read up to 560 MB/s
- Sequential Write up to 450 MB/s

Power Requirements:

Input Voltage:	5V±5%
Max Operating Wattage:	4.0W
Idle Wattage:	1.4W

Reliability:

Capacity	TBW	DWPD
128GB	289	2.1
256GB	578	2.1
512GB	1154	2.1
1TB	2308	2.1
2TB	4615	2.1
4TB	9231	2.1

Data Retention	10 Years
Warranty	3 Years

For warranty details, please refer to:

https://www.innodisk.com/en/support_and_service/warranty

Table of contents

LIST OF FIGURES	7
1. PRODUCT OVERVIEW	8
1.1 INTRODUCTION OF INNODISK 2.5" SATA SSD 3TG6-P	8
1.2 PRODUCT VIEW AND MODELS	8
1.3 SATA INTERFACE.....	9
1.4 2.5-INCH FORM FACTOR	9
2. PRODUCT SPECIFICATIONS	10
2.1 CAPACITY AND DEVICE PARAMETERS.....	10
2.2 PERFORMANCE	10
2.3 ELECTRICAL SPECIFICATIONS	12
2.3.1 Power Requirement.....	12
2.3.2 Power Consumption	12
2.4 ENVIRONMENTAL SPECIFICATIONS	13
2.4.1 Temperature Ranges	13
2.4.2 Humidity.....	13
2.4.3 Shock and Vibration	13
2.4.4 Mean Time between Failures (MTBF)	13
2.5 CE AND FCC COMPATIBILITY	13
2.6 RoHS COMPLIANCE	14
2.7 RELIABILITY	14
2.8 TRANSFER MODE	14
2.9 PIN ASSIGNMENT	15
2.11 ASSEMBLY WEIGHT	17
2.12 SEEK TIME	17
2.13 HOT PLUG.....	17
2.14 NAND FLASH MEMORY.....	17
3. THEORY OF OPERATION	18
3.1 OVERVIEW.....	18
3.2 SATA CONTROLLER	18
3.3 ERROR DETECTION AND CORRECTION.....	18
3.4 WEAR-LEVELING	19
3.5 BAD BLOCKS MANAGEMENT	19
3.6 iDATA GUARD.....	19
3.7 GARBAGE COLLECTION/TRIM	19
3.8 iPOWER GUARD.....	19
3.9 DIE RAID	19
3.10 QUICK ERASE (OPTIONAL)	20

3.10.1 Quick Erase Command.....20

3.11 THERMAL THROTTLING.....21

4.1 2.5" SATA SSD 3TG6-P PIN DIRECTIONS.....22

4.2 ELECTRICAL CONNECTIONS FOR 2.5" SATA SSD 3TG6-P22

4.3 FORM FACTOR.....22

4.4 DEVICE DRIVE23

5. SMART FEATURE SET24

5.1 SMART ATTRIBUTES.....25

6. PART NUMBER RULE26

REVISION HISTORY

Revision	Description	Date
Preliminary	First Released	Jan., 2019
Rev 1.0	Modify Performance Table Modify Power Consumption Table Update RoHS report Add Note for TRIM function	Mar., 2019
Rev 1.1	Add 1TB & 2TB Information Add Die RAID Modify Power Consumption Table Modify SMART Attribute Table	May, 2019
Rev 1.2	Delete 2TB Information Update RoHS report	May, 2019
Rev 1.3	Add 2TB Information	Sep., 2020
Rev 1.4	Add 64-layers & 96 Layers information	Oct., 2020
Rev 1.5	Modify 4TB Information	Dec., 2020
Rev 1.6	96 Layers add Wide temperature solution	Jan., 2021
Rev 1.7	Add 128GB information for 96L	May, 2021
Rev 1.8	Update TBW	Aug., 2021
Rev 1.9	Modify Performance Data	Aug., 2021
Rev 2.0	Add 112 Layers information	May., 2022
Rev 2.1	Add an image of Quick Erase	May., 2022
Rev 2.2	Add Feature Table	May., 2022
Rev 2.3	Update 128GB LBA	Oct., 2022
Rev 2.4	Update 96 Layers Performance chart	Dec., 2022
Rev 2.5	Remove EOL Product	Nov., 2023
Rev 2.6	Revise PN rule	Apr., 2024
Rev 2.7	Add 112-Layer Slim inside Performance	May., 2024

List of Tables

TABLE 1: DEVICE PARAMETERS.....10

TABLE 2: PERFORMANCE¹ – 96 LAYERS 3D TLC – SLIM INSIDE10

TABLE 3: PERFORMANCE¹ – 96 LAYERS 3D TLC – FULL PCB11

TABLE 4: PERFORMANCE¹ – 112 LAYERS 3D TLC - SLIM INSIDE11

TABLE 5: PERFORMANCE¹ – 112 LAYERS 3D TLC – FULL PCB12

TABLE 6: INNODISK 2.5" SATA SSD 3TG6-P POWER REQUIREMENT.....12

TABLE 7: TYPICAL POWER CONSUMPTION12

TABLE 8: TEMPERATURE RANGE FOR 2.5" SATA SSD 3TG6-P13

TABLE 9: SHOCK/VIBRATION TESTING FOR 2.5" SATA SSD 3TG6-P13

TABLE 10: 2.5" SATA SSD 3TG6-P MTBF13

TABLE 11: INNODISK 2.5" SATA SSD 3TG6-P PIN ASSIGNMENT.....15

List of Figures

FIGURE 1: INNODISK 2.5" SATA SSD 3TG6-P	8
FIGURE 2: INNODISK 2.5" SATA SSD 3TG6-P BLOCK DIAGRAM.....	18
FIGURE 3: SIGNAL SEGMENT AND POWER SEGMENT	22

1. Product Overview

1.1 Introduction of Innodisk 2.5" SATA SSD 3TG6-P

Innodisk 2.5" SATA SSD 3TG6-P products provide high capacity flash memory Solid State Drive (SSD) that electrically complies with Serial ATA (SATA) standard. It supports SATA III standard (6.0GHz) with high performance. Innodisk 2.5" SATA SSD 3TG6-P is designed for industrial field, and supports several standard features, including TRIM, NCQ, and S.M.A.R.T. The SSD have good performance, no latency time and small seek time. It effectively reduces the booting time of operation system and the power consumption is less than hard disk drive (HDD).

CAUTION *TRIM must be enabled.*

TRIM enables SSD's controller to skip invalid data instead of moving. It can free up significant amount of resources, extends the lifespan of SSD by reducing erase, and write cycles on the SSD. Innodisk's handling of garbage collection along with TRIM command improves write performance on SSDs.

1.2 Product View and Models

Innodisk 2.5" SATA SSD 3TG6-P is available in follow capacities:

2.5" SATA SSD 3TG6-P 128GB

2.5" SATA SSD 3TG6-P 256GB

2.5" SATA SSD 3TG6-P 512GB

2.5" SATA SSD 3TG6-P 1TB

2.5" SATA SSD 3TG6-P 2TB

2.5" SATA SSD 3TG6-P 4TB



Figure 1: Innodisk 2.5" SATA SSD 3TG6-P

1.3 SATA Interface

Innodisk 2.5" SATA SSD 3TG6-P supports SATA III interface, and backward compliant with SATA I and SATA II.

1.4 2.5-inch Form Factor

The Industry-standard 2.5-inch form factor design with metal material case is easy for installation, which has a compact design 69.85mm (W) x 100.00mm (L) x 6.90mm (H)

2. Product Specifications

2.1 Capacity and Device Parameters

2.5" SATA SSD 3TG6-P device parameters are shown in Table 1.

Table 1: Device parameters

Capacity	LBA	Cylinders	Heads	Sectors	User Capacity(MB)
128GB	234441648	16383	16	63	114473
256GB	468862128	16383	16	63	228936
512GB	937703088	16383	16	63	457862
1TB	1875385008	16383	16	63	915715
2TB	3750748848	16383	16	63	1831420
4TB	7501497696	16383	16	63	3662840

2.2 Performance

Burst Transfer Rate: 6.0Gbps

Table 2: Performance¹ – 96 Layers 3D TLC – Slim inside

Capacity	Unit	128GB	256GB	512GB
Sequential ² Read (max.)	MB/s	380	550	560
Sequential ² Write (max.)		60	110	240
4KB Random ² Read (QD32)	IOPS	25,000	43,000	71,000
4KB Random ² Write (QD32)		16,000	28,000	55,000

Note: 1. Performance based on CrystalDiskMark 5.1.2 with file size 1000MB of Queue Depth 32

2. Performance may vary based on various firmware version or test platform

Table 3: Performance¹ – 96 Layers 3D TLC – Full PCB

Capacity	Unit	128GB	256GB	512GB	1TB	2TB	4TB
Sequential ² Read (max.)	MB/s	380	550	550	540	510	500
Sequential ² Write (max.)		60	120	250	420	410	410
4KB Random ² Read (QD32)	IOPS	25,000	47,000	74,000	79,000	81,000	79000
4KB Random ² Write (QD32)		16,000	31,000	58,000	56,000	57,000	54000

Note: 1. Performance based on CrystalDiskMark 5.1.2 with file size 1000MB of Queue Depth 32

2. Performance may vary based on various firmware version or test platform

Table 4: Performance¹ – 112 Layers 3D TLC - Slim inside

Capacity	Unit	128GB	256GB	512GB
Sequential ² Read (max.)	MB/s	400	510	510
Sequential ² Write (max.)		90	170	240
4KB Random ² Read (QD32)	IOPS	26,000	49,000	58,000
4KB Random ² Write (QD32)		22,000	44,000	55,000

Note: 1. Performance based on CrystalDiskMark 6.0.2 with file size 1000MB of Queue Depth 32

2. Single PCB inside

3. Performance may vary based on various firmware version or test platform

Table 5: Performance¹ – 112 Layers 3D TLC – Full PCB

Capacity	Unit	128GB	256GB	512GB	1TB	2TB	4TB
Sequential ² Read (max.)	MB/s	220	210	400	510	500	450
Sequential ² Write (max.)		90	70	150	300	450	420
4KB Random ² Read (QD32)	IOPS	26,000	23,000	43,000	68,000	76,000	82,000
4KB Random ² Write (QD32)		22,000	19,000	38,000	56,000	58,000	57,000

Note: 1. Performance based on CrystalDiskMark 6.0.2 with file size 1000MB of Queue Depth 32

2. Single PCB inside

3. Performance may vary based on various firmware version or test platform

2.3 Electrical Specifications

2.3.1 Power Requirement

Table 6: Innodisk 2.5" SATA SSD 3TG6-P Power Requirement

Item	Symbol	Rating	Unit
Input voltage	V _{IN}	+5 DC +- 5%	V

2.3.2 Power Consumption

Table 7: Typical Power Consumption

Mode	Power Consumption (W)
Read (RMS) ¹	3.4
Write (RMS) ¹	4.0
Idle	1.4
Boot Up	3.7

Target: 4TB 2.5" SATA SSD 3TG6-P

2.4 Environmental Specifications

2.4.1 Temperature Ranges

Table 8: Temperature range for 2.5" SATA SSD 3TG6-P

Temperature	Range
Operating (Ta)	Standard Grade: 0°C to +70°C
	Industrial Grade: -40°C to 85°C
Storage	-40°C to +85°C

2.4.2 Humidity

Relative Humidity: 10-95%, non-condensing

2.4.3 Shock and Vibration

Table 9: Shock/Vibration Testing for 2.5" SATA SSD 3TG6-P

Reliability	Test Conditions	Reference Standards
Vibration	7 Hz to 2K Hz, 20G, 3 axes	IEC 60068-2-6
Mechanical Shock	Duration: 0.5ms, 1500 G, 3 axes	IEC 60068-2-27

2.4.4 Mean Time between Failures (MTBF)

Following table summarizes the MTBF prediction results for various 2.5" SATA SSD 3TG6-P configurations. The analysis was performed using a RAM Commander™ failure rate prediction.

- **Failure Rate:** The total number of failures within an item population, divided by the total number of life units expended by that population, during a particular measurement interval under stated condition.
- **Mean Time between Failures (MTBF):** A basic measure of reliability for repairable items: The mean number of life units during which all parts of the item perform within their specified limits, during a particular measurement interval under stated conditions.

Table 10: 2.5" SATA SSD 3TG6-P MTBF

Product	Condition	MTBF (Hours)
Innodisk 2.5" SATA SSD 3TG6-P	Telcordia SR-332 GB, 25°C	>3,000,000

2.5 CE and FCC Compatibility

2.5" SATA SSD 3TG6-P conforms to CE and FCC requirements.

Reliability	Reference standards
Electrostatic Discharge (ESD)	EC 61000-4-2 ESD

2.6 RoHS Compliance

2.5" SATA SSD 3TG6-P is fully compliant with RoHS directive.

2.7 Reliability

Parameter	Value	
Flash endurance	3,000 P/E cycles	
Wear-Leveling Algorithm	Support	
Bad Blocks Management	Support	
Error Correct Code	Support	
TBW* (Total Bytes Written) Unit:TB		
Capacity	Sequential workload	Client workload
128GB	341	289
256GB	682	578
512GB	1364	1154
1TB	2663	2308
2TB	5327	4615
4TB	10654	9231
*Note:		
1. Sequential: Mainly sequential write.		
2. Client: Follow JESD218 Test method and JESD219A Workload, tested by ULINK. (The capacity lower than 64GB client workload is not specified in JEDEC219A, the values are estimated.)		
3. Based on out-of-box performance.		

2.8 Transfer Mode

2.5" SATA SSD 3TG6-P support following transfer mode:

Serial ATA III 6.0Gbps

Serial ATA II 3.0Gbps

Serial ATA I 1.5Gbps

2.9 Pin Assignment


Innodisk 2.5" SATA SSD 3TG6-P uses a standard SATA pin-out. See following table for 2.5" SATA SSD 3TG6-P pin assignment.

Table 11: Innodisk 2.5" SATA SSD 3TG6-P Pin Assignment


Name	Type	Description
S1	GND	NA
S2	A+	Differential Signal Pair A
S3	A-	
S4	GND	NA
S5	B-	Differential Signal Pair B
S6	B+	
S7	GND	NA
Key and Spacing separate signal and power segments		
P1	NC	NA
P2	NC	NA
P3	NC	NA
P4	GND	NA
P5	GND	NA
P6	GND	NA
P7	V5	5V Power, Pre-Charge
P8	V5	5V Power
P9	V5	5V Power
P10	GND	NA
P11	DAS/DSS	Device Activity Signal / Disable Staggered
P12	GND	NA
P13	NC	NA
P14	NC	NA
P15	NC	NA

2.10 Mechanical Dimensions

* Full PCB

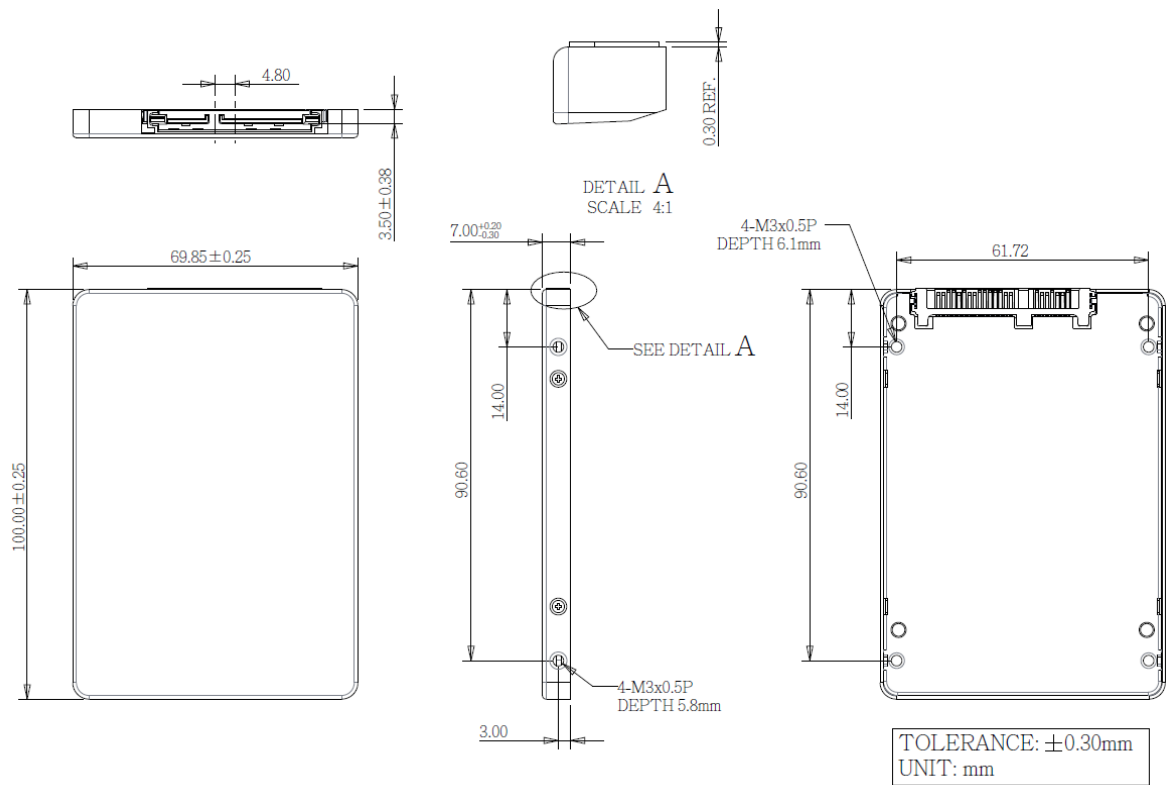

* Slim inside

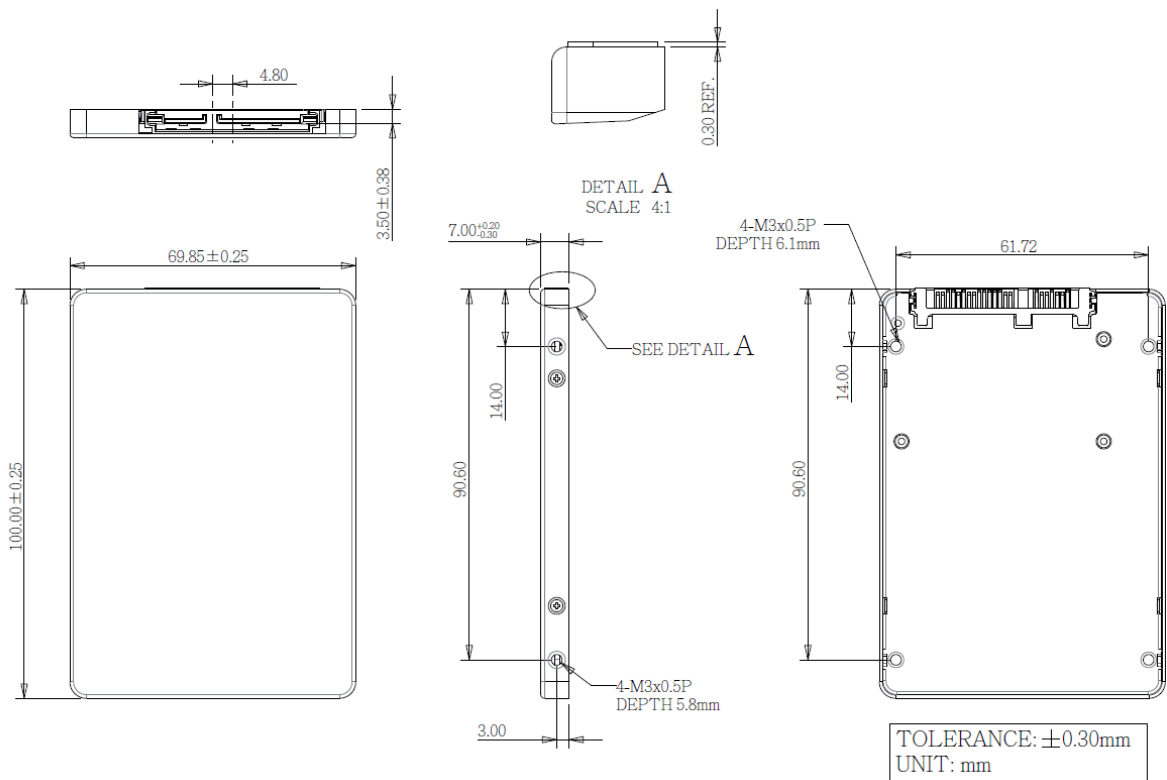

2.11 Assembly Weight

An Innodisk 2.5" SATA SSD 3TG6-P within 3D TLC Flash ICs, 2TB's weight is 90 grams approx.

2.12 Seek Time

Innodisk 2.5" SATA SSD 3TG6-P is not a magnetic rotating design. There is no seek or rotational latency required.

2.13 Hot Plug

The SSD support hot plug function and can be removed or plugged-in during operation. User has to avoid hot plugging the SSD which is configured as boot device and installed operation system.

Surprise hot plug : The insertion of a SATA device into a backplane (combine signal and power) that has power present. The device powers up and initiates an OOB sequence.

Surprise hot removal: The removal of a SATA device from a powered backplane, without first being placed in a quiescent state.

2.14 NAND Flash Memory

Innodisk 2.5" SATA SSD 3TG6-P uses 3D TLC Innodisk NAND flash memory, with 3,000 program & erase cycles, which is non-volatility, high reliability and high speed memory storage.

3. Theory of Operation

3.1 Overview

Figure 2 shows the operation of Innodisk 2.5" SATA SSD 3TG6-P from the system level, including the major hardware blocks.

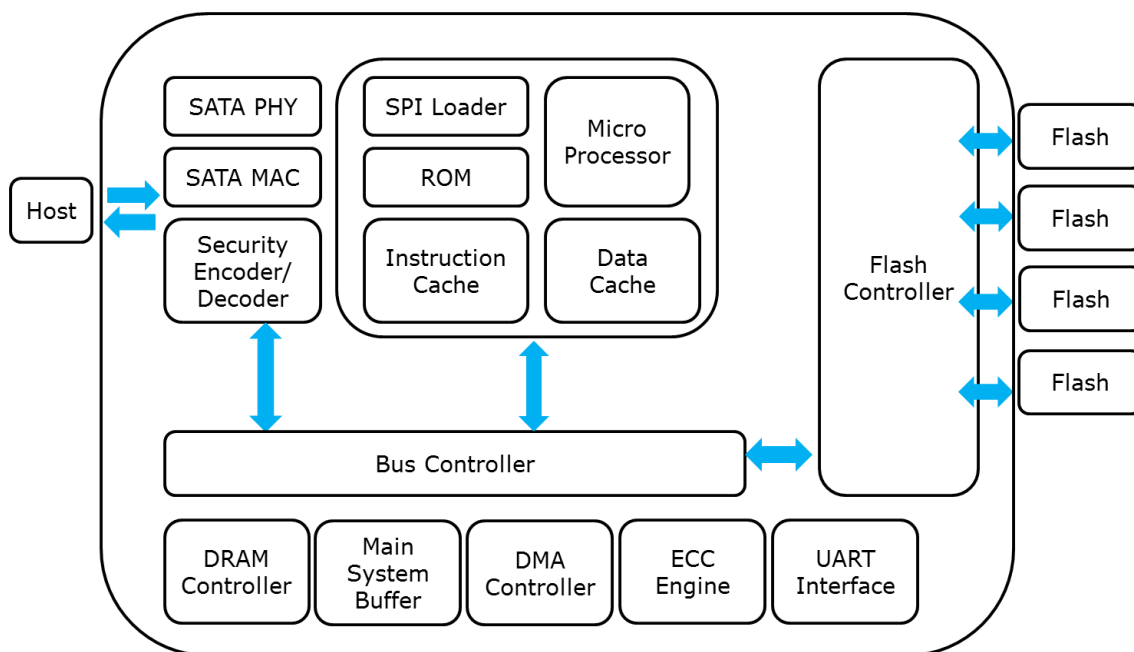


Figure 2: Innodisk 2.5" SATA SSD 3TG6-P Block Diagram

Innodisk 2.5" SATA SSD 3TG6-P integrates a SATA III controller and NAND flash memories. Communication with the host occurs through the host interface, using the standard ATA protocol. Communication with the flash device(s) occurs through the flash interface.

3.2 SATA Controller

Innodisk 2.5" SATA SSD 3TG6-P is designed with 88SS1080, a SATA III 6.0Gbps controller. The Serial ATA physical, link and transport layers are compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps/3.0Gbps/6.0Gbps data rate). The controller has 4 channels for flash interface.

3.3 Error Detection and Correction

Innodisk 2.5" SATA SSD 3TG6-P is designed with hardware LDPC ECC engine with hard-decision and soft-decision decoding. Low-density parity-check (LDPC) codes have excellent error correcting performance close to the Shannon limit when decoded with the belief-propagation (BP) algorithm using soft-decision information.

3.4 Wear-Leveling

Flash memory can be erased within a limited number of times. This number is called the **erase cycle limit** or **write endurance limit** and is defined by the flash array vendor. The erase cycle limit applies to each individual erase block in the flash device.

Innodisk 2.5" SATA SSD 3TG6-P uses a static wear-leveling algorithm to ensure that consecutive writes of a specific sector are not written physically to the same page/block in the flash. This spreads flash media usage evenly across all pages, thereby extending flash lifetime.

3.5 Bad Blocks Management

Bad Blocks are blocks that contain one or more invalid bits whose reliability are not guaranteed. The Bad Blocks may be presented while the SSD is shipped, or may develop during the life time of the SSD. When the Bad Blocks is detected, it will be flagged, and not be used anymore. The SSD implement Bad Blocks management, Bad Blocks replacement, Error Correct Code to avoid data error occurred. The functions will be enabled automatically to transfer data from Bad Blocks to spare blocks, and correct error bit.

3.6 iData Guard

iData Guard is a comprehensive data protection mechanism that functions before and after a sudden power outage to SSD. Low-power detection terminates data writing before an abnormal power-off, while table-remapping after power-on deletes corrupt data and maintains data integrity. iData Guard provides effective power cycling management, preventing data stored in flash from degrading with use.

3.7 Garbage Collection/TRIM

Garbage collection and TRIM technology is used to maintain data consistency and perform continual data cleansing on SSDs. It runs as a background process, freeing up valuable controller resources while sorting good data into available blocks, and deleting bad blocks. It also significantly reduces write operations to the drive, thereby increasing the SSD's speed and lifespan.

3.8 iPower Guard

iPower Guard technology is a set of preventive measures that protect the SSD in an unstable power supply environment. This comprehensive package comprises safeguards for start-up and shut-down to maintain device performance and ensure data integrity.


3.9 Die RAID

Die RAID is a controller function which leveraged user capacity to back up the data in NAND flash. Die RAID supported can ensure the user data in the NAND Flash more consistent in certain scenario. Innodisk 2.5" SATA SSD 3TG6-P series is default enable the Die RAID function for the

industrial application.

3.10 Quick Erase (optional)

Quick Erase function is designed for emergency data erase in few seconds by providing ATA command.

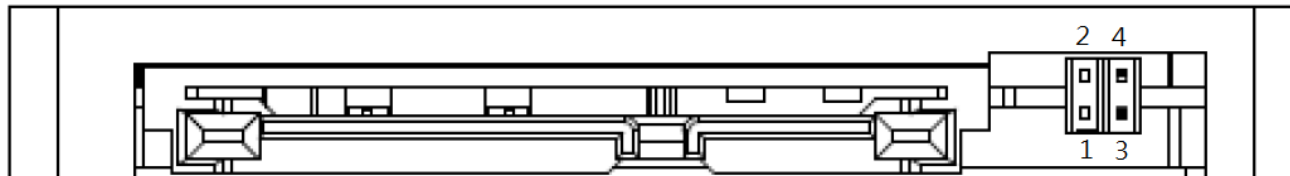

3.10.1 Quick Erase Command

- Protocol: No Data

-Inputs

Table 9: Execute Quick Erase command for inputs information

Register	7	6	5	4	3	2	1	0
Features	21h							
Sector Count	41h							
LBA Low	Na							
LBA Mid	Na							
LBA High	Na							
Device	1	1	1	0	Na			
Command	82h							

-Normal Outputs

Table 10: Quick Erase command for normal output information

Register	7	6	5	4	3	2	1	0
Error	Na							
Sector Count	Na							
LBA Low	Na							
LBA Mid	Na							
LBA High	Na							
Device	obs	Na	obs	DEV	Na	Na	Na	Na
Status	BSY	DRDY	DF	Na	DRQ	Na	Na	ERR

Device register-

DEV shall specify the selected device.

Status register

BSY will be cleared to zero indicating command completion

DRDY will be set to one.

DF (Device Fault) will be cleared to zero.

DRQ will be cleared to zero

ERR will be cleared to zero.

3.11 Thermal Throttling

Thermal throttling is a protective mechanism designed to safeguard components from potential damage caused by excessive temperatures. When an SSD approaches a critical temperature threshold, Innodisk firmware activates the thermal throttling mechanism to regulate the SSD's temperature. Thermal throttling is crucial for SSDs since it prevents drive damage, which could otherwise result in data loss. However, it's worth noting that when thermal throttling is activated, read and write tasks may experience a reduction in speed.

4. Installation Requirements

4.1 2.5" SATA SSD 3TG6-P Pin Directions

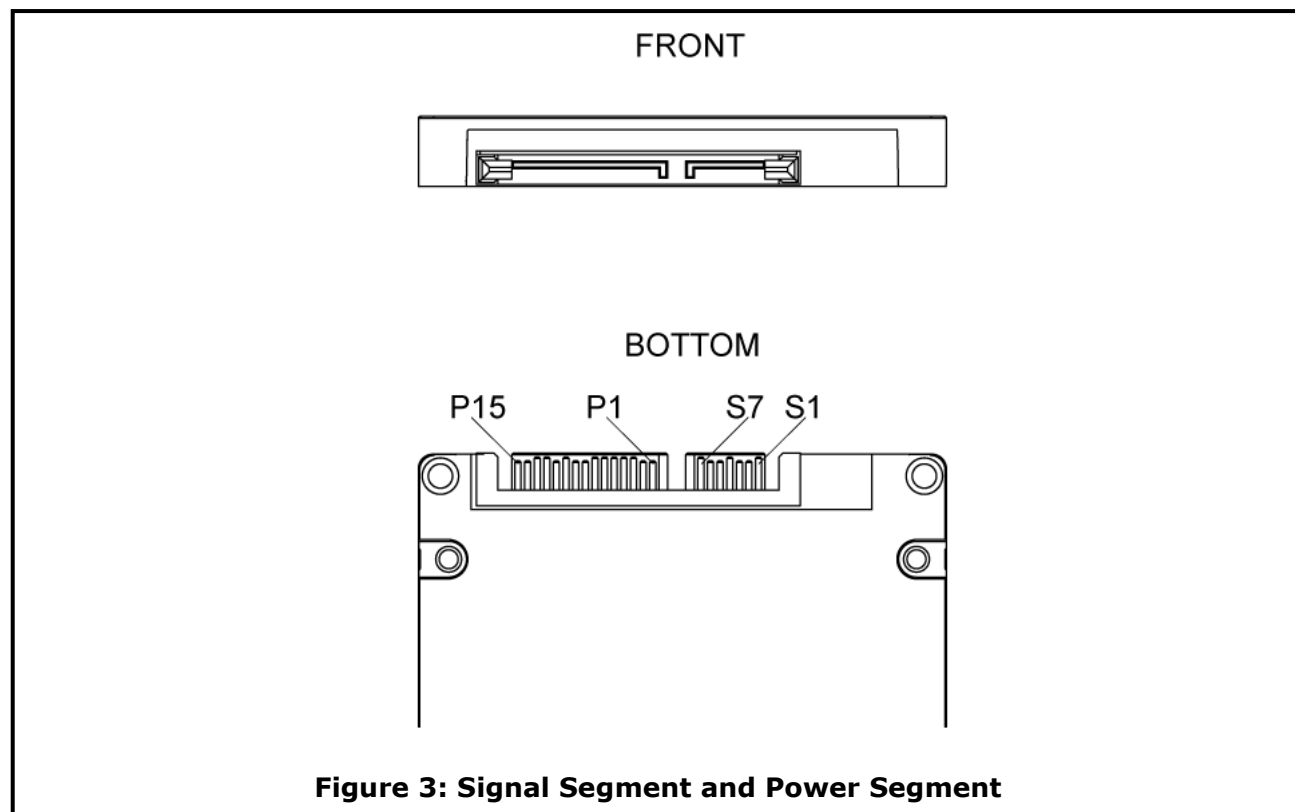


Figure 3: Signal Segment and Power Segment

4.2 Electrical Connections for 2.5" SATA SSD 3TG6-P

A Serial ATA device may be either directly connected to a host or connected to a host through a cable. For connection via cable, the cable should be no longer than 1meter. The SATA interface has a separate connector for the power supply. Please refer to the pin description for further details.

4.3 Form Factor

Please prepare following things:

- Screw driver.
- Four M3 screws. (Torque value is 2.0 ~ 2.5 Kgf.cm)
- SATA single cable (7-pin, Maximum length 1 meter).
- SATA power cable (15-pin).

Please turn off your computer, and open your computer's case. Find one of available 2.5-inch slot, and plug the SSD in. To use the screws fix the SSD. Plug in the SATA single cable, and power cable. Please boot the installation Operation System from CD-ROM, and install Operation System into SSD.

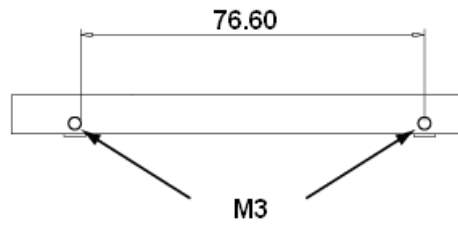


Figure 4: 2.5" SATA SSD 3TG6-P Mechanical Screw Hole

4.4 Device Drive

No additional device drives are required. Innodisk 2.5" SATA SSD 3TG6-P can be configured as a boot device.

5. SMART Feature Set

Innodisk 3TG6-P series support the SMART command set and defines some vendor-specific data to report SMART attributes of SSD.

Value	Command
D0h	Read Data
D1h	Read Attribute Threshold
D2h	Enable/Disable Autosave
D3h	Save Attribute Values
D4h	Execute OFF-LINE Immediate
D5h	Read Log
D6h	Return Status
D8h	Enable SMART Operations
D9h	Disable SMART Operations
DAh	Return Status

5.1 SMART Attributes

Innodisk 3TG6-P series SMART data attributes are listed in following table.

Attribute ID (hex)	Raw Attribute Value							Attribute Name
5 (05h)	LSB			MSB	00	00	00	Later Bad
9 (09h)	LSB			MSB	00	00	00	Power-On hours Count
12 (0Ch)	LSB			MSB	00	00	00	Drive Power Cycle Count
163 (A3h)	LSB					MSB	00	Total Bad Block Count
165 (A5h)	LSB			MSB	00	00	00	Max Erase count
167 (A7h)	LSB			MSB	00	00	00	Avg Erase count
169 (A9h)	LSB	00	00	00	00	00	00	Device Life
170 (AAh)	LSB					MSB	00	Spare Block Count
171 (ABh)	LSB					MSB	00	Program fail count
172 (ACh)	LSB					MSB	00	Erase fail count
184 (B8h)	LSB			MSB	00	00	00	Error Corrected Count
187 (BBh)	LSB			MSB	00	00	00	Reported Uncorrect Count
192 (C0h)	LSB			MSB	00	00	00	Unexpected Power Loss Count
194 (C2h)	Cur.*	00	MIN	00	MAX	03	Cur. *	Temperature
229 (E5h)	ID 0	ID 1	ID 2	ID 3	ID 4	ID 5	00	Flash ID
235 (EBh)		MSB	LSB	MSB	LSB	MSB	LSB	Later bad block info (Read/Write/Erase)
241 (F1h)	LSB					MSB	00	Total LBA written(LBA=32MB)
242 (F2h)	LSB					MSB	00	Total LBA read(LBA=32MB)

6. Part Number Rule

CODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
	D	G	S	2	5	-	A	2	8	M	7	1	K	C	C	D	L	-	X	X	X
Description	Disk	2.5" SATA SSD					Capacity			Category			Flash mode	Operation Temp.	Internal Control	CH.	Flash		Customized Code		
Definition																					
Code 1 st (Disk)													Code 13 th (Flash mode)								
D : Disk													G: 96 Layers 3D TLC								
													K: 112 Layers 3D TLC								
Code 2 nd ~ 5 th (Form Factor)													Code 14 th (Operation Temperature)								
GS25: 2.5" SATA SSD													C: Standard Grade (0°C~ +70°C)								
Code 7 th ~9 th (Capacity)													W: Industrial Grade (-40°C ~ +85°C)								
A28: 128GB													Code 15 th (Internal control)								
B56: 256GB													1/3/A/B/C: PCB version								
C12:512GB																					
01T: 1TB																					
02T: 2TB																					
04T: 4TB																					
													Code 16 th (Channel of data transfer)								
Code 10 th ~12 th (Series)													S: Single Channel								
M71: 2.5" SATA SSD 3TG6-P													D: Dual Channels								
													Q: Quad Channels								
													Code 17 th (Flash Type)								
													L: Innodisk 3D TLC								
													Q: Original 3D TLC								
													Code 19 th ~21 th (Customized code)								