

MODEL:
IMB-H810-i2

microATX Motherboard with LGA1150 Intel® Core™ i7/i5/i3, Pentium® or Celeron® CPU, Intel® H81 Chipset, Dual GbE, DDR3, Internal DisplayPort, VGA, USB, COM Ports Four SATA 6Gb/s Ports, IPMI 2.0 and RoHS

User Manual

Revision

Date	Version	Changes
June 11, 2021	1.12	Updated Section 2.3: Packing List Updated Chapter 6: Software Drivers Changed audio IC to ALC888S
September 8, 2015	1.11	Updated I/O shielding part number
June 16, 2015	1.10	Updated for R11 version
March 13, 2014	1.01	Deleted I ² C information
January 13, 2014	1.00	Initial release

Copyright

COPYRIGHT NOTICE

The information in this document is subject to change without prior notice in order to improve reliability, design and function and does not represent a commitment on the part of the manufacturer.

In no event will the manufacturer be liable for direct, indirect, special, incidental, or consequential damages arising out of the use or inability to use the product or documentation, even if advised of the possibility of such damages.

This document contains proprietary information protected by copyright. All rights are reserved. No part of this manual may be reproduced by any mechanical, electronic, or other means in any form without prior written permission of the manufacturer.

TRADEMARKS

All registered trademarks and product names mentioned herein are used for identification purposes only and may be trademarks and/or registered trademarks of their respective owners.

Manual Conventions



WARNING

Warnings appear where overlooked details may cause damage to the equipment or result in personal injury. Warnings should be taken seriously.



CAUTION

Cautionary messages should be heeded to help reduce the chance of losing data or damaging the product.



NOTE

These messages inform the reader of essential but non-critical information. These messages should be read carefully as any directions or instructions contained therein can help avoid making mistakes.

Table of Contents

1 INTRODUCTION.....	1
1.1 INTRODUCTION.....	2
1.2 BENEFITS	3
1.3 FEATURES.....	3
1.4 CONNECTORS	4
1.5 DIMENSIONS.....	5
1.6 DATA FLOW	6
1.7 TECHNICAL SPECIFICATIONS	7
2 PACKING LIST.....	9
2.1 ANTI-STATIC PRECAUTIONS	10
2.2 UNPACKING PRECAUTIONS.....	10
2.3 PACKING LIST.....	11
2.4 OPTIONAL ITEMS	12
3 CONNECTORS	14
3.1 PERIPHERAL INTERFACE CONNECTORS.....	15
3.1.1 <i>IMB-H810-i2 Layout</i>	15
3.1.2 <i>Peripheral Interface Connectors</i>	16
3.1.3 <i>External Interface Panel Connectors</i>	17
3.2 INTERNAL PERIPHERAL CONNECTORS	18
3.2.1 <i>Audio Connector</i>	18
3.2.2 <i>ATX Power Connector</i>	19
3.2.3 <i>Battery Connector</i>	20
3.2.4 <i>Chassis Intrusion Connector</i>	21
3.2.5 <i>CPU Power Connector</i>	22
3.2.6 <i>DisplayPort Connector</i>	23
3.2.7 <i>Fan Connector (CPU)</i>	24
3.2.8 <i>Fan Connector (System)</i>	25
3.2.9 <i>Front Panel Connector</i>	26
3.2.10 <i>iRIS Module Slot</i>	27

3.2.11 LAN LED Connectors.....	28
3.2.12 Memory Card Slots	29
3.2.13 Parallel Port Connector	29
3.2.14 PCI Express Power Connector	31
3.2.15 Power Button	32
3.2.16 SATA 6Gb/s Drive Connectors.....	33
3.2.17 Serial Port Connector (COM3~COM6), RS-232.....	34
3.2.18 Serial Port Connector (COM7~COM10), RS-232.....	35
3.2.19 Serial Port Connector (COM10), RS-422/485.....	36
3.2.20 SMBus Connector	38
3.2.21 SPI Flash Connector.....	39
3.2.22 SPI Flash Connector, EC.....	40
3.2.23 TPM Connector.....	41
3.2.24 USB 2.0 Connectors.....	42
3.3 EXTERNAL PERIPHERAL INTERFACE CONNECTOR PANEL	43
3.3.1 Audio Connector	43
3.3.2 Keyboard and Mouse Connectors.....	44
3.3.3 Ethernet and USB 2.0 Connectors.....	45
3.3.4 Ethernet and USB 3.2 Gen 1 Connectors	46
3.3.5 Serial Port Connectors (COM1, COM2).....	47
3.3.6 VGA Connectors	48
4 INSTALLATION	49
4.1 ANTI-STATIC PRECAUTIONS	50
4.2 INSTALLATION CONSIDERATIONS.....	50
4.2.1 Socket LGA1150 CPU Installation	52
4.2.2 Socket LGA1150 Cooling Kit Installation.....	55
4.2.3 DIMM Installation	57
4.2.4 iRIS-2400 Module Installation.....	58
4.3 SYSTEM CONFIGURATION.....	59
4.3.1 AT/ATX Power Mode Setting	59
4.3.2 Clear CMOS Button.....	60
4.3.3 COM 10 Function Select.....	60
4.3.4 Flash Descriptor Security Override.....	61
4.3.5 PCIe x16 Interface Setup	62

IMB-H810-i2 microATX Motherboard

4.3.6	<i>USB Power Select</i>	62
4.4	INTERNAL PERIPHERAL DEVICE CONNECTIONS	63
4.4.1	<i>SATA Drive Connection</i>	63
4.5	IPMI SETUP PROCEDURE	64
4.5.1	<i>Managed System Hardware Setup</i>	64
4.5.2	<i>Using the IEI iMAN Web GUI</i>	65
5	BIOS	67
5.1	INTRODUCTION.....	68
5.1.1	<i>Starting Setup</i>	68
5.1.2	<i>Using Setup</i>	68
5.1.3	<i>Getting Help</i>	69
5.1.4	<i>Unable to Reboot after Configuration Changes</i>	69
5.1.5	<i>BIOS Menu Bar</i>	69
5.2	MAIN.....	70
5.3	ADVANCED	71
5.3.1	<i>ACPI Settings</i>	72
5.3.2	<i>RTC Wake Settings</i>	74
5.3.3	<i>Trusted Computing</i>	75
5.3.4	<i>CPU Information</i>	76
5.3.5	<i>SATA Configuration</i>	79
5.3.6	<i>USB Configuration</i>	80
5.3.7	<i>F81866 Super IO Configuration</i>	81
5.3.7.1	<i>Serial Port n Configuration</i>	82
5.3.7.2	<i>Parallel Port Configuration</i>	87
5.3.8	<i>F81866 H/W Monitor</i>	89
5.3.8.1	<i>Smart Fan Mode Configuration</i>	90
5.3.9	<i>F81216 Secondary Super IO Configuration</i>	91
5.3.9.1	<i>Serial Port n Configuration</i>	92
5.3.10	<i>Serial Port Console Redirection</i>	96
5.3.11	<i>iEi Feature</i>	99
5.4	CHIPSET	100
5.4.1	<i>PCH-IO Configuration</i>	101
5.4.1.1	<i>PCI Express Configuration</i>	103
5.4.1.2	<i>PCH Azalia Configuration</i>	104

5.4.2 System Agent (SA) Configuration	105
5.4.2.1 Graphics Configuration.....	106
5.4.2.2 NB PCIe Configuration.....	109
5.4.2.3 Memory Configuration	110
5.5 BOOT.....	111
5.6 SECURITY.....	113
5.7 SAVE & EXIT	113
5.8 SERVER MANAGEMENT	115
5.8.1 System Event Log.....	116
5.8.2 BMC Network Configuration.....	118
6 SOFTWARE DRIVERS	119
6.1 AVAILABLE DRIVERS	120
6.2 DRIVER DOWNLOAD	120
A REGULATORY COMPLIANCE	122
B PRODUCT DISPOSAL	124
C BIOS OPTIONS	126
D WATCHDOG TIMER	130
E ERROR BEEP CODE.....	133
E.1 PEI BEEP CODES.....	134
E.2 DXE BEEP CODES	134
F HAZARDOUS MATERIALS DISCLOSURE.....	135
F.1 RoHS II DIRECTIVE (2015/863/EU)	136
F.2 CHINA RoHS.....	137

List of Figures

Figure 1-1: IMB-H810-i2.....	2
Figure 1-2: Connectors	4
Figure 1-3: IMB-H810-i2 Dimensions (mm)	5
Figure 1-4: Data Flow Diagram.....	6
Figure 3-1: Connectors and Jumpers.....	15
Figure 3-2: Audio Connector Location	18
Figure 3-3: ATX Power Connector Location	19
Figure 3-4: Battery Connector Location.....	20
Figure 3-5: Chassis Intrusion Connector Location.....	21
Figure 3-6: CPU Power Connector Location.....	22
Figure 3-7: DisplayPort Connector Location	23
Figure 3-8: CPU Fan Connector Location	24
Figure 3-9: System Fan Connector Location.....	25
Figure 3-10: Front Panel Connector Location	26
Figure 3-11: iRIS Module Slot Location.....	27
Figure 3-12: LAN LED Connector Locations	28
Figure 3-13: Memory Card Slot Locations	29
Figure 3-14: Parallel Port Connector Location	30
Figure 3-15: PCIe Power Location	31
Figure 3-16: Power Button Location.....	32
Figure 3-17: SATA 6Gb/s Drive Connector Locations	33
Figure 3-18: Serial Port Connector (COM3~COM6) Location.....	34
Figure 3-19: Serial Port Connector (COM7~COM10) Location.....	35
Figure 3-20: RS-422/485 Connector Location.....	37
Figure 3-21: SMBus Connector Location	38
Figure 3-22: SPI Flash Connector Location.....	39
Figure 3-23: SPI EC Flash Connector Location.....	40
Figure 3-24: TPM Connector Location.....	41
Figure 3-25: USB 2.0 Connector Locations	42
Figure 3-26: External Peripheral Interface Connector	43

Figure 3-27: Audio Connector	43
Figure 3-28: PS/2 Pinouts	44
Figure 3-29: Serial Port Connector Pinouts.....	47
Figure 3-30: VGA Connector	48
Figure 4-1: Disengage the CPU Socket Load Lever.....	52
Figure 4-2: Remove Protective Cover.....	53
Figure 4-3: Insert the Socket LGA1150 CPU.....	54
Figure 4-4: Close the Socket LGA1150	55
Figure 4-5: Cooling Kit Support Bracket.....	56
Figure 4-6: DIMM Installation.....	57
Figure 4-7: iRIS-2400 Module Installation	58
Figure 4-8: AT/ATX Power Mode Switch Location	59
Figure 4-9: Clear CMOS Button Location.....	60
Figure 4-10: COM 10 Function Select Jumper Location.....	61
Figure 4-11: Flash Descriptor Security Override Jumper Location	61
Figure 4-12: SATA Drive Cable Connection.....	63
Figure 4-13: SATA Power Drive Connection.....	64
Figure 4-14: IEI iMAN Web Address.....	65
Figure 4-15: IEI iMAN Web GUI.....	66
Figure 6-1: IEI Resource Download Center.....	120

List of Tables

Table 1-1: IMB-H810-i2 Specifications.....	8
Table 2-1: Packing List.....	11
Table 2-2: Optional Items.....	13
Table 3-1: Peripheral Interface Connectors.....	17
Table 3-2: Rear Panel Connectors.....	17
Table 3-3: Audio Connector Pinouts.....	18
Table 3-4: ATX Power Connector Pinouts.....	19
Table 3-5: Battery Connector Pinouts.....	20
Table 3-6: Chassis Intrusion Connector Pinouts.....	21
Table 3-7: CPU Power Connector Pinouts.....	22
Table 3-8: DisplayPort Connector Pinouts.....	23
Table 3-9: CPU Fan Connector Pinouts.....	24
Table 3-10: System Fan Connector Pinouts.....	25
Table 3-11: Front Panel Connector Pinouts.....	26
Table 3-12: LAN1 LED Connector (LED_LAN1) Pinouts.....	28
Table 3-13: LAN2 LED Connector (LED_LAN2) Pinouts.....	28
Table 3-14: Parallel Port Connector Pinouts.....	30
Table 3-15: PCIe Power Pinouts.....	31
Table 3-16: SATA 6Gb/s Drive Connector Pinouts.....	33
Table 3-17: COM3~6 Serial Port Connector Pinouts.....	35
Table 3-18: COM7~10 Serial Port Connector Pinouts.....	36
Table 3-19: RS-422/485 Connector Pinouts.....	37
Table 3-20: DB-9 RS-422/485 Pinouts.....	37
Table 3-21: SMBus Connector Pinouts.....	38
Table 3-22: SPI Flash Connector Pinouts.....	39
Table 3-23: SPI EC Flash Connector Pinouts.....	40
Table 3-24: TPM Connector Pinouts.....	41
Table 3-25: USB 2.0 Connector Pinouts.....	42
Table 3-26: PS/2 Connector Pinouts.....	44
Table 3-27: USB 2.0 Port Pinouts.....	45

Table 3-28: LAN2 Pinouts	45
Table 3-29: Connector LEDs.....	45
Table 3-30: USB 3.2 Gen 1 Port Pinouts.....	46
Table 3-31: LAN1 Pinouts	46
Table 3-32: COM1 Serial Port Connector Pinouts	47
Table 3-33: COM2 Serial Port Connector Pinouts	47
Table 3-34: VGA Connector Pinouts.....	48
Table 4-1: COM 10 Function Select Jumper Settings	60
Table 4-2: Flash Descriptor Security Override Jumper Settings.....	61
Table 4-3: PCIe x16 Interface Setup.....	62
Table 4-4: BIOS Options and Configured USB Ports.....	62
Table 5-1: BIOS Navigation Keys	69
Table 5-2: BIOS Options and Configured USB Ports.....	102

BIOS Menus

BIOS Menu 1: Main	70
BIOS Menu 2: Advanced	72
BIOS Menu 3: ACPI Configuration	72
BIOS Menu 4: RTC Wake Settings	74
BIOS Menu 5: Trusted Computing	75
BIOS Menu 6: CPU Information	76
BIOS Menu 7: SATA Configuration	79
BIOS Menu 8: USB Configuration	80
BIOS Menu 9: F81866 Super IO Configuration	81
BIOS Menu 10: Serial Port n Configuration Menu	82
BIOS Menu 11: Parallel Port Configuration Menu	87
BIOS Menu 12: F81866 H/W Monitor	89
BIOS Menu 13: Smart Fan Mode Configuration	90
BIOS Menu 14: F81216 Secondary Super IO Configuration	91
BIOS Menu 15: Serial Port n Configuration Menu	92
BIOS Menu 16: Serial Port Console Redirection	96
BIOS Menu 17: iEi Feature	99
BIOS Menu 18: Chipset	100
BIOS Menu 19: PCH-IO Configuration	101
BIOS Menu 20: PCI Express Configuration	103
BIOS Menu 21: PCH Azalia Configuration	104
BIOS Menu 22: System Agent (SA) Configuration	105
BIOS Menu 23: Graphics Configuration	106
BIOS Menu 24: LCD Control	108
BIOS Menu 25: NB PCIe Configuration	109
BIOS Menu 26: Memory Configuration	110
BIOS Menu 27: Boot	111
BIOS Menu 28: Security	113
BIOS Menu 29: Save & Exit	114
BIOS Menu 30: Server Management	115

BIOS Menu 31: System Event Log	116
BIOS Menu 32: BMC Network Configuration	118

Chapter

1

Introduction

1.1 Introduction



Figure 1-1: IMB-H810-i2

The IMB-H810-i2 is a microATX motherboard. It accepts a Socket LGA1150 Intel® Core™ i7, Core™ i5, Core™ i3, Pentium® or Celeron® processor and supports two 240-pin 1333/1066 MHz dual-channel DDR3 DIMM modules up to 16.0 GB maximum.

The IMB-H810-i2 features Intelligent Platform Management Interface (IPMI) that helps lower the overall costs of server management by enabling users to maximize IT resource, save time and manage multiple systems. The IMB-H810-i2 supports IPMI 2.0 through the optional iRIS-2400 module.

The IMB-H810-i2 includes two VGA ports for easy dual independent display setup and one internal DisplayPort connector supporting HDMI, LVDS, VGA, DVI and DisplayPort with up to 3840 x 2160 resolutions. Expansion and I/O include two PCI slots, one PCIe x16 slot, one PCIe x1 slot, two USB 3.2 Gen 1 (5Gb/s) ports and two USB 2.0 on the rear panel, eight USB 2.0 by pin header, four SATA 6Gb/s connectors, ten COM ports, and two keyboard/mouse connectors.

IMB-H810-i2 microATX Motherboard

1.2 Benefits

Some of the IMB-H810-i2 motherboard benefits include:

- Powerful graphics with multiple monitors
- Staying connected with both wired LAN connections
- Speedy running of multiple programs and applications

1.3 Features

Some of the IMB-H810-i2 motherboard features are listed below:

- microATX form factor
- RoHS compliant
- LGA1150 Intel® Core™ i7, Core™ i5, Core™ i3, Pentium® or Celeron® processor supported
- Intel® H81 Chipset
- Two 240-pin 1333/1066 MHz dual-channel DDR3 DIMMs with up to 16.0 GB memory
- Two VGA ports for easy dual independent display setup
- Internal DisplayPort (iDP) interface supports HDMI, LVDS, VGA, DVI and DisplayPort with up to 3840 x 2160 resolutions
- Supports IPMI 2.0 via IEI iRIS-2400 module
- Two Intel® PCIe GbE connectors
- Four SATA 6Gb/s connectors
- Two PCI card expansion slots
- One PCIe x16 card expansion slot
- One PCIe x1 card expansion slot
- Multiple USB 3.2 Gen 1 (5Gb/s) and USB 2.0 ports
- Ten serial ports
- High Definition Audio

1.4 Connectors

The connectors on the IMB-H810-i2 are shown in the figure below.

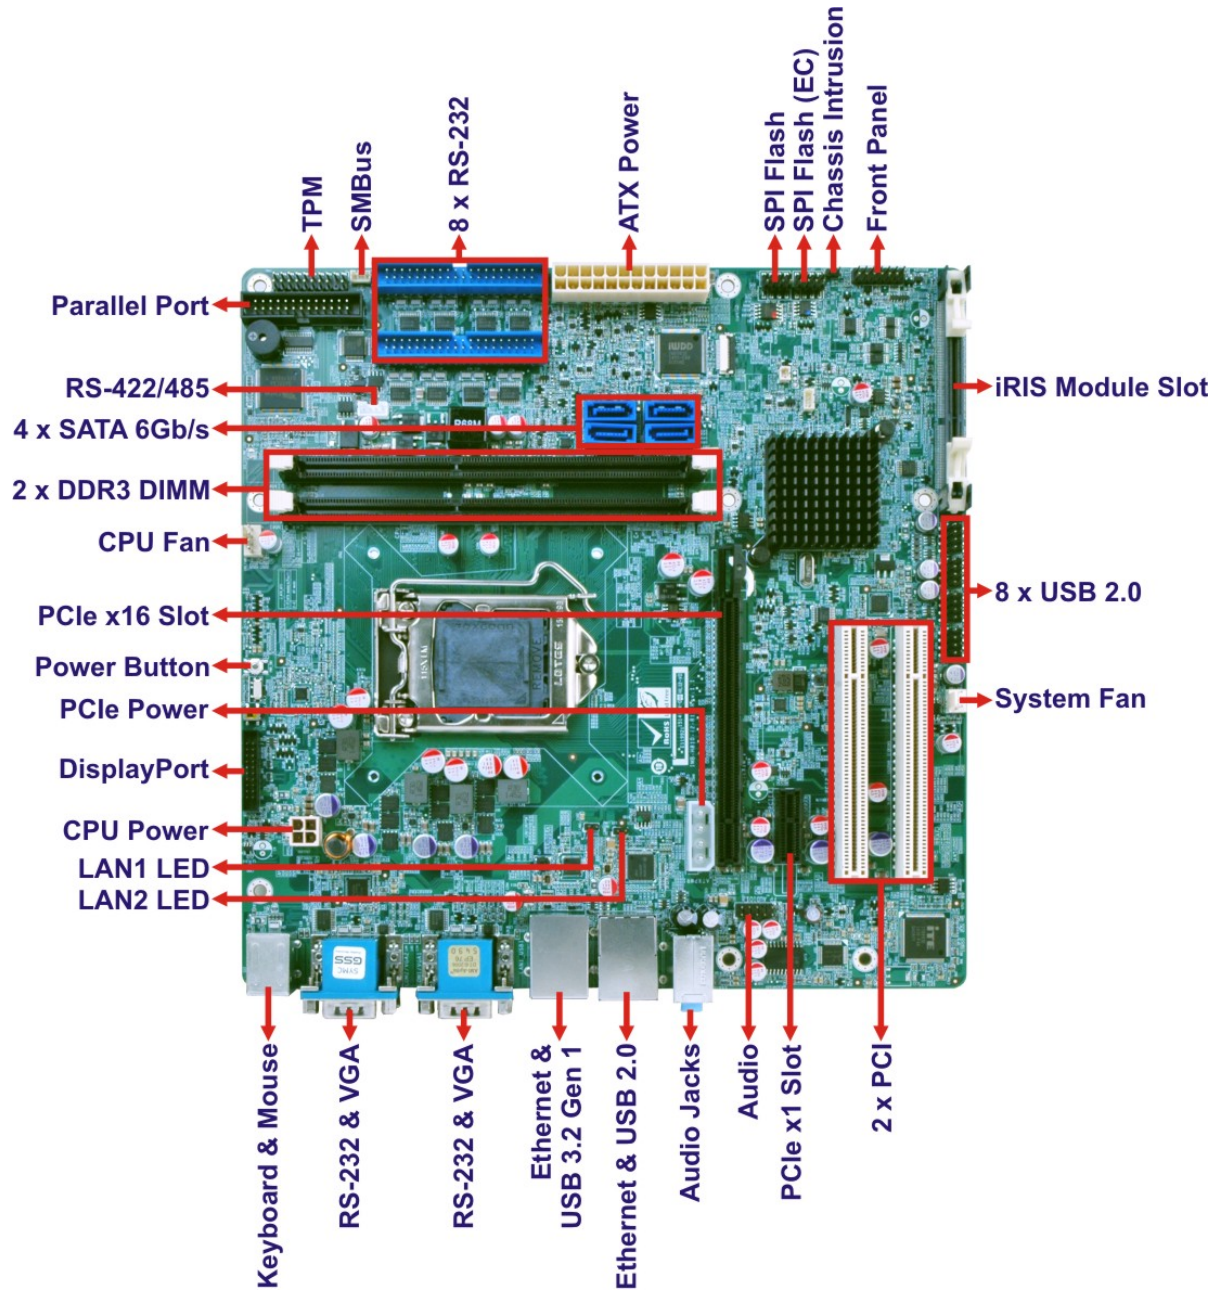


Figure 1-2: Connectors

IMB-H810-i2 microATX Motherboard

1.5 Dimensions

The main dimensions of the IMB-H810-i2 are shown in the diagram below.

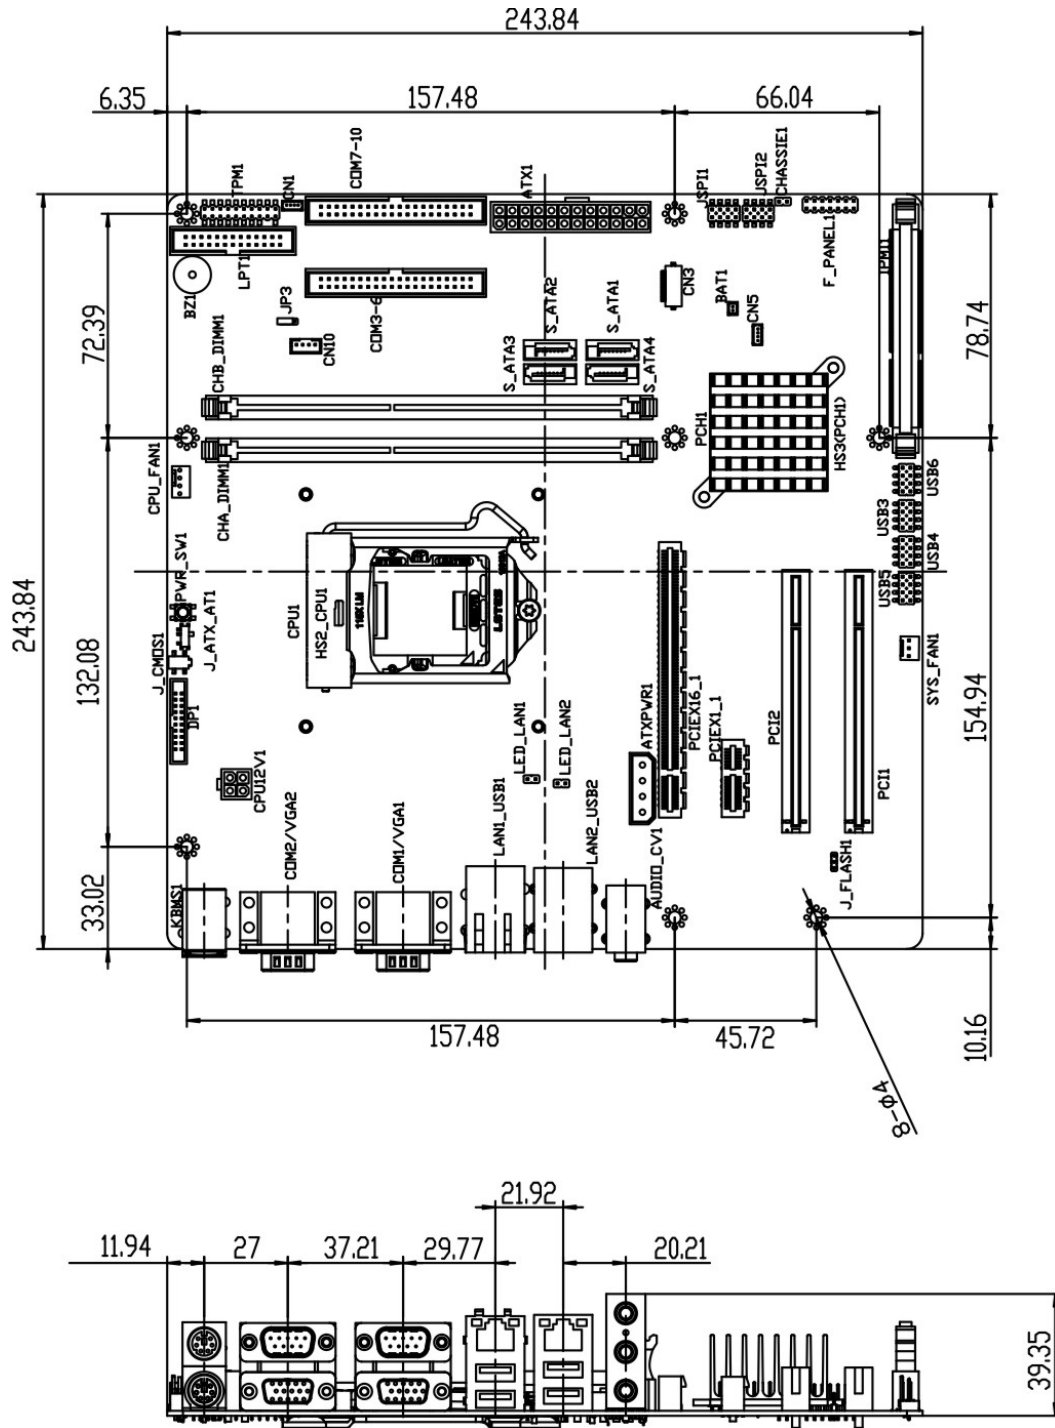


Figure 1-3: IMB-H810-i2 Dimensions (mm)

1.6 Data Flow

Figure 1-4 shows the data flow between the system chipset, the CPU and other components installed on the motherboard.

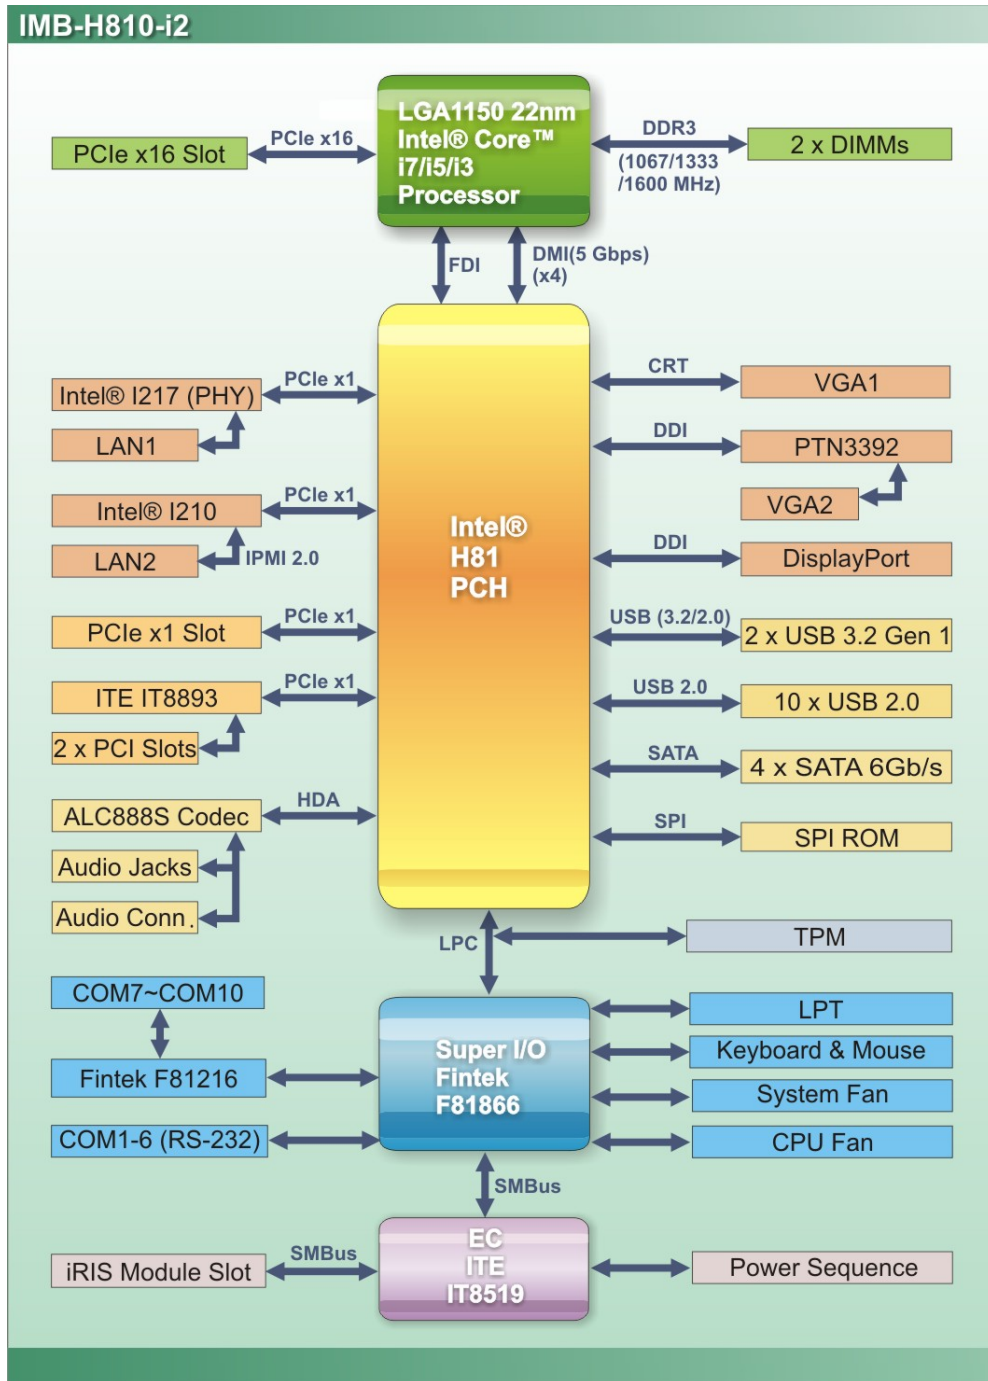


Figure 1-4: Data Flow Diagram

IMB-H810-i2 microATX Motherboard

1.7 Technical Specifications

IMB-H810-i2 technical specifications are listed below.

Specification/Model	IMB-H810-i2
Form Factor	microATX
CPU Supported	LGA1150 Intel® Core™ i7, Core™ i5, Core™ i3, Pentium® or Celeron® processor supported
Chipset	Intel® H81
Integrated Graphics	Intel® HD Graphics Gen 7.5 supports DirectX 11.1, OpenCL 1.2, OpenGL 3.2, Full MPEG2, VC1, AVC Decode
Memory	Two 240-pin 1333/1066 MHz dual-channel DDR3 SDRAM DIMMs support up to 16.0 GB maximum
Audio	Realtek ALC888S HD Audio codec
BIOS	UEFI BIOS
Ethernet Controllers	LAN1: Intel® I217LM PHY LAN2: Intel® I210-AT PCIe Ethernet controller with NCSI & IPMI 2.0 support
Super I/O Controller	Fintek F81866
PCIe-to-PCI Bridge	ITE IT8893E
Embedded Controller	ITE IT8519
Watchdog Timer	Software programmable supports 1~255 sec. system reset
Expansion	
PCI	Two PCI slots
PCIe	One PCIe x16 slot One PCIe x1 slot
I/O Interface Connectors	
Display Ports	Two VGA integrated in the Intel® H81 (up to 1920x1200, 60Hz) One internal DisplayPort integrated in the Intel® H81 supports HDMI, LVDS, VGA, DVI, DisplayPort (up to 3840x2160, 60Hz)

Specification/Model	IMB-H810-i2
Audio Connectors	Three external audio jacks (line-in, line-out, mic-in) One audio connector (10-pin header)
Ethernet	Two RJ-45 GbE ports
IPMI 2.0	Supported by the optional iRIS-2400 module
Keyboard/Mouse	One PS/2 keyboard connector One PS/2 mouse connector
TPM	One TPM connector via 20-pin header
Serial Ports	Two external RS-232 serial port One RS-422/485 via internal wafer connector Eight RS-232 via internal box headers
USB ports	Two external USB 3.2 Gen 1 (5Gb/s) ports on rear IO Two external USB 2.0 ports on rear IO Eight internal USB 2.0 ports by pin headers
Serial ATA	Four SATA 6Gb/s connectors
LAN LED	Two 2-pin LAN active LED connectors
SMBus	Supported by one 4-pin wafer connector
Environmental and Power Specifications	
Power Supply	AT/ATX power supported
Power Consumption	3.3V@0.64A, 5V@4.20A, 12V@0.14A, Vcore_12V@3.88A, 5VSB@0.20A (3.90GHz Intel® i7-4770K CPU with two 4GB 1333MHz DDR3 DIMMs)
Operating Temperature	-10°C ~ 60°C
Storage Temperature	-20°C ~ 70°C
Humidity	5% ~ 95% (non-condensing)
Physical Specifications	
Dimensions	244 mm x 244 mm
Weight GW/NW	1200 g / 680 g

Table 1-1: IMB-H810-i2 Specifications

Chapter

2

Packing List

2.1 Anti-static Precautions



WARNING!

Static electricity can destroy certain electronics. Make sure to follow the ESD precautions to prevent damage to the product, and injury to the user.

Make sure to adhere to the following guidelines:

- **Wear an anti-static wristband:** Wearing an anti-static wristband can prevent electrostatic discharge.
- **Self-grounding:** Touch a grounded conductor every few minutes to discharge any excess static buildup.
- **Use an anti-static pad:** When configuring any circuit board, place it on an anti-static mat.
- **Only handle the edges of the PCB:** Don't touch the surface of the motherboard. Hold the motherboard by the edges when handling.

2.2 Unpacking Precautions

When the IMB-H810-i2 is unpacked, please do the following:

- Follow the antistatic guidelines above.
- Make sure the packing box is facing upwards when opening.
- Make sure all the packing list items are present.

IMB-H810-i2 microATX Motherboard

2.3 Packing List



NOTE:

If any of the components listed in the checklist below are missing, do not proceed with the installation. Contact the IEI reseller or vendor the IMB-H810-i2 was purchased from or contact an IEI sales representative directly by sending an email to sales@ieiworld.com.

The IMB-H810-i2 is shipped with the following components:







Quantity	Item and Part Number	Image
1	IMB-H810-i2 single board computer	
2	SATA cable	
1	I/O shielding	
1	Mini jumper pack (2.54mm)	
1	Quick Installation Guide	

Table 2-1: Packing List

2.4 Optional Items

The following are optional components which may be separately purchased:

Item and Part Number	Image
IPMI 2.0 adapter card with AST2400 BMC chip (P/N: iRIS-2400-R10)	
Dual-port USB cable with bracket, 300mm (P/N: 19800-003100-100-RS)	
Dual-port USB 3.2 Gen 1 cable with bracket, 450mm (P/N: 19800-010500-200-RS)	
SATA Power Cable (P/N: 32102-000100-200-RS)	
RS-422/485 cable, 500mm (P/N: 32205-003801-100-RS)	
Quad port RS-232 cable with bracket (400/400/400/400MM) (P/N: 32205-001203-200-RS)	
KB/MS cable, 220mm (P/N: 19800-000075-RS)	
Parallel port cable, 240mm (P/N:19800-000049-RS)	

IMB-H810-i2 microATX Motherboard









Item and Part Number	Image
LGA1155/LGA1156 cooler kit (1U chassis compatible, 73W) (P/N: CF-115XA-R10)	
LGA1155/LGA1156 cooler kit (95W) (P/N: CF-115XE-R10)	
DisplayPort to HDMI converter board for iEi IDP connector (P/N: DP-HDMI-R10)	
DisplayPort to 24-bit dual-channel LVDS converter board for iEi IDP connector (P/N: DP-LVDS-R10)	
DisplayPort to VGA converter board for iEi IDP connector (P/N: DP-VGA-R10)	
DisplayPort to DVI-D converter board for iEi IDP connector (P/N: DP-DVI-R10)	
DisplayPort to DisplayPort converter board for iEi IDP connector (P/N: DP-DP-R10)	
20-pin Infineon TPM Module, S/W management tool, firmware V3.17 (P/N: TPM-IN01-R20)	

Table 2-2: Optional Items

Chapter

3

Connectors

IMB-H810-i2 microATX Motherboard

3.1 Peripheral Interface Connectors

This chapter details all the jumpers and connectors.

3.1.1 IMB-H810-i2 Layout

The figures below show all the connectors and jumpers.

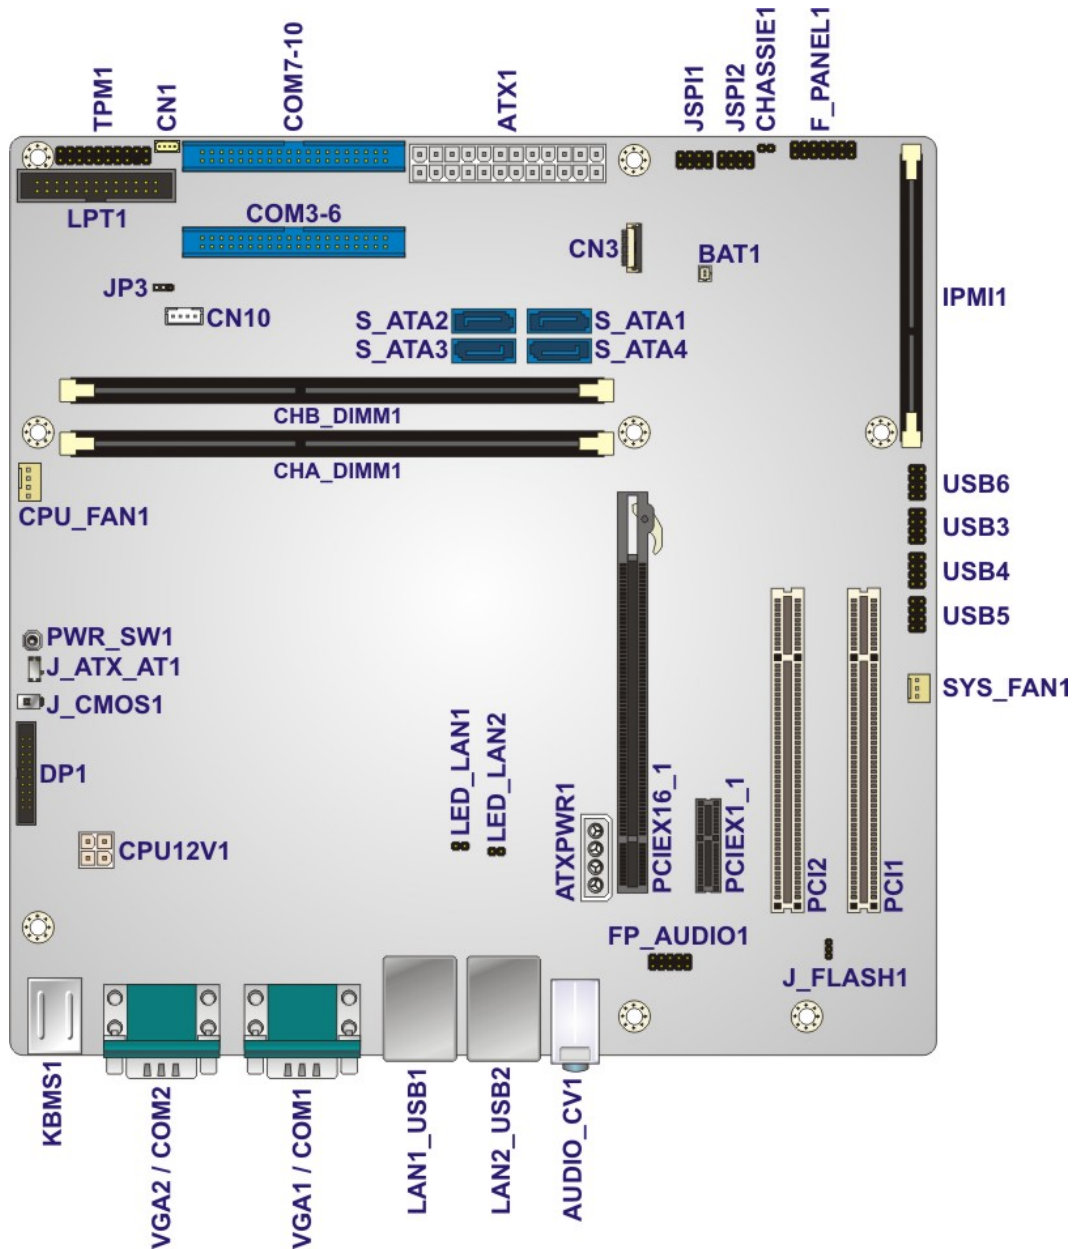


Figure 3-1: Connectors and Jumpers

3.1.2 Peripheral Interface Connectors

The table below lists all the connectors on the board.

Connector	Type	Label
Audio connector	10-pin header	FP_AUDIO1
ATX Power connector	24-pin connector	ATX1
Battery connector	2-pin wafer	BAT1
Chassis intrusion connector	2-pin header	CHASSIE1
CPU power connector	4-pin connector	CPU12V1
DisplayPort connector	19-pin box header	DP1
EC debug connector	20-pin FPC connector	CN3
Fan connector (CPU)	4-pin wafer	CPU_FAN1
Fan connectors (system)	3-pin wafer	SYS_FAN1
Front panel connector	14-pin header	F_PANEL1
iRIS module connector	204-pin DDR3 SO-DIMM slot	IPMI1
LAN1 LED connector	2-pin header	LED_LAN1
LAN2 LED connector	2-pin header	LED_LAN2
Memory card slot	DIMM slot	CHA_DIMM1, CHB_DIMM1
Parallel port connector	26-pin box header	LPT1
PCI slots	PCI slot	PCI1, PCI2
PCIe x1 slot	PCIe x1 slot	PCIEX1_1
PCIe x16 slot	PCIe x16 slot	PCIEX16_1
PCIe power connector	4-pin connector	ATXPWR1
Power button	Push button	PWR_SW1
SATA 6Gb/s drive connectors	7-pin SATA connector	S_ATA1, S_ATA2, S_ATA3, S_ATA 4
Serial port, RS-232	40-pin box header	COM3-6, COM7-10

IMB-H810-i2 microATX Motherboard

Connector	Type	Label
Serial port, RS-422/485	4-pin wafer	CN10
SMBus connector	4-pin wafer	CN1
SPI flash connector	8-pin header	JSPI1
SPI flash connector, EC	8-pin header	JSPI2
TPM connector	20-pin header	TPM1
USB 2.0 connectors	8-pin headers	USB3, USB4, USB5, USB6

Table 3-1: Peripheral Interface Connectors

3.1.3 External Interface Panel Connectors

The table below lists the connectors on the external I/O panel.

Connector	Type	Label
Audio connector	Audio jacks	AUDIO_CV1
Keyboard/Mouse and USB 2.0 ports	PS/2, USB Type-A	KBMS1
Ethernet and USB 2.0 ports	RJ-45, USB Type-A	LAN2_USB2
Ethernet and USB 3.2 Gen 1 ports	RJ-45, USB Type-A	LAN1_USB1
Serial port connectors	9-pin male DB-9	COM1, COM2
VGA connectors	15-pin female	VGA1, VGA2

Table 3-2: Rear Panel Connectors

3.2 Internal Peripheral Connectors

The section describes all of the connectors on the IMB-H810-i2.

3.2.1 Audio Connector

- CN Label:** FP_AUDIO1
- CN Type:** 10-pin header, p=2.54 mm
- CN Location:** See **Figure 3-2**
- CN Pinouts:** See **Table 3-3**

The audio connector connects to speakers, a microphone and a line audio source.

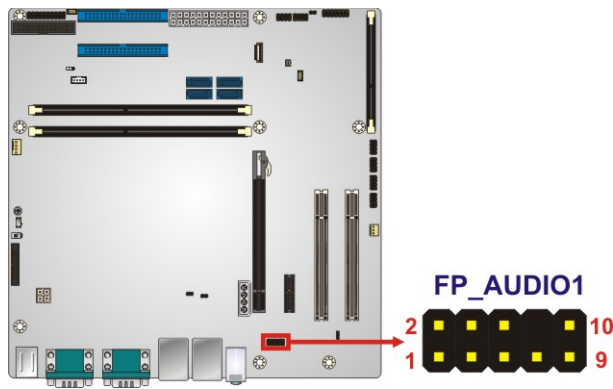


Figure 3-2: Audio Connector Location

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	LMIC2_L	2	AUD_GND
3	LMIC2_R	4	F_PRESENCE#
5	LLINE2_R	6	MIC2_JD
7	F_SENSE	8	NC
9	LLINE2_L	10	AUD_GND

Table 3-3: Audio Connector Pinouts

IMB-H810-i2 microATX Motherboard

3.2.2 ATX Power Connector

- CN Label:** ATX1
- CN Type:** 24-pin ATX, p=4.2 mm
- CN Location:** See **Figure 3-3**
- CN Pinouts:** See **Table 3-4**

The ATX power connector connects to an ATX power supply.

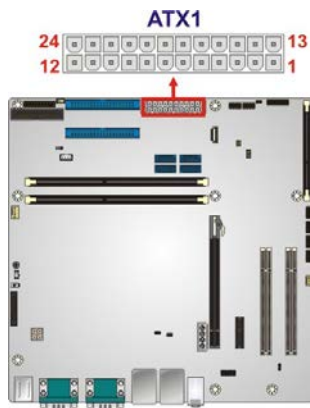


Figure 3-3: ATX Power Connector Location

Pin	Description	Pin	Description
1	+3.3V	13	+3.3V
2	+3.3V	14	-12V
3	GND	15	GND
4	+5V	16	PS_ON
5	GND	17	GND
6	+5V	18	GND
7	GND	19	GND
8	Power good	20	-5V
9	5VSB	21	+5V
10	+12V	22	+5V
11	+12V	23	+5V
12	+3.3V	24	GND

Table 3-4: ATX Power Connector Pinouts

3.2.3 Battery Connector



CAUTION:

Risk of explosion if battery is replaced by an incorrect type. Only certified engineers should replace the on-board battery.

Dispose of used batteries according to instructions and local regulations.

- CN Label:** **BAT1**
- CN Type:** 2-pin wafer, p=2.0 mm
- CN Location:** See **Figure 3-4**
- CN Pinouts:** See **Table 3-5**

A system battery is placed in the battery holder. The battery provides power to the system clock to retain the time when power is turned off. **NOTE:** It is recommended to attach the RTC battery onto the system chassis in which the IMB-H810-i2 is installed.

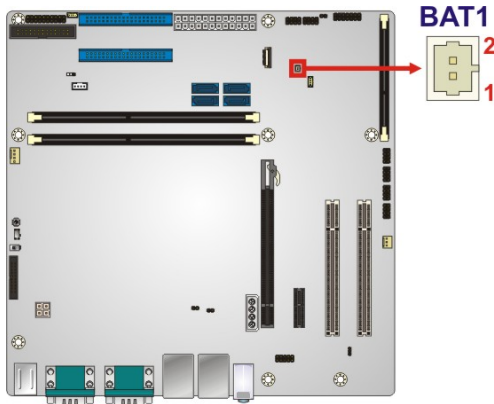


Figure 3-4: Battery Connector Location

Pin	Description
1	GND
2	VBATT

Table 3-5: Battery Connector Pinouts

IMB-H810-i2 microATX Motherboard

3.2.4 Chassis Intrusion Connector

- CN Label:** CHASSIE1
- CN Type:** 2-pin header, p=2.54 mm
- CN Location:** See **Figure 3-5**
- CN Pinouts:** See **Table 3-6**

The chassis intrusion connector is for a chassis intrusion detection sensor or switch that detects if a chassis component is removed or replaced.

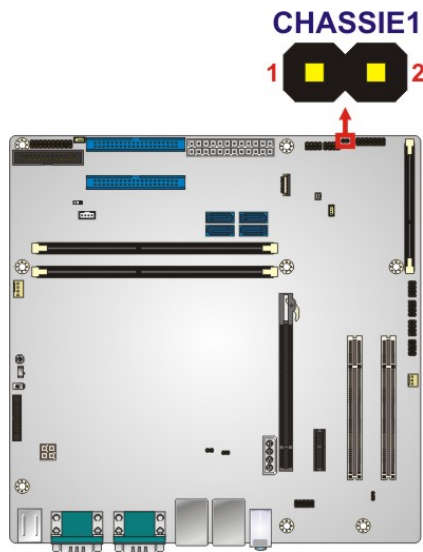


Figure 3-5: Chassis Intrusion Connector Location

Pin	Description
1	Pull High +3.3V
2	CHASSIS OPEN

Table 3-6: Chassis Intrusion Connector Pinouts

3.2.5 CPU Power Connector

- CN Label:** CPU12V1
- CN Type:** 4-pin connector, p=4.2 mm
- CN Location:** See **Figure 3-6**
- CN Pinouts:** See **Table 3-7**

The CPU power input connector provides power to the CPU.

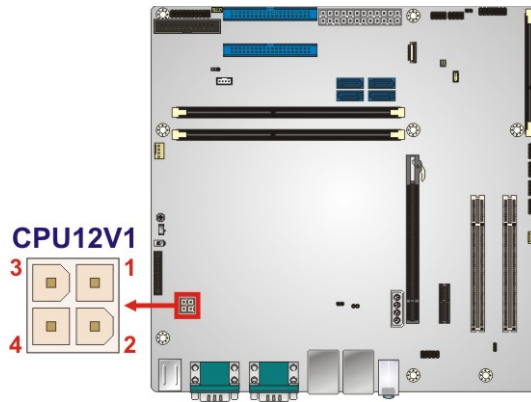


Figure 3-6: CPU Power Connector Location

PIN NO.	DESCRIPTION
1	GND
2	GND
3	+12V
4	+12V

Table 3-7: CPU Power Connector Pinouts

IMB-H810-i2 microATX Motherboard

3.2.6 DisplayPort Connector

- CN Label:** DP1
- CN Type:** 19-pin box header, p=2.0 mm
- CN Location:** See **Figure 3-7**
- CN Pinouts:** See **Table 3-8**

The DisplayPort connector supports HDMI, LVDS, VGA, DVI and DisplayPort graphics interfaces with up to 3840x2160 resolutions.

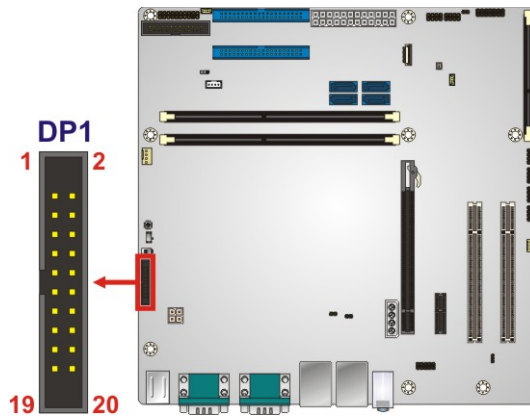


Figure 3-7: DisplayPort Connector Location

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+5V	11	AUXP
2	LANE1N	12	AUXN
3	LANE1P	13	GND
4	GND	14	LANE2P
5	LANE3N	15	LANE2N
6	LANE3P	16	GND
7	GND	17	LANE0P
8	AUX_CTRL_DET_D	18	LANE0N
9	GND	19	+3.3V
10	HPD		

Table 3-8: DisplayPort Connector Pinouts

3.2.7 Fan Connector (CPU)

- CN Label:** CPU_FAN1
- CN Type:** 4-pin wafer, p=2.54 mm
- CN Location:** See **Figure 3-8**
- CN Pinouts:** See **Table 3-9**

The fan connector attaches to a CPU cooling fan.

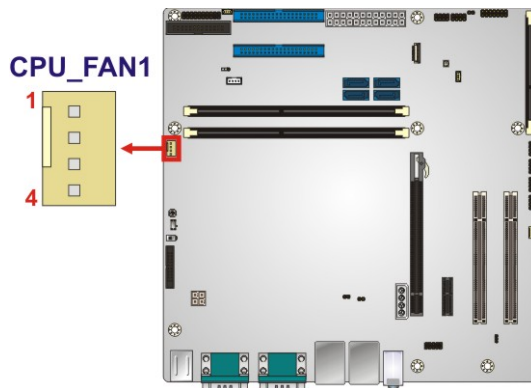


Figure 3-8: CPU Fan Connector Location

PIN NO.	DESCRIPTION
1	GND
2	+12 V
3	FANIO
4	PWM

Table 3-9: CPU Fan Connector Pinouts

IMB-H810-i2 microATX Motherboard

3.2.8 Fan Connector (System)

- CN Label:** SYS_FAN1
- CN Type:** 3-pin wafer, p=2.54 mm
- CN Location:** See **Figure 3-9**
- CN Pinouts:** See **Table 3-10**

Each fan connector attaches to a system cooling fan.

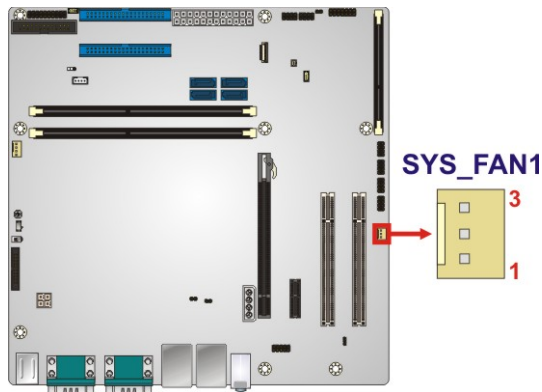


Figure 3-9: System Fan Connector Location

PIN NO.	DESCRIPTION
1	FANIO
2	+12 V (PWM)
3	GND

Table 3-10: System Fan Connector Pinouts

3.2.9 Front Panel Connector

- CN Label:** F_PANEL1
- CN Type:** 14-pin header, p=2.54 mm
- CN Location:** See **Figure 3-10**
- CN Pinouts:** See **Table 3-11**

The front panel connector connects to the indicator LEDs and buttons on the computer's front panel.

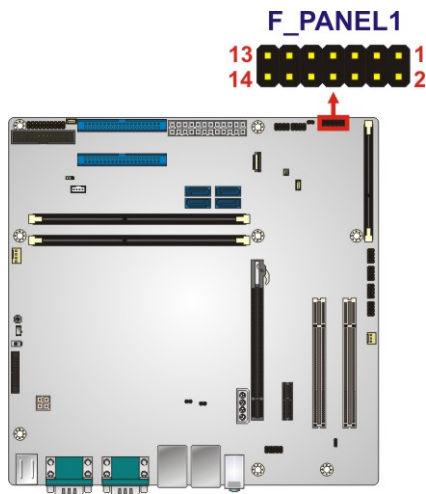


Figure 3-10: Front Panel Connector Location

FUNCTION	PIN	DESCRIPTION	FUNCTION	PIN	DESCRIPTION
Power LED	1	PWR_LED+	Speaker	2	Speaker+
	3	NC	IPMI LED	4	IPMI ID_LED+
	5	PWR_LED-		6	IPMI ID_LED-
Power Button	7	PWR_BTN+	Speaker	8	Speaker-
	9	PWR_BTN-		10	NC
HDD LED	11	HDD_LED+	Reset	12	RESET+
	13	HDD_LED-		14	RESET-

Table 3-11: Front Panel Connector Pinouts

IMB-H810-i2 microATX Motherboard

3.2.10 iRIS Module Slot

CN Label:	IPMI1
CN Type:	204-pin DDR3 SO-DIMM slot
CN Location:	See Figure 3-11

The iRIS module slot is used to install the IEI iRIS-2400 IPMI 2.0 module.



WARNING:

The iRIS module slot is designed to install the IEI iRIS-2400 IPMI 2.0 module only. DO NOT install other modules into the iRIS module slot. Doing so may cause damage to the IMB-H810-i2.

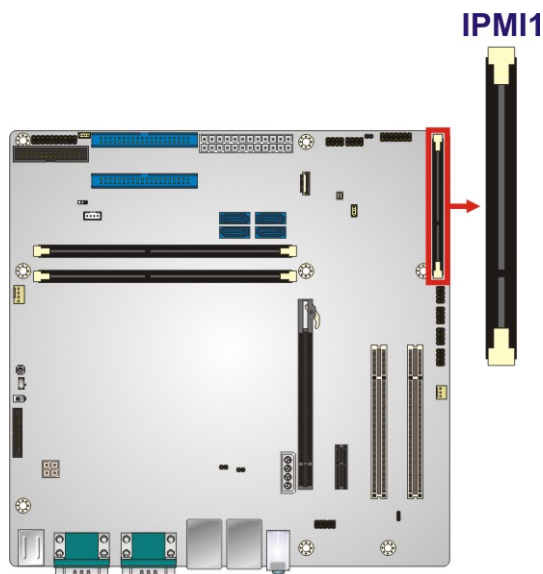


Figure 3-11: iRIS Module Slot Location

3.2.11 LAN LED Connectors

- CN Label:** LED_LAN1, LED_LAN2
- CN Type:** 2-pin header, p=2.54 mm
- CN Location:** See **Figure 3-12**
- CN Pinouts:** See **Table 3-12** and **Table 3-13**

The LAN LED connectors are used to connect to the LAN LED indicators on the chassis to indicate users the link activities of the two LAN ports.

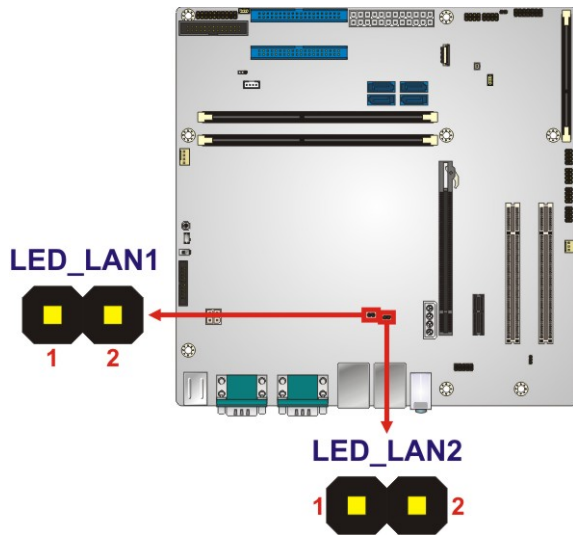


Figure 3-12: LAN LED Connector Locations

Pin	Description
1	Active+
2	Active-

Table 3-12: LAN1 LED Connector (LED_LAN1) Pinouts

Pin	Description
1	Active+
2	Active-

Table 3-13: LAN2 LED Connector (LED_LAN2) Pinouts

IMB-H810-i2 microATX Motherboard

3.2.12 Memory Card Slots

CN Label: CHA_DIMM1, CHB_DIMM1

CN Type: DDR3 DIMM slot

CN Location: See **Figure 3-13**

The DIMM slots are for DDR3 DIMM memory modules.



CAUTION:

For dual channel configuration, always install two identical memory modules that feature the same capacity, timings, voltage, number of ranks and the same brand.

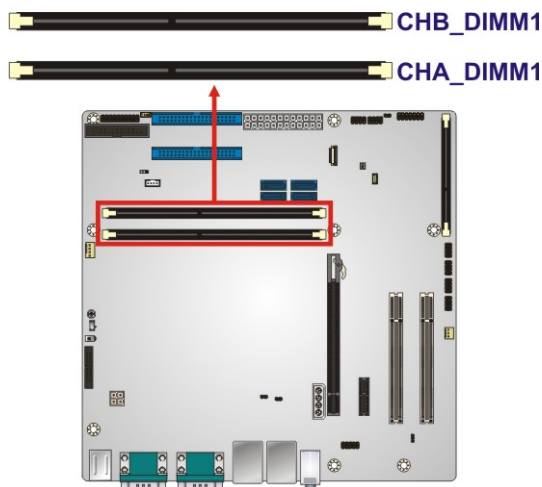


Figure 3-13: Memory Card Slot Locations

3.2.13 Parallel Port Connector

CN Label: LPT1

CN Type: 26-pin box header, p=2.54 mm

CN Location: See **Figure 3-14**

CN Pinouts: See **Table 3-14**

The parallel port connector connects to a parallel port connector interface or some other parallel port device such as a printer.

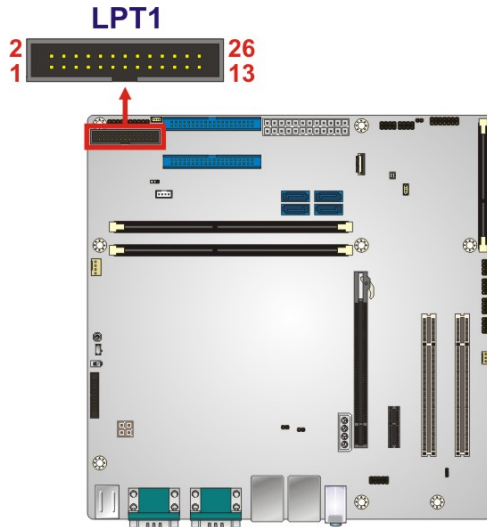


Figure 3-14: Parallel Port Connector Location

Pin	Description	Pin	Description
1	STROBE#	2	DATA 0
3	DATA 1	4	DATA 2
5	DATA 3	6	DATA 4
7	DATA 5	8	DATA 6
9	DATA 7	10	ACKNOWLEDGE#
11	BUSY	12	PAPER EMPTY
13	PRINTER SELECT	14	AUTO FORM FEED #
15	ERROR#	16	INITIALIZE#
17	PRINTER SELECT LN#	18	GROUND
19	GROUND	20	GROUND
21	GROUND	22	GROUND
23	GROUND	24	GROUND
25	GROUND	26	NC

Table 3-14: Parallel Port Connector Pinouts

IMB-H810-i2 microATX Motherboard

3.2.14 PCI Express Power Connector

- CN Label:** ATXPWR1
- CN Type:** 4-pin connector, p=5.08 mm
- CN Location:** See **Figure 3-15**
- CN Pinouts:** See **Table 3-15**

The PCIe power connector provides extra power to the PCIe expansion card.

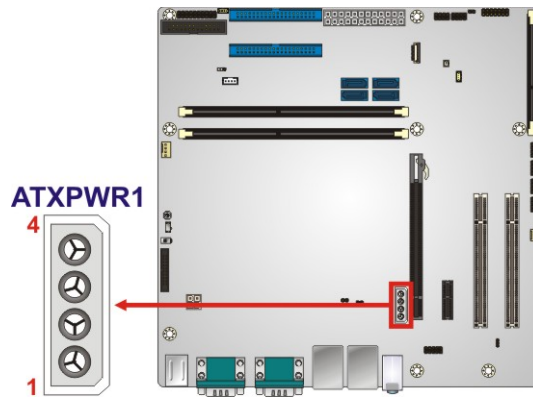


Figure 3-15: PCIe Power Location

Pin	Description
1	+12V
2	GND
3	GND
4	+5V

Table 3-15: PCIe Power Pinouts

3.2.15 Power Button

- CN Label:** PWR_SW1
- CN Type:** Push button
- CN Location:** See **Figure 3-16**

The on-board power button controls system power.

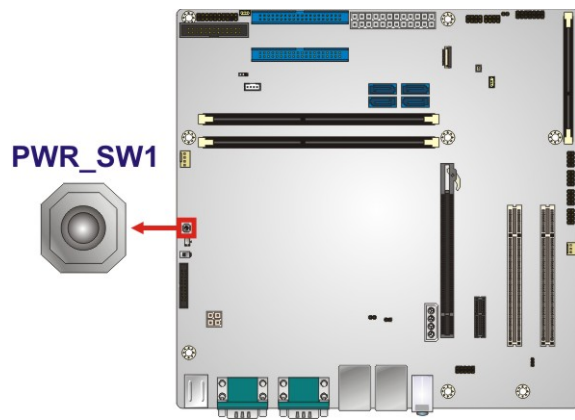


Figure 3-16: Power Button Location

IMB-H810-i2 microATX Motherboard

3.2.16 SATA 6Gb/s Drive Connectors

CN Label: S_ATA1, S_ATA2, S_ATA3, S_ATA4

CN Type: 7-pin SATA drive connectors

CN Location: See Figure 3-17

CN Pinouts: See Table 3-16

The SATA drive connectors can be connected to SATA drives.

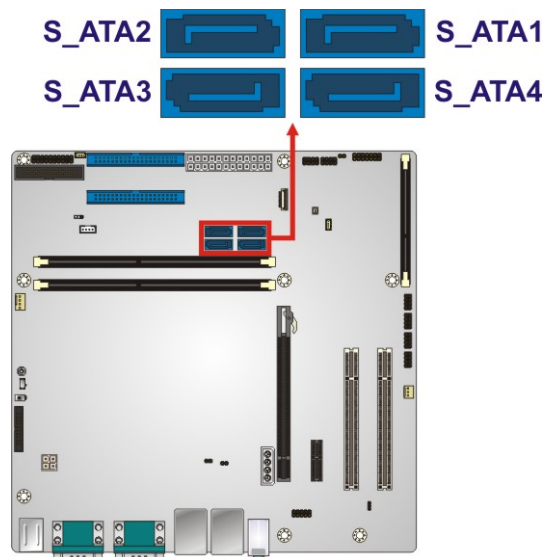


Figure 3-17: SATA 6Gb/s Drive Connector Locations

Pin	Description
1	GND
2	SATA_TX+
3	SATA_TX-
4	GND
5	SATA_RX-
6	SATA_RX+
7	GND

Table 3-16: SATA 6Gb/s Drive Connector Pinouts

3.2.17 Serial Port Connector (COM3~COM6), RS-232

- CN Label:** COM3-6
- CN Type:** 40-pin box header, p=2.54 mm
- CN Location:** See **Figure 3-18**
- CN Pinouts:** See **Table 3-17**

The connector provides four RS-232 ports connection.

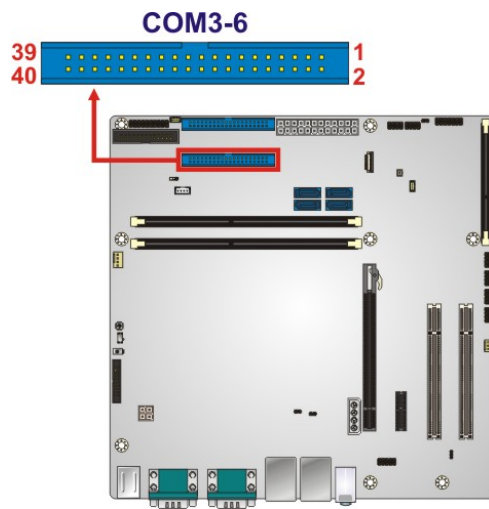


Figure 3-18: Serial Port Connector (COM3~COM6) Location

	PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
COM3	1	DCD	2	DSR
	3	RXD	4	RTS
	5	TXD	6	CTS
	7	DTR	8	RI
	9	GND	10	GND
COM4	11	DCD	12	DSR
	13	RXD	14	RTS
	15	TXD	16	CTS
	17	DTR	18	RI
	19	GND	20	GND
	21	DCD	22	DSR

IMB-H810-i2 microATX Motherboard

	PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
COM5	23	RXD	24	RTS
	25	TXD	26	CTS
	27	DTR	28	RI
	29	GND	30	GND
COM6	31	DCD	32	DSR
	33	RXD	34	RTS
	35	TXD	36	CTS
	37	DTR	38	RI
	39	GND	40	GND

Table 3-17: COM3~6 Serial Port Connector Pinouts

3.2.18 Serial Port Connector (COM7~COM10), RS-232

- CN Label:** COM7-10
- CN Type:** 40-pin box header, p=2.54 mm
- CN Location:** See **Figure 3-19**
- CN Pinouts:** See **Table 3-18**

The connector provides four RS-232 ports connection.

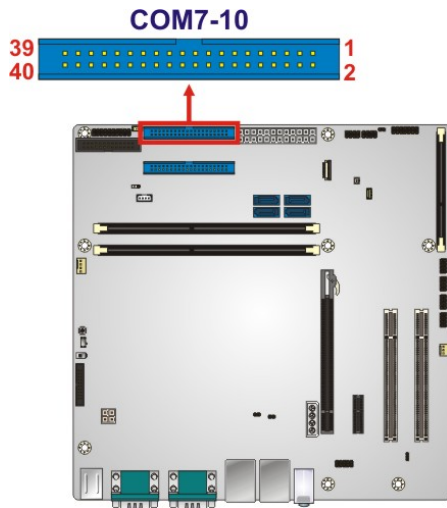


Figure 3-19: Serial Port Connector (COM7~COM10) Location

	PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
COM7	1	DCD	2	DSR
	3	RXD	4	RTS
	5	TXD	6	CTS
	7	DTR	8	RI
	9	GND	10	GND
COM8	11	DCD	12	DSR
	13	RXD	14	RTS
	15	TXD	16	CTS
	17	DTR	18	RI
	19	GND	20	GND
COM9	21	DCD	22	DSR
	23	RXD	24	RTS
	25	TXD	26	CTS
	27	DTR	28	RI
	29	GND	30	GND
COM10	31	DCD	32	DSR
	33	RXD	34	RTS
	35	TXD	36	CTS
	37	DTR	38	RI
	39	GND	40	GND

Table 3-18: COM7~10 Serial Port Connector Pinouts

3.2.19 Serial Port Connector (COM10), RS-422/485

- CN Label:** CN10
- CN Type:** 4-pin wafer, p=2.0 mm
- CN Location:** See **Figure 3-20**
- CN Pinouts:** See **Table 3-19**

Used for RS-422/485 communications.

IMB-H810-i2 microATX Motherboard

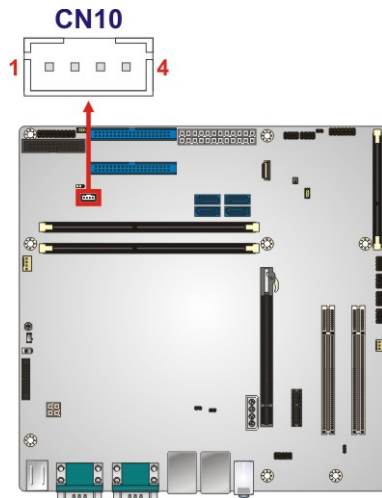


Figure 3-20: RS-422/485 Connector Location

PIN NO.	DESCRIPTION
1	RXD422-
2	RXD422+
3	TXD422+/TXD485+
4	TXD422-/TXD485-

Table 3-19: RS-422/485 Connector Pinouts

Use the optional RS-422/485 cable to connect to a serial device. The pinouts of the DB-9 connector are listed below.

RS-422 Pinouts	RS-485 Pinouts

Table 3-20: DB-9 RS-422/485 Pinouts

3.2.20 SMBus Connector

- CN Label:** CN1
- CN Type:** 4-pin wafer, p=1.25 mm
- CN Location:** See **Figure 3-21**
- CN Pinouts:** See **Table 3-21**

The SMBus (System Management Bus) connector provides low-speed system management communications.

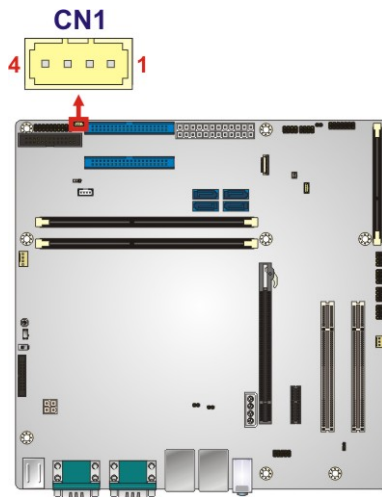


Figure 3-21: SMBus Connector Location

PIN	DESCRIPTION
1	GND
2	SMB_DATA
3	SMB_CLK
4	+5V

Table 3-21: SMBus Connector Pinouts

IMB-H810-i2 microATX Motherboard

3.2.21 SPI Flash Connector

- CN Label:** JSPI1
- CN Type:** 8-pin header, p=2.54 mm
- CN Location:** See **Figure 3-22**
- CN Pinouts:** See **Table 3-22**

The SPI flash connector is used to flash the SPI ROM.

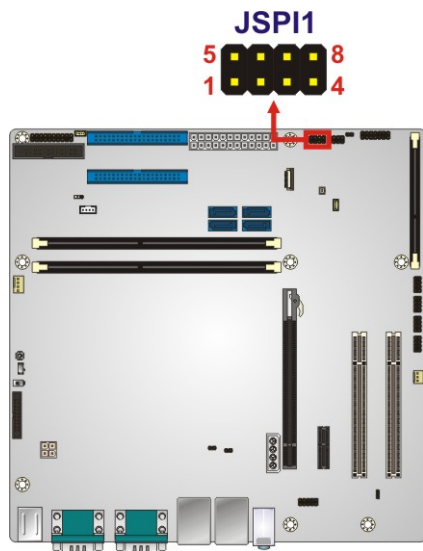


Figure 3-22: SPI Flash Connector Location

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+3.3V	2	SPI_CS#
3	SPI_SO	4	NC
5	GND	6	SPI_CLK
7	SPI_SI	8	NC

Table 3-22: SPI Flash Connector Pinouts

3.2.22 SPI Flash Connector, EC

- CN Label:** JSPI2
- CN Type:** 8-pin header, p=2.54 mm
- CN Location:** See **Figure 3-23**
- CN Pinouts:** See **Table 3-23**

The SPI flash connector is used to flash the EC ROM.

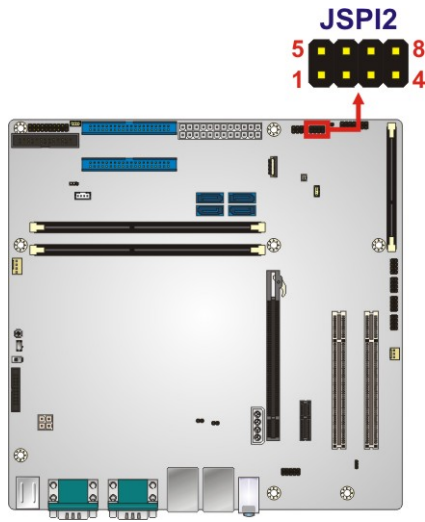


Figure 3-23: SPI EC Flash Connector Location

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	+3.3V	2	SPI_CS#
3	SPI_SO	4	NC
5	GND	6	SPI_CLK
7	SPI_SI	8	NC

Table 3-23: SPI EC Flash Connector Pinouts

IMB-H810-i2 microATX Motherboard

3.2.23 TPM Connector

- CN Label:** TPM1
- CN Type:** 20-pin header, p=2.54 mm
- CN Location:** See **Figure 3-24**
- CN Pinouts:** See **Table 3-24**

The TPM connector connects to a TPM module.

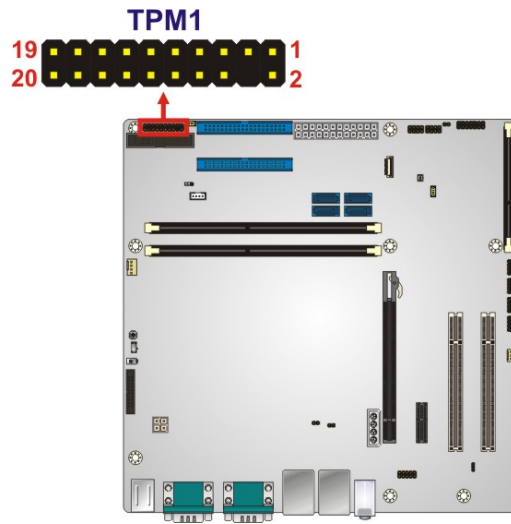


Figure 3-24: TPM Connector Location

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	LCLK	2	GND
3	LFRAME#	4	KEY
5	LRERST#	6	+5V
7	LAD3	8	LAD2
9	+3.3V	10	LAD1
11	LAD0	12	GND
13	SCL	14	SDA
15	SB3V	16	SERIRQ
17	GND	18	GLKRUN#
19	LPCPD#	20	LDRQ#

Table 3-24: TPM Connector Pinouts

3.2.24 USB 2.0 Connectors

- CN Label:** USB3, USB4, USB5, USB6
- CN Type:** 8-pin header, p=2.54 mm
- CN Location:** See **Figure 3-25**
- CN Pinouts:** See **Table 3-25**

The USB 2.0 connectors connect to USB 2.0 devices. Each pin header provides two USB 2.0 ports.

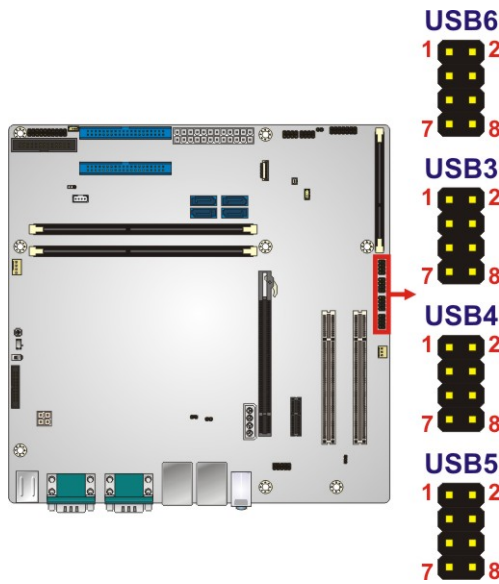


Figure 3-25: USB 2.0 Connector Locations

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	VCC	2	GND
3	USB_DATA-	4	USB_DATA+
5	USB_DATA+	6	USB_DATA-
7	GND	8	VCC

Table 3-25: USB 2.0 Connector Pinouts

IMB-H810-i2 microATX Motherboard

3.3 External Peripheral Interface Connector Panel

The figure below shows the external peripheral interface connector (EPIC) panel. The EPIC panel consists of the following:

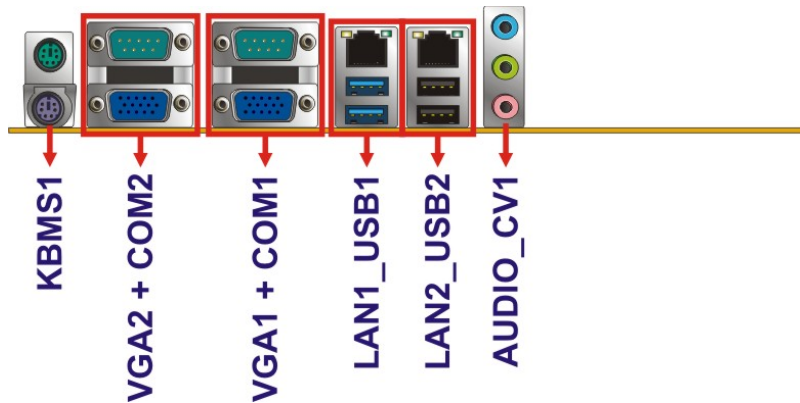


Figure 3-26: External Peripheral Interface Connector

3.3.1 Audio Connector

CN Label:	AUDIO_CV1
CN Type:	Audio jack
CN Location:	See Figure 3-26

The audio jacks connect to external audio devices.

- **Line In port (Light Blue):** Connects a CD-ROM, DVD player, or other audio devices.
- **Line Out port (Lime):** Connects to a headphone or a speaker. With multi-channel configurations, this port can also connect to front speakers.
- **Microphone (Pink):** Connects a microphone.




Figure 3-27: Audio Connector

3.3.2 Keyboard and Mouse Connectors

- CN Label:** KBMS1
- CN Type:** PS/2
- CN Location:** See **Figure 3-26**
- CN Pinouts:** See **Figure 3-28** and **Table 3-26**

The PS/2 ports are for connecting a PS/2 mouse and a PS/2 keyboard.

Pin	Description	Pin	Description
1	Keyboard Data	7	Mouse Data
2	NC	8	NC
3	GND	9	GND
4	VCC	10	VCC
5	Keyboard Clock	11	Mouse Clock
6	NC	12	NC

Table 3-26: PS/2 Connector Pinouts

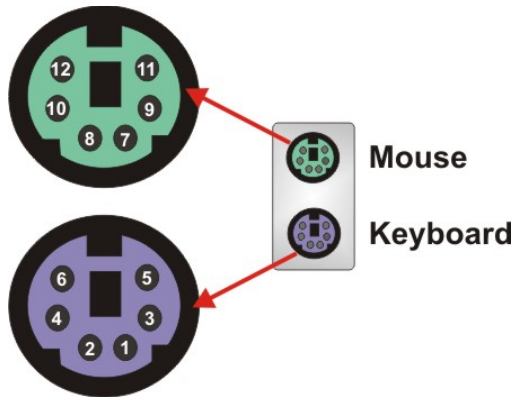


Figure 3-28: PS/2 Pinouts

IMB-H810-i2 microATX Motherboard

3.3.3 Ethernet and USB 2.0 Connectors

- CN Label:** LAN2_USB2
- CN Type:** RJ-45, USB Type-A
- CN Location:** See **Figure 3-26**
- CN Pinouts:** See **Table 3-27** and **Table 3-28**

The USB 2.0 connector can be connected to a USB device.

PIN	DESCRIPTION	PIN	DESCRIPTION
1	VCC	5	VCC
2	USB_DATA-	6	USB_DATA-
3	USB_DATA+	7	USB_DATA+
4	GND	8	GND

Table 3-27: USB 2.0 Port Pinouts


A 10/100/1000 Mb/s connection can be made to a Local Area Network. LAN2 also supports IPMI 2.0.

PIN	DESCRIPTION	PIN	DESCRIPTION
P2	TRD2P0	P6	TRD2P2
P3	TRD2N0	P7	TRD2N2
P4	TRD2P1	P8	TRD2P3
P5	TRD2N1	P9	TRD2N3

Table 3-28: LAN2 Pinouts

LED	Description	LED	Description
A	on: linked blinking: data is being sent/received	B	off: 10 Mb/s green: 100 Mb/s orange: 1000 Mb/s

LED A **LED B**



Pin 1

Table 3-29: Connector LEDs

3.3.4 Ethernet and USB 3.2 Gen 1 Connectors

- CN Label:** LAN1_USB1
- CN Type:** RJ-45, USB Type-A
- CN Location:** See **Figure 3-26**
- CN Pinouts:** See **Table 3-30** and **Table 3-31**

There are two external USB 3.2 Gen 1 (5Gb/s) connectors on the IMB-H810-i2.

PIN	DESCRIPTION	PIN	DESCRIPTION
1	VCC	10	VCC
2	USB_DATA-	11	USB_DATA-
3	USB_DATA+	12	USB_DATA+
4	GND	13	GND
5	USB3_RX-	14	USB3_RX-
6	USB3_RX+	15	USB3_RX+
7	GND	16	GND
8	USB3_TX-	17	USB3_TX-
9	USB3_TX+	18	USB3_TX+

Table 3-30: USB 3.2 Gen 1 Port Pinouts

A 10/100/1000 Mb/s connection can be made to a Local Area Network.

PIN	DESCRIPTION	PIN	DESCRIPTION
20	LAN1_MDI0P	24	LAN1_MDI2P
21	LAN1_MDI0N	25	LAN1_MDI2N
22	LAN1_MDI1P	26	LAN1_MDI3P
23	LAN1_MDI1N	27	LAN1_MDI3N

Table 3-31: LAN1 Pinouts

IMB-H810-i2 microATX Motherboard

3.3.5 Serial Port Connectors (COM1, COM2)

- CN Label:** COM1, COM2
- CN Type:** DB-9 connector
- CN Location:** See **Figure 3-26**
- CN Pinouts:** See **Table 3-32, Table 3-33**

The serial port connects to a RS-232 serial communications device.

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	DCD1	6	DSR1
2	RXD1	7	RTS1
3	TXD1	8	CTS1
4	DTR1	9	RI1
5	GND1		

Table 3-32: COM1 Serial Port Connector Pinouts

PIN NO.	DESCRIPTION	PIN NO.	DESCRIPTION
1	DCD2	6	DSR2
2	RXD2	7	RTS2
3	TXD2	8	CTS2
4	DTR2	9	RI2
5	GND2		

Table 3-33: COM2 Serial Port Connector Pinouts




Figure 3-29: Serial Port Connector Pinouts

3.3.6 VGA Connectors

- CN Label:** VGA1, VGA2
- CN Type:** 15-pin Female
- CN Location:** See **Figure 3-26**
- CN Pinouts:** See **Table 3-34** and **Figure 3-30**

Both VGA connectors can be connected to monitors that accept standard VGA input for easy dual display setup. The VGA connectors support up to 1920 x 1200 resolutions.

PIN	DESCRIPTION	PIN	DESCRIPTION
V1	RED	V2	GREEN
V3	BLUE	V4	NC
V5	GND	V6	GND
V7	GND	V8	GND
V9	VCC	V10	GND
V11	NC	V12	DDCDA
V13	HSYNC	V14	VSYNC
V15	DDCCLK		

Table 3-34: VGA Connector Pinouts




Figure 3-30: VGA Connector

Chapter

4

Installation

4.1 Anti-static Precautions



WARNING:

Failure to take ESD precautions during the installation of the IMB-H810-i2 may result in permanent damage to the IMB-H810-i2 and severe injury to the user.

Electrostatic discharge (ESD) can cause serious damage to electronic components, including the IMB-H810-i2. Dry climates are especially susceptible to ESD. It is therefore critical that whenever the IMB-H810-i2 or any other electrical component is handled, the following anti-static precautions are strictly adhered to.

- **Wear an anti-static wristband:** Wearing a simple anti-static wristband can help to prevent ESD from damaging the board.
- **Self-grounding:** Before handling the board, touch any grounded conducting material. During the time the board is handled, frequently touch any conducting materials that are connected to the ground.
- **Use an anti-static pad:** When configuring the IMB-H810-i2, place it on an anti-static pad. This reduces the possibility of ESD damaging the IMB-H810-i2.
- **Only handle the edges of the PCB:** When handling the PCB, hold the PCB by the edges.

4.2 Installation Considerations



NOTE:

The following installation notices and installation considerations should be read and understood before installation. All installation notices must be strictly adhered to. Failing to adhere to these precautions may lead to severe damage and injury to the person performing the installation.

IMB-H810-i2 microATX Motherboard



WARNING:

The installation instructions described in this manual should be carefully followed in order to prevent damage to the components and injury to the user.

Before and during the installation please **DO** the following:

- Read the user manual:
 - The user manual provides a complete description of the IMB-H810-i2 installation instructions and configuration options.
- Wear an electrostatic discharge cuff (ESD):
 - Electronic components are easily damaged by ESD. Wearing an ESD cuff removes ESD from the body and helps prevent ESD damage.
- Place the IMB-H810-i2 on an antistatic pad:
 - When installing or configuring the motherboard, place it on an antistatic pad. This helps to prevent potential ESD damage.
- Turn all power to the IMB-H810-i2 off:
 - When working with the IMB-H810-i2, make sure that it is disconnected from all power supplies and that no electricity is being fed into the system.

Before and during the installation of the IMB-H810-i2 **DO NOT:**

- Remove any of the stickers on the PCB board. These stickers are required for warranty validation.
- Use the product before verifying all the cables and power connectors are properly connected.
- Allow screws to come in contact with the PCB circuit, connector pins, or its components.

4.2.1 Socket LGA1150 CPU Installation



WARNING:

CPUs are expensive and sensitive components. When installing the CPU please be careful not to damage it in anyway. Make sure the CPU is installed properly and ensure the correct cooling kit is properly installed.

DO NOT touch the pins at the bottom of the CPU. When handling the CPU, only hold it on the sides.

To install the CPU, follow the steps below.

Step 1: Disengage the load lever by pressing the lever down and slightly outward to clear the retention tab. Fully open the lever. See **Figure 4-1**.

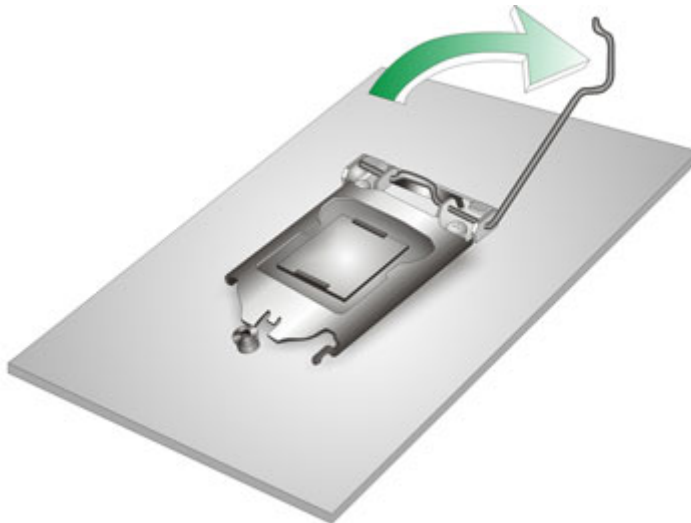


Figure 4-1: Disengage the CPU Socket Load Lever

Step 2: Open the socket and remove the protective cover. The black protective cover can be removed by pulling up on the tab labeled "Remove". See **Figure 4-2**.

IMB-H810-i2 microATX Motherboard

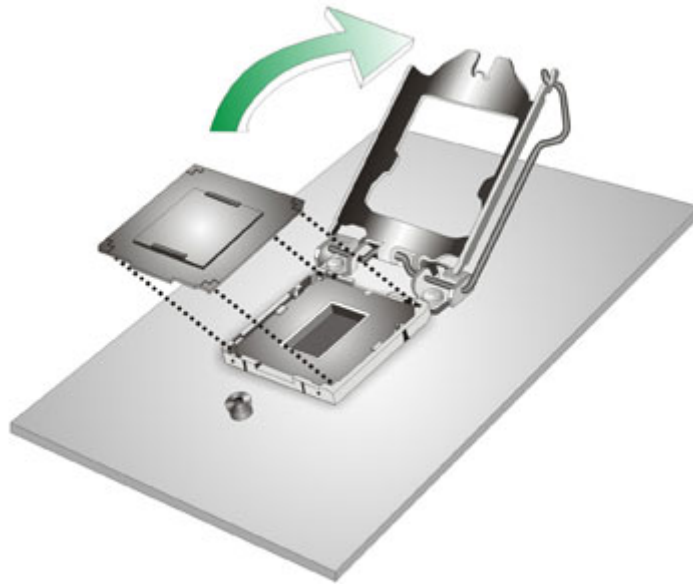


Figure 4-2: Remove Protective Cover

Step 3: Inspect the CPU socket. Make sure there are no bent pins and make sure the socket contacts are free of foreign material. If any debris is found, remove it with compressed air.

Step 4: Orientate the CPU properly. The contact array should be facing the CPU socket.



WARNING:

DO NOT touch the pins at the bottom of the CPU. When handling the CPU, only hold it on the sides.

Step 5: Correctly position the CPU. Match the Pin 1 mark with the cut edge on the CPU socket.

Step 6: Align the CPU pins. Locate pin 1 and the two orientation notches on the CPU. Carefully match the two orientation notches on the CPU with the socket alignment keys.

Step 7: Insert the CPU. Gently insert the CPU into the socket. If the CPU pins are properly aligned, the CPU should slide into the CPU socket smoothly. See **Figure 4-3**.

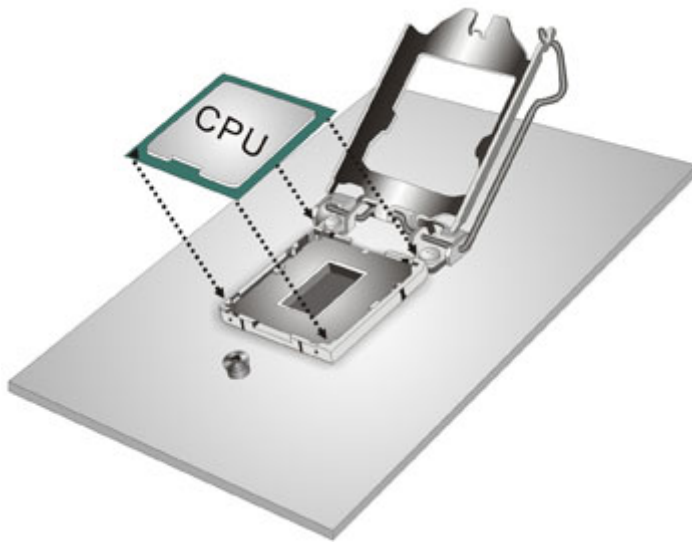


Figure 4-3: Insert the Socket LGA1150 CPU

Step 8: Close the CPU socket. Close the load plate and pull the load lever back a little to have the load plate be able to secure to the knob. Engage the load lever by pushing it back to its original position (**Figure 4-4**). There will be some resistance, but will not require extreme pressure.

IMB-H810-i2 microATX Motherboard

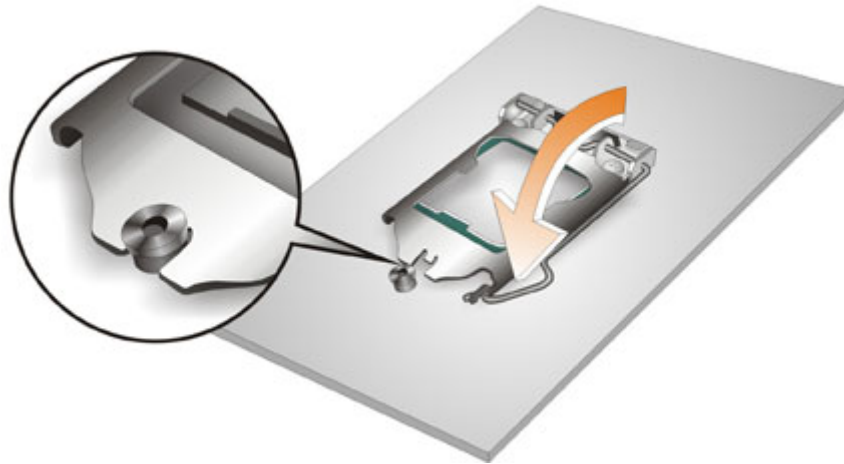


Figure 4-4: Close the Socket LGA1150

Step 9: Connect the 12 V power to the board. Connect the 12 V power from the power supply to the board.

4.2.2 Socket LGA1150 Cooling Kit Installation



WARNING:

DO NOT attempt to install a push-pin cooling fan.

The pre-installed support bracket prevents the board from bending and is **ONLY** compatible with captive screw type cooling fans.

The cooling kit can be bought from IEI. The cooling kit has a heatsink and fan.

**WARNING:**

Do not wipe off (accidentally or otherwise) the pre-sprayed layer of thermal paste on the bottom of the heat sink. The thermal paste between the CPU and the heat sink is important for optimum heat dissipation.

To install the cooling kit, follow the instructions below.

Step 1: A cooling kit bracket is pre-installed on the rear of the motherboard.

See **Figure 4-5**.

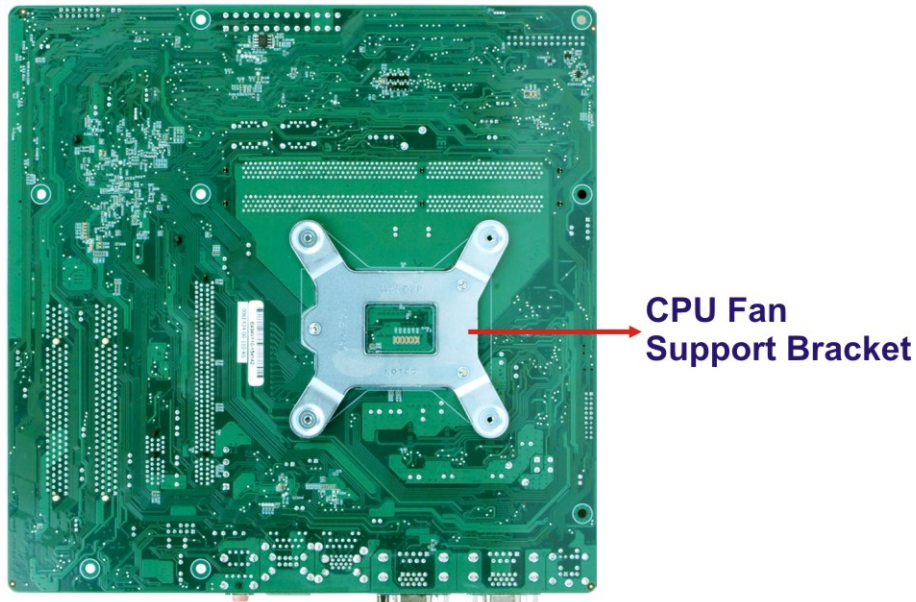


Figure 4-5: Cooling Kit Support Bracket

Step 2: Place the cooling kit onto the socket LGA1150 CPU. Make sure the CPU cable can be properly routed when the cooling kit is installed.

Step 3: Mount the cooling kit. Gently place the cooling kit on top of the CPU. Make sure the four threaded screws on the corners of the cooling kit properly pass through the holes of the cooling kit bracket.

IMB-H810-i2 microATX Motherboard

Step 4: Secure the cooling kit by fastening the four retention screws of the cooling kit.

Step 5: Connect the fan cable. Connect the cooling kit fan cable to the fan connector on the IMB-H810-i2. Carefully route the cable and avoid heat generating chips and fan blades.

4.2.3 DIMM Installation

To install a DIMM, please follow the steps below and refer to **Figure 4-6**.



CAUTION:

For dual channel configuration, always install two identical memory modules that feature the same capacity, timings, voltage, number of ranks and the same brand.

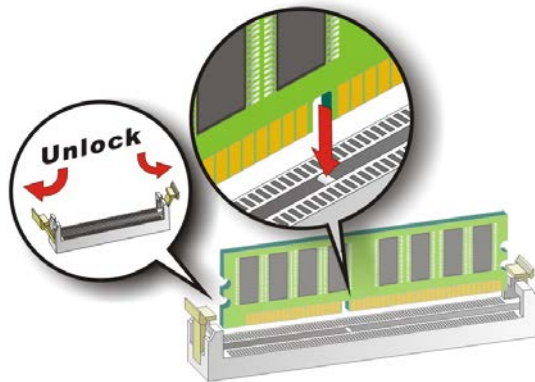


Figure 4-6: DIMM Installation

Step 1: Open the DIMM socket handles. Open the two handles outwards as far as they can. See **Figure 4-6**.

Step 2: Align the DIMM with the socket. Align the DIMM so the notch on the memory lines up with the notch on the memory socket. See **Figure 4-6**.

Step 3: **Insert the DIMM.** Once aligned, press down until the DIMM is properly seated.

Clip the two handles into place. See **Figure 4-6**.

Step 4: **Removing a DIMM.** To remove a DIMM, push both handles outward. The

memory module is ejected by a mechanism in the socket.

4.2.4 iRIS-2400 Module Installation



WARNING:

The iRIS module slot is designed to install the IEI iRIS-2400 IPMI 2.0 module only. **DO NOT** install other modules into the iRIS module slot. Doing so may cause damage to the IMB-H810-i2.

To install the iRIS-2400 module, please follow the steps below and refer to **Figure 4-7**.

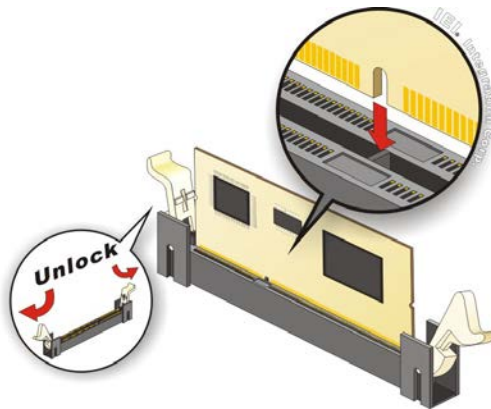


Figure 4-7: iRIS-2400 Module Installation

Step 1: **Locate the iRIS module slot.** See **Figure 3-11**.

Step 2: **Open the socket handles.** Open the two handles outwards as far as they can.

See **Figure 4-7**.

Step 3: **Align the iRIS-2400 module with the socket.** Align the iRIS-2400 module so

the notch on the module lines up with the notch on the socket. See **Figure 4-7**.

IMB-H810-i2 microATX Motherboard

Step 4: Insert the iRIS-2400 module. Once aligned, press down until the iRIS-2400 module is properly seated. Clip the two handles into place. See **Figure 4-7**.

Step 5: Removing the iRIS-2400 module. To remove the iRIS-2400 module, push both handles outward. The module is ejected by a mechanism in the socket.



NOTE:

After installing the iRIS-2400 module, use **LAN2** port to establish a network connection. Please refer to **Section 4.5** for IPMI setup procedures.

4.3 System Configuration

The system configuration is controlled by buttons, switches and BIOS options. The system configuration must be performed before installation.

4.3.1 AT/ATX Power Mode Setting

The AT and ATX power mode selection is made through the AT/ATX power mode switch which is shown in **Figure 4-8**.

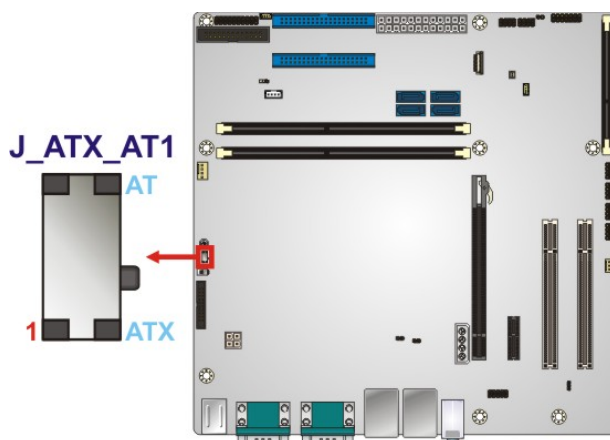


Figure 4-8: AT/ATX Power Mode Switch Location

4.3.2 Clear CMOS Button

To reset the BIOS, remove the on-board battery and press the clear CMOS button for three seconds or more. The clear CMOS button location is shown in **Figure 4-9**.

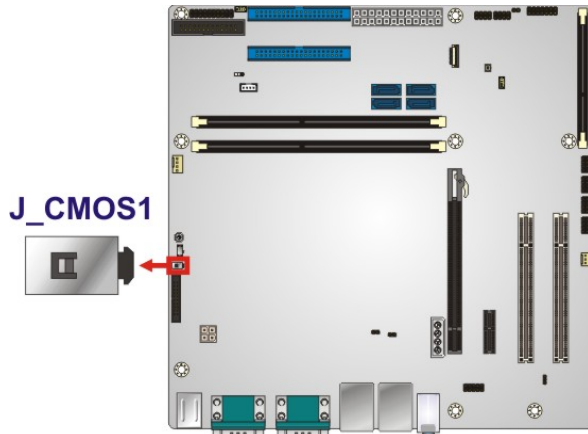


Figure 4-9: Clear CMOS Button Location

4.3.3 COM 10 Function Select

The COM 10 Function Select jumper sets the communication protocol used by the COM 10 port as RS-232, RS-422 or RS-485. The COM 10 Function Select settings are shown in **Table 4-1**.

Setting	Description
Short 1-2	RS-232 (Default)
Short 2-3	RS-422 or RS-485

Table 4-1: COM 10 Function Select Jumper Settings

IMB-H810-i2 microATX Motherboard

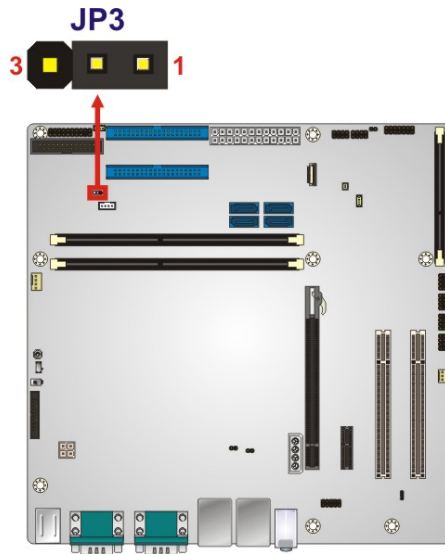


Figure 4-10: COM 10 Function Select Jumper Location

4.3.4 Flash Descriptor Security Override

The Flash Descriptor Security Override jumper specifies whether to override the flash descriptor.

Setting	Description
Short 1-2	No override (Default)
Short 2-3	Override

Table 4-2: Flash Descriptor Security Override Jumper Settings

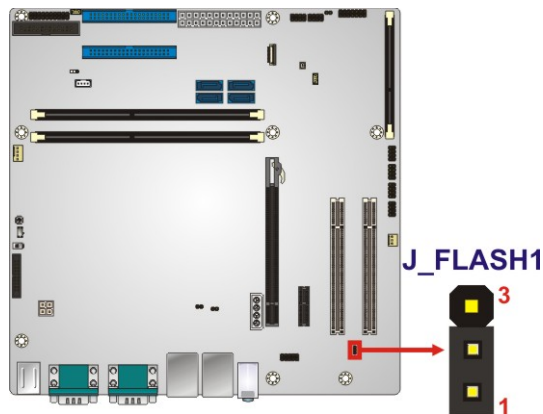


Figure 4-11: Flash Descriptor Security Override Jumper Location

4.3.5 PCIe x16 Interface Setup

The PCIe x16 interface setup is made through the BIOS options in “Chipset → PCH-IO Configuration” BIOS menu. Use the **PCIEX16 Power** option to configure the PCIe x16 channel mode.

BIOS Options	Description
1 x16 PCIE	Sets the PCIe x16 slot as one PCIe x16. (Default)

Table 4-3: PCIe x16 Interface Setup

Please refer to **Section 5.4.1** for detailed information.

4.3.6 USB Power Select

The USB power selection is made through the BIOS options in “Chipset → PCH-IO Configuration” BIOS menu. Use the **USB SW1 Power** and the **USB SW2 Power** BIOS options to configure the power source to the corresponding USB ports (see **Table 4-4**).

BIOS Options	Configured USB Ports
USB SW1 Power	LAN1_USB1 (external USB 3.2 Gen 1 ports) LAN2_USB2 (external USB 2.0 ports)
USB SW2 Power	USB3, USB4, USB5, USB6 (internal USB 2.0 ports)

Table 4-4: BIOS Options and Configured USB Ports

Please refer to **Section 5.4.1** for detailed information.

IMB-H810-i2 microATX Motherboard

4.4 Internal Peripheral Device Connections

This section outlines the installation of peripheral devices to the onboard connectors.

4.4.1 SATA Drive Connection

The IMB-H810-i2 is shipped with two SATA drive cables. To connect the SATA drives to the connectors, please follow the steps below.

Step 1: Locate the connectors. The locations of the SATA drive connectors are shown in **Chapter 3**.

Step 2: Insert the cable connector. Insert the cable connector into the on-board SATA drive connector. See **Figure 4-12**.

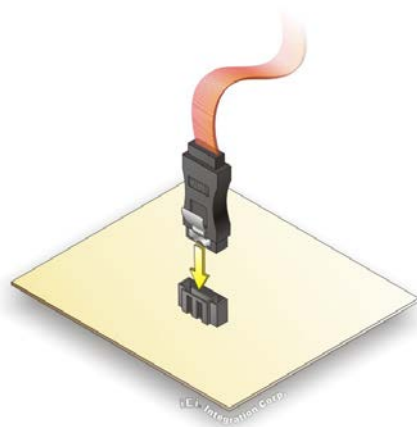


Figure 4-12: SATA Drive Cable Connection

Step 3: Connect the cable to the SATA disk. Connect the connector on the other end of the cable to the connector at the back of the SATA drive. See **Figure 4-13**.

Step 4: Connect the SATA power cable (optional). Connect the SATA power connector to the back of the SATA drive. See **Figure 4-13**.

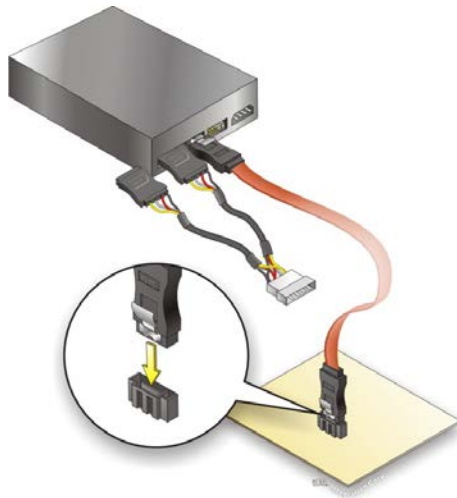


Figure 4-13: SATA Power Drive Connection

Step 5: The SATA power cable can be bought from IEI. See Optional Items in Section 2.4.

4.5 IPMI Setup Procedure

The IMB-H810-i2 features Intelligent Platform Management Interface (IPMI) that helps lower the overall costs of server management by enabling users to maximize IT resources, save time and manage multiple systems. The IMB-H810-i2 supports IPMI 2.0 through the optional iRIS-2400 module. Follow the steps below to setup IPMI.

4.5.1 Managed System Hardware Setup

The hardware configuration of the managed system (IMB-H810-i2) is described below.

Step 1: Install an iRIS-2400 module to the IPMI module socket (refer to **Section 4.2.4**).

Step 2: Make sure at least one DDR3 DIMM is installed in one of the DIMM sockets. If multiple DIMMs are installed, all of the DIMMs must be same size, same speed and same brand to get the best performance.

Step 3: Connect an Ethernet cable to the RJ-45 connector labeled **LAN2_USB2** (**Figure 3-26**).

IMB-H810-i2 microATX Motherboard

4.5.2 Using the IEI iMAN Web GUI

To manage a client system from a remote console using IEI iMAN Web GUI, follow the steps below.

- Step 1:** Obtain the IP address of the managed system. It is recommended to use the IPMI Tool on the managed system to obtain the IP address. To use IPMI Tool to obtain IP address, follow the steps below:
- Copy the **ipmitool.exe** file to a bootable USB flash drive.
 - Insert the USB flash drive to the IMB-H810-i2
 - The IMB-H810-i2 boots from the USB flash drive
 - Enter the following command: **ipmitool 20 30 02 01 03 00 00**
(there is a space between each two-digit number)
 - A serial of number shows. The last four two-digit hexadecimal numbers are the IP address. Convert the hexadecimal numbers to decimal numbers.
- Step 2:** On the remote management console, open a web browser. Enter the managed system IP address in the web browser (**Figure 4-14**).




Figure 4-14: IEI iMAN Web Address

- Step 3:** The login page appears in the web browser.
- Step 4:** Enter the user name and password to login the system. The default login username and password are:
- Username: **admin**
 - Password: **admin**
- Step 5:** Press the login button to login the system.
- Step 6:** The IEI iMAN Web GUI appears (**Figure 4-15**).

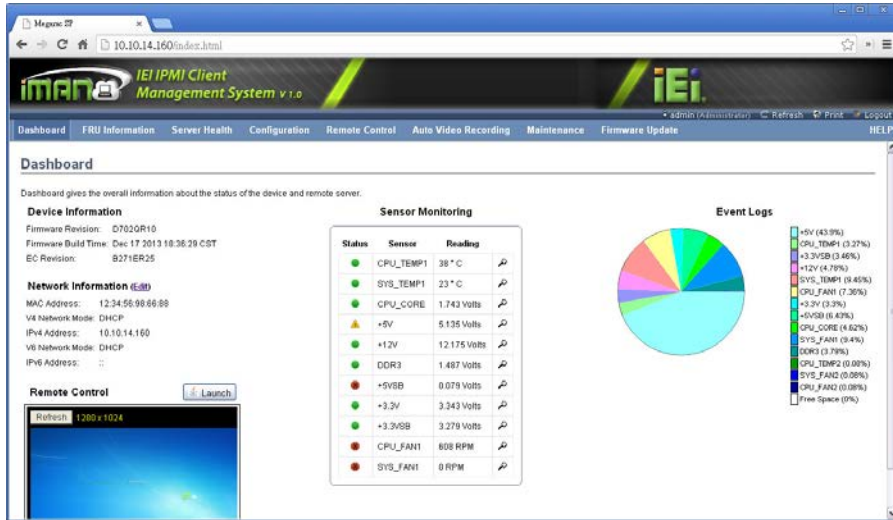


Figure 4-15: IEI iMAN Web GUI



NOTE:

To understand how to use the IEI iMAN Web GUI, please refer to the iRIS-2400 Web GUI user manual which can be obtained from [IEI Resource Download Center](#). The user manual describes each function in detail.

Chapter

5

BIOS

5.1 Introduction

The BIOS is programmed onto the BIOS chip. The BIOS setup program allows changes to certain system settings. This chapter outlines the options that can be changed.



NOTE:

Some of the BIOS options may vary throughout the life cycle of the product and are subject to change without prior notice.

5.1.1 Starting Setup

The UEFI BIOS is activated when the computer is turned on. The setup program can be activated in one of two ways.

1. Press the **DEL** or **F2** key as soon as the system is turned on or
2. Press the **DEL** or **F2** key when the “**Press DEL or F2 to enter SETUP**” message appears on the screen.

If the message disappears before the **DEL** or **F2** key is pressed, restart the computer and try again.

5.1.2 Using Setup

Use the arrow keys to highlight items, press **ENTER** to select, use the PageUp and PageDown keys to change entries, press **F1** for help and press **ESC** to quit. Navigation keys are shown in **Table 5-1**.

Key	Function
Up arrow	Move to previous item
Down arrow	Move to next item
Left arrow	Move to the item on the left hand side
Right arrow	Move to the item on the right hand side
+	Increase the numeric value or make changes

IMB-H810-i2 microATX Motherboard

Key	Function
-	Decrease the numeric value or make changes
Esc key	Main Menu – Quit and not save changes into CMOS Status Page Setup Menu and Option Page Setup Menu -- Exit current page and return to Main Menu
F1 key	General help, only for Status Page Setup Menu and Option Page Setup Menu
F2 key	Load previous values
F3 key	Load optimized defaults
F4 key	Save changes and Exit BIOS

Table 5-1: BIOS Navigation Keys

5.1.3 Getting Help

When **F1** is pressed a small help window describing the appropriate keys to use and the possible selections for the highlighted item appears. To exit the Help Window press **Esc** or the **F1** key again.

5.1.4 Unable to Reboot after Configuration Changes

If the computer cannot boot after changes to the system configuration is made, CMOS defaults. Use the clear CMOS button described in **Chapter 4**.

5.1.5 BIOS Menu Bar

The **menu bar** on top of the BIOS screen has the following main items:

- Main – Changes the basic system configuration.
- Advanced – Changes the advanced system settings.
- Chipset – Changes the chipset settings.
- Boot – Changes the system boot configuration.
- Security – Sets User and Supervisor Passwords.
- Save & Exit – Selects exit options and loads default settings

5.2 Main

The **Main** BIOS menu (**BIOS Menu 1**) appears when the **BIOS Setup** program is entered. The **Main** menu gives an overview of the basic system information.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
Main  Advanced  Chipset  Boot  Security  Save & Exit  Server Mgmt

BIOS Information
BIOS Vendor                American Megatrends
Core Version                4.6.5.4
Compliancy                 UEFI 2.3.1;PI1.2
Project Version            E434AR36.ROM
Build Date                 04/30/2015 14:46:19

iWDD Vendor                iEi
iWDD Version               E434ER15.bin

Processor Information
Name                       Haswell
Brand String               Intel(R) Core(TM) i5-459
Frequency                  2600MHz
Processor ID                306c3
Stepping                   C0
Number of Processors       4Core(s) / 4Thread(s)
Microcode Revision         1c
GT Info                    GT2 (700MHz)

IGFX VBIOS Version         2178
Memory RC Version          1.6.2.1
Total Memory                2048 MB (DDR3)
Memory Frequency            1600 Mhz

PCH Information
Name                       LynxPoint
PCH SKU                    H81
Stepping                   05/C2
LAN PHY Revision           A3

ME FW Version              9.1.10.1005
ME Firmware SKU            1.5MB

SPI Clock Frequency
DOFR Support                Supported
Read Status Clock Frequency 50MHz
Write Status Clock Frequency 50MHz
Fast Read Status Clock     50MHz
Frequency

System Date                 [Tue 01/08/2014]
System Time                 [15:10:27]

-----
<->: Select Screen
↑ ↓: Select Item
EnterSelect
+ -: Change Opt.
F1:  General Help
F2:  Previous Values
F3:  Optimized Defaults
F4:  Save & Exit
ESC: Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
  
```

BIOS Menu 1: Main

IMB-H810-i2 microATX Motherboard

The System Overview field has two user configurable fields:

→ **System Date [xx/xx/xx]**

Use the **System Date** option to set the system date. Manually enter the day, month and year.

→ **System Time [xx:xx:xx]**

Use the **System Time** option to set the system time. Manually enter the hours, minutes and seconds.

5.3 Advanced

Use the **Advanced** menu (**BIOS Menu 2**) to configure the CPU and peripheral devices through the following sub-menus:



WARNING!

Setting the wrong values in the sections below may cause the system to malfunction. Make sure that the settings made are compatible with the hardware.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
Main  Advanced  Chipset  Boot  Security  Save & Exit  Server Mgmt
-----
> ACPI Settings
> RTC Wake Settings
> Trusted Computing
> CPU Configuration
> SATA Configuration
> USB Configuration
> F81866 Super IO Configuration
> F81866 H/W Monitor
> F81216 Secondary Super IO Configuration
> Serial Port Console Redirection
> iEi Feature

System ACPI Parameters
-----
<=>: Select Screen
↑↓: Select Item
EnterSelect
+ - Change Opt.
F1  General Help
F2  Previous Values
F3  Optimized Defaults
F4  Save & Exit
ESC Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
  
```

BIOS Menu 2: Advanced

5.3.1 ACPI Settings

The **ACPI Settings** menu (**BIOS Menu 3**) configures the Advanced Configuration and Power Interface (ACPI) options.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
-----
Advanced
-----
ACPI Settings
ACPI Sleep State          [S1 (CPU Stop Clock)]

Select the highest ACPI
sleep state the system
will enter when the
SUSPEND button is
pressed.

-----
<=>: Select Screen
↑↓: Select Item
EnterSelect
+ - Change Opt.
F1  General Help
F2  Previous Values
F3  Optimized Defaults
F4  Save & Exit
ESC Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
  
```

BIOS Menu 3: ACPI Configuration

IMB-H810-i2 microATX Motherboard

→ ACPI Sleep State [S1 (CPU Stop Clock)]

Use the **ACPI Sleep State** option to specify the sleep state the system enters when it is not being used.


→ Suspend Disabled

→ **S1 (CPU Stop Clock)** **DEFAULT** The system enters S1(POS) sleep state. The system appears off. The CPU is stopped; RAM is refreshed; the system is running in a low power mode.

→ **S3 (Suspend to RAM)** The caches are flushed and the CPU is powered off. Power to the RAM is maintained. The computer returns slower to a working state, but more power is saved.

5.3.2 RTC Wake Settings

The **RTC Wake Settings** menu (**BIOS Menu 4**) configures RTC wake event. The RTC wake function is supported in ACPI (S3/S4/S5) and APM soft off modes.

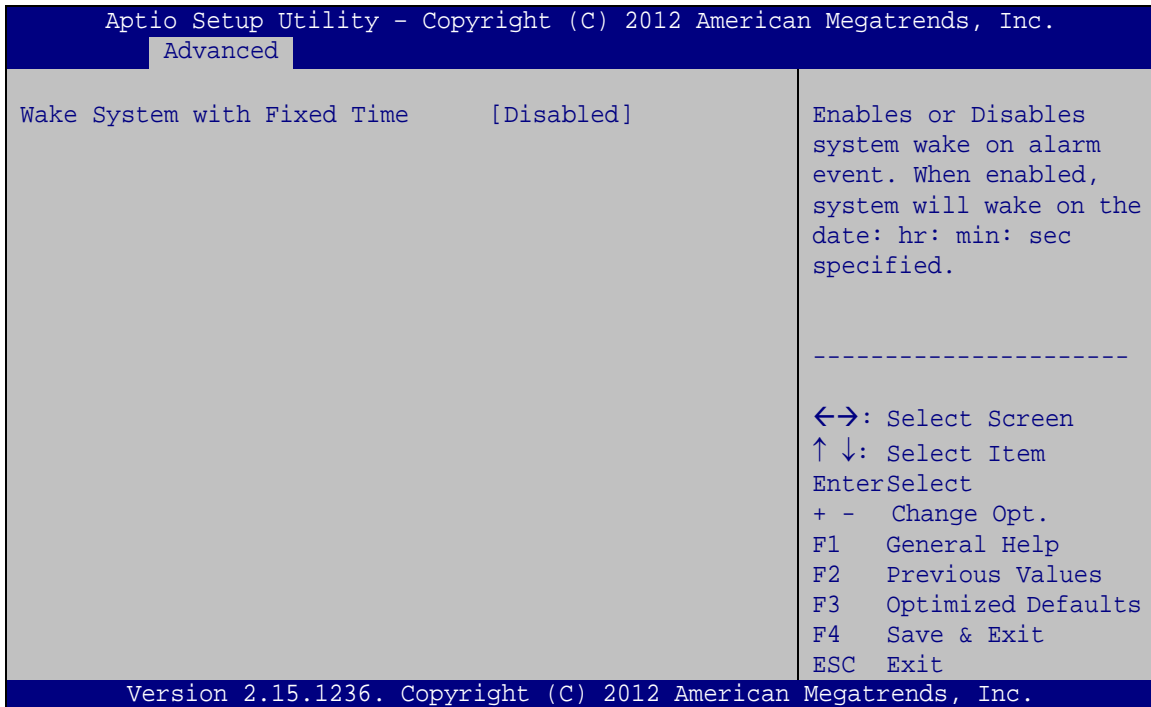

BIOS Menu 4: RTC Wake Settings

→ Wake System with Fixed Time [Disabled]

Use the **Wake System with Fixed Time** option to specify the time the system should be roused from a suspended state.

- **Disabled** **DEFAULT** The real time clock (RTC) cannot generate a wake event

IMB-H810-i2 microATX Motherboard

➔ **Enabled**

If selected, the following appears with values that can be selected:

*Wake up every day

*Wake up date

*Wake up hour

*Wake up minute

*Wake up second

After setting the alarm, the computer turns itself on from a suspend state when the alarm goes off.

5.3.3 Trusted Computing

Use the **Trusted Computing** menu (**BIOS Menu 5**) to configure settings related to the Trusted Computing Group (TCG) Trusted Platform Module (TPM).

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
  Advanced
-----
Configuration
  Security Device Support          [Disabled]
Current Status Information
  NO Security Device Found
-----
                                  Enables or Disables BIOS
                                  support for security
                                  device. O.S. will not
                                  show Security Device.
                                  TCG EFI protocol and
                                  INT1A interface will not
                                  be available.
                                  -----
                                  ←→: Select Screen
                                  ↑ ↓: Select Item
                                  Enter>Select
                                  + - Change Opt.
                                  F1  General Help
                                  F2  Previous Values
                                  F3  Optimized Defaults
                                  F4  Save & Exit
                                  ESC Exit
-----
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
  
```

BIOS Menu 5: Trusted Computing

→ Security Device Support [Disable]

Use the **Security Device Support** option to configure support for security devices.

→ **Disable** **DEFAULT** Security Device support is disabled.

→ **Enable** Security Device support is enabled.

5.3.4 CPU Information

Use the **CPU Information** submenu (**BIOS Menu 6**) to view detailed CPU specifications and configure the CPU.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
  Advanced
CPU Information
Intel® Core(TM) i5-4590TE CPU @ 2.00GHz
CPU Signature          306c3
Processor Family      6
Microcode Patch       1c
FSB Speed             100 MHz
Max CPU Speed         2000 MHz
Min CPU Speed         800 MHz
CPU Speed             2600 MHz
Processor Cores       4
Intel HT Technology    Not Supported
Intel VT-x Technology Supported
Intel SMX Technology  Supported
64-bit                Supported
EIST Technology       Supported
CPU C3 state          Supported
CPU C6 state          Supported
CPU C7 state          Supported

L1 Data ache          32 kB x 4
L1 Code Cache         32 kB x 4
L2 Cache              256 kB x 4
L3 Cache              6144 kB

Active Processor Cores [All]
Intel Virtualization Technology [Disabled]
EIST                  [Enabled]
Intel TXT(LT) Support [Disabled]

Number of cores to enable
in each processor
package.

-----
←→: Select Screen
↑ ↓: Select Item
EnterSelect
+ - Change Opt.
F1 General Help
F2 Previous Values
F3 Optimized Defaults
F4 Save & Exit
ESC Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
  
```

BIOS Menu 6: CPU Information

IMB-H810-i2 microATX Motherboard

The CPU Configuration menu (**BIOS Menu 6**) lists the following CPU details:

- Processor Type: Lists the brand name of the CPU being used
- CPU Signature: Lists the CPU signature value.
- Microcode Patch: Lists the microcode patch being used.
- FSB Speed: Lists the front side bus (FSB) speed.
- Max CPU Speed: Lists the maximum CPU processing speed.
- Min CPU Speed: Lists the minimum CPU processing speed.
- CPU Speed: Lists the CPU processing speed.
- Processor Cores: Lists the number of the processor core
- Intel HT Technology: Indicates if Intel HT Technology is supported by the CPU.
- Intel VT-x Technology: Indicates if Intel VT-x Technology is supported by the CPU.
- Intel SMX Technology: Indicates if Intel SMX Technology is supported by the CPU.
- EIST Technology: Indicates if Enhanced Intel SpeedStep® Technology is supported by the CPU.
- L1 Data Cache: Lists the amount of data storage space on the L1 cache.
- L1 Code Cache: Lists the amount of code storage space on the L1 cache.
- L2 Cache: Lists the amount of storage space on the L2 cache.
- L3 Cache: Lists the amount of storage space on the L3 cache.

→ Active Processor Cores [All]

Use the **Active Processor Cores** BIOS option to enable numbers of cores in the processor package.

- | | | | |
|---|-----|---------|--|
| → | All | DEFAULT | Enable all cores in the processor package. |
| → | 1 | | Enable one core in the processor package. |
| → | 2 | | Enable two cores in the processor package. |
| → | 3 | | Enable three cores in the processor package. |

→ Intel Virtualization Technology [Disabled]

Use the **Intel Virtualization Technology** option to enable or disable virtualization on the system. When combined with third party software, Intel® Virtualization technology allows several OSs to run on the same system at the same time.

→ Disabled **DEFAULT** Disables Intel Virtualization Technology.

→ Enabled Enables Intel Virtualization Technology.

→ EIST [Enabled]

Use the **EIST** option to enable or disable Enhanced Intel SpeedStep® Technology (EIST).

→ Disabled Disables Enhanced Intel SpeedStep®
Technology.

→ Enabled **DEFAULT** Enables Enhanced Intel SpeedStep®
Technology.

IMB-H810-i2 microATX Motherboard

5.3.5 SATA Configuration

Use the **SATA Configuration** menu (**BIOS Menu 7**) to change and/or set the configuration of the SATA devices installed in the system.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
  Advanced
SATA Controller(s)          [Enabled]          Enable or disable SATA
SATA Mode Selection         [IDE]           Device

SATA1 Port                  Empty
SATA2 Port                  Empty
SATA3 Port                  Empty
SATA4 Port                  Empty

-----
<=>: Select Screen
↑ ↓: Select Item
Enter>Select
+ - Change Opt.
F1  General Help
F2  Previous Values
F3  Optimized Defaults
F4  Save & Exit
ESC Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
  
```

BIOS Menu 7: SATA Configuration

➔ SATA Controller(s) [Enabled]

Use the **SATA Controller(s)** option to enable or disable the serial ATA controller.

- ➔ **Enabled** **DEFAULT** Enables the on-board SATA controller.
- ➔ **Disabled** Disables the on-board SATA controller.

➔ SATA Mode Selection [IDE]

Use the **SATA Mode Selection** option to configure SATA devices as normal IDE devices.

- ➔ **IDE** **DEFAULT** Configures SATA devices as normal IDE device.
- ➔ **AHCI** Configures SATA devices as AHCI device.

5.3.6 USB Configuration

Use the **USB Configuration** menu (**BIOS Menu 8**) to read USB configuration information and configure the USB settings.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
  Advanced
USB Configuration
USB Devices:
  1 Keyboard, 3 Hubs
Legacy USB Support          [Enabled]
-----
<=>: Select Screen
↑ ↓: Select Item
Enter>Select
+ -  Change Opt.
F1   General Help
F2   Previous Values
F3   Optimized Defaults
F4   Save & Exit
ESC  Exit
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
  
```

BIOS Menu 8: USB Configuration

➔ USB Devices

The **USB Devices Enabled** field lists the USB devices that are enabled on the system

➔ Legacy USB Support [Enabled]

Use the **Legacy USB Support** BIOS option to enable USB mouse and USB keyboard support. Normally if this option is not enabled, any attached USB mouse or USB keyboard does not become available until a USB compatible operating system is fully booted with all USB drivers loaded. When this option is enabled, any attached USB mouse or USB keyboard can control the system even when there is no USB driver loaded onto the system.

➔ **Enabled** **DEFAULT** Legacy USB support enabled

IMB-H810-i2 microATX Motherboard

- ➔ **Disabled** Legacy USB support disabled
- ➔ **Auto** Legacy USB support disabled if no USB devices are connected

5.3.7 F81866 Super IO Configuration

Use the **F81866 Super IO Configuration** menu (**BIOS Menu 9**) to set or change the configurations for the parallel ports and serial ports.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
  Advanced
F81866 Super IO Configuration
F81866 Super IO Chip          F81866
> Serial Port 1 Configuration
> Serial Port 2 Configuration
> Serial Port 3 Configuration
> Serial Port 4 Configuration
> Serial Port 5 Configuration
> Serial Port 6 Configuration
> Parallel Port Configuration


Set Parameters of Serial
Port 1 (COMA)
-----
<->: Select Screen
↑ ↓: Select Item
Enter>Select
+ -  Change Opt.
F1   General Help
F2   Previous Values
F3   Optimized Defaults
F4   Save & Exit
ESC  Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
  
```

BIOS Menu 9: F81866 Super IO Configuration

5.3.7.1 Serial Port n Configuration

Use the **Serial Port n Configuration** menu (**BIOS Menu 10**) to configure the serial port n.

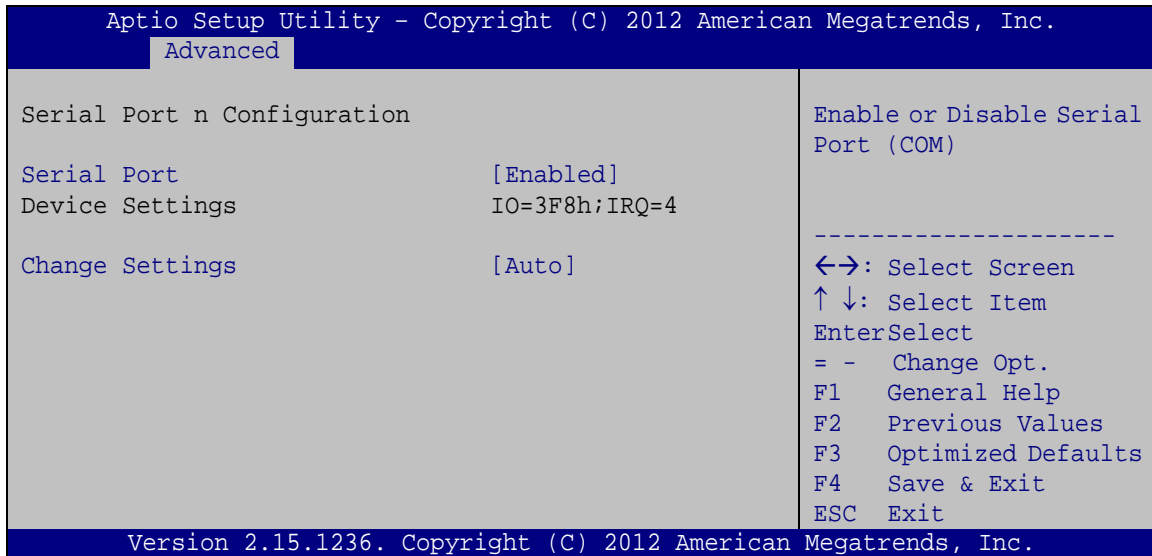

BIOS Menu 10: Serial Port n Configuration Menu

5.3.7.1.1 Serial Port 1 Configuration

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled** Disable the serial port
- **Enabled** **DEFAULT** Enable the serial port

→ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- **IO=3F8h;**
IRQ=4 Serial Port I/O port address is 3F8h and the interrupt address is IRQ4

IMB-H810-i2 microATX Motherboard

- **IO=3F8h;**
IRQ=3, 4 Serial Port I/O port address is 3F8h and the interrupt address is IRQ3,4
- **IO=2C0h;**
IRQ=3, 4 Serial Port I/O port address is 2C0h and the interrupt address is IRQ3, 4
- **IO=2C8h;**
IRQ=3, 4 Serial Port I/O port address is 2C8h and the interrupt address is IRQ3, 4

5.3.7.1.2 Serial Port 2 Configuration

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled** Disable the serial port
- **Enabled** **DEFAULT** Enable the serial port

→ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- **IO=2F8h;**
IRQ=3 Serial Port I/O port address is 2F8h and the interrupt address is IRQ3
- **IO=3F8h;**
IRQ=3, 4 Serial Port I/O port address is 3F8h and the interrupt address is IRQ3, 4
- **IO=2F8h;**
IRQ=3, 4 Serial Port I/O port address is 2F8h and the interrupt address is IRQ3, 4
- **IO=2C0h;**
IRQ=3, 4 Serial Port I/O port address is 2C0h and the interrupt address is IRQ3, 4
- **IO=2C8h;**
IRQ=3, 4 Serial Port I/O port address is 2C8h and the interrupt address is IRQ3, 4

5.3.7.1.3 Serial Port 3 Configuration

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled** Disable the serial port
- **Enabled** **DEFAULT** Enable the serial port

→ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- **IO=2D0h;**
IRQ=10 Serial Port I/O port address is 2D0h and the interrupt address is IRQ10
- **IO=2D0h;**
IRQ=10, 11 Serial Port I/O port address is 2D0h and the interrupt address is IRQ10, 11
- **IO=2E8h;**
IRQ=10, 11 Serial Port I/O port address is 2E8h and the interrupt address is IRQ10, 11
- **IO=2D8h;**
IRQ=10, 11 Serial Port I/O port address is 2D8h and the interrupt address is IRQ10, 11

5.3.7.1.4 Serial Port 4 Configuration

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled** Disable the serial port
- **Enabled** **DEFAULT** Enable the serial port

IMB-H810-i2 microATX Motherboard

→ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- | | | | |
|---|--------------------------------|----------------|---|
| → | Auto | DEFAULT | The serial port IO port address and interrupt address are automatically detected. |
| → | IO=2E8h;
IRQ=10 | | Serial Port I/O port address is 2E8h and the interrupt address is IRQ10 |
| → | IO=2E8h;
IRQ=10, 11 | | Serial Port I/O port address is 2E8h and the interrupt address is IRQ10, 11 |
| → | IO=2D0h;
IRQ=10, 11 | | Serial Port I/O port address is 2D0h and the interrupt address is IRQ10, 11 |
| → | IO=2D8h;
IRQ=10, 11 | | Serial Port I/O port address is 2D8h and the interrupt address is IRQ10, 11 |

5.3.7.1.5 Serial Port 5 Configuration

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- | | | | |
|---|-----------------|----------------|-------------------------|
| → | Disabled | | Disable the serial port |
| → | Enabled | DEFAULT | Enable the serial port |

→ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- | | | | |
|---|----------------------------|----------------|---|
| → | Auto | DEFAULT | The serial port IO port address and interrupt address are automatically detected. |
| → | IO=2D0h;
IRQ=10 | | Serial Port I/O port address is 2D0h and the interrupt address is IRQ10 |

- **IO=2C0h;**
IRQ=10, 11 Serial Port I/O port address is 2C0h and the interrupt address is IRQ10, 11
- **IO=2C8h;**
IRQ=10, 11 Serial Port I/O port address is 2C8h and the interrupt address is IRQ10, 11
- **IO=2D0h;**
IRQ=10, 11 Serial Port I/O port address is 2D0h and the interrupt address is IRQ10, 11
- **IO=2D8h;**
IRQ=10, 11 Serial Port I/O port address is 2D8h and the interrupt address is IRQ10, 11
- **IO=2E0h;**
IRQ=10, 11 Serial Port I/O port address is 2E0h and the interrupt address is IRQ10, 11

5.3.7.1.6 Serial Port 6 Configuration

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled** Disable the serial port
- **Enabled** **DEFAULT** Enable the serial port

→ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.


- **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- **IO=2D8h;**
IRQ=10 Serial Port I/O port address is 2D8h and the interrupt address is IRQ10
- **IO=2C0h;**
IRQ=10, 11 Serial Port I/O port address is 2C0h and the interrupt address is IRQ10, 11
- **IO=2C8h;**
IRQ=10, 11 Serial Port I/O port address is 2C8h and the interrupt address is IRQ10, 11

IMB-H810-i2 microATX Motherboard

- ➔ **IO=2D0h;** Serial Port I/O port address is 2D0h and the interrupt address is IRQ10, 11
IRQ=10, 11
- ➔ **IO=2D8h;** Serial Port I/O port address is 2D8h and the interrupt address is IRQ10, 11
IRQ=10, 11
- ➔ **IO=2E0h;** Serial Port I/O port address is 2E0h and the interrupt address is IRQ10, 11
IRQ=10, 11

5.3.7.2 Parallel Port Configuration

Use the **Parallel Port Configuration** menu (**BIOS Menu 11**) to configure the serial port n.

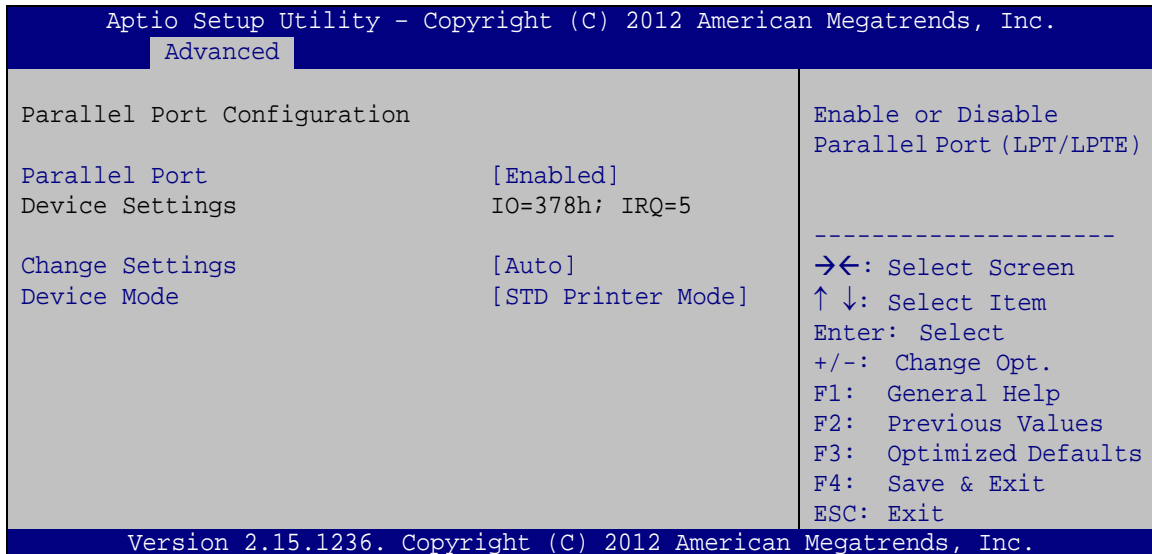

BIOS Menu 11: Parallel Port Configuration Menu

- ➔ **Parallel Port [Enabled]**

Use the **Parallel Port** option to enable or disable the parallel port.

- ➔ **Disabled** Disable the parallel port
- ➔ **Enabled DEFAULT** Enable the parallel port

→ Change Settings [Auto]

Use the **Change Settings** option to change the parallel port IO port address and interrupt address.

- | | | | |
|---|------------------------------|----------------|---|
| → | Auto | DEFAULT | The parallel port IO port address and interrupt address are automatically detected. |
| → | IO=378h;
IRQ=5 | | Parallel Port I/O port address is 378h and the interrupt address is IRQ5 |
| → | IO=378h;
IRQ=5, 7 | | Parallel Port I/O port address is 378h and the interrupt address is IRQ5, 7 |
| → | IO=3BCh;
IRQ=5, 7 | | Parallel Port I/O port address is 3BCh and the interrupt address is IRQ5, 7 |

→ Device Mode [STD Printer Mode]

Use the **Device Mode** option to select the mode the parallel port operates in. Configuration options are listed below.

- | | | |
|---|----------------------|----------------|
| ▪ | STD Printer Mode | DEFAULT |
| ▪ | SPP Mode | |
| ▪ | EPP-1.9 and SPP Mode | |
| ▪ | EPP-1.7 and SPP Mode | |
| ▪ | ECP Mode | |
| ▪ | ECP and EPP 1.9 Mode | |
| ▪ | ECP and EPP 1.7 Mode | |

IMB-H810-i2 microATX Motherboard

5.3.8 F81866 H/W Monitor

The **F81866 H/W Monitor** menu (**BIOS Menu 12**) contains the fan configuration submenus and displays operating temperature, fan speeds and system voltages.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
Advanced
PC Health Status
> Smart Fan Mode Configuration
CPU Temperature      :+54 °C
SYS Temperature     :+30 °C
CPU_FAN1 Speed      :1224 RPM
SYS_FAN1 Speed      :N/A
CPU_CORE             :+1.734 V
+5V                  :+5.203 V
+12V                 :+12.239 V
DDR                  :+1.368 V
+5VSB                :+4.983 V
+3.3V                :+3.408 V
+3.3VSB              :+3.317 V

Smart FAN Configuration
-----
<->: Select Screen
↑ ↓: Select Item
EnterSelect
+ - Change Opt.
F1  General Help
F2  Previous Values
F3  Optimized Defaults
F4  Save & Exit
ESC Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.

```

BIOS Menu 12: F81866 H/W Monitor

→ PC Health Status


The following system parameters and values are shown. The system parameters that are monitored are:

- System Temperatures:
 - CPU Temperature
 - System Temperature
- Fan Speeds:
 - CPU Fan Speed
 - System Fan Speed
- Voltages:
 - CPU_CORE
 - +5V
 - +12V
 - DDR

- +5VSB
- +3.3V
- +3.3VSB

5.3.8.1 Smart Fan Mode Configuration

Use the **Smart Fan Mode Configuration** submenu (**BIOS Menu 13**) to configure smart fan temperature and speed settings.

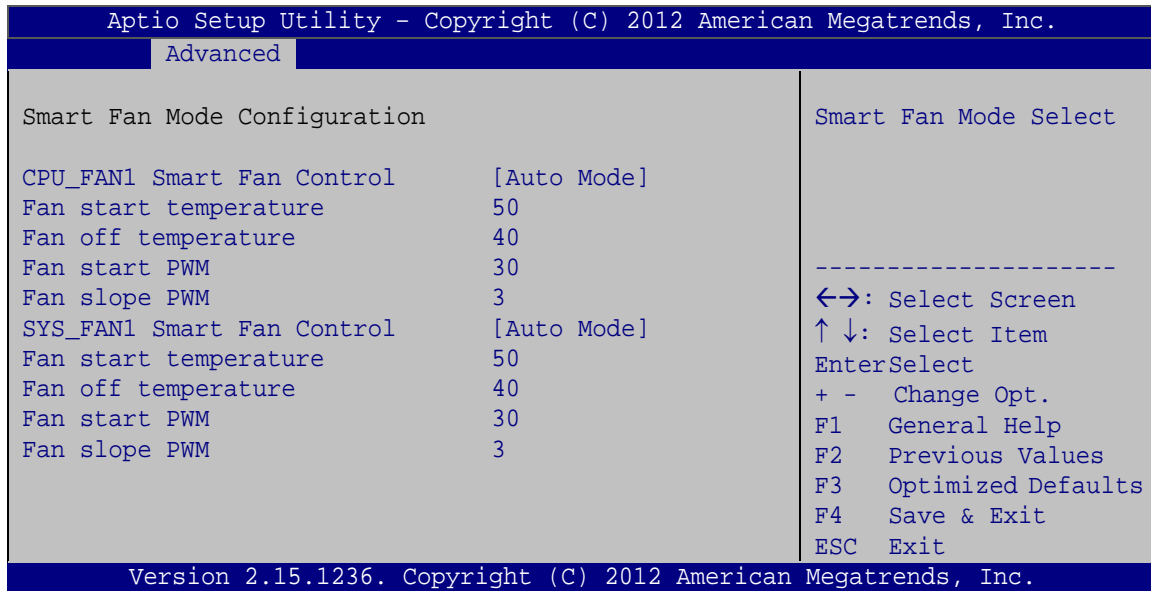

BIOS Menu 13: Smart Fan Mode Configuration

→ CPU_FAN1 Smart Fan Control/SYS_FAN1 Smart Fan Control [Auto Mode]

Use the **CPU_FAN1 Smart Fan Control/SYS_FAN1 Smart Fan Control** option to configure the CPU/System Smart Fan.

- **Manual Mode** The fan spins at the speed set in Manual Mode settings.
- **Auto Mode** **DEFAULT** The fan adjusts its speed using Auto Mode settings.

IMB-H810-i2 microATX Motherboard

→ Fan start/off temperature

Use the + or – key to change the **Fan start/off temperature** value. Enter a decimal number between 1 and 100.

→ Fan start PWM

Use the + or – key to change the **Fan start PWM** value. Enter a decimal number between 1 and 128.

→ Fan slope PWM

Use the + or – key to change the **Fan slope PWM** value. Enter a decimal number between 1 and 64.

5.3.9 F81216 Secondary Super IO Configuration

Use the **F81216 Secondary Super IO Configuration** menu (**BIOS Menu 9**) to set or change the configurations for the serial ports.

```


Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
  Advanced
F81216 Second super IO Configuration
F81216 Second Super IO Chip      F81216 SecondIo
> Serial Port 7 Configuration
> Serial Port 8 Configuration
> Serial Port 9 Configuration
> Serial Port 10 Configuration
Set Parameters of Serial
Port 7 (COMG)
-----
<->: Select Screen
↑ ↓: Select Item
EnterSelect
+ -  Change Opt.
F1   General Help
F2   Previous Values
F3   Optimized Defaults
F4   Save & Exit
ESC  Exit
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.

```

BIOS Menu 14: F81216 Secondary Super IO Configuration

5.3.9.1 Serial Port n Configuration

Use the **Serial Port n Configuration** menu (**BIOS Menu 10**) to configure the serial port n.

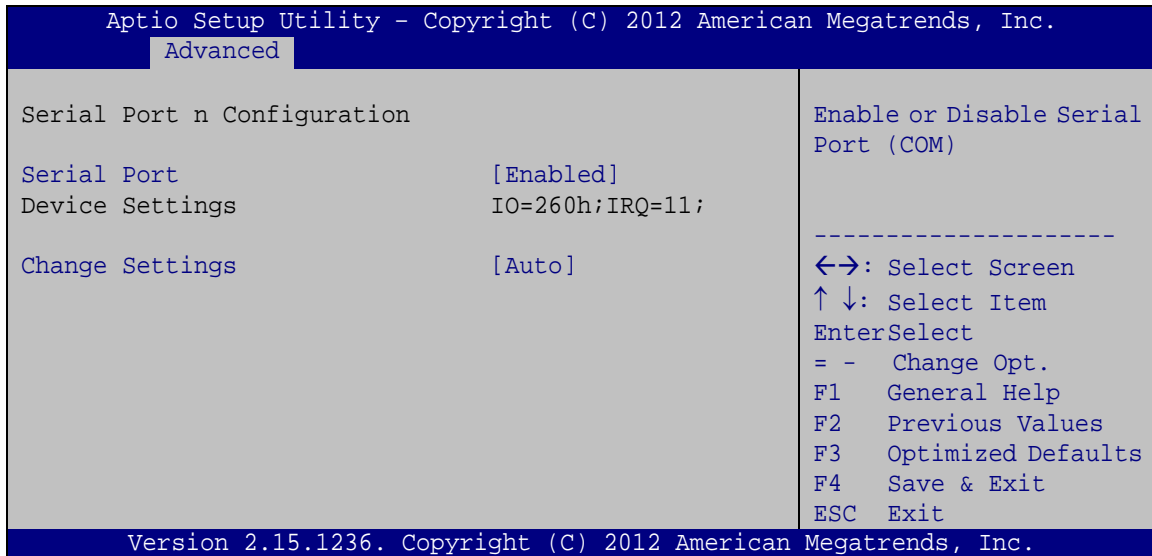

BIOS Menu 15: Serial Port n Configuration Menu

5.3.9.1.1 Serial Port 7 Configuration

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled** Disable the serial port
- **Enabled** **DEFAULT** Enable the serial port

→ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- **IO=260h;**
IRQ=11 Serial Port I/O port address is 260h and the interrupt address is IRQ11

IMB-H810-i2 microATX Motherboard

- ➔ **IO=260h;**
IRQ=10, 11 Serial Port I/O port address is 260h and the interrupt address is IRQ10, 11
- ➔ **IO=268h;**
IRQ=10, 11 Serial Port I/O port address is 268h and the interrupt address is IRQ10, 11
- ➔ **IO=270h;**
IRQ=10, 11 Serial Port I/O port address is 270h and the interrupt address is IRQ10, 11
- ➔ **IO=278h;**
IRQ=10, 11 Serial Port I/O port address is 278h and the interrupt address is IRQ10, 11

5.3.9.1.2 Serial Port 8 Configuration

➔ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- ➔ **Disabled** Disable the serial port
- ➔ **Enabled** **DEFAULT** Enable the serial port

➔ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- ➔ **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- ➔ **IO=268h;**
IRQ=11 Serial Port I/O port address is 268h and the interrupt address is IRQ11
- ➔ **IO=260h;**
IRQ=10, 11 Serial Port I/O port address is 260h and the interrupt address is IRQ10, 11
- ➔ **IO=268h;**
IRQ=10, 11 Serial Port I/O port address is 268h and the interrupt address is IRQ10, 11
- ➔ **IO=270h;**
IRQ=10, 11 Serial Port I/O port address is 270h and the interrupt address is IRQ10, 11

- ➔ **IO=278h;**
IRQ=10, 11 Serial Port I/O port address is 278h and the interrupt address is IRQ10, 11

5.3.9.1.3 Serial Port 9 Configuration

➔ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- ➔ **Disabled** Disable the serial port
- ➔ **Enabled** **DEFAULT** Enable the serial port

➔ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- ➔ **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- ➔ **IO=270h;**
IRQ=11 Serial Port I/O port address is 270h and the interrupt address is IRQ11
- ➔ **IO=260h;**
IRQ=10, 11 Serial Port I/O port address is 260h and the interrupt address is IRQ10, 11
- ➔ **IO=268h;**
IRQ=10, 11 Serial Port I/O port address is 268h and the interrupt address is IRQ10, 11
- ➔ **IO=270h;**
IRQ=10, 11 Serial Port I/O port address is 270h and the interrupt address is IRQ10, 11
- ➔ **IO=278h;**
IRQ=10, 11 Serial Port I/O port address is 278h and the interrupt address is IRQ10, 11

IMB-H810-i2 microATX Motherboard

5.3.9.1.4 Serial Port 10 Configuration

→ Serial Port [Enabled]

Use the **Serial Port** option to enable or disable the serial port.

- **Disabled** Disable the serial port
- **Enabled** **DEFAULT** Enable the serial port

→ Change Settings [Auto]

Use the **Change Settings** option to change the serial port IO port address and interrupt address.

- **Auto** **DEFAULT** The serial port IO port address and interrupt address are automatically detected.
- **IO=278h;**
IRQ=11 Serial Port I/O port address is 278h and the interrupt address is IRQ11
- **IO=260h;**
IRQ=10, 11 Serial Port I/O port address is 260h and the interrupt address is IRQ10, 11
- **IO=268h;**
IRQ=10, 11 Serial Port I/O port address is 268h and the interrupt address is IRQ10, 11
- **IO=270h;**
IRQ=10, 11 Serial Port I/O port address is 270h and the interrupt address is IRQ10, 11
- **IO=278h;**
IRQ=10, 11 Serial Port I/O port address is 278h and the interrupt address is IRQ10, 11

→ Device Mode [RS232]

Use the **Device Mode** option to configure the serial port 10.

- **RS232** **DEFAULT** COM10 is configured as RS-232 serial port.
- **RS422/485** COM10 is configured as RS-422/485 serial port.

5.3.10 Serial Port Console Redirection

The **Serial Port Console Redirection** menu (**BIOS Menu 16**) allows the console redirection options to be configured. Console redirection allows users to maintain a system remotely by re-directing keyboard input and text output through the serial port.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
  Advanced
COM1
  Console Redirection      [Disabled]      Console Redirection
  > Console Redirection Settings      Enable or Disable

COM2
  Console Redirection      [Disabled]
  > Console Redirection Settings

COM3
  Console Redirection      [Disabled]
  > Console Redirection Settings

COM4
  Console Redirection      [Disabled]
  > Console Redirection Settings

COM5
  Console Redirection      [Disabled]
  > Console Redirection Settings

COM6
  Console Redirection      [Disabled]
  > Console Redirection Settings

COM7
  Console Redirection      [Disabled]
  > Console Redirection Settings

COM8
  Console Redirection      [Disabled]
  > Console Redirection Settings

COM9
  Console Redirection      [Disabled]
  > Console Redirection Settings

COM10
  Console Redirection      [Disabled]
  > Console Redirection Settings

-----
<->: Select Screen
↑ ↓: Select Item
Enter>Select
+/-: Change Opt.
F1   General Help
F2   Previous Values
F3   Optimized Defaults
F4   Save & Exit
ESC  Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
  
```

BIOS Menu 16: Serial Port Console Redirection

IMB-H810-i2 microATX Motherboard

→ Console Redirection [Disabled]

Use **Console Redirection** option to enable or disable the console redirection function.

- **Disabled** **DEFAULT** Disabled the console redirection function
- **Enabled** Enabled the console redirection function

The following options are available in the **Console Redirection Settings** submenu when the Console Redirection option is enabled.

→ Terminal Type [ANSI]

Use the **Terminal Type** option to specify the remote terminal type.

- **VT100** The target terminal type is VT100
- **VT100+** The target terminal type is VT100+
- **VT-UTF8** The target terminal type is VT-UTF8
- **ANSI** **DEFAULT** The target terminal type is ANSI

→ Bits per second [115200]

Use the **Bits per second** option to specify the serial port transmission speed. The speed must match the other side. Long or noisy lines may require lower speeds.

- **9600** Sets the serial port transmission speed at 9600.
- **19200** Sets the serial port transmission speed at 19200.
- **57600** Sets the serial port transmission speed at 57600.
- **115200** **DEFAULT** Sets the serial port transmission speed at 115200.

→ Data Bits [8]

Use the **Data Bits** option to specify the number of data bits.

- **7** Sets the data bits at 7.
- **8** **DEFAULT** Sets the data bits at 8.

→ Parity [None]

Use the **Parity** option to specify the parity bit that can be sent with the data bits for detecting the transmission errors.

- | | | |
|----------------|----------------|---|
| → None | DEFAULT | No parity bit is sent with the data bits. |
| → Even | | The parity bit is 0 if the number of ones in the data bits is even. |
| → Odd | | The parity bit is 0 if the number of ones in the data bits is odd. |
| → Mark | | The parity bit is always 1. This option does not provide error detection. |
| → Space | | The parity bit is always 0. This option does not provide error detection. |

→ Stop Bits [1]


Use the **Stop Bits** option to specify the number of stop bits used to indicate the end of a serial data packet. Communication with slow devices may require more than 1 stop bit.

- | | | |
|------------|----------------|------------------------------------|
| → 1 | DEFAULT | Sets the number of stop bits at 1. |
| → 2 | | Sets the number of stop bits at 2. |

IMB-H810-i2 microATX Motherboard

5.3.11 iEi Feature

Use the **iEi Feature** menu (**BIOS Menu 17**) to configure IEI One Key Recovery function.

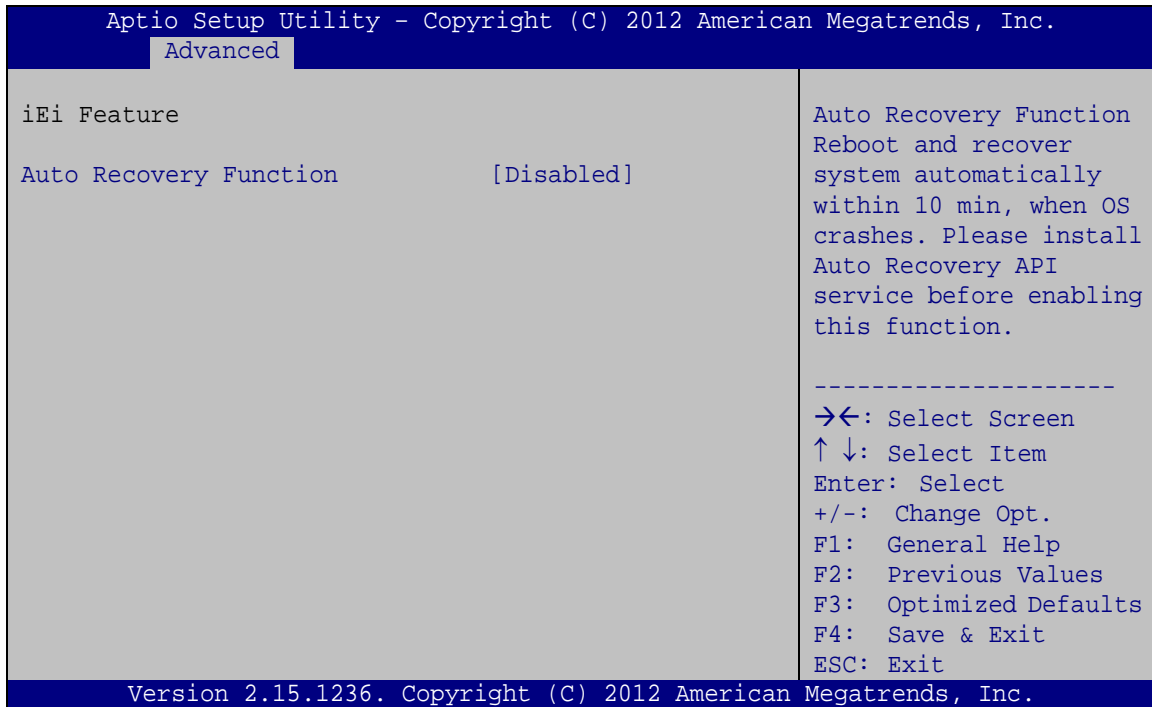

BIOS Menu 17: iEi Feature

→ Auto Recovery Function [Disabled]

Use the **Auto Recovery Function** BIOS option to enable or disable the auto recovery function of the IEI One Key Recovery.

- **Disabled** **DEFAULT** Auto recovery function disabled
- **Enabled** Auto recovery function enabled

5.4 Chipset

Use the **Chipset** menu (**BIOS Menu 18**) to access the PCH-IO and System Agent (SA) Subsystem configuration menus.



WARNING!

Setting the wrong values for the Chipset BIOS selections in the Chipset BIOS menu may cause the system to malfunction.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
Main   Advanced  Chipset  Boot   Security  Save & Exit  Server Mgmt
-----
> PCH-IO Configuration          PCH Parameters.
> System Agent (SA) Configuration

-----
<=>: Select Screen
↑ ↓: Select Item
Enter>Select
+ -  Change Opt.
F1   General Help
F2   Previous Values
F3   Optimized Defaults
F4   Save & Exit
ESC  Exit


Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
    
```

BIOS Menu 18: Chipset

IMB-H810-i2 microATX Motherboard

5.4.1 PCH-IO Configuration

Use the **PCH-IO Configuration** menu (**BIOS Menu 19**) to configure the PCH chipset.

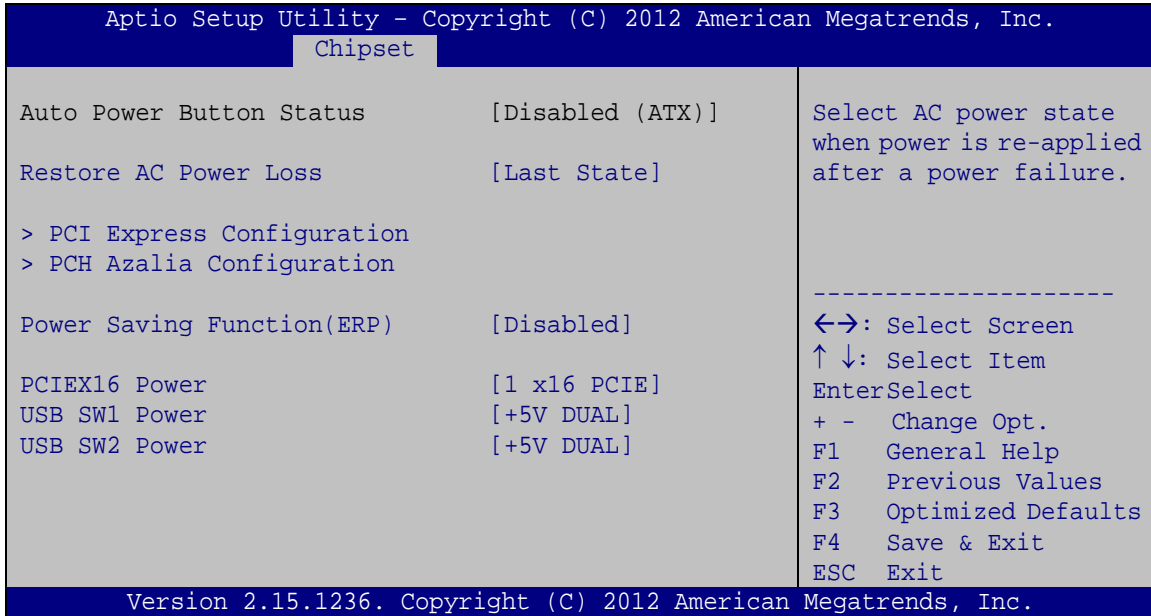

BIOS Menu 19: PCH-IO Configuration

→ Restore on AC Power Loss [Last State]

Use the **Restore on AC Power Loss** BIOS option to specify what state the system returns to if there is a sudden loss of power to the system.

- **Power Off** The system remains turned off
- **Power On** The system turns on
- **Last State** **DEFAULT** The system returns to its previous state. If it was on, it turns itself on. If it was off, it remains off.

→ Power Saving Function [Disabled]

Use the **Power Saving Function** BIOS option to enable or reduce power consumption in the S5 state. When enabled, the system can only be powered-up using the power button.

- **Disabled** **DEFAULT** Power Saving Function support disabled

→ **Enabled** Power Saving Function support enabled

→ **PCIEX16 Power [1 x16 PCIE]**

Use the **PCIEX16 Power** BIOS option to configure the PCIe x16 channel mode on the motherboard.

→ **1 x16 PCIE** **DEFAULT** Configure the PCIe x16 slot as one PCIe x16

→ **USB SW1 Power [+5V DUAL]**

Use the **USB SW1 Power** BIOS option to configure the USB power source for the corresponding USB connector (**Table 5-2**).

→ **+5V** Set the USB power source to +5V

→ **+5V DUAL** **DEFAULT** Set the USB power source to +5V dual

→ **USB SW2 Power [+5V DUAL]**

Use the **USB SW2 Power** BIOS option to configure the USB power source for the corresponding USB connector (**Table 5-2**).

→ **+5V** Set the USB power source to +5V

→ **+5V DUAL** **DEFAULT** Set the USB power source to +5V dual

BIOS Options	Configured USB Ports
USB SW1 Power	LAN1_USB1 (external USB 3.2 Gen 1 ports) LAN2_USB2 (external USB 2.0 ports)
USB SW2 Power	USB3, USB4, USB5, USB6 (internal USB 2.0 ports)

Table 5-2: BIOS Options and Configured USB Ports

IMB-H810-i2 microATX Motherboard

5.4.1.1 PCI Express Configuration

Use the **PCI Express Configuration** submenu (**BIOS Menu 20**) to configure the PCI Express slots.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
Chipset
PCI Express Configuration
> PCIEx1_1 Slot
PCIEX1_1 Setting
-----
<->: Select Screen
↑ ↓: Select Item
EnterSelect
+ - Change Opt.
F1 General Help
F2 Previous Values
F3 Optimized Defaults
F4 Save & Exit
ESC Exit
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
    
```

BIOS Menu 20: PCI Express Configuration

➔ PCIe Speed [Auto]

Use the **PCIe Speed** option to specify the PCI Express port speed. Configuration options are listed below.

- Auto **DEFAULT**
- Gen 1
- Gen 2

➔ Detect Non-Compliance Device [Disabled]

Use the **Detect Non-Compliance Device** option to configure whether to detect if a non-compliance PCI Express device is connected to the PCI Express port.


- ➔ **Disabled** **DEFAULT** Do not detect if a non-compliance PCI Express device is connected to the PCI Express port.

➔ Enabled

Detect if a non-compliance PCI Express device is connected to the PCI Express port.

5.4.1.2 PCH Azalia Configuration

Use the **PCH Azalia Configuration** submenu (**BIOS Menu 21**) to configure the PCH Azalia codec.

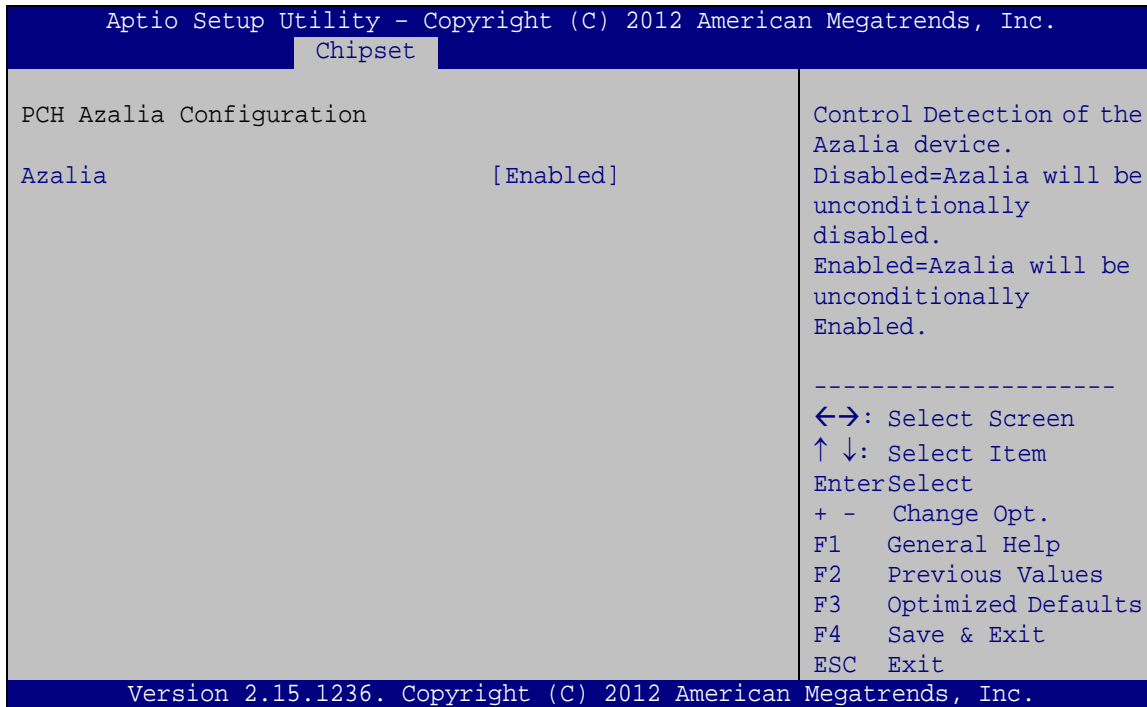

BIOS Menu 21: PCH Azalia Configuration

➔ Azalia [Enabled]


Use the **Azalia** option to enable or disable the High Definition Audio controller.

- ➔ **Disabled** The onboard High Definition Audio controller is disabled
- ➔ **Enabled DEFAULT** The onboard High Definition Audio controller is detected automatically and enabled

IMB-H810-i2 microATX Motherboard

5.4.2 System Agent (SA) Configuration

Use the **System Agent (SA) Configuration** menu (**BIOS Menu 22**) to configure the video device connected to the system.

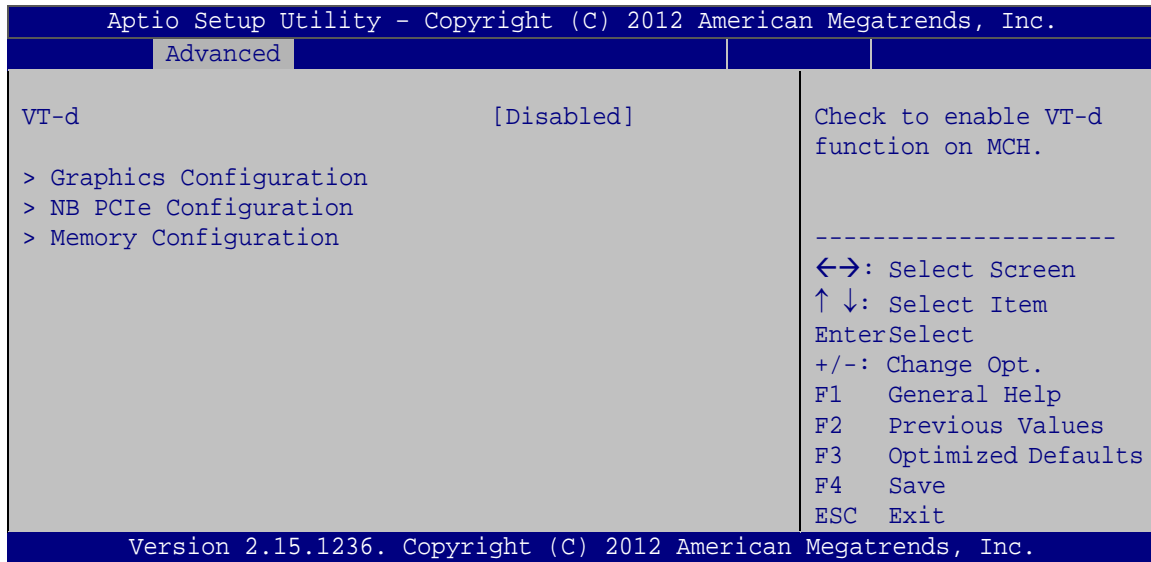

BIOS Menu 22: System Agent (SA) Configuration


→ VT-d [Disabled]

Use the **VT-d** option to enable or disable VT-d support.

- **Disabled** **DEFAULT** Disable VT-d support.
- **Enabled** Enable VT-d support.

5.4.2.1 Graphics Configuration

Use the **Graphics Configuration** submenu (**BIOS Menu 23**) to configure the graphics settings.

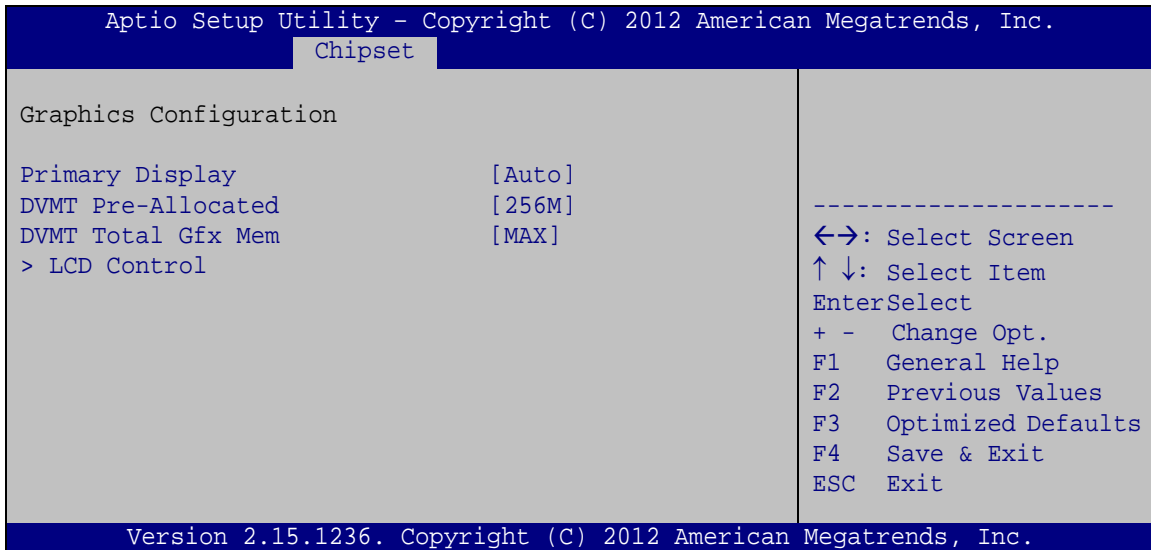

BIOS Menu 23: Graphics Configuration

→ Primary Display [Auto]

Use the **Primary Display** option to select the display device used by the system when it boots. Configuration options are listed below.

- Auto **DEFAULT**
- IGFX
- PEG
- PCIE/PCI

→ DVMT Pre-Allocated [256M]

Use the **DVMT Pre-Allocated** option to specify the amount of system memory that can be used by the internal graphics device.

- 32M 32 MB of memory used by internal graphics device
- 64M 64 MB of memory used by internal graphics device

IMB-H810-i2 microATX Motherboard

- **128M** 128 MB of memory used by internal graphics device
- **256M** **DEFAULT** 256 MB of memory used by internal graphics device
- **512M** 512 MB of memory used by internal graphics device


→ **DVMT Total Gfx Mem [MAX]**

Use the **DVMT Total Gfx Mem** option to specify the maximum amount of memory that can be allocated as graphics memory. Configuration options are listed below.

- 128M
- 256M
- **MAX** **Default**

5.4.2.1.1 LCD Control

Use the **LCD Control** submenu (**BIOS Menu 24**) to select a display device which will be activated during POST.

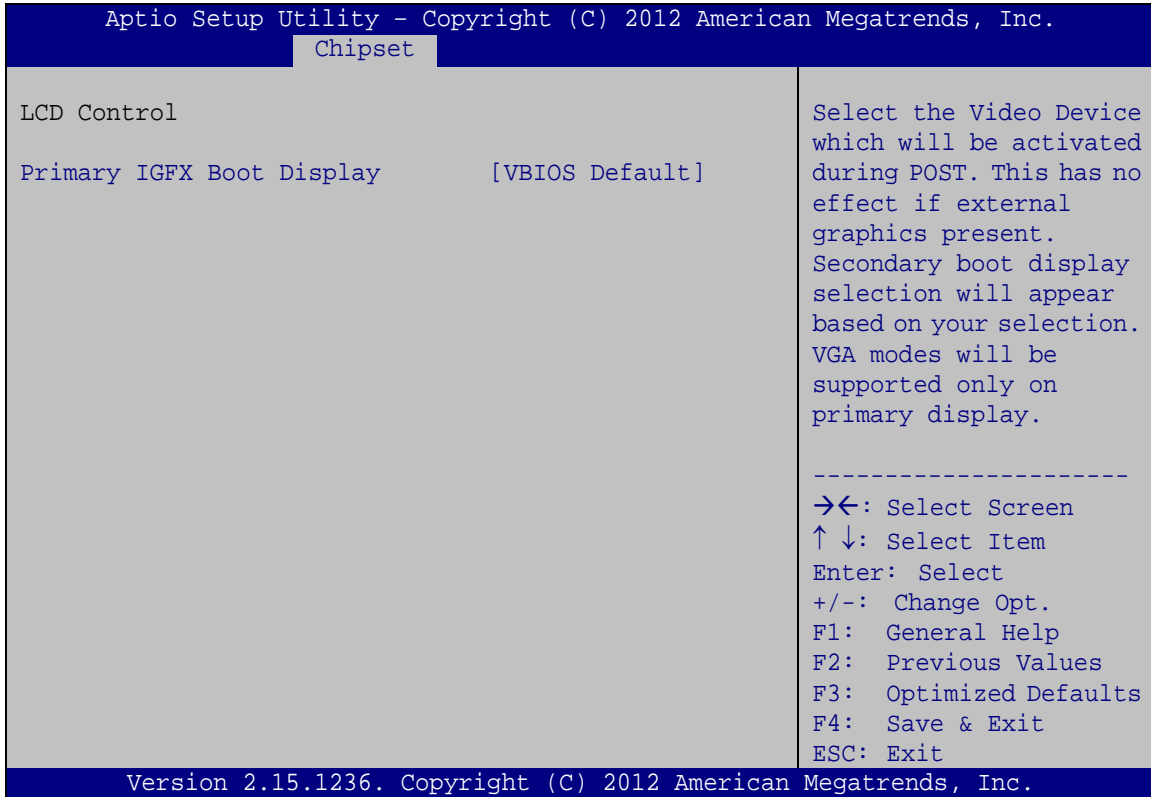

BIOS Menu 24: LCD Control

→ Primary IGFX Boot Display [VBIOS Default]


Use the **Primary IGFX Boot Display** option to select the display device used by the system when it boots. Configuration options are listed below.

- VBIOS Default **DEFAULT**
- CRT1
- CRT2
- DP

IMB-H810-i2 microATX Motherboard

5.4.2.2 NB PCIe Configuration

Use the **NB PCIe Configuration** submenu (**BIOS Menu 25**) to configure the northbridge PCIe settings.

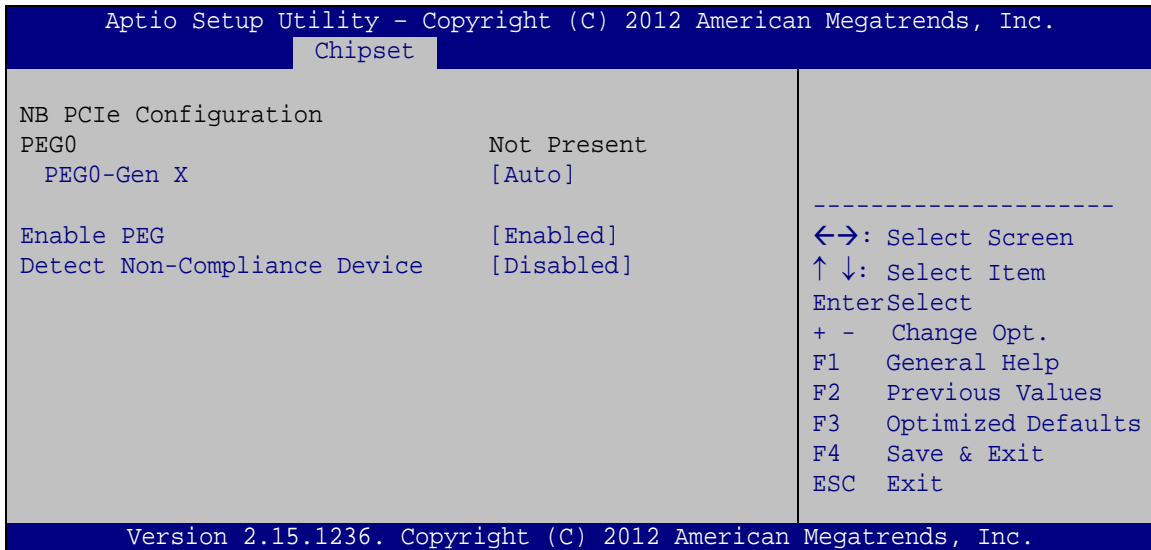

BIOS Menu 25: NB PCIe Configuration

→ PEG0-Gen X [Gen1]

Use the **PEG0-Gen X** option to configure PEG0 B0:D1:F0. Configuration options are listed below.

- Auto **Default**
- Gen1
- Gen2

→ Enable PEG [Enabled]

Use the **Enable PEG** option to enable or disable PEG.

- Disabled Disables PEG.
- Enabled **DEFAULT** Enables PEG.
- Auto Automatically detect PEG


→ Detect Non-Compliance Device [Disabled]

Use the **Detect Non-Compliance Device** option to detect non-compliance PCIe device in PEG.

- **Disabled** **DEFAULT** Do not detect non-compliance PCIe device in PEG
- **Enabled** Detect non-compliance PCIe device in PEG

5.4.2.3 Memory Configuration

Use the **Memory Configuration** submenu (**BIOS Menu 26**) to configure the Memory settings.

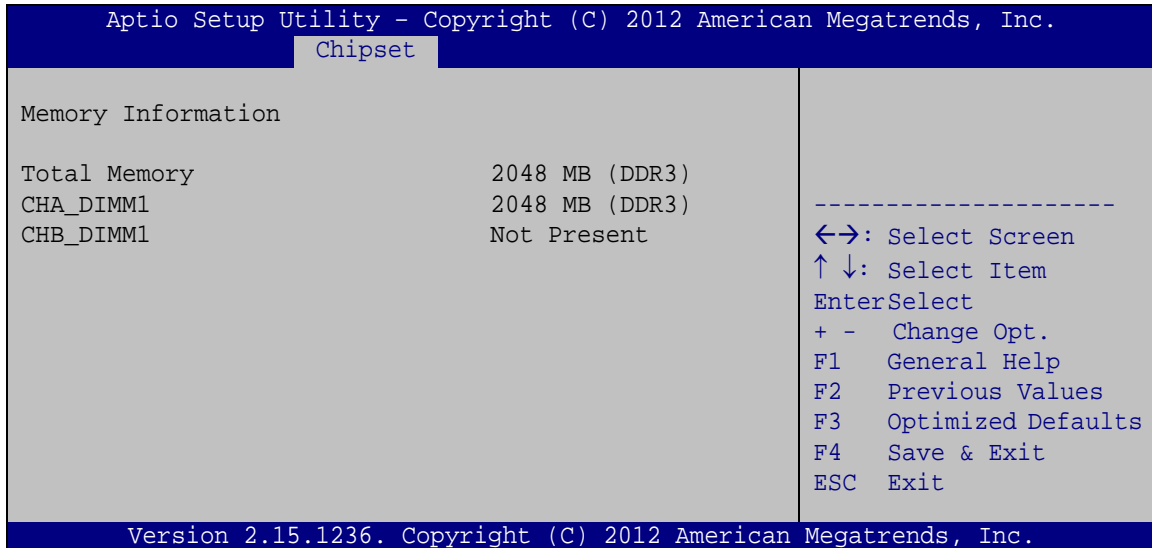


BIOS Menu 26: Memory Configuration

IMB-H810-i2 microATX Motherboard

5.5 Boot

Use the **Boot** menu (**BIOS Menu 27**) to configure system boot options.

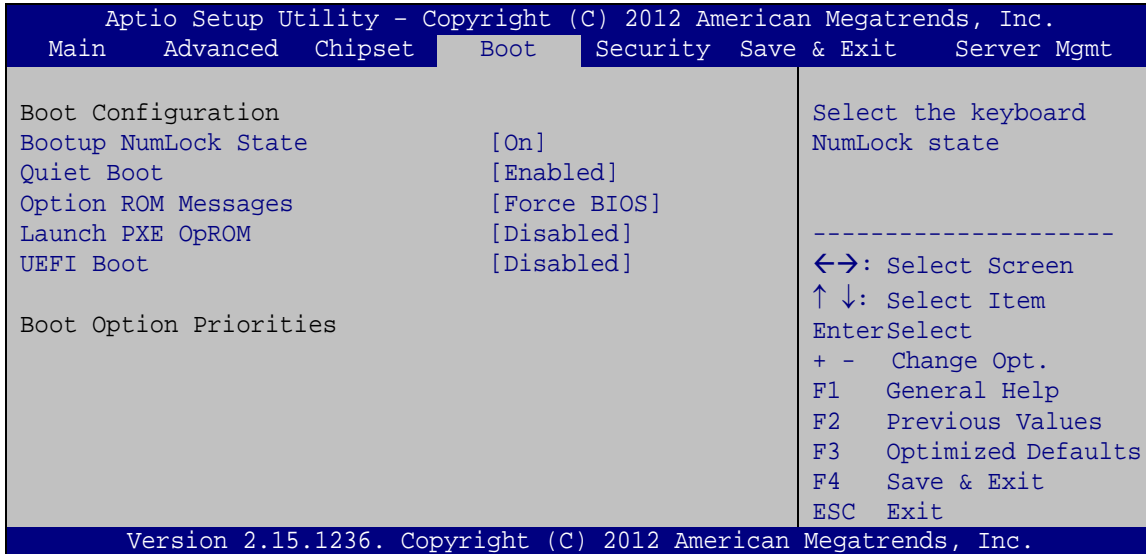

BIOS Menu 27: Boot

→ Bootup NumLock State [On]

Use the **Bootup NumLock State** BIOS option to specify if the number lock setting must be modified during boot up.

→ **On** **DEFAULT** Allows the Number Lock on the keyboard to be enabled automatically when the computer system boots up. This allows the immediate use of the 10-key numeric keypad located on the right side of the keyboard. To confirm this, the Number Lock LED light on the keyboard is lit.

→ **Off** Does not enable the keyboard Number Lock automatically. To use the 10-keys on the keyboard, press the Number Lock key located on the upper left-hand corner of the 10-key pad. The Number Lock LED on the keyboard lights up when the Number Lock is engaged.

→ Quiet Boot [Enabled]

Use the **Quiet Boot** BIOS option to select the screen display when the system boots.

- **Disabled** Normal POST messages displayed
- **Enabled** **DEFAULT** OEM Logo displayed instead of POST messages

→ Option ROM Messages [Force BIOS]

Use the **Option ROM Messages** option to set the Option ROM display mode.

- **Force BIOS** **DEFAULT** Sets display mode to force BIOS.
- **Keep Current** Sets display mode to current.

→ Launch PXE OpROM [Disabled]

Use the **Launch PXE OpROM** option to enable or disable boot option for legacy network devices.

- **Disabled** **DEFAULT** Ignore all PXE Option ROMs
- **Enabled** Load PXE Option ROMs

→ UEFI Boot [Disabled]

Use the **UEFI Boot** option to enable or disable to boot from a UEFI device.

- **Disabled** **DEFAULT** Disable to boot from a UEFI device.
- **Enabled** Enable to boot from a UEFI device.

IMB-H810-i2 microATX Motherboard

5.6 Security

Use the **Security** menu (**BIOS Menu 28**) to set system and user passwords.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
Main   Advanced  Chipset   Boot     Security  Save & Exit  Server Mgmt
-----
Password Description
If ONLY the Administrator's password is set,
then this only limits access to Setup and is
only asked for when entering Setup.
If ONLY the User's password is set, then this
is a power on password and must be entered to
boot or enter Setup. In Setup the User will
have Administrator rights.
The password must be
In the following range:
Maximum length           3
Minimum length          20

Administrator Password
User Password

Set Administrator
Password

-----
<->: Select Screen
↑ ↓: Select Item
EnterSelect
+ -  Change Opt.
F1   General Help
F2   Previous Values
F3   Optimized Defaults
F4   Save & Exit
ESC  Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.

```

BIOS Menu 28: Security

→ Administrator Password

Use the **Administrator Password** to set or change a administrator password.

→ User Password

Use the **User Password** to set or change a user password.

5.7 Save & Exit

Use the **Save & Exit** menu (**BIOS Menu 29**) to load default BIOS values, optimal failsafe values and to save configuration changes.

```

Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
Main   Advanced  Chipset  Boot   Security  Save & Exit  Server Mgmt
-----
Save Changes and Reset
Discard Changes and Reset

Restore Defaults
Save as User Defaults
Restore User Defaults

Exit the system after
saving the changes.

-----
<->: Select Screen
↑ ↓: Select Item
Enter>Select
+ -  Change Opt.
F1   General Help
F2   Previous Values
F3   Optimized Defaults
F4   Save & Exit
ESC  Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.

```

BIOS Menu 29: Save & Exit

→ Save Changes and Reset

Use the **Save Changes and Reset** option to save the changes made to the BIOS options and reset the system.

→ Discard Changes and Reset

Use the **Discard Changes and Reset** option to exit the system without saving the changes made to the BIOS configuration setup program.

→ Restore Defaults

Use the **Restore Defaults** option to load the optimal default values for each of the parameters on the Setup menus. **F3 key can be used for this operation.**

→ Save as User Defaults

Use the **Save as User Defaults** option to save the changes done so far as user defaults.

→ Restore User Defaults

Use the **Restore User Defaults** option to restore the user defaults to all the setup options.

IMB-H810-i2 microATX Motherboard

5.8 Server Management

Use the **Server Mgmt** menu (**BIOS Menu 30**) to configure BMC network parameters.

```
Aptio Setup Utility - Copyright (C) 2012 American Megatrends, Inc.
Main   Advanced  Chipset  Boot   Security  Save & Exit  Server Mgmt
-----
BMC Self Test Status          FAILED
> System Event Log
> BMC network configuration

Configure BMC network
parameters


-----
<=>: Select Screen
↑↓: Select Item
EnterSelect
+ - Change Opt.
F1  General Help
F2  Previous Values
F3  Optimized Defaults
F4  Save & Exit
ESC Exit

Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.
```

BIOS Menu 30: Server Management

5.8.1 System Event Log

Use the **System Event Log** menu (**BIOS Menu 31**) to configure the system event log of the BMC.

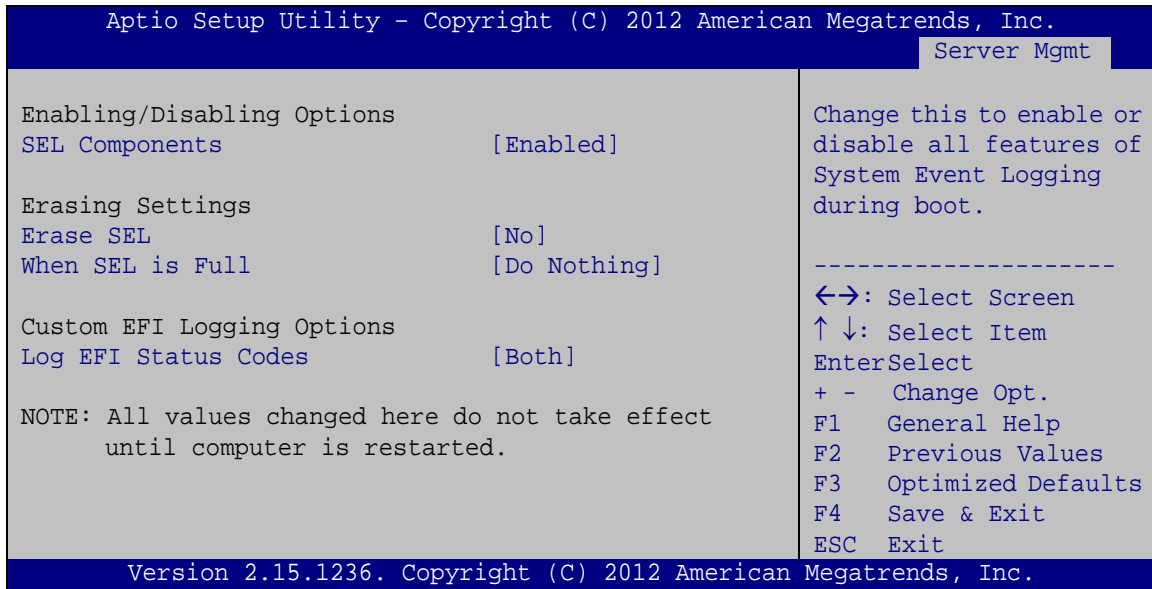

BIOS Menu 31: System Event Log

→ SEL Components [Enabled]

Use the **SEL Components** option to enable or disable all features of System Event Log (SEL) when the system boots.

- **Disabled** **DEFAULT** System Event Log is disabled.
- **Enabled** System Event Log is enabled.

→ Erase SEL [No]

Use the **Erase SEL** option for erasing SEL.

- **No** **DEFAULT** Do not erase system event log.
- **Yes, On next** Erase system event log on next reset.
reset

IMB-H810-i2 microATX Motherboard

- **Yes, On every reset** Erase system event log on every reset.

→ **When SEL is Full [Do Nothing]**

Use the **When SEL is Full** option to select an reaction to a full SEL.

- **Do Nothing** **DEFAULT** Do not do anything when SEL is full.
- **Erase Immediately** Erase SEL immediately when SEL is full.


→ **Log EFI Status Codes [Both]**

Use the **Log EFI Status Codes** option to configure how to log Extensible Firmware Interface (EFI) status codes.

- **Disabled** **DEFAULT** Disable the logging of EFI status codes.
- **Both** Log both error codes and progress codes.
- **Error code** Log error codes only.
- **Progress code** Log progress codes only.

5.8.2 BMC Network Configuration

Use the **BMC Network Configuration** menu (**BIOS Menu 32**) to configure the BMC network parameters.

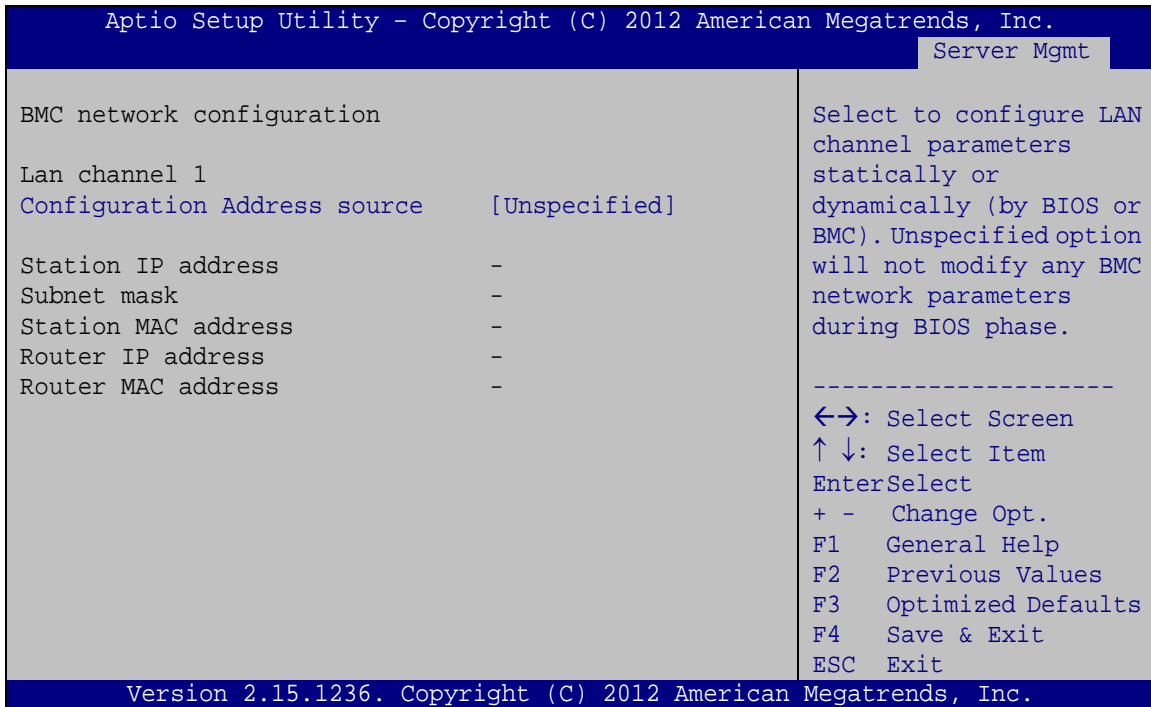

BIOS Menu 32: BMC Network Configuration

→ Configuration Address source [Unspecified]

Use the **Configuration Address source** option to configure LAN channel parameters statically or dynamically (by BIOS or BMC). Choosing the **Unspecified** option will not modify any BMC network parameters during BIOS phase. The following options are available:

- Unspecified **DEFAULT**
- Static
- Dynamic-Obtained by BMC
- Dynamic-Loaded by BIOS
- Dynamic-BMC running other Protocol

Chapter

6

Software Drivers

6.1 Available Drivers

All the drivers for the IMB-H810-i2 are available on IEI Resource Download Center (<https://download.ieiworld.com>). Type IMB-H810-i2 and press Enter to find all the relevant software, utilities, and documentation.


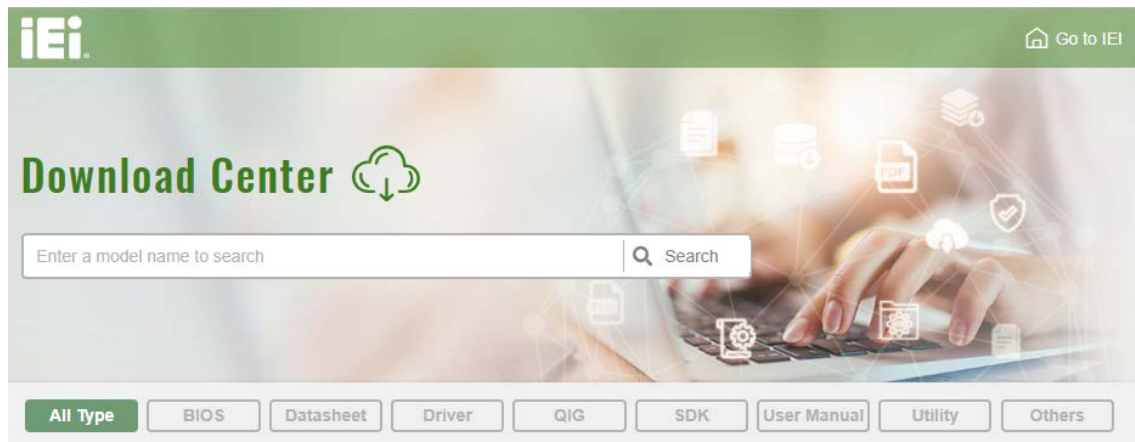


Figure 6-1: IEI Resource Download Center

6.2 Driver Download

To download drivers from IEI Resource Download Center, follow the steps below.

Step 1: Go to <https://download.ieiworld.com>. Type IMB-H810-i2 and press Enter.

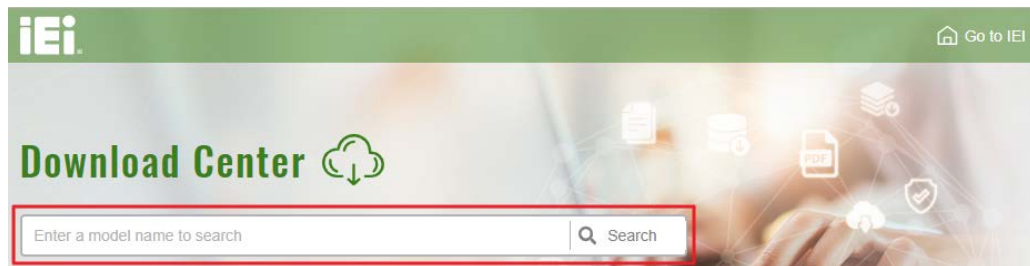

Step 6: All product-related software, utilities, and documentation will be listed. You can choose **Driver** to filter the result.

IMB-H810-i2 microATX Motherboard

[All Type](#)
[BIOS](#)
[Datasheet](#)
[Driver](#)
[QIG](#)
[SDK](#)
[User Manual](#)
[Utility](#)
[Others](#)

Keyword: "IMB-H810", Searching Result : 23 Records.

IMB-H810 [Product Info](#)

[Embedded Computer](#) > [Single Board Computer](#) > [Industrial Motherboard](#)

microATX motherboard supports 22nm LGA1150 Intel® Core™ i7/i5/i3, Pentium®, Celeron® CPU per Intel® H81

Driver

File Name	Published	Version	File Checksum
7B000-000951-RS_V2.1.iso (1.6 GB)	2018/03/27	2.10	457D5745C04F54824F4E2BB3331A1BD7

Step 7: Click the driver file name on the page and you will be prompted with the following window. You can download the entire ISO file (❶), or double click an individual item to find its driver file and click the file name to download (❷).

7B000-000951-RS_V2.1.iso

❶ Click here to download entire ISO file. (1.6 GB)

* Download individual file *

- Docs
 - 1. Chipset
 - Win10.zip (2.7 MB)
 - Win7 Win8.zip (2.7 MB)
 - WinXP.zip (6.03 MB)
 - 10. Manual
 - 2. Graphic(Haswell)
 - 3. LAN
 - 3. LAN(PCI-E-H810)
 - 4. USB3.0
 - 5. Audio
 - 6. IR
 - 7. iAMT Driver & Utility
 - 8. RAID&AHCI
 - 9. iSMM



NOTE:

To install software from the downloaded ISO image file in Windows 8, 8.1 or 10, double-click the ISO file to mount it as a virtual drive to view its content. On Windows 7 system, an additional tool (such as Virtual CD-ROM Control Panel from Microsoft) is needed to mount the file.

Appendix

A

Regulatory Compliance

IMB-H810-i2 microATX Motherboard

DECLARATION OF CONFORMITY



This equipment has been tested and found to comply with specifications for CE marking. If the user modifies and/or installs other devices in the equipment, the CE conformity declaration may no longer apply.

FCC WARNING



This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Appendix

B

Product Disposal

IMB-H810-i2 microATX Motherboard




CAUTION:

Risk of explosion if battery is replaced by an incorrect type. Only certified engineers should replace the on-board battery.

Dispose of used batteries according to instructions and local regulations.

- Outside the European Union – If you wish to dispose of used electrical and electronic products outside the European Union, please contact your local authority so as to comply with the correct disposal method.
- Within the European Union – The device that produces less waste and is easier to recycle is classified as electronic device in terms of the European Directive 2012/19/EU (WEEE), and must not be disposed of as domestic garbage.



EU-wide legislation, as implemented in each Member State, requires that waste electrical and electronic products carrying the mark (left) must be disposed of separately from normal household waste. This includes monitors and electrical accessories, such as signal cables or power cords. When you need to dispose of your device, please follow the guidance of your local authority, or ask the shop where you purchased the product. The mark on electrical and electronic products only applies to the current European Union Member States.

Please follow the national guidelines for electrical and electronic product disposal.

Appendix

C

BIOS Options

IMB-H810-i2 microATX Motherboard

Below is a list of BIOS configuration options in the BIOS chapter.

<input type="checkbox"/>	System Date [xx/xx/xx]	71
<input type="checkbox"/>	System Time [xx:xx:xx]	71
<input type="checkbox"/>	ACPI Sleep State [S1 (CPU Stop Clock)]	73
<input type="checkbox"/>	Wake System with Fixed Time [Disabled]	74
<input type="checkbox"/>	Security Device Support [Disable]	76
<input type="checkbox"/>	Active Processor Cores [All]	77
<input type="checkbox"/>	Intel Virtualization Technology [Disabled]	78
<input type="checkbox"/>	EIST [Enabled]	78
<input type="checkbox"/>	SATA Controller(s) [Enabled]	79
<input type="checkbox"/>	SATA Mode Selection [IDE]	79
<input type="checkbox"/>	USB Devices	80
<input type="checkbox"/>	Legacy USB Support [Enabled]	80
<input type="checkbox"/>	Serial Port [Enabled]	82
<input type="checkbox"/>	Change Settings [Auto]	82
<input type="checkbox"/>	Serial Port [Enabled]	83
<input type="checkbox"/>	Change Settings [Auto]	83
<input type="checkbox"/>	Serial Port [Enabled]	84
<input type="checkbox"/>	Change Settings [Auto]	84
<input type="checkbox"/>	Serial Port [Enabled]	84
<input type="checkbox"/>	Change Settings [Auto]	85
<input type="checkbox"/>	Serial Port [Enabled]	85
<input type="checkbox"/>	Change Settings [Auto]	85
<input type="checkbox"/>	Serial Port [Enabled]	86
<input type="checkbox"/>	Change Settings [Auto]	86
<input type="checkbox"/>	Parallel Port [Enabled]	87
<input type="checkbox"/>	Change Settings [Auto]	88
<input type="checkbox"/>	Device Mode [STD Printer Mode]	88
<input type="checkbox"/>	PC Health Status	89
<input type="checkbox"/>	CPU_FAN1 Smart Fan Control/SYS_FAN1 Smart Fan Control [Auto Mode]	90
<input type="checkbox"/>	Fan start/off temperature	91
<input type="checkbox"/>	Fan start PWM	91
<input type="checkbox"/>	Fan slope PWM	91
<input type="checkbox"/>	Serial Port [Enabled]	92

<input type="checkbox"/>	Change Settings [Auto].....	92
<input type="checkbox"/>	Serial Port [Enabled].....	93
<input type="checkbox"/>	Change Settings [Auto].....	93
<input type="checkbox"/>	Serial Port [Enabled].....	94
<input type="checkbox"/>	Change Settings [Auto].....	94
<input type="checkbox"/>	Serial Port [Enabled].....	95
<input type="checkbox"/>	Change Settings [Auto].....	95
<input type="checkbox"/>	Device Mode [RS232].....	95
<input type="checkbox"/>	Console Redirection [Disabled]	97
<input type="checkbox"/>	Terminal Type [ANSI].....	97
<input type="checkbox"/>	Bits per second [115200].....	97
<input type="checkbox"/>	Data Bits [8]	97
<input type="checkbox"/>	Parity [None].....	98
<input type="checkbox"/>	Stop Bits [1].....	98
<input type="checkbox"/>	Auto Recovery Function [Disabled].....	99
<input type="checkbox"/>	Restore on AC Power Loss [Last State].....	101
<input type="checkbox"/>	Power Saving Function [Disabled].....	101
<input type="checkbox"/>	PCIEX16 Power [1 x16 PCIE].....	102
<input type="checkbox"/>	USB SW1 Power [+5V DUAL].....	102
<input type="checkbox"/>	USB SW2 Power [+5V DUAL].....	102
<input type="checkbox"/>	PCIe Speed [Auto].....	103
<input type="checkbox"/>	Detect Non-Compliance Device [Disabled]	103
<input type="checkbox"/>	Azalia [Enabled]	104
<input type="checkbox"/>	VT-d [Disabled].....	105
<input type="checkbox"/>	Primary Display [Auto]	106
<input type="checkbox"/>	DVMT Pre-Allocated [256M]	106
<input type="checkbox"/>	DVMT Total Gfx Mem [MAX].....	107
<input type="checkbox"/>	Primary IGFX Boot Display [VBIOS Default]	108
<input type="checkbox"/>	PEG0-Gen X [Gen1]	109
<input type="checkbox"/>	Enable PEG [Enabled]	109
<input type="checkbox"/>	Detect Non-Compliance Device [Disabled]	110
<input type="checkbox"/>	Bootup NumLock State [On].....	111
<input type="checkbox"/>	Quiet Boot [Enabled]	112
<input type="checkbox"/>	Option ROM Messages [Force BIOS].....	112
<input type="checkbox"/>	Launch PXE OpROM [Disabled].....	112

IMB-H810-i2 microATX Motherboard

<input type="checkbox"/> UEFI Boot [Disabled]	112
<input type="checkbox"/> Administrator Password	113
<input type="checkbox"/> User Password	113
<input type="checkbox"/> Save Changes and Reset	114
<input type="checkbox"/> Discard Changes and Reset	114
<input type="checkbox"/> Restore Defaults	114
<input type="checkbox"/> Save as User Defaults	114
<input type="checkbox"/> Restore User Defaults	114
<input type="checkbox"/> SEL Components [Enabled].....	116
<input type="checkbox"/> Erase SEL [No]	116
<input type="checkbox"/> When SEL is Full [Do Nothing].....	117
<input type="checkbox"/> Log EFI Status Codes [Both]	117
<input type="checkbox"/> Configuration Address source [Unspecified]	118

Appendix

D

Watchdog Timer

IMB-H810-i2 microATX Motherboard

**NOTE:**

The following discussion applies to DOS environment. Contact IEI support or visit the IEI website for specific drivers for other operating systems.

The Watchdog Timer is provided to ensure that standalone systems can always recover from catastrophic conditions that cause the CPU to crash. This condition may have occurred by external EMIs or a software bug. When the CPU stops working correctly, Watchdog Timer either performs a hardware reset (cold boot) or a Non-Maskable Interrupt (NMI) to bring the system back to a known state.

A BIOS function call (INT 15H) is used to control the Watchdog Timer.

INT 15H:

AH – 6FH Sub-function:	
AL – 2:	Sets the Watchdog Timer's period.
BL:	Time-out value (Its unit-second is dependent on the item "Watchdog Timer unit select" in CMOS setup).

Table D-1: AH-6FH Sub-function

Call sub-function 2 to set the time-out period of Watchdog Timer first. If the time-out value is not zero, the Watchdog Timer starts counting down. When the timer value reaches zero, the system resets. To ensure that this reset condition does not occur, calling sub-function 2 must periodically refresh the Watchdog Timer. However, the watchdog timer is disabled if the time-out value is set to zero.

A tolerance of at least 10% must be maintained to avoid unknown routines within the operating system (DOS), such as disk I/O that can be very time-consuming.

**NOTE:**

When exiting a program it is necessary to disable the Watchdog Timer, otherwise the system resets.

EXAMPLE PROGRAM:

```
; INITIAL TIMER PERIOD COUNTER
```

```
;
```

```
W_LOOP:
```

```
;
```

```
    MOV     AX, 6F02H      ;setting the time-out value  
    MOV     BL, 30        ;time-out value is 48 seconds  
    INT     15H
```

```
;
```

```
; ADD THE APPLICATION PROGRAM HERE
```

```
;
```

```
    CMP     EXIT_AP, 1    ;is the application over?  
    JNE     W_LOOP        ;No, restart the application
```

```
    MOV     AX, 6F02H      ;disable Watchdog Timer  
    MOV     BL, 0         ;  
    INT     15H
```

```
;
```

```
; EXIT ;
```

Appendix

E

Error Beep Code

E.1 PEI Beep Codes

Number of Beeps	Description
1	Memory not Installed
1	Memory was installed twice (InstallPeiMemory routine in PEI Core called twice)
2	Recovery started
3	DXE IPL was not found
3	DXE Core Firmware Volume was not found
4	Recovery failed
4	S3 Resume failed
7	Reset PPI is not available

E.2 DXE Beep Codes

Number of Beeps	Description
1	Invalid password
4	Some of the Architectural Protocols are not available
5	No Console Output Devices are found
5	No Console Input Devices are found
6	Flash update is failed
7	Reset protocol is not available
8	Platform PCI resource requirements cannot be met

**NOTE:**

If you have any question, please contact IEI for further assistance.

Appendix

F

Hazardous Materials Disclosure

F.1 RoHS II Directive (2015/863/EU)

The details provided in this appendix are to ensure that the product is compliant with the RoHS II Directive (2015/863/EU). The table below acknowledges the presences of small quantities of certain substances in the product, and is applicable to RoHS II Directive (2015/863/EU).

Please refer to the following table.

Part Name	Toxic or Hazardous Substances and Elements									
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (CR(VI))	Polybrominated Biphenyls (PBB)	Polybrominated Diphenyl Ethers (PBDE)	Bis(2-ethylhexyl) phthalate (DEHP)	Butyl benzyl phthalate (BBP)	Dibutyl phthalate (DBP)	Diisobutyl phthalate (DIBP)
Housing	O	O	O	O	O	O	O	O	O	O
Display	O	O	O	O	O	O	O	O	O	O
Printed Circuit Board	O	O	O	O	O	O	O	O	O	O
Metal Fasteners	O	O	O	O	O	O	O	O	O	O
Cable Assembly	O	O	O	O	O	O	O	O	O	O
Fan Assembly	O	O	O	O	O	O	O	O	O	O
Power Supply Assemblies	O	O	O	O	O	O	O	O	O	O
Battery	O	O	O	O	O	O	O	O	O	O

O: This toxic or hazardous substance is contained in all of the homogeneous materials for the part is below the limit requirement in Directive (EU) 2015/863.

X: This toxic or hazardous substance is contained in at least one of the homogeneous materials for this part is above the limit requirement in Directive (EU) 2015/863.

IMB-H810-i2 microATX Motherboard

F.2 China RoHS

此附件旨在确保本产品符合中国 RoHS 标准。以下表格标示此产品中某有毒物质的含量符合中国 RoHS 标准规定的限量要求。

本产品上会附有“环境友好使用期限”的标签，此期限是估算这些物质“不会有泄漏或突变”的年限。本产品可能包含有较短的环境友好使用期限的可替换元件，像是电池或灯管，这些元件将会单独标示出来。

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (CR(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
壳体	○	○	○	○	○	○
显示	○	○	○	○	○	○
印刷电路板	○	○	○	○	○	○
金属螺帽	○	○	○	○	○	○
电缆组装	○	○	○	○	○	○
风扇组装	○	○	○	○	○	○
电力供应组装	○	○	○	○	○	○
电池	○	○	○	○	○	○

○: 表示该有毒有害物质在该部件所有物质材料中的含量均在 SJ/T11364-2014 與 GB/T26572-2011 标准规定的限量要求以下。

X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 SJ/T11364-2014 與 GB/T26572-2011 标准规定的限量要求。