
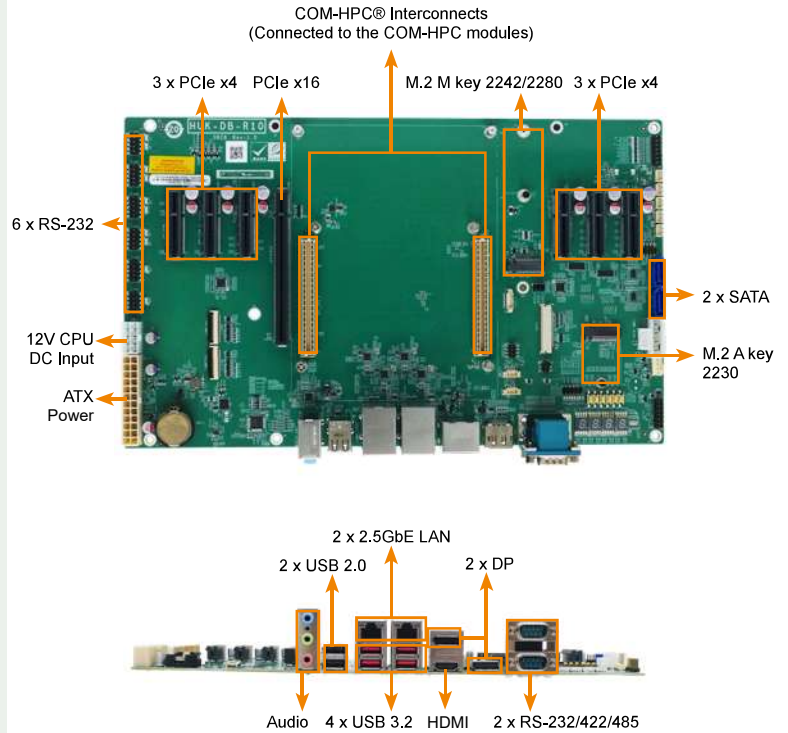
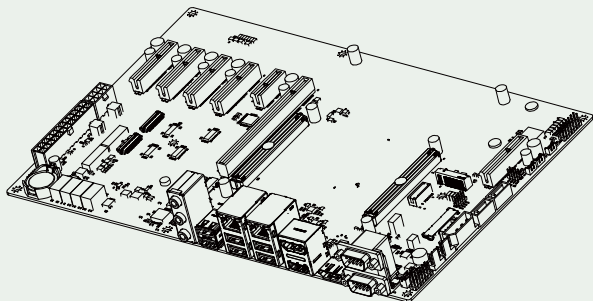



HUK-DB

Dimensions

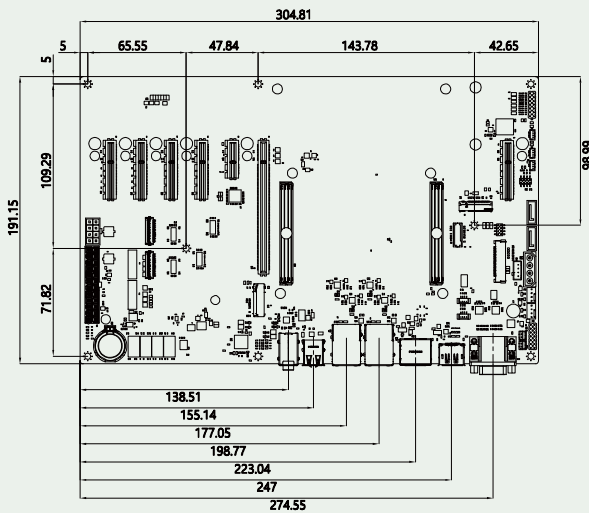

Specifications

Model	HUK-DB
Compatible Models	COM-HPC Size A Module (95 x 120mm), B Module (120 x 120mm) and C Module (120 x 160mm)
Display	1 x eDP 1 x HDMI 1.4 up to 4096 x 2304 @30Hz 2 x DP 1.2 up to 4096 x 2304 @60Hz
Ethernet	2 x RJ45 (2.5GbE)
External I/O	6 x RS-232 1 x General Purpose SPI Port (2 x4 pin, P=2.0) 1 x 12-bit DIO (2*7 pin, P=2.54) 2 x SATA 6Gb/s
Internal I/O	1 x General Purpose SPI Port (2 x4 pin, P=2.0) 1 x 12-bit DIO (2*7 pin, P=2.54) 2 x SATA 6Gb/s
Expansion	1 x PCIe Gen5 x16 1 x PCIe Gen3 x4 (x2signal) 4 x PCIe Gen4 x4 1 x M.2 M Key 2242/2280 (PCIe Gen3 x2) 1 x PCIe Gen3 x4 1 x M.2 A Key 2230 (USB2.0&PCIe Gen3 x2)
MIPI	2 X MIPI CSI CONN
AUDIO	1 x Realtek ALC888S HD codec / 1 x I2S Audio (Line-in, Line-out, Mic) 1 x Soundwire Audio (2 x 4 pin header) 2 x DMIC connector
Front Panel	1 x Front_Panel (2*7 pin) (Power LED, HDD LED, Speaker (Buzzer), Power Button, Reset Button)
I2C	2 x 4-pin wafer
SMBus	1 x 4-pin wafer
FAN connector	1 x System fan connector (1x4 pin)
Power Supply	12V DC Input
Temperature	-10°C ~ 60°C
Humidity	5% ~95 non-condensing
Dimensions	315mm x 190mm
Certification	CE/FCC compliant