

Datasheet

USB EDC Horizontal 2SE3 series

- High performance with USB 2.0 interface
- Wear-leveling supported
- Low power consumption
- ECC capability up to 72-bit/1024 Bytes
- Pin pitch 2.54mm/2.00mm
- Mounting hole supported



Introduction

The Innodisk USB EDC (Embedded Disk Card) products provide high capacity USB flash memory storage that electrically complies with USB 2.0. The device features attractive small form factor and the connectivity over USB2.0 and the NAND flash architecture provide a faster data transmission.


USB EDC Horizontal 2SE3 series

Drawing

Contact us for more information
about the USB EDC Horizontal 2SE3

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Pin pitch 2.00mm

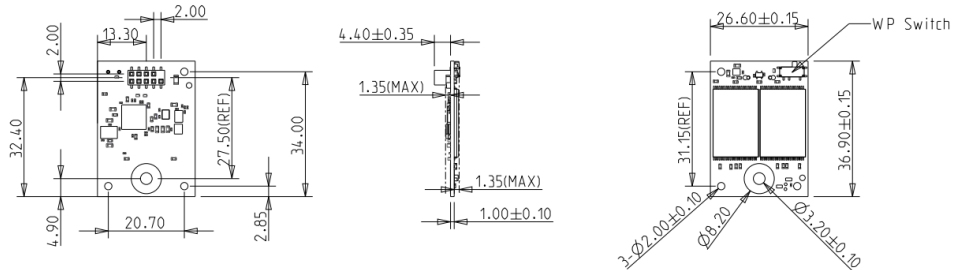

PITCH 2.0

TOLERANCE: $\pm 0.30\text{mm}$
UNIT: mm

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City,
Taiwan (R.O.C.)
Tel: +886-2-77033000
Email: sales@innodisk.com


Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-040-3045-400
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2024 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

20240723

Pin pitch 2.54mm

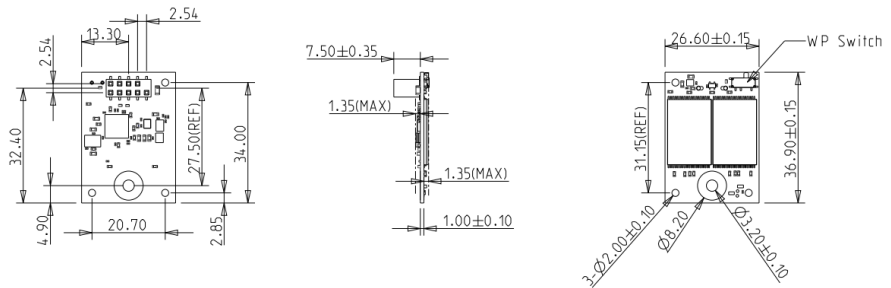

PITCH 2.54

TOLERANCE: $\pm 0.30\text{mm}$
UNIT: mm

innodisk

www.innodisk.com

Contact us for more information
about the **USB EDC Horizontal 2SE3**

Specifications

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City,
Taiwan (R.O.C.)
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-040-3045-400
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2024 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

Interface	USB 2.0
Flash Type	SLC
Connector	Standard, 9 pin, 2.54mm Low profile, 9 pin, 2.00mm
Capacity	4GB-32GB
Max. Channels	1
Sequential R/W (MB/sec, max.)	35/35
Max. Power Consumption	0.36W
H/W Write Protect	Optional
S.M.A.R.T.	Y
Dimension (WxLxH)	26.6x36.9x6.75mm (Pin Pitch 2.00mm) 26.6x36.9x9.85mm (Pin Pitch 2.54mm)
Environment	Vibration: 5G @7~2000Hz Shock: 50G @ 0.5ms Storage Temperature: -40°C ~ +85°C MTBF: 3 million hours

20240723

Ordering Information

Operation Temp.	4GB	8GB	16GB	32GB
Standard Grade (0°C ~ +70°C)	DEUH%-04GI61AC*SB	DEUH%-08GI61AC*SB	DEUH%-16GI61AC*SB	DEUH%-32GI61AC*SB
Industrial Grade (-40°C ~ +85°C)	DEUH%-04GI61AW*SB	DEUH%-08GI61AW*SB	DEUH%-16GI61AW*SB	DEUH%-32GI61AW*SB

%. 1: pin pitch = 2.54mm/2: pin pitch = 2.00mm
*. 1: 5V/2: 3.3V



www.innodisk.com