


PCIE-5711

Single Port Fiber 200GbE Ethernet PCI Express Data Processing Unit with NVIDIA® BlueField®-2

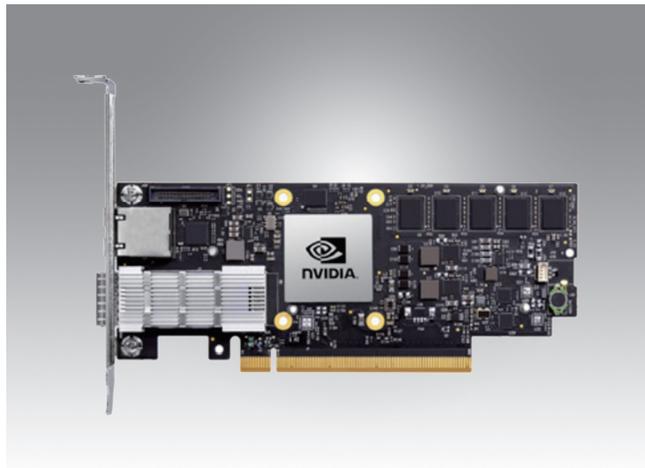

Features

- NVIDIA® BlueField®-2 Controller
- 1 200GbE QSFP56 ports
- PCIe Gen. 4 x16 host interface
- Low profile (half length) form factors
- Supports 200GBASE-SR4, 200GBASE-CR4 and 200GBASE-KR4 modules
- Supports SR-IOV based virtualization
- Supports InfiniBand HDR/HDR100



Introduction

The PCIE-5711 built on NVIDIA® is a low-profile single port 200GbE Ethernet Data Processing Unit (DPU) based on the NVIDIA® BlueField®-2 Controller that supports PCIe gen. 4. The DPU supports up to one QSFP56 ports of 200GbE connectivity to deliver accelerated software-defined networking, storage, security, and management services. By combining the NVIDIA ConnectX®-6 Dx network adapter with an array of Arm® cores, BlueField-2 offers purpose-built, hardware-acceleration engines with full software programmability. Meanwhile, through The NVIDIA DOCA™ software framework, developers can rapidly create applications and services.

PCIE-5711 is an ideal network interface solution for Enterprise data centers with Big data analytics, Cloud-native, web 2.0, hyperscale, Cybersecurity, network function virtualization (NFV), Machine learning and AI.

Specifications

Controller	Controller	NVIDIA® BlueField®-2
	Physical Functions	8
	Virtual Functions	1K
Ethernet	PCI Express Lanes	x16
	Speed	Gen 4
	Port Number	1
	Ports	200GbE QSFP56
Networking	LAN Bypass	Not supported
Power	Voltage	+12V
	Watts	75W
Mechanical Design	Board Dimension (D x W)	167.65 x 68.9 mm
	Bracket	Full height and half height options available
Environment	Operating Humidity	0 to 90% (non-condensing)
	Operating Temperature	0 ~ 45 °C (32 ~ 113 °F)
	Storage	-40 ~ 70 °C (-40 ~ 158 °F)
Certification	EMC	CE / FCC / VCCI / ICES / RCM

Ordering Information

Part Number	Description
PCIE-5711NP-MEA1E	Single Port Fiber 200GbE (QSFP56) Ethernet PCI Express Data Processing Unit with NVIDIA® BlueField®-2 controller, PCIe gen. 4 x16

Please contact your Advantech representative for a list of supported and validated transceiver modules.