

W24IAD3S-MRA2FP

23.8" Intel® Core™ i5-1335U-5350U Flat PCAP ECDIS Marine Panel PC



KEY FEATURES

- 23.8" 1920 x 1080 resolution with projective capacitive multi-touch screen
- Edge-to-edge narrow bezel design and fanless cooling system
- Color calibrated for ECDIS compliance (Optional)
- Capacitive touch keys for quick function access and display control (Support ECDIS DAY, DUSK, and NIGHT mode switching)
- Optional 4 x COM port (NMEA 0183 protocol) 422/485 switchable via software
- Meet the requirements of Industrial marine standards, including IEC60945 4th Edition, DNV-CG-0339, IACS E10
- Support capacitive touch key lock / touchscreen lock function



OVERVIEW



Certified Marine Computing Solutions

Winmate's ECDIS marine panel pcs are certified to meet DNV-CG-0339, IEC60945, and IACS-E10 standards, ensuring compliance with international marine regulations. Rigorous in-house testing guarantees they perform reliably in harsh maritime environments.



Effortless Control with Marine Panel PC

To enhance operator convenience in industrial settings, Winmate's marine ECDIS panel pc series has optimized the six key OSD button for seamless access to DAY/DUSK/Night Mode. This improvement simplifies operation, removing complexity and allowing quick access to the central control on the front panel.



Precision Color Calibration for Marine Navigation

Winmate calibrates color settings according to the IEC 61174 ECDIS Standard, ensuring accurate color representation. This meticulous process guarantees the reliability of color panel pc, which is crucial for maritime navigation.



Sleek and Sturdy Marine Workstations

The true-flat, edge-to-edge design provides a slim and elegant appearance, surpassing standard industrial marine computers with rugged construction, fanless operation, powerful performance, and flexible mounting options.



Comprehensive Marine Connectivity


Extensive connectivity options include Ethernet LAN, USB2.0, USB3.0, HDMI, and optional 4-channel isolated digital input and output. The optional COM ports (RS232/422/485) adhere to the NMEA 0183 standard and are software switchable.

SPECIFICATIONS

Display			
Touch / Glass	Projected Capacitive Multi Touch Screen (AR Coating) AG film (Optional) AR Glass (Optional)	Resolution	1920x1080

Size	23.8 inches	Contrast Ratio	3000:1
Panel Brightness	250.0 nits	View Angles	89,89,89,89
Active Area	527.04x296.46 mm		
System Specification			
Processor	Intel® Core™ i5-1335U 3.4GHz(up to 4.60 GHz)	Memory	1 x SO-DIMM, DDR5 4800 MHz, 8GB 16GB (Optional) 32GB (Optional)
Storage	1 x M.2 2280 M-Key NVMe SSD 128GB 256GB (Optional) 512GB (Optional) 1TB (Optional) 2TB (Optional)	Ethernet controller	2 x Intel® Ethernet Controller
Operating System	Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 22.04(Do not support Wake on Touch) (Optional)	Buzzer	75 dB~80 dB, 2300 Hz, 1m
Environment			
Operating Humidity	5% to 95%	Operating Temperature	-15~55°C
Shock	15G,11ms duration	Vibration	0.7g@DNV-CG-0339 (Class A)
IP rating	IP66 (Front Side)		
Certification			
Certification	CE, FCC		
IO Ports			
USB Port	2 x USB3.0 1 x USB2.0 (Optional)	Serial Port	1 x RS232(Default)/422/485 1 x RS232 (Optional)
Video	1 x HDMI (Optional)	Expansion Port	1 x 2.5" Removable 64GB SSD/HDD up to 512GB (Optional)
LAN	2 x RJ45	Front Control	Power Brightness + Brightness - Menu Function Key(Default setting: ECDIS Mode)
Indicator	Day Mode Dusk Mode Night Mode	DIDO	8 Channel Isolated Digital Input/Output (Optional)
NMEA	4 x NMEA 0183 Port (Optional)		
Mechanical			
Dimension	595 x 385 x 73.8 mm	Weight	10.3 kg
Mounting	VESA mount Panel mount (Optional)	Enclosure	Anodized Aluminum Bezel
Cooling System	Fanless Design	Cut out	570 x 360 mm
Accessory			
Accessory	User Manual 12V AC to DC Adapter (with 3 pin Terminal Block) Power Cord M4 x 30 Black Screws Bolts M4 x 15 Sliver Screws Bolts	Optional Accessory	Four 5 Pin Terminal Block 3.81 (Phoenix Type)*For NMEA port (Optional)
Power			
Power Rating	24V DC-in with Isolation (Approval by Certificate) 9~36V DC Input Acceptable	Consumption	65W (Typical)

DIMENSIONS UNIT:MM

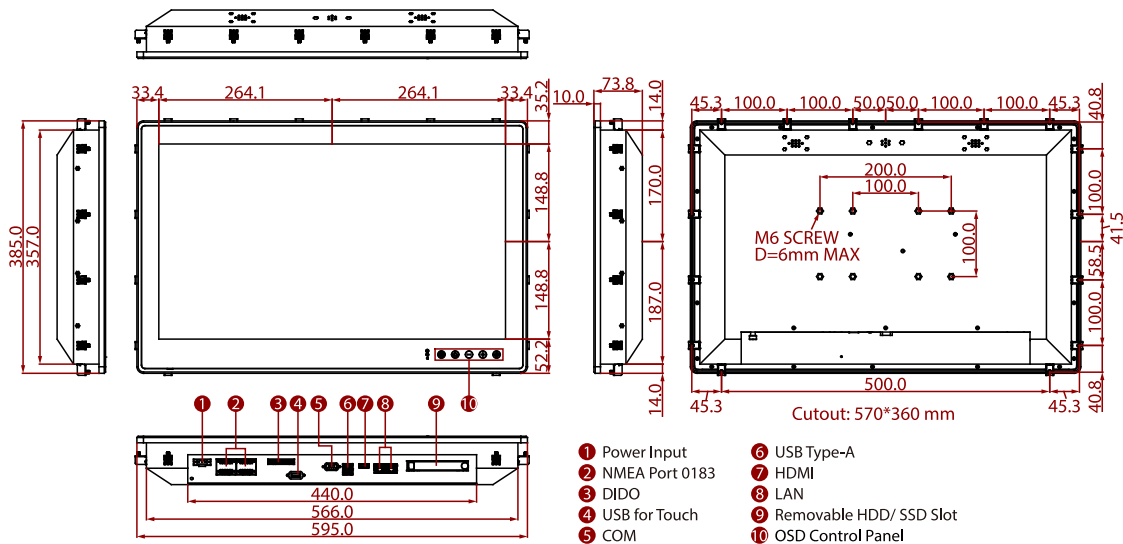

NOTE

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. Only 24V DC has been approved by DNV certification.
- 3. Please contact our sales representative if you need further product information.
- 4. All specifications are subject to change without prior notice.
- 5. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.