

CMI203 System Family

Mini-ITX System

Expandable System with IBASE Mini-ITX Motherboard

CMI203-992VF-X3G / CMI203-991 / CMI203-990



Rear I/O




Specifications

	Model	CMI203-992VF-X3G	CMI203-991	CMI203-990
System	System Mainboard	MI992VF	MI991AF/MI991EF	MI990VF/MI990EF
	Processor	7th Gen Intel® KabyLake-H mobile Processors	6th Gen Intel® Core™ i7/i5/i3/ Pentium®/ Celeron® DT Processors	6th Gen Intel® Core™ i7/i5/i3/ Pentium®/ Celeron® MB Processors
	PCH	Intel® CM238	MI991AF: Intel® Q170 MI991EF: Intel® H110	MI990VF: Intel® CM236 MI990EF: Intel® HM170
	System Speed	Up to 3.7 GHz	Up to 4.0 GHz	Up to 3.7 GHz
	Memory	1x DDR4-2400 SO-DIMM	2x DDR4-2133 SO-DIMM	2x DDR4-2133 SO-DIMM
I/O Interface	Front-side Panel I/O	N/A		
	Rear-side Panel I/O	1x AC-outlet, 1x Power button, 1x reset button 1x Power LED, 1x HDD LED 1x DB9M for GPIO (4-in & 4-out) 3x RS232 ports via pin header 2x USB 2.0 ports via pin header 2x system fans Based on different motherboard I/O ports		
Storage Interface	SATA / M.2	1 x 3.5" or 2.5" HDD drive bay, 1x M.2 (M-Key)	1x 3.5" or 2.5" HDD drive bay	
	mSATA	1x mSATA	1x mSATA	1x mSATA
Expansion Slots	PCI-E Expansion	1x PCI-E (x16) expansion slot		
	Add-on card Max. Size	111mm(W) x 170mm(D) x 40mm(H)		
Power Supply	ATX Power	Industrial 250W ATX power supply Input voltage: 100V ~ 240V Input frequency: 47Hz ~ 63Hz Compatible with IEC62368-1/EN62368-1		
Mechanical	Construction	SECC		
	Chassis Color	Black		
	Mounting Type	Wall mount & Desktop		
	Dimensions	345mm (W) x 225mm (D) x 100mm (H) 13.58" (W) x 8.86" (D) x 3.94" (H)		
	Weight	4.4kg	4.4kg	4.4kg
Environmental	Operating Temperature	0°C~45°C (32°F~113°F)		
	Storage Temperature	-20°C~80°C (-4°F~176°F)		
	Humidity	5% ~ 90% @45C (Non-condensing)		
	Vibration	Non-Operating : 1.0 grms / 5~500Hz / random Operating : 0.25 grms / 5~500Hz / random		
	Certification	CE / LVD / FCC Class B (Pre-scan only)		

CMI203 System Family

Dimensions and Drawing

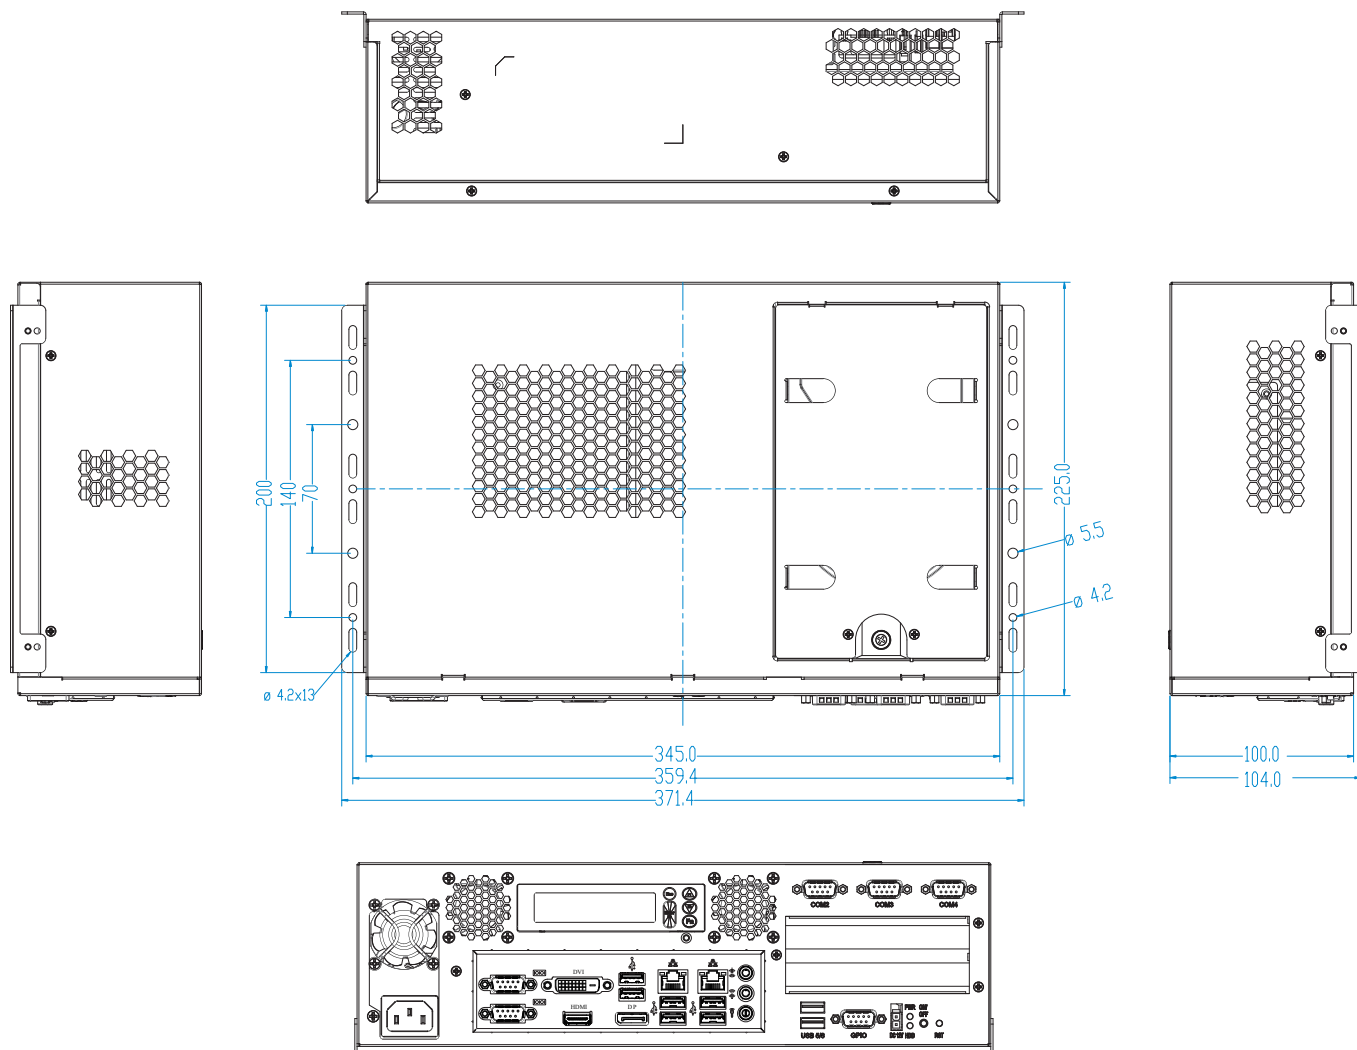

Based on MI992VF-X3G & MI991 & MI990 I/O

Ordering Information

CMI203-992VF-X3G	Chassis with MI992VF + IP118 riser card, w/ 250W PSU, CPU & memory & 500G HDD, 2.5" storage holder, mounting brackets, (RoHS2)
CMI203-992VF-X3GM	Chassis with MI992VF + IP118 riser card, w/ 250W PSU, CPU, 2.5" storage holder, w/o memory & HDD, 1x PCI-E(x16) expansion slot, (RoHS2)
CMI203-991AFM	Chassis with MI991AF + IP118 riser card, w/o CPU, HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)
CMI203-991EFM	Chassis with MI991EF + IP118 riser card, w/o CPU, HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)
CMI203-990-6820M	Chassis with MI990VF-6820 + IP118 riser card, w/o HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)
CMI203-990-6440M	Chassis with MI990VF-6440 + IP118 riser card, w/o HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)
CMI203-990-6100M	Chassis with MI990EF-6100 + IP118 riser card, w/o HDD, memory, w/ 250W PSU, 2.5" HDD holder, 1x PCI-E (x16) expansion slot (RoHS2)