


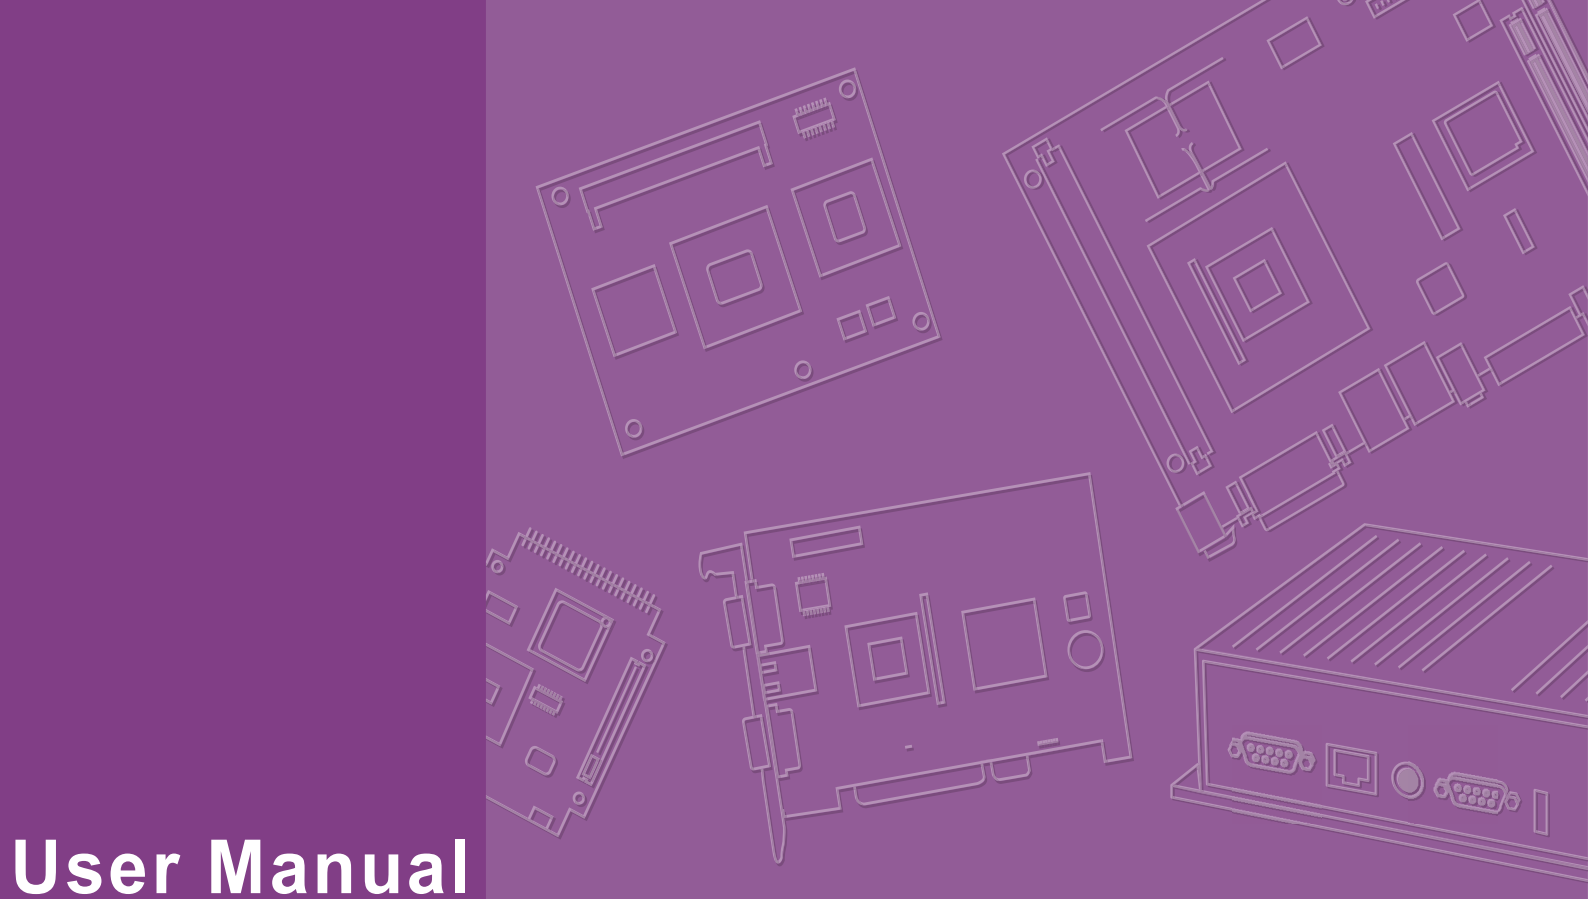

User Manual

SOM-6884

CPU Computer on Module

ADVANTECH

Enabling an Intelligent Planet

Copyright

The documentation and the software included with this product are copyrighted 2024 by Advantech Co., Ltd. All rights are reserved. Advantech Co., Ltd. reserves the right to make improvements in the products described in this manual at any time without notice. No part of this manual may be reproduced, copied, translated, or transmitted in any form or by any means without the prior written permission of Advantech Co., Ltd. The information provided in this manual is intended to be accurate and reliable. However, Advantech Co., Ltd. assumes no responsibility for its use, nor for any infringements of the rights of third parties that may result from its use.

Acknowledgments

Intel® and Pentium® are trademarks of Intel Corporation.

Microsoft Windows and MS-DOS are registered trademarks of Microsoft Corp.

All other product names or trademarks are properties of their respective owners.

Product Warranty (2 Years)

Advantech warrants the original purchaser that each of its products will be free from defects in materials and workmanship for two years from the date of purchase.

This warranty does not apply to any products that have been repaired or altered by persons other than repair personnel authorized by Advantech, or products that have been subject to misuse, abuse, accident, or improper installation. Advantech assumes no liability under the terms of this warranty as a consequence of such events.

Because of Advantech's high quality-control standards and rigorous testing, most customers never need to use our repair service. If an Advantech product is defective, it will be repaired or replaced free of charge during the warranty period. For out-of-warranty repairs, customers will be billed according to the cost of replacement materials, service time, and freight. Please consult your dealer for more details.

If you believe your product to be defective, follow the steps outlined below.

1. Collect all the information about the problem encountered. (For example, CPU speed, Advantech products used, other hardware and software used, etc.) Note anything abnormal and list any onscreen messages displayed when the problem occurs.
2. Call your dealer and describe the problem. Please have your manual, product, and any helpful information readily available.
3. If your product is diagnosed as defective, obtain a return merchandise authorization (RMA) number from your dealer. This allows us to process your return more quickly.
4. Carefully pack the defective product, a completed Repair and Replacement Order Card, and a proof of purchase date (such as a photocopy of your sales receipt) into a shippable container. Products returned without a proof of purchase date are not eligible for warranty service.
5. Write the RMA number clearly on the outside of the package and ship the package prepaid to your dealer.

Declaration of Conformity

CE

This product has passed the CE test for environmental specifications. Test conditions for passing include the equipment being operated within an industrial enclosure. In order to protect the product from damage caused by electrostatic discharge (ESD) or EMI leakage, we strongly recommend the use of CE-compliant industrial enclosure products.

FCC Class B

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for assistance.

FM

This equipment has passed the FM certification. According to the National Fire Protection Association, work sites are classified into different classes, divisions and groups, based on hazard considerations. This equipment is compliant with the specifications of Class I, Division 2, Groups A, B, C, and D indoor hazards.

Technical Support and Assistance

1. Visit the Advantech website at www.advantech.com/support to obtain the latest product information.
2. Contact your distributor, sales representative, or Advantech's customer service center for technical support if you need additional assistance. Please have the following information ready before calling:
 - Product name and serial number
 - Description of your peripheral attachments
 - Description of your software (operating system, version, application software, etc.)
 - A complete description of the problem
 - The exact wording of any error messages

Warnings, Cautions and Notes

Warning! Warnings indicate conditions that if not observed can cause personal injury!



Caution! Cautions are included to help you avoid damaging hardware or losing data. e.g.:



There is a danger of a new battery exploding if it is incorrectly installed. Do not attempt to recharge, force open, or heat the battery. Replace the battery only with the same or equivalent type recommended by the manufacturer. Discard used batteries according to the manufacturer's instructions.

Note! Notes provide optional additional information.



Document Feedback

To assist us with improving this manual, we welcome all comments and constructive criticism. Please send all feedback in writing to support@advantech.com.

Safety Precautions - Static Electricity

Follow these simple precautions to protect yourself from harm and the products from damage.

- To avoid electrical shock, always disconnect the power from your PC chassis before you work on it. Don't touch any components on the CPU card or other cards while the PC is on.
- Disconnect power before making any configuration changes. The sudden rush of power as you connect a jumper or install a card may damage sensitive electronic components.

Safety Instructions

1. Read these safety instructions carefully.
2. Retain this user manual for future reference.
3. Disconnect the equipment from all power outlets before cleaning. Use only a damp cloth for cleaning. Do not use liquid or spray detergents.
4. For pluggable equipment, the power outlet socket must be located near the equipment and easily accessible.
5. Protect the equipment from humidity.
6. Place the equipment on a reliable surface during installation. Dropping or letting the equipment fall may cause damage.
7. The openings on the enclosure are for air convection. Protect the equipment from overheating. Do not cover the openings.
8. Ensure that the voltage of the power source is correct before connecting the equipment to a power outlet.
9. Position the power cord away from high-traffic areas. Do not place anything over the power cord.
10. All cautions and warnings on the equipment should be noted.
11. If the equipment is not used for a long time, disconnect it from the power source to avoid damage from transient overvoltage.
12. Never pour liquid into an opening. This may cause fire or electrical shock.
13. Never open the equipment. For safety reasons, the equipment should be opened only by qualified service personnel.
14. If any of the following occurs, have the equipment checked by service personnel:
 - The power cord or plug is damaged.
 - Liquid has penetrated the equipment.
 - The equipment has been exposed to moisture.
 - The equipment is malfunctioning, or does not operate according to the user manual.
 - The equipment has been dropped and damaged.
 - The equipment shows obvious signs of breakage.
15. Do not leave the equipment in an environment with a storage temperature of below -20°C (-4°F) or above 60°C (140°F) as this may damage the components. The equipment should be kept in a controlled environment.
16. CAUTION: Batteries are at risk of exploding if incorrectly replaced. Replace only with the same or equivalent type as recommended by the manufacturer. Discard used batteries according to the manufacturer's instructions.
17. In accordance with IEC 704-1:1982 specifications, the sound pressure level at the operator's position does not exceed 70 dB (A).

DISCLAIMER: These instructions are provided according to IEC 704-1 standards. Advantech disclaims all responsibility for the accuracy of any statements contained herein.

Contents

Chapter 1 General Information1

1.1	Introduction	2
1.1.1	Acronyms	3
	Table 1.1: Acronyms	3
1.2	Functional Block Diagram	4
1.3	Product Specifications	5
1.3.1	Compliance	5
1.3.2	Feature List	5
	Table 1.2: Feature List	5
1.3.3	Processor System	6
	Table 1.3: Processor System	6
1.3.4	Memory	6
1.3.5	Graphics/Audio	6
	Table 1.4: Graphics/Audio	6
1.3.6	Expansion Interface	7
	Table 1.5: PCIe x1 (A1 Version)	7
	Table 1.6: PCIe x1 (A2 Version)	7
1.3.7	Serial Bus	7
1.3.8	I/O	7
	Table 1.7: USB 3.2	8
	Table 1.8: USB 2.0	8
	Table 1.9: BIOS	9
1.3.9	Power Management	10
1.3.10	Environment	10
1.3.11	MTBF	11
1.3.12	OS Support	11
1.3.13	Advantech iManager	11
1.3.14	Power Consumption	11
	Table 1.10: Power Consumption Table (Watts)	11
1.3.15	Performance	12
1.3.16	Selection Guide w/ P/N	12
	Table 1.11: Selection Guide w/ P/N (1)	12
	Table 1.12: Selection Guide w/ P/N (2)	12
1.3.17	Packing List	13
	Table 1.13: Packing List	13
1.3.18	Development Board	13
	Table 1.14: Development Board	13
1.3.19	Optional Accessory	13
	Table 1.15: Optional Accessories	13
1.3.20	Pin Description	13

Chapter 2 Mechanical Information15

2.1	Board Information	16
	Figure 2.1 A1 Version Board Chips ID – Front	16
	Figure 2.2 A1 Version Board Chips ID – Rear	17
	Figure 2.3 A2 Version Board Chips ID – Front	17
	Figure 2.4 A2 Version Board Chips ID – Rear	18
2.2	Mechanical Diagrams	19
	Figure 2.5 A1 Version Board Mechanical Diagram - Front	19
	Figure 2.6 A1 Version Board Mechanical Diagram – Rear	20
	Figure 2.7 A1 Version Board Mechanical Diagram – Side1	20
	Figure 2.8 A2 Version Board Mechanical Diagram - Front	21
	Figure 2.9 A2 Version Board Mechanical Diagram – Rear	21

	Figure 2.10A2 Version Board Mechanical Diagram – Side1	22
2.3	Assembly Diagram	23
	Figure 2.11A1 Version Assembly Diagram	23
	Figure 2.12A2 Version Assembly Diagram	24
2.4	Assembly Diagram	25
	Figure 2.13CPU Height and Tolerance	25

Chapter 3 BIOS 27

3.1	Introduction	28
	Figure 3.1 A1 Version Setup Program Initial Screen	28
	Figure 3.2 A2 Version Setup Program Initial Screen	29
3.2	Entering Setup	30
3.3	Main Setup	30
	Figure 3.3 Main Setup Screen	30
3.4	Advanced BIOS Features Setup	31
	Figure 3.4 Advanced BIOS Features Setup Screen	31
3.4.1	CPU Configuration	32
	Figure 3.5 CPU Configuration	32
3.4.2	Power & Performance	33
	Figure 3.6 Power & Performance	33
	Figure 3.7 Power & Performance	34
	Figure 3.8 Config TDP Configurations	35
	Figure 3.9 GT - Power Management Control	36
3.4.3	PCH-FW Configuration	37
	Figure 3.10ME FW Configuration	37
	Figure 3.11FW Update Configuration	38
3.4.4	Trusted Computing	39
	Figure 3.12Trusted Computing	39
3.4.5	ACPI Settings	40
	Figure 3.13ACPI Settings	40
3.4.6	Embedded Controller	41
	Figure 3.14Embedded Controller	41
	Figure 3.15Serial Port 1 Configuration	42
3.4.7	Serial Port Console Redirection	43
	Figure 3.16Serial Port Console Redirection	43
	Figure 3.17Legacy Console Redirection Settings	44
3.4.8	USB Configuration	45
	Figure 3.18USB Configuration	45
3.4.9	Network Stack Configuration	46
	Figure 3.19Network Stack Configuration	46
3.4.10	CSM Configuration	47
	Figure 3.20CSM Configuration	47
3.4.11	OEM Configuration	48
	Figure 3.21OEM Configuration	48
3.4.12	Tls Auth Configuration	49
	Figure 3.22Tls Auth Configuration	49
3.4.13	Intel® Ethernet Controller I226-IT -00:A0:C9:00:00:00	50
	Figure 3.23Intel® Ethernet Controller I226-IT	50
3.5	Chipset Setup	51
	Figure 3.24Chipset Setup	51
3.5.1	System Agent (SA) Configuration	52
	Figure 3.25System Agent (SA) Configuration	52
	Figure 3.26A1 Version Memory Configuration	53
	Figure 3.27A2 Version Memory Configuration	53
	Figure 3.28A2 Version Memory Configuration	54
	Figure 3.29Graphics Configuration	55
	Figure 3.30LCD Control	56
	Figure 3.31A1 Version PCI Express Configuration	57

	Figure 3.32A2 Version PCI Express Configuration.....	58
	Figure 3.33PCI Express Root Port 1 (PEG_4)	59
	Figure 3.34PCI Express Root Port 2 (PEG_8)	60
	Figure 3.35PCI Express Root Port 3 (NVME).....	61
3.5.2	PCH-IO Configuration	62
	Figure 3.36PCH-IO Configuration.....	62
	Figure 3.37PCI Express Configuration	63
	Figure 3.38PCI Express Root Port 0	64
	Figure 3.39SATA Drives	65
	Figure 3.40USB Configuration.....	66
	Figure 3.41Security Configuration	67
	Figure 3.42HD Audio Subsystem Configuration Settings	68
	Figure 3.43Seriallo Configuration	69
3.6	Security Chipset.....	70
	Figure 3.44Security Chipset	70
3.6.1	Secure Boot	71
	Figure 3.45Secure Boot.....	71
3.6.2	Boot Setup	72
	Figure 3.46Boot Setup.....	72
3.7	Save & Exit.....	73
	Figure 3.47Save & Exit.....	73

Chapter 4 S/W Introduction & Installation75

4.1	S/W Introduction.....	76
4.2	Driver Installation	76
	4.2.1 Windows Driver Setup	76
	4.2.2 Other OS.....	76
4.3	Advantech iManager	77

Appendix A Pin Assignments79

A.1	SOM-6884 Pin Assignments	80
	Table A.1: SOM-6884 A1 Pin Assignments	80
	Table A.2: SOM-6884 A2 Pin Assignments	85

Appendix B Watchdog Timer91

B.1	Programming the Watchdog Timer	92
	Table B.1: Programming the Watchdog Timer.....	92

Appendix C Programming GPIO93

C.1	GPIO Register.....	94
	Table C.1: GPIO Register	94

Appendix D System Assignments95

D.1	System I/O Ports	96
	Table D.1: System I/O Ports	96
D.2	Interrupt Assignments	98
	Table D.2: A1 Version Interrupt Assignments	98
	Table D.3: A2 Version Interrupt Assignments	108
D.3	1st MB Memory Map.....	118
	Table D.4: 1st MB Memory Map	118

Chapter 1

General Information

This chapter gives background information on the SOM-6884 CPU Computer on Module.

Sections include:

- Introduction
- Functional Block Diagram
- Product Specifications

1.1 Introduction

SOM-6884 is designed for high-performance edge computing applications. The new COM Express Type 6 Compact Module is integrated with a 13th Gen Intel® Core™ processor (formally called Raptor Lake-P). The processor provides fourteen cores of computing performance with TDP under 45 Watts. It also comes with the excellent Intel® Iris® Xe graphics, and the Advantech ready-to-use Edge AI Suite software toolkit. The new SOM-6884 is an ideal solution for medical imaging and AI applications.

SOM-6884 is designed to support up to 64GB of DDR5 4800 RAM for groundbreaking computing and graphics performance. (That's 1.5X performance compared to the previous generation.) In addition, there are numerous ultra-high-speed I/O interfaces included, such as PCIe Gen4 (16GT/s), 2.5Gbase-T, and USB 3.2 Gen2 (10Gbps), for plenty of system expansion options. In particular, for USB, there is a reference design document and development board called SOM-MZ20 to help with USB4 implementation.

The unit has also been developed to easily accommodate four independent displays of up to 4K resolution. There are three DisplayPort 1.4 / HDMI 2.0 and one optional eDP or LVDS interface. Furthermore, the device can be configured for up to two 8K HDR outputs. With the optional NVMe SSD, TPM 2.0 on-board design, 8.5~20V power input feature, and -40 to 85°C operating temperature range (heat spreader & QFCS included.), SOM-6884 is a suitable and reliable solution to readily meet edge computing requirements.

Advantech iManager (SUSI 4) was developed for the requirements of embedded applications and is equipped with a multi-level watchdog timer, voltage and temperature monitoring, thermal protection and mitigation through processor throttling, LCD backlight on/off and brightness control, embedded storage for customized information, and more. With Advantech WISE-PaaS/RMM, it can perform remote monitoring and can control devices through the Internet for easy maintenance. All Advantech COM Express modules integrate iManager and WISE-PaaS/RMM as an add-on feature for customer applications.

Capable of solid performance under extreme conditions, and featuring embedded platform power efficiency and multiple expansion I/O interfaces, SOM-6884 is a product that is compute-centric, thermal sensitive, with robust graphics/media capabilities, and well-suited for demanding I/O applications.


1.1.1 Acronyms

Table 1.1: Acronyms


Term	Definition
AC'97	Audio CODEC (Coder-Decoder)
ACPI	Advanced Configuration Power Interface – standard to implement power saving modes in PC-AT systems
BIOS	Basic Input/Output System – firmware in the PC-AT system that is used to initialize system components before handing control over to the operating system
CAN	Controller-area network (CAN or CAN bus) is a vehicle bus standard designed to allow microcontrollers to communicate with each other within a vehicle without a host computer.
DDI	Digital Display Interface – containing DisplayPort, HDMI/DVI, and SDVO
EAPI	Embedded Application Programmable Interface Software interface for COM Express® for specific industrial functions ■ System information ■ Watchdog timer ■ I2C Bus ■ Flat-panel brightness control ■ User storage area ■ GPIO
GbE	Gigabit Ethernet
GPIO	General Purpose Input/Output
HDA	Intel® High Definition Audio (Intel® HD Audio) refers to the specification released by Intel in 2004 for delivering high-definition audio that is capable of playing back more channels at higher quality than AC'97.
I2C	Inter-Integrated Circuit – 2-wire (clock and data) signaling scheme allowing communication between integrated circuits, primarily used to read and load register values
ME	Management Engine
PC-AT	“Personal Computer – Advanced Technology” – an IBM trademark term used to refer to Intel-based personal computers in the 1990s
PEG	PCI Express Graphics
RTC	Real-Time Clock – battery-backed circuit in PC-AT systems that maintains the system time and date as well as certain system setup parameters
SPD	Serial Presence Detect – refers to serial EEPROM on DRAMs that has DRAM Module configuration information
TPM	Trusted Platform Module chip to enhance the security features of a computer system
UEFI	Unified Extensible Firmware Interface
WDT	Watchdog Timer

1.2 Functional Block Diagram

A1 version

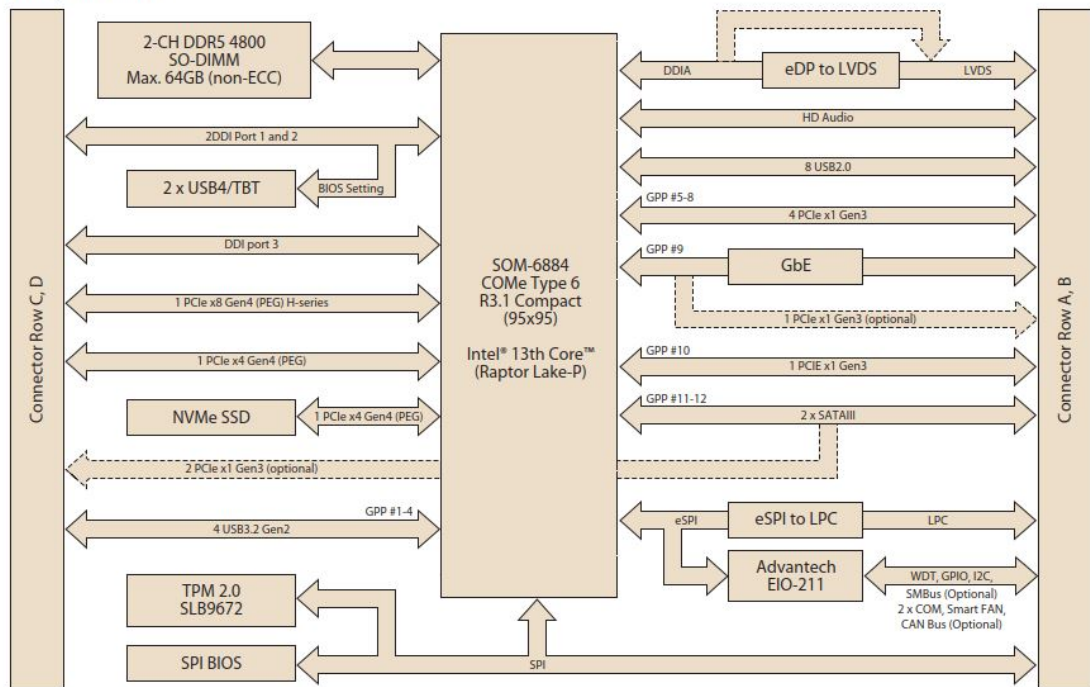

A2 version

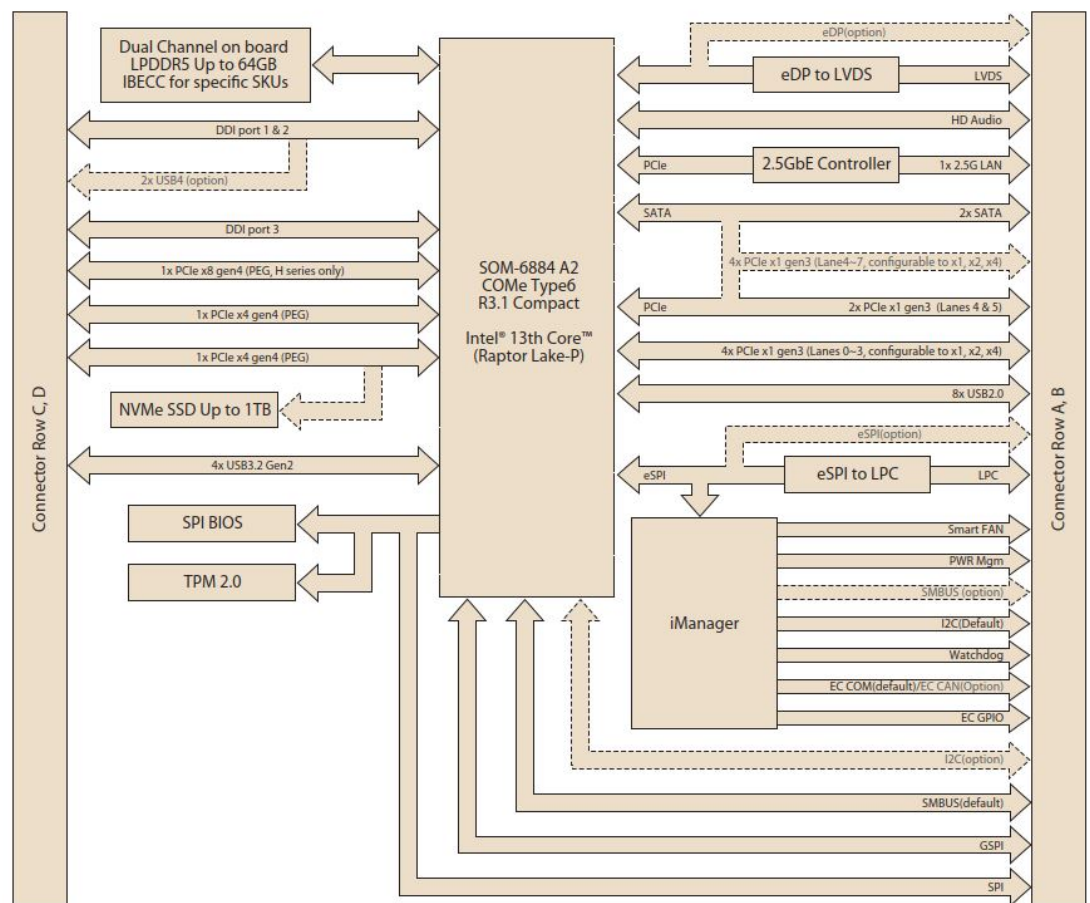

1.3 Product Specifications

1.3.1 Compliance

- PICMG COM.0 (COM Express) Revision 3.1
- Basic Size - 95 x 95 mm (3.7 x 3.7 in)
- Pin-out Type 6 compatible

1.3.2 Feature List

Table 1.2: Feature List					
Feature Type	Connector Row	Feature	Type 6 Defined		SOM-6884
			Max.	Min.	
Display	A-B	LVDS Channel A (18-/24-bit)	1	0	1
	A-B	LVDS Channel B (18-/24-bit)	1	0	1
	A-B	eDP (muxed on LVDS Channel A)	1	0	1
	A-B	VGA	1	0	0
Expansion	A-B	PCI Express x1	6	1	6
	A-B	LPC	1	1	1
Serial	A-B	SMBus	1	1	1
	A-B	I2C Bus	1	1	1
	A-B	Serial Port	2	0	2
	A-B	CAN bus (muxed on SER1)	1	0	1
I/O	A-B	LAN Port 0 (Gigabit Ethernet)	1	1	1
	A-B	SATA	4	1	4
	A-B	USB 2.0	8	4	8
	A-B	USB Client	1	0	0
	A-B	HD Audio	1	0	1
	A-B	SPI Bus	2	1	1
	A-B	General Purpose I/O (GPIO)	8	8	8
	A-B	SDIO (muxed on GPIO)	1	0	0
	A-B	Watchdog Timer Output	1	0	1
	A-B	Speaker Out	1	1	1
	A-B	External BIOS ROM Support	2	0	1
	A-B	Power Button Support	1	1	1
	A-B	Power Good	1	1	1
	A-B	VCC_5V_SBY Contacts	4	4	4
	A-B	Sleep	1	0	1
	A-B	Thermal Protection	1	0	1
	A-B	Lid Input	1	0	1
	A-B	Battery Low Alarm	1	0	1
	A-B	Suspend/Wake Signals	3	0	3
	A-B	Fan PWM / Tachometer	2	0	2
	A-B	Trusted Platform Modules	1	0	1
	A-B	RSMRST_OUT#	1	1	1
	A-B	GP_SPI	1	0	1
Display	C-D	Digital Display Interfaces 1 - 3	3	0	3

Table 1.2: Feature List

I/O	C-D	PEG (PCI Express x16)	1	0	1
	C-D	PCI Express x1	2	0	2
	C-D	USB 3.0	4	0	4
	C-D	Rapid Shutdown	1	0	1

1.3.3 Processor System

Table 1.3: Processor System

CPU	Cores (P+E)	P-Cores Base/ Max Freq.	E-Cores Base/ Max Freq.	Cache (MB)	TDP (W)
i7-13800HE	14C (6+8)	2.5 GHz / 5.0 GHz	1.8 GHz / 4.0 GHz	24	45W
i5-13600HE	12C (4+8)	2.7 GHz / 4.8 GHz	1.9 GHz / 3.6 GHz	18	45W
i3-13300HE	8C (4+4)	2.1 GHz / 4.6 GHz	1.5 GHz / 3.4 GHz	12	45W
i7-13800HRE	14C (6+8)	2.5 GHz / 5.0 GHz	1.8 GHz / 4.0 GHz	24	45W
i3-13200PRE	8C (4+4)	1.7 GHz / 4.9 GHz	1.2 GHz / 3.3 GHz	12	28W
i7-1365UE	10C (2+8)	1.4 GHz / 4.6 GHz	1.2 GHz / 3.7 GHz	12	15W
i5-1345UE	10C (2+8)	1.2 GHz / 4.5 GHz	1.1 GHz / 3.4 GHz	12	15W
i3-1315UE	6C (2+4)	1.7 GHz / 4.9 GHz	0.9 GHz / 3.3 GHz	10	15W
i7-1365URE	10C (2+8)	1.4 GHz / 4.6 GHz	1.2 GHz / 3.7 GHz	12	15W

1.3.4 Memory

- **A1 Version:** There is a total of 2 memory sockets on SOM-6884: the top side holds 1pcs and the bottom side holds 1pcs by default. There is support for a max of 64GB capacity with 262-pin SODIMM sockets (dual-channel).
- **A2 Version:** Dual-channel onboard LPDDR5 4800MT/s up to 64GB.

1.3.5 Graphics/Audio

Graphics Core: 13th Gen Intel® Iris® Xe Graphics Core supporting DX12.1, OGL4.6, Vulkan1.2, and MJPEG, HEVC/H265, AVC/VP9 HW decode/encode/transcode acceleration.

Table 1.4: Graphics/Audio

CPU	Graphics Core	Max Freq.
i7-13800HE	Iris Xe Graphics	1400
i5-13600HE	Iris Xe Graphics	1400
i3-13300HE	UHD Graphics	1300
i7-13800HRE	Iris Xe Graphics	1400
i7-1365UE	Iris Xe Graphics	1300
i5-1345UE	Iris Xe Graphics	1250
i3-1315UE	UHD Graphics	1200
i7-1365URE	Iris Xe Graphics	1300

1.3.6 Expansion Interface

1.3.6.1 PCIe x1

PCI Express x1: Supports a default of 8 x PCIe x1 compliant with PCIe Gen3 (8.0 GT/s) specifications, configurable to PCIe x4 or PCIe x2. Several configurable combinations are available.

Table 1.5: PCIe x1 (A1 Version)										
Type 6		Rows A,B						Rows C,D		
		P0	P1	P2	P3	P4	P5	P6	P7	
Default	Config	X1	X1	X1	X1	GbE (LAN)	X1	SATA #0	SATA #1	
Option 1		X4				X4 (optional)				
Option 2		X2		X2		X4 (optional)				
Option 3		X4				X2 (optional)			X2 (optional)	

Table 1.6: PCIe x1 (A2 Version)									
Type 6		Rows A,B						Rows C,D	
		P0	P1	P2	P3	P4	P5	P6	P7
Default	Config	X1	X1	X1	X1	X1	X1	NA	NA
Option 1		X4				X4			
Option 2		X2		X2		X4			
Option 3		X4				X2		X2	

Note! Max PCIe Root Port only supports 5 devices.



1.3.6.2 LPC

Supports the Low Pin Count (LPC) 1.1 specification, without DMA or bus mastering. Enables connection to Super I/O, an embedded controller, or TPM. 25MHz LPC clock.

1.3.7 Serial Bus

1.3.7.1 SMBus

Supports SMBus 2.0 specifications.

1.3.7.2 I²C Bus

Supports I²C bus 7-bit and 10-bit address modes. Supports standard mode up to 100 kb/s and fast mode up to 400 kb/s.

1.3.8 I/O

1.3.8.1 Gigabit Ethernet

Ethernet: Intel® I226 Gigabit LAN supports 10/100/1000 Mbps & 2.5 Gbps speed.

1.3.8.2 SATA

Supports 2 x SATA Gen3 (6.0 Gb/s), backward compliant with SATA Gen2 (3.0 Gb/s) and Gen1 (1.5 Gb/s). The maximum data rate is 600 MB/s. It supports AHCI 1.3.1 mode (it does not support IDE mode).

1.3.8.3 USB 3.2 / USB 2.0

COM-Express supports USB 3.0, but SOM-6884 supports 4 x USB 3.2 Gen2 (10 Gbps) ports and 8 x USB 2.0 (480 Mbps) ports which are reverse-compatible with USB 1.x. For USB 3.2, the product supports LPM (U0, U1, U2, and U3) for power efficiency. For USB 4.0, please use MZ20 for support.

Notice: To accommodate USB 3.2 Gen2 performance, Advantech strongly recommends using a certified cable.

Table 1.7: USB 3.2

Type 6	P0	P1	P2	P3
SoC	P0	P1	P2	P3
Type 6	USB_OC#01		USB_OC#23	
SoC USB_OC#	USB_OC0#		USB_OC2#	

Table 1.8: USB 2.0

Type 6	P0	P1	P2	P3	P4	P5	P6	P7
SoC	P0	P1	P2	P3	P4	P5	P6	P7
Type 6	OC_01		OC_23		OC_45		OC_67	
SoC USB_OC#	OC_0#		OC_2#				OC_3#	

1.3.8.4 SPI Bus

Supports BIOS flash only. The SPI clock can be 20 MHz, with capacity up to 128Mb.

1.3.8.5 GPIO

8 programmable general purpose inputs or outputs (GPIO).

1.3.8.6 Watchdog Timer

Supports multi-level watchdog time-out output. Provides 1-65535 levels, from 100 ms to 109.22-minute intervals.

1.3.8.7 Serial Ports

2 x 2-wire serial ports (Tx/Rx), supporting 16550 UART compliance.

- Programmable FIFO or character mode
- 16-byte FIFO buffer on transmitter and receiver in FIFO mode
- Programmable serial-interface characteristics: 5-, 6-, 7-, or 8-bit characters
- Even, odd, or no parity bit selectable
- 1, 1.5, or 2 stop bits selectable
- Baud rate up to 115.2K

1.3.8.8 TPM

Supports a TPM 2.0 module by default.

1.3.8.9 Smart Fan

There is support for 2 x Fan PWM control signals and 2 x tachometer inputs for fan speed detection. One is provided on the module with a connector and the other on the carrier board following PICMG COM Express R3.1 specifications.

1.3.8.10 BIOS

The BIOS chip is on the module by default. Users can place the BIOS chip on the carrier board with the appropriate design and jumper settings in BIOS_DIS#[1:0].


Table 1.9: BIOS

BIOS_DIS#0	BIOS_DIS#1	Bootup Destination/Function
Open	Open	Boot from Module's SPI BIOS
Open	GND	SPI_CS0# to Carrier Board, SPI_CS1# to Module
GND	GND	SPI_CS0# to Module, SPI_CS1# to Carrier Board

Note! Note: If the system CMOS is cleared, Advantech strongly suggests going to the BIOS setup menu and loading default settings on the first bootup.



The standard module has no jumper at SCN1, so BIOS settings are kept without an RTC coin battery. If you need to restore to default BIOS settings, follow the steps below:

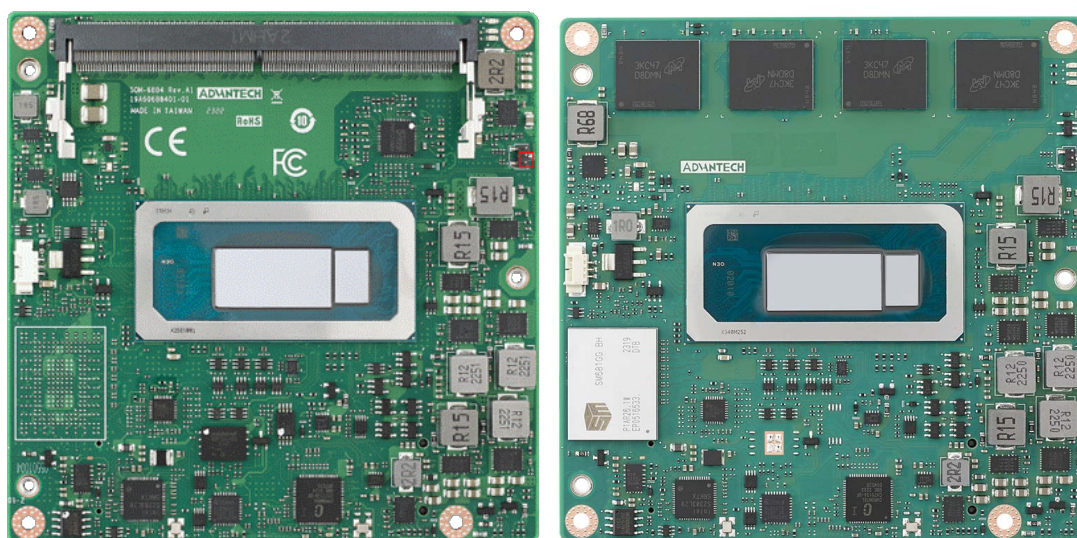

1. Remove the coin battery.
2. Put a jumper on SCN2 pins 1-2.
3. Turn on the power supply.
4. The system will boot up a few times.
5. BIOS will load the default settings successfully.

1.3.9 Power Management

1.3.9.1 Power Supply

Both ATX and AT power modes are supported. VSB is for suspended power and can be optional if not required by standby (suspend-to-RAM) support. The RTC battery may be optional if date/timekeeping is not required.

- VCC: 8.5V (9V-5%) – 20V (19V+5%)
- VSB: 5V +/- 5% (Suspend power)
- RTC Battery Power: 2.0V – 3.3V

1.3.9.2 PWROK

Power-good from the main power supply. A high value indicates the power level is good. This signal can be used to postpone module startup allowing carrier-based FPGAs or other configurable devices time to be programmed.

1.3.9.3 Power Sequence

According to PICMG COM Express COM.0 R 3.1 specifications.

1.3.9.4 Wake Event

Various wake events are supported to allow users to adapt to different scenarios.

- Wake-on-LAN (WOL): Wake to S0 from S3/S4/S5
- USB Wake: Wake to S0 from S3
- PCIe Device Wake: depends on user inquiry and may need customized BIOS
- LPC Wake: depends on user inquiry and may need customized BIOS

1.3.9.5 Advantech S5 ECO Mode (Deep Sleep Mode)

Advantech iManager provides additional features allowing the system to enter a very low suspended power mode – S5 ECO mode. In this mode, the module will cut all power, including suspended and active power to the chipset, and keep an on-module controller active. Only power under 50 mW will be consumed, meaning user battery packs can last longer. While this mode is enabled in the BIOS, the system (or module) only allows power button boot instead of other methods such as WOL.

1.3.10 Environment

1.3.10.1 Temperature

- Operating: 0 ~ 60°C (32 ~ 140°F), -40 ~ 85°C (-40 ~ 185°F) for industrial SKU
- Storage: -40 ~ 85°C (-40 ~ 185°F)

1.3.10.2 Humidity

- Operating: 40°C @ 95% relative humidity, non-condensing
- Storage: 60°C @ 95% relative humidity, non-condensing

1.3.10.3 Vibrations

IEC60068-2-64: Random vibration test under operation mode, 3.5 Grms

1.3.10.4 Drop Test (Shock)

Federal Standard 101 Method 5007 test procedure with standard packing

1.3.10.5 EMC

CE EN55022 Class B and FCC Certifications: validated with standard development boards in the Advantech chassis

1.3.11 MTBF

Please refer to the Advantech SOM-6884 Refresh Series Reliability Prediction report on the website: com.advantech.com

1.3.12 OS Support

The mission of Advantech Embedded Software Services is to "Enhance quality of life with Advantech platforms and Microsoft Windows Embedded technology". We enable Windows Embedded software products on Advantech platforms to more effectively support the embedded computing community. Customers are freed from the hassle of dealing with multiple vendors (hardware suppliers, system integrators, embedded OS distributors) for projects. Our goal is to make Windows Embedded software solutions easily and widely available to the embedded computing community.

To install drivers, please go to the website <http://support.advantech.com.tw> to download the setup file.

1.3.13 Advantech iManager

Supports APIs for GPIO, smart fan control, multi-stage watchdog timer, temperature sensor, and hardware monitoring. Follows PICMG EAPI 1.0 specifications with backward compatibility.

1.3.14 Power Consumption

Table 1.10: Power Consumption Table (Watts)						
VCC=12 V, VSB=5 V	Active Power Domain			Suspend Power Domain		Mechanical Off
Power State	S0 Max. Load	S0 Burn-In	S0 Idle	S5	S5 Deep Sleep	RTC (μA)
SOM-6884C7H-U5A1	152.18	67.29	9.69	0.71	0.14	4.43
SOM-6884C7UXA-S7A2	167.68	62.62	7.95	0.64	0.24	4.43

Hardware Configurations:

1. MB: SOM-6884C7H-U5A1 / SOM-6884C7UXA-S7A2
2. DRAM: 32GB DDR5 3200MHz x 2pcs / LPDDR5 64GB DDR5 6000MHz
3. Carrier board: SOM-DB5830-00A3

Test Conditions:

1. Test temperature: room temperature (about 25°C)
2. Test voltage: rated voltage DC +12.0 V
3. Test loading:
 - Maximum load mode: according to Intel thermal/power test tools.
 - Burn-in mode: burn-in test V8.1 Pro (1023) for 64-bit Windows. (CPU, RAM, 2D&3D Graphics and Disk with 100%)
 - Idle mode: DUT power management off and not running any programs.
4. OS: Windows 10 Enterprise

1.3.15 Performance

To compare performance or benchmark data with other modules, please refer to the “Advantech COM Performance & Power Consumption Table”.

1.3.16 Selection Guide w/ P/N

Table 1.11: Selection Guide w/ P/N (1)

Part No.	CPU	Cores (P+E)	P-Cores Freq.	E-Cores Freq.	CPU TDP	LLC	SSD	USB4	Thermal Solution	Operating Temp.
SOM-6884C7H-U5A1	Core™ i7-13800HE	14C (6+8)	2.7 GHz / 4.8 GHz	1.8 GHz / 4.0 GHz	45W	24 MB	64G	NA	Active	0~60°C
SOM-6884C5H-U7A1	Core™ i5-13600HE	12C (4+8)	2.1 GHz / 4.6 GHz	1.9 GHz / 3.6 GHz	45W	18 MB	N/A	NA	Active	0~60°C
SOM-6884C3H-U1A1	Core™ i3-13300HE	8C (4+4)	2.5 GHz / 5.0 GHz	1.5 GHz / 3.4 GHz	45W	12 MB	N/A	NA	Active	0~60°C
SOM-6884C7H-X-U5A1	Core™ i7-13800HRE	14C (6+8)	2.7 GHz / 4.8 GHz	1.8 GHz / 4.0 GHz	45W	24 MB	64G	NA	Active	-40~85°C
SOM-6884C3H-A-U1A1	Core™ i3-13300HE	8C (4+4)	2.5 GHz / 5.0 GHz	1.5 GHz / 3.4 GHz	45W	12 MB	N/A	Yes	Active	-40~85°C
SOM-6884C3P-X-S7A1	Core™ i3-1320PRE	8C (4+4)	1.4 GHz / 4.6 GHz	1.2 GHz / 3.3 GHz	28W	12MB	N/A	NA	Active	-40~85°C
SOM-6884C7U-S7A1	Core™ i7-1365UE	10C (2+8)	1.2 GHz / 4.5 GHz	1.2 GHz / 3.7 GHz	15W	12 MB	N/A	NA	Active	0~60°C
SOM-6884C5U-S4A1	Core™ i5-1345UE	10C (2+8)	1.7 GHz / 4.9 GHz	1.1GHz / 3.4 GHz	15W	12 MB	N/A	NA	Active	0~60°C
SOM-6884C3U-S2A1	Core™ i3-1315UE	6C (2+4)	1.4 GHz / 4.6 GHz	0.9 GHz / 3.3 GHz	15W	10 MB	N/A	NA	Active	0~60°C
SOM-6884C7U-X-S7A1	Core™ i7-1365URE	10C (2+8)	1.2 GHz / 4.5 GHz	1.2 GHz / 3.7 GHz	15W	12 MB	N/A	NA	Active	-40~85°C

Table 1.12: Selection Guide w/ P/N (2)

Part No.	CPU	Cores (P+E)	P-Cores Freq.	E-Cores Freq.	CPU TDP	LLC	SSD	USB4	Thermal Solution	Operating Temp.
SOM-6884C7H-XA-U5A2	Core™ i7-13800HRE	14C (6+8)	2.7 GHz / 4.8 GHz	1.8 GHz / 4.0 GHz	45W	24 MB	1TB	NA	Active	-40~85°C
SOM-6884C7U-XA-S7A2	Core™ i7-1365URE	10C (2+8)	1.2 GHz / 4.5 GHz	1.2 GHz / 3.7 GHz	1W	18 MB	1TB	NA	Active	-40~85°C
SOM-6884C7U-XB-S7A2	Core™ i7-1365URE	10C (2+8)	1.2 GHz / 4.5 GHz	1.2 GHz / 3.7 GHz	15W	12 MB	512G	NA	Active	-40~85°C
SOM-6884C7U-A-S4A2	Core™ i5-1345URE	10C (2+8)	1.7 GHz / 4.9 GHz	1.1GHz / 3.4 GHz	15W	24 MB	64G	YES	Active	0~60°C

1.3.17 Packing List

Table 1.13: Packing List		
Part No.	Description	Quantity
-	SOM-6884 COM module	1
1970005711T000	Heatspreader for SOM-6884	1

1.3.18 Development Board

Table 1.14: Development Board	
Part No.	Description
SOM-DB5830-00A3	COMe Devel. Board COMe R3.1 Type 6 pin-out (LVDS) 0 ~ 60°C
SOM-DB5830A-00A3	COMe Devel. Board COMe R3.1 Type 6 pin-out (eDP) 0 ~ 60°C

1.3.19 Optional Accessory

Table 1.15: Optional Accessories	
Part No.	Description
1970004870T001	Semi-Cooler 95 x 95 x 33 mm with 12V Fan
1970005709T001	QFCS 95 x 95 x 29.3 mm
SOM-MZ20-00A1	SOM-MZ20 USB4 Card

1.3.20 Pin Description

Advantech provides useful checklists for schematic design and layout routing. In the schematic checklist, it will specify in detail each pin's electrical properties and how to connect them for different user scenarios. In the layout checklist, it will specify the layout constraints and recommendations for trace length, impedance, and other necessary information during design.

Please contact your nearest Advantech branch office to request the design documents and further advanced support.

Chapter 2

Mechanical Information

This chapter gives mechanical information for the SOM-6884 CPU Computer on Module.

Sections include:

- Board Information
- Mechanical Diagrams
- Assembly Diagram

2.1 Board Information

The figures below indicate the main chips on the SOM-6884 Computer-on-Module. Please be aware of these positions. Customers can design their own carrier boards to avoid mechanical issues and choose thermal solutions with suitable heat dissipation performance.


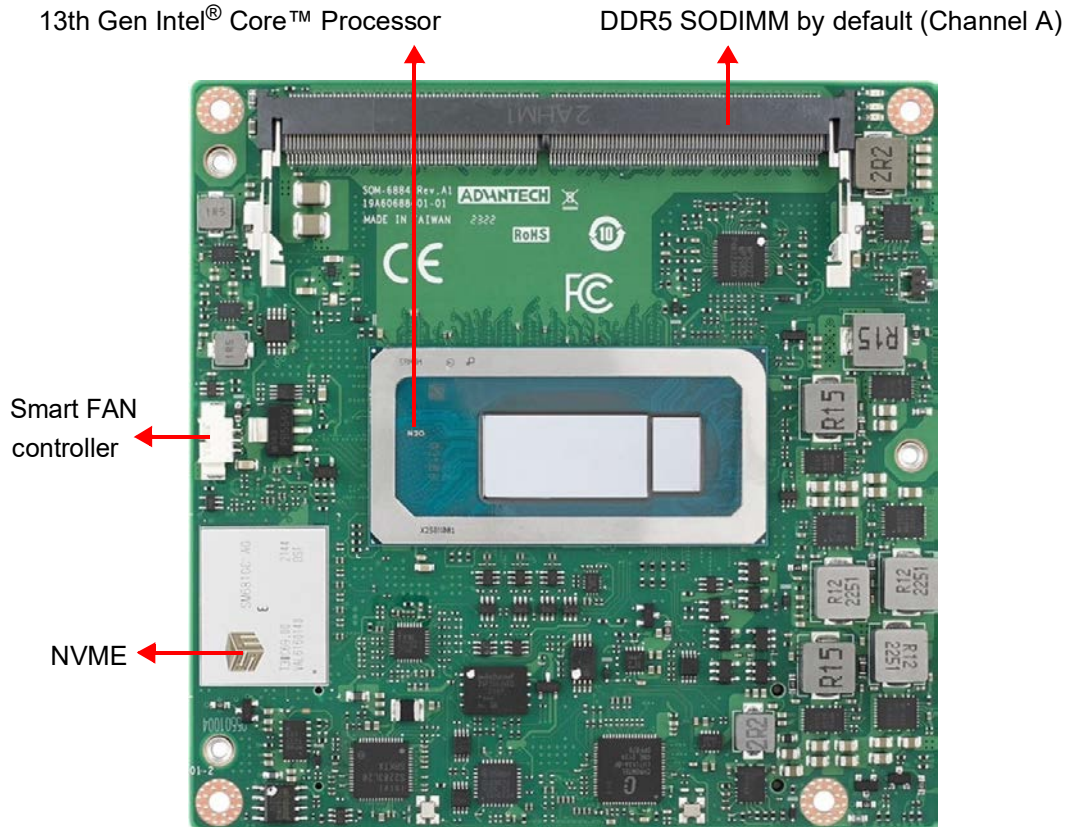


Figure 2.1 A1 Version Board Chips ID – Front

DDR5 SODIMM by default (Channel B)

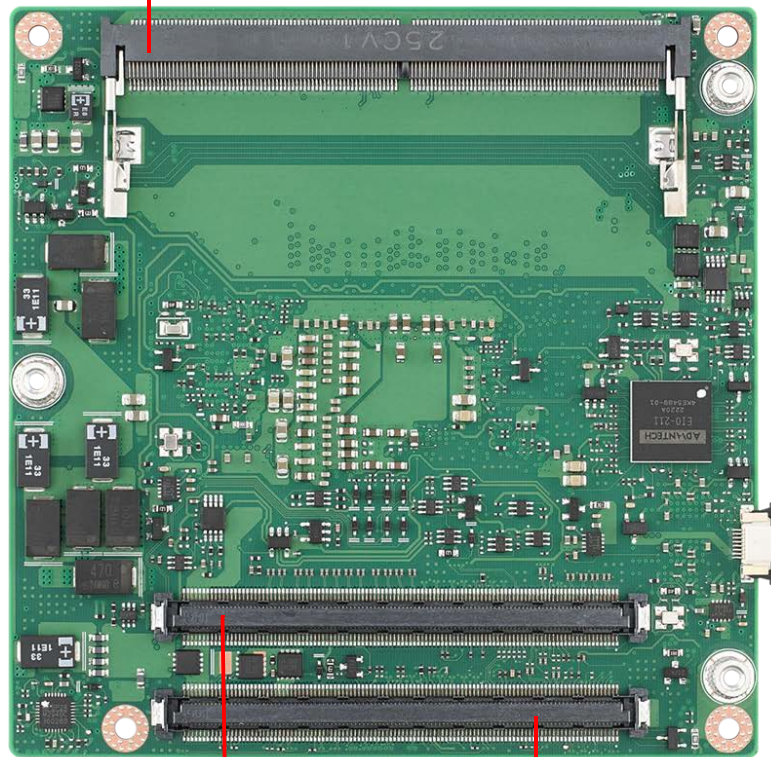

Com Express connector (C-D)

Com Express connector (A-B)

Figure 2.2 A1 Version Board Chips ID – Rear


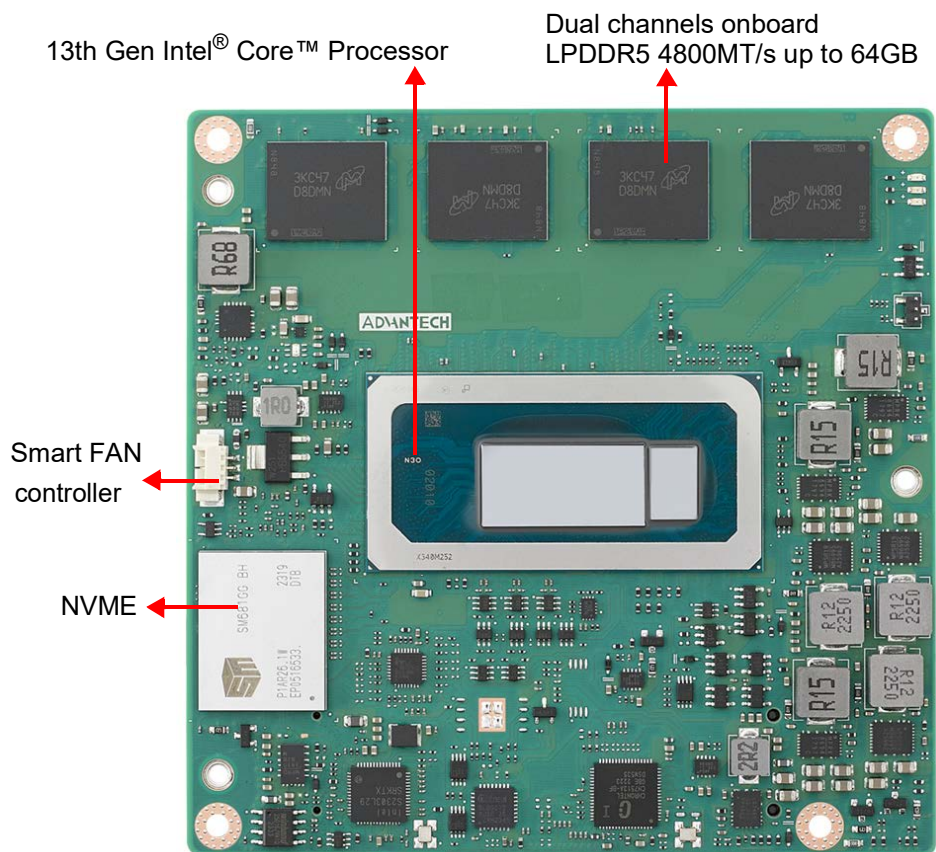


Figure 2.3 A2 Version Board Chips ID – Front

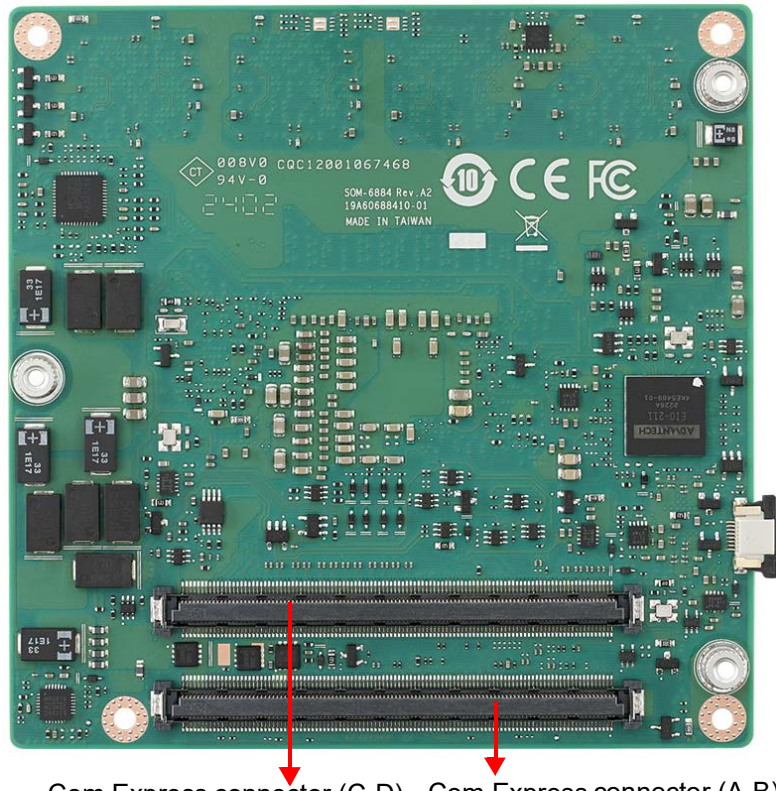

Com Express connector (C-D) Com Express connector (A-B)

Figure 2.4 A2 Version Board Chips ID – Rear

2.2 Mechanical Diagrams

For more details and 2D/3D models, please consult the Advantech COM support service website at <http://com.advantech.com>.

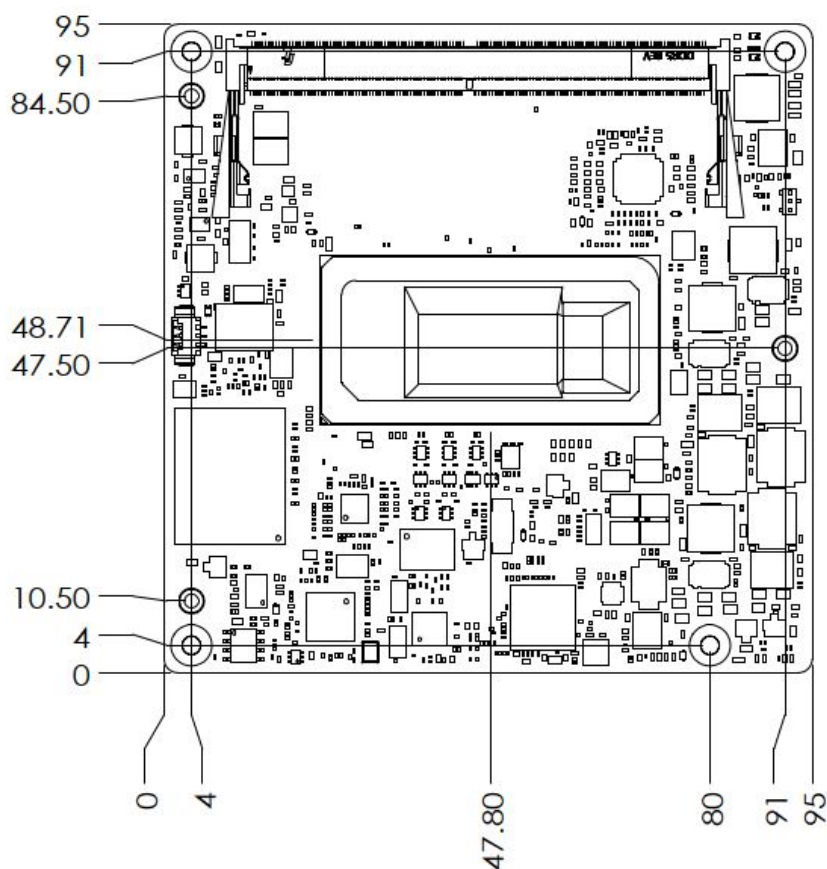


Figure 2.5 A1 Version Board Mechanical Diagram - Front

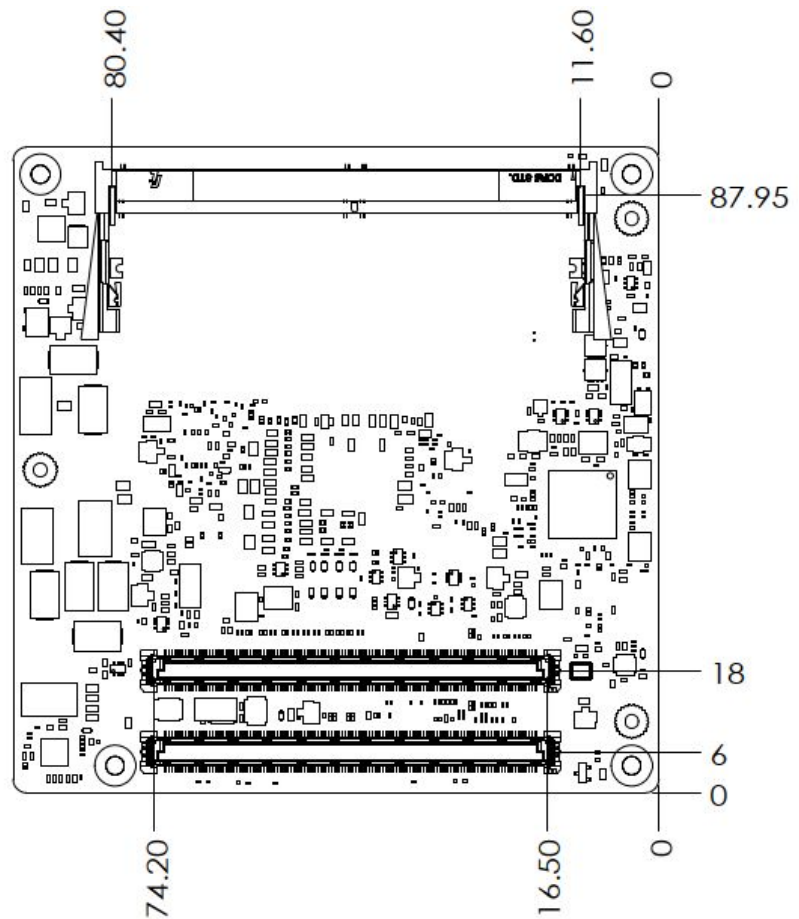


Figure 2.6 A1 Version Board Mechanical Diagram – Rear

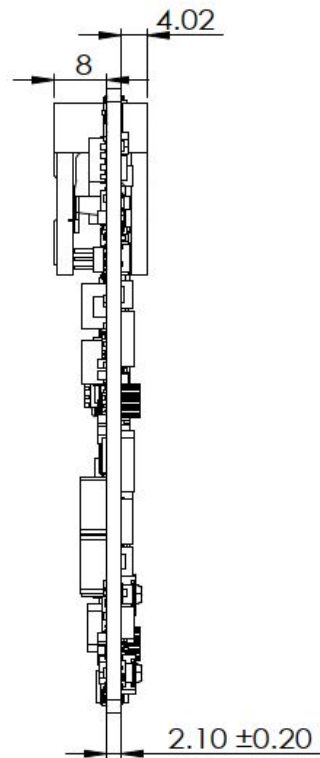
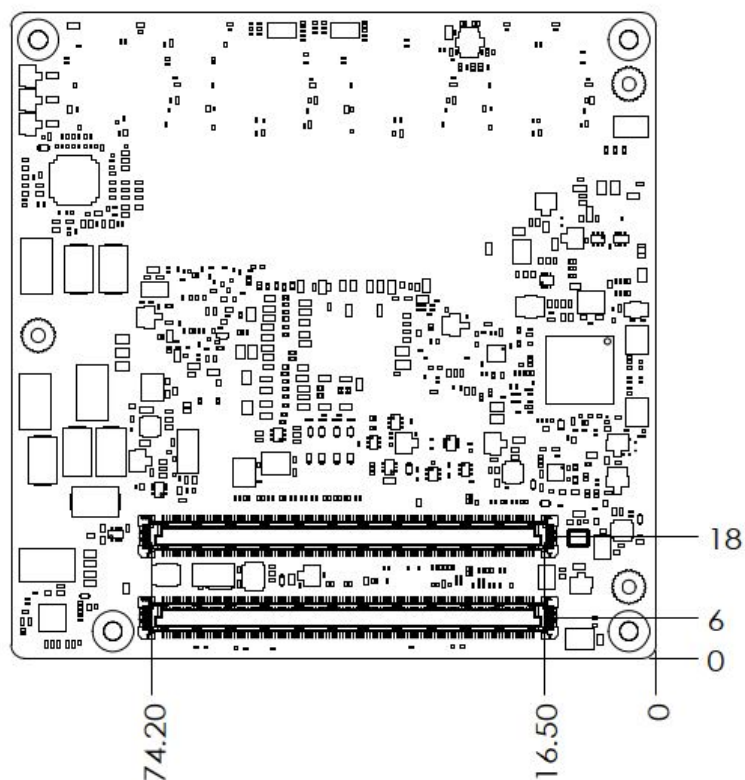
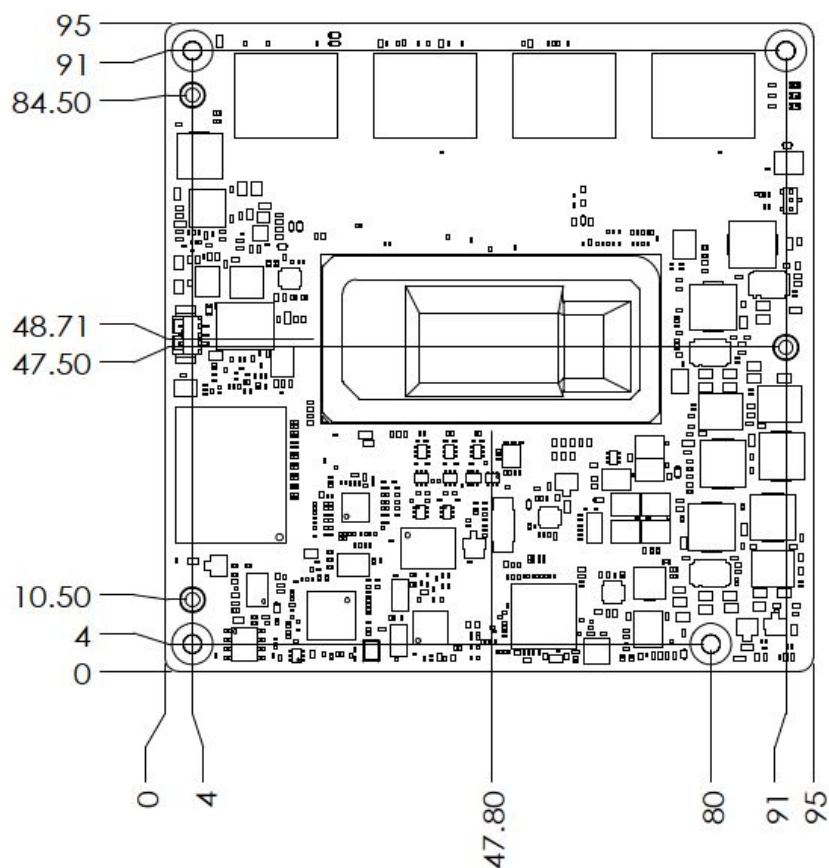


Figure 2.7 A1 Version Board Mechanical Diagram – Side1



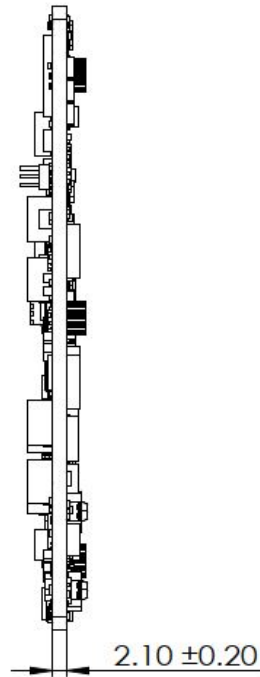


Figure 2.10 A2 Version Board Mechanical Diagram – Side1

2.3 Assembly Diagram

These figures demonstrate the order of assembly for attaching the thermal module and COM module to the carrier board.

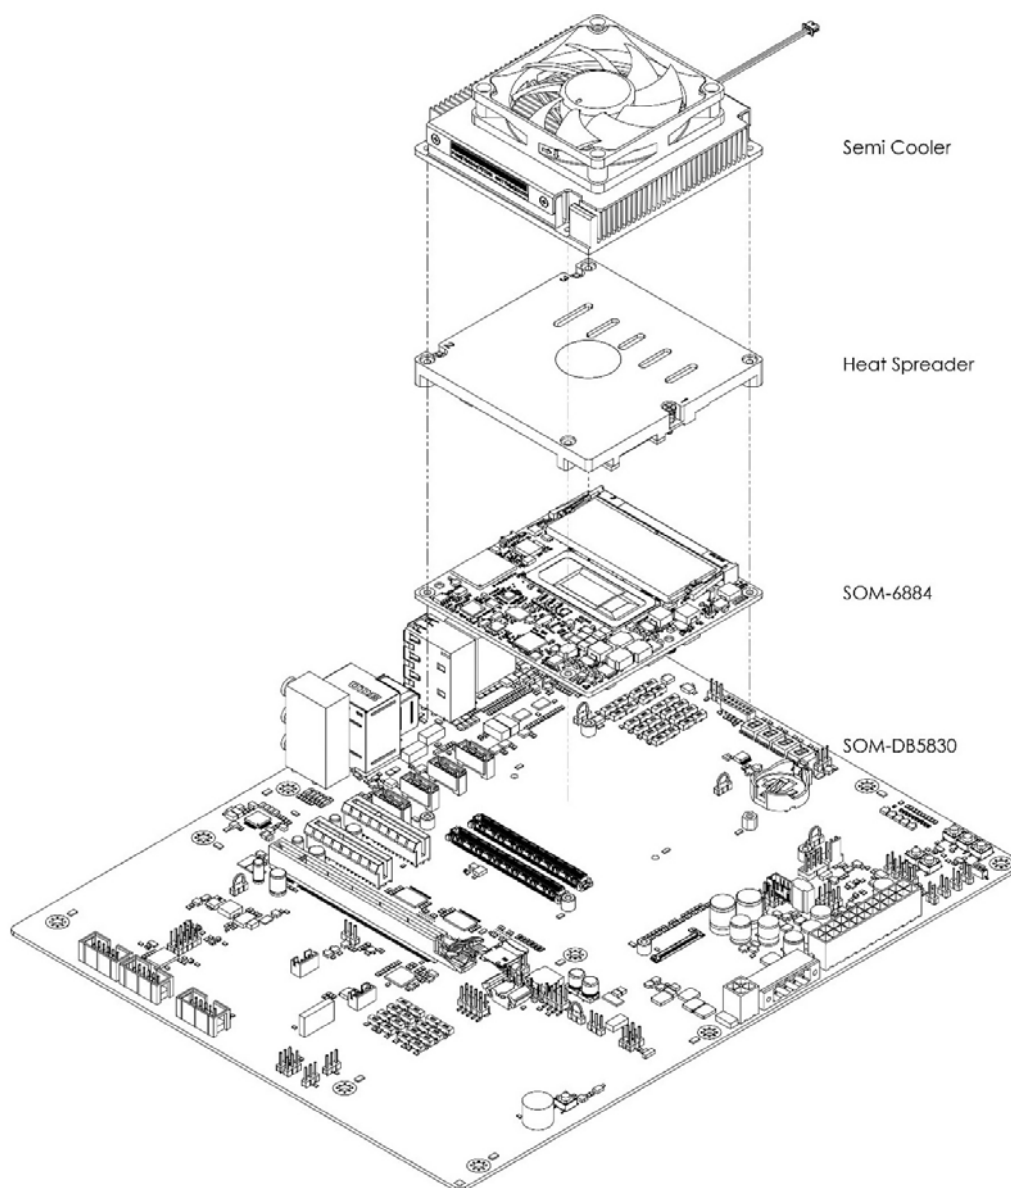


Figure 2.11 A1 Version Assembly Diagram

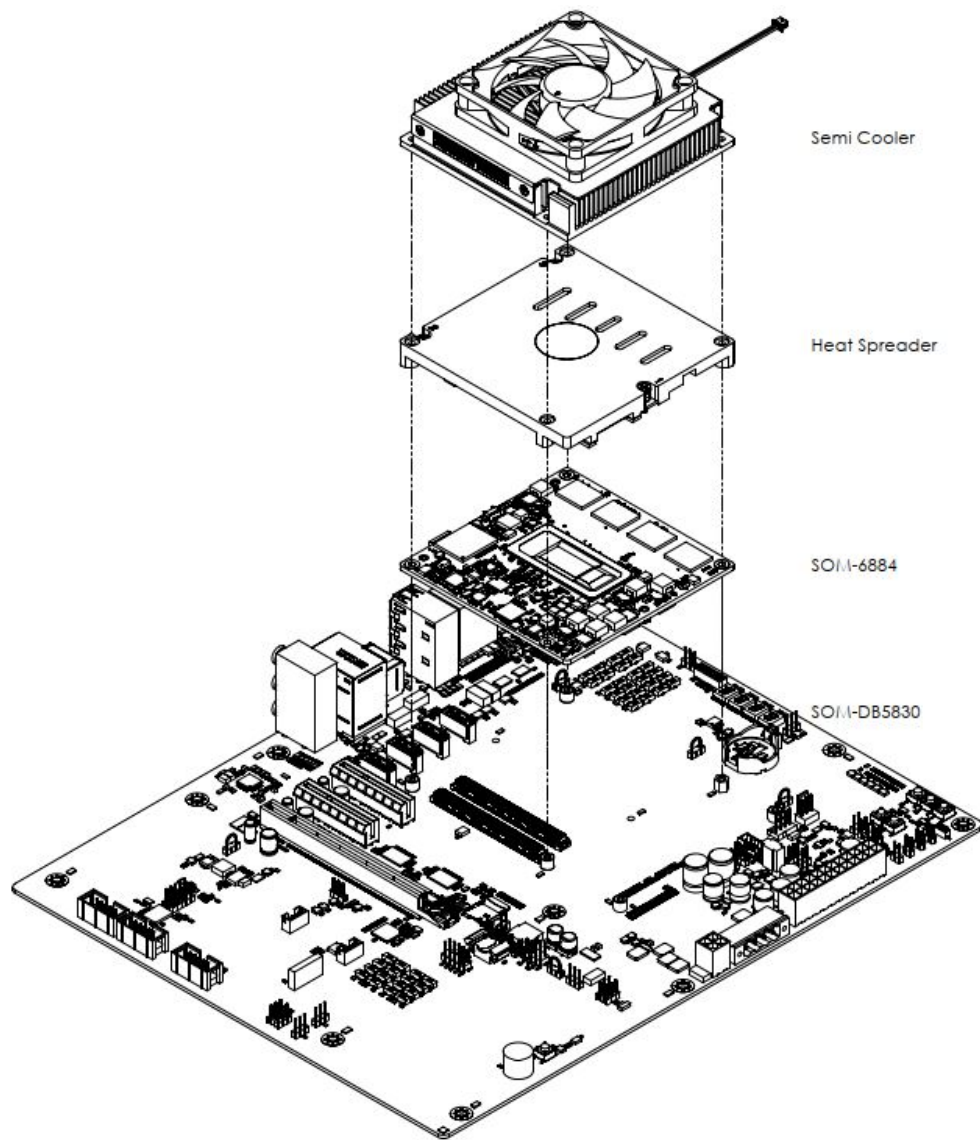


Figure 2.12 A2 Version Assembly Diagram

There are 5 reserved screw holes for SOM-6884 to be pre-assembled with the heat spreader.

2.4 Assembly Diagram

Please consider the CPU and chip height tolerance when designing your thermal solution.

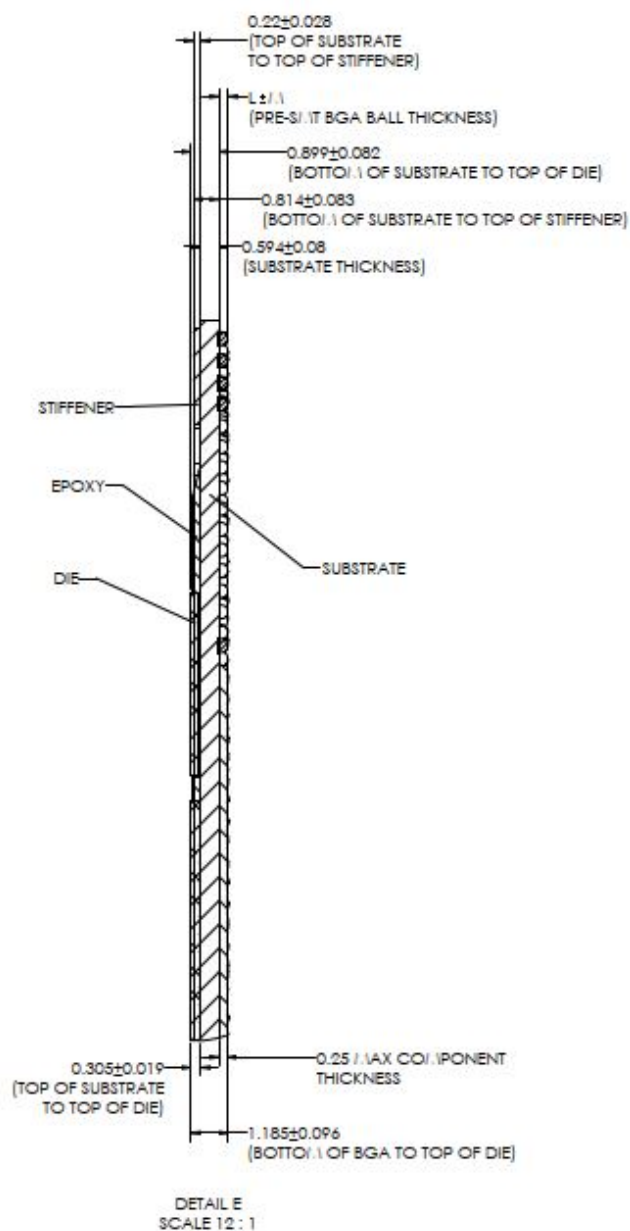


Figure 2.13 CPU Height and Tolerance

Chapter 3

BIOS

This chapter gives BIOS setup information for the SOM-6884 Computer on Module.

Sections include:

- Introduction
- Entering Setup
- Hot/Operation Keys
- Exit BIOS Setup Utility

3.1 Introduction

AMI BIOS has been integrated into many motherboards for over a decade. With the AMI BIOS Setup Utility, users can modify BIOS settings and control various system features. This chapter describes the basic navigation of the BIOS Setup Utility.



Figure 3.1 A1 Version Setup Program Initial Screen



Figure 3.2 A2 Version Setup Program Initial Screen

AMI BIOS ROM has a built-in setup program that allows users to modify the basic system configuration. This information is stored in flash ROM to retain the setup information when the power is turned off.

3.2 Entering Setup

Turn on the computer and then press or <ESC> to enter the Setup menu.

3.3 Main Setup

When users first enter the BIOS Setup Utility, users will enter the Main setup screen. Users can always return to the Main setup screen by selecting the Main tab. There are two Main Setup options. They are described in this section. The Main BIOS Setup screen is shown below.

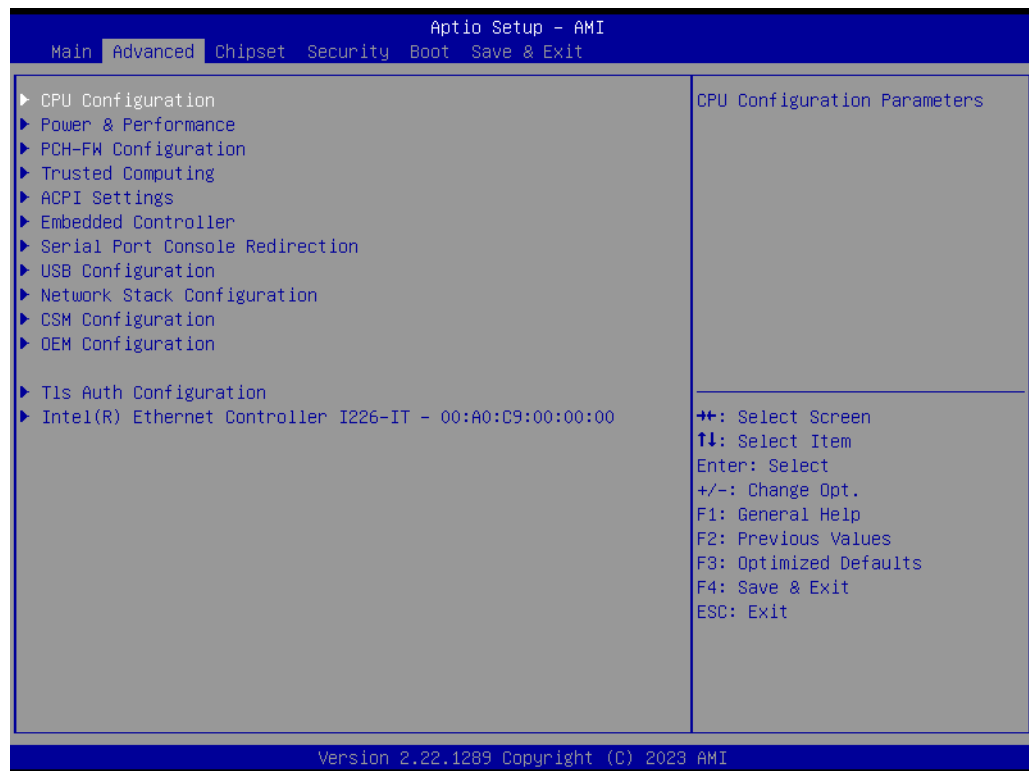


Figure 3.3 Main Setup Screen

The Main BIOS setup screen has two main frames. The left frame displays all the options that can be configured. Grayed-out options cannot be configured; options in blue can. The right frame displays the key legend.

Above the key legend is an area reserved for a text message. When an option is selected in the left frame, it is highlighted in white. Often a text message will accompany it.

System Time / System Date

Use this option to change the system time and date. Highlight System Time or System Date using the <Arrow> keys. Enter new values through the keyboard. Press the <Tab> key or the <Arrow> keys to move between fields. The date must be entered in MM/DD/YY format. The time must be entered in HH:MM:SS format.

3.4 Advanced BIOS Features Setup

Select the Advanced tab from the SOM-6884 Setup screen to enter the Advanced BIOS Setup screen. Users can select any item in the left frame of the screen, such as CPU Configuration, to go to the sub-menu for that item. Users can display an Advanced BIOS Setup option by highlighting it using the <Arrow> keys. All Advanced BIOS Setup options are described in this section. The Advanced BIOS Setup screens are shown below. The sub-menus are described on the following pages.

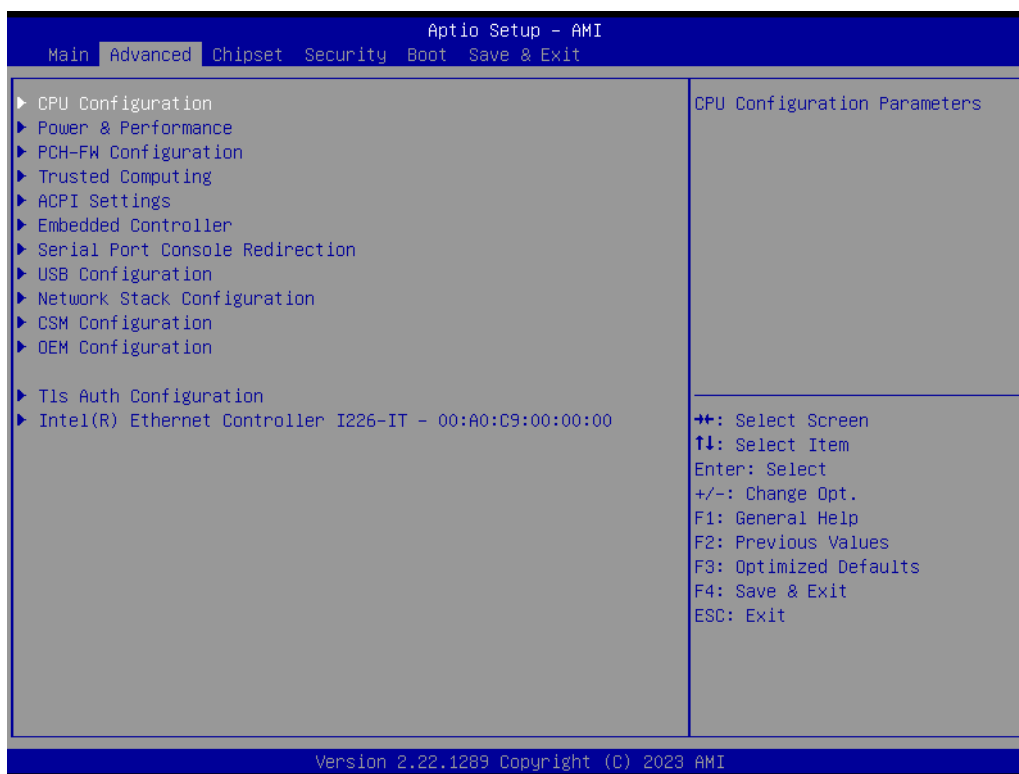


Figure 3.4 Advanced BIOS Features Setup Screen

- **CPU Configuration**
CPU Configuration Parameters
- **Power & Performance**
Power & Performance Options
- **PCH-FW Configuration**
Configure Management Engine Technology Parameters
- **Trusted Computing**
Trusted Computing Settings
- **ACPI Settings**
ACPI Sleep State
- **Embedded Controller**
Embedded Controller Parameters
- **Serial Port Console Redirection**
Console Redirection Settings
- **USB Configuration**
USB Configuration Parameters
- **Network Stack Configuration**
Network Stack Settings

- **CSM Configuration**
Enable/Disable, Option ROM execution settings, etc.
- **OEM Configuration**
Advanced settings
- **Tls Auth Configuration**
Press <Enter> to select Tls Auth Configuration.
- **Intel® Ethernet Controller I226-IT -00:A0:C9:00:00:00**
Configuration of Gigabit Ethernet device parameters.

3.4.1 CPU Configuration

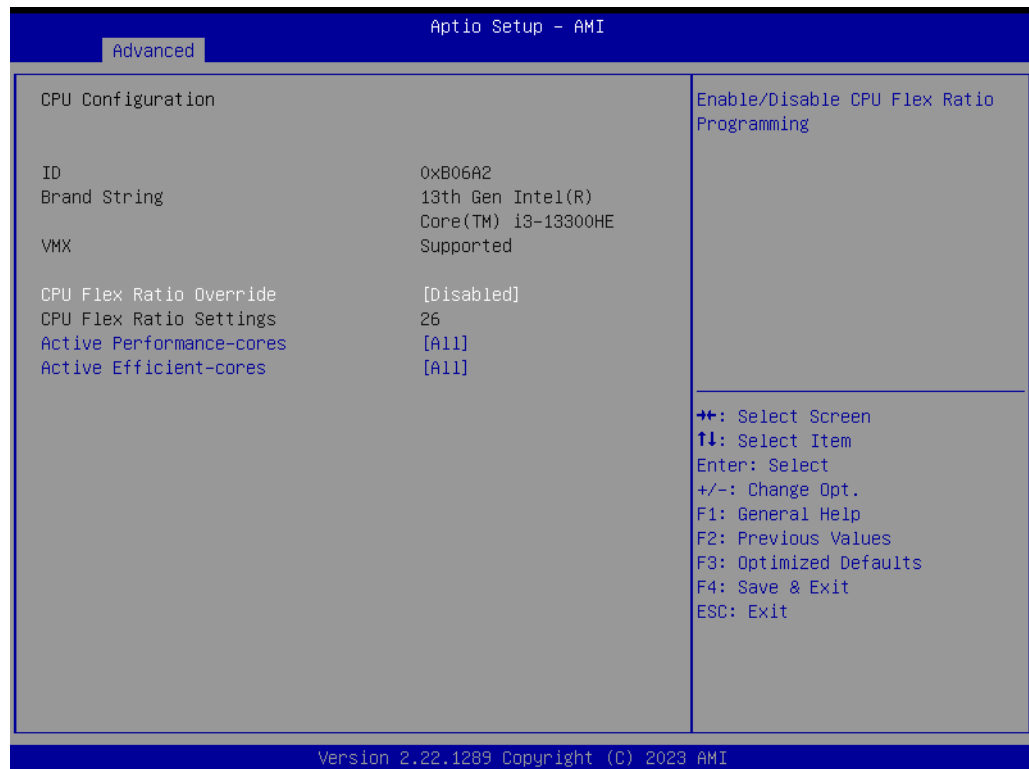


Figure 3.5 CPU Configuration

- **CPU Flex Ratio Override**
Enable/Disable CPU Flex Ratio Programming.
- **Active Performance-Cores**
Number of P-cores to enable in each processor package. Note: The number of Cores and E-cores are taken together. When both are {0,0}, P-code will enable all cores.
- **Active Efficient-Cores**
The number of E-cores to enable in each processor package. Note: the number of Cores and E-cores are taken together. When both are {0,0}, P-code will enable all cores.

3.4.2 Power & Performance



Figure 3.6 Power & Performance

- **CPU - Power Management Control**
CPU - Power Management Control Options
- **GT - Power Management Control**
GT - Power Management Control Options

3.4.2.1 CPU - Power Management Control

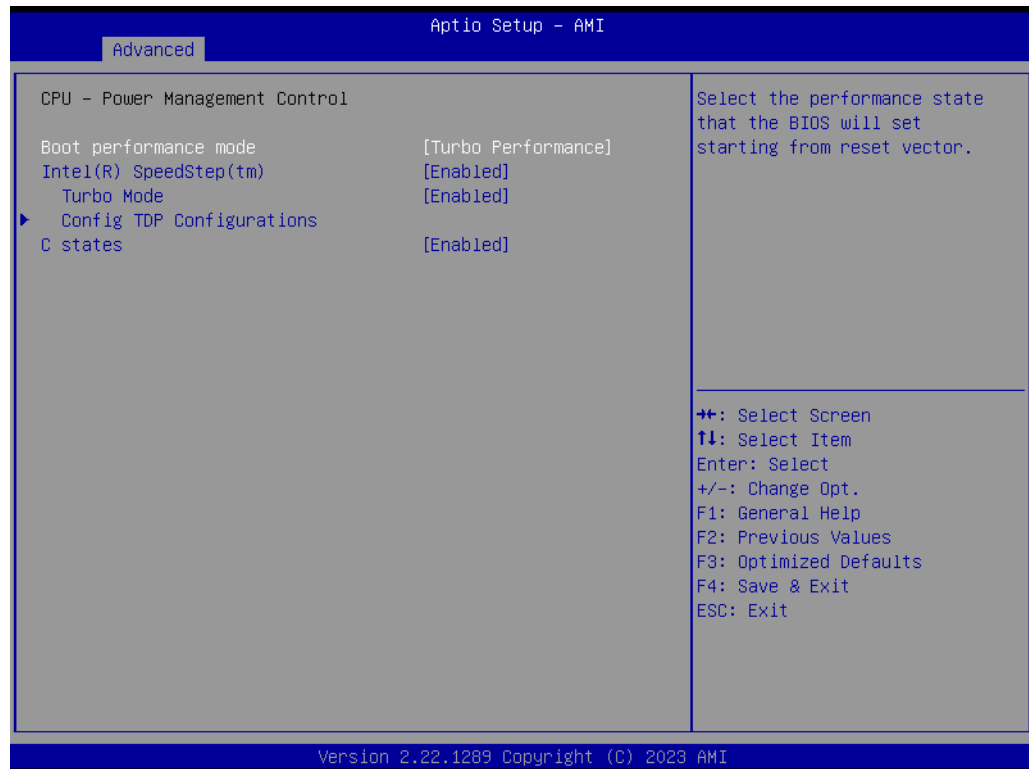


Figure 3.7 Power & Performance

- **Boot Performance Mode**
Select the performance state that the BIOS will set starting from the reset vector.
- **Intel® SpeedStep™**
Allows more than two frequency ranges to be supported.
- **Turbo Mode**
Enable/Disable processor Turbo Mode (requires EMTTM enabled). AUTO means enabled.
- **Config TDP Configurations**
TDP Configurations.
- **C States**
Enable/Disable CPU Power Management. Allows CPU to go to C states when it's not 100% utilized.

3.4.2.2 Config TDP Configurations

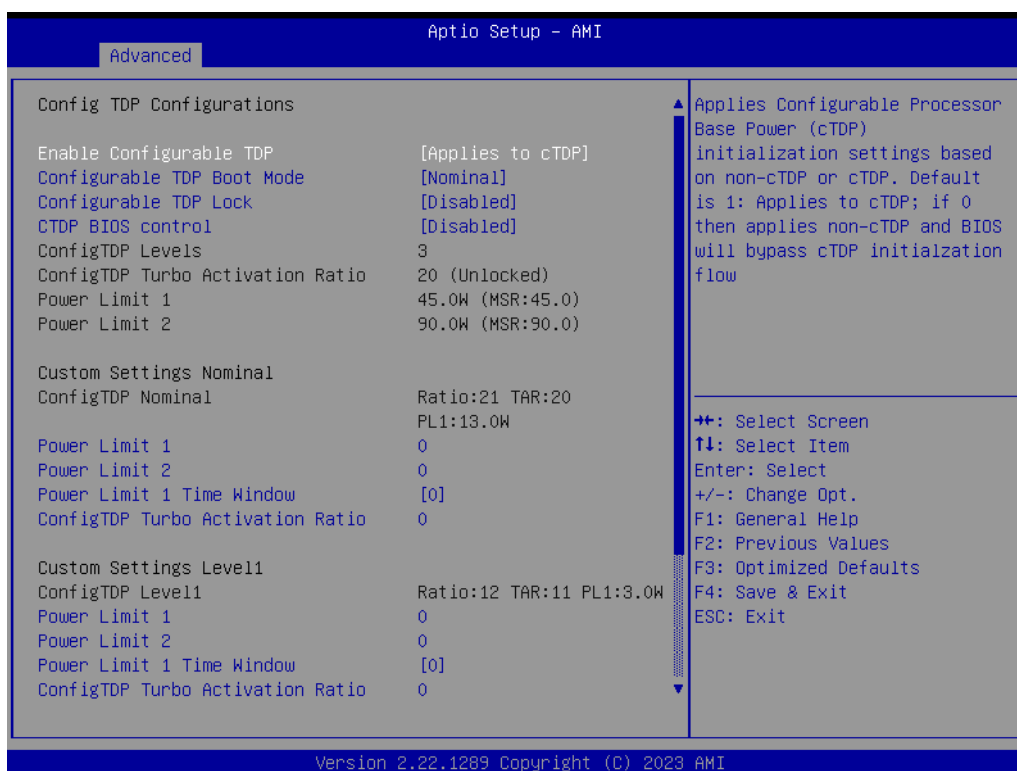


Figure 3.8 Config TDP Configurations

- **Enable Configurable TDP**
Applies configurable Processor Base Power (cTDP) initialization settings based on non-cTDP or cTDP. If the default is 1: It applies to cTDP; if 0, then non-cTDP and BIOS will bypass cTDP initialization flow.
- **Configurable TDP Boot Mode**
Configurable TDP Mode as Nominal/Up/Down/Deactivate TDP selection. The Deactivate option will set MSR to Nominal and MMIO to Zero.
- **Configurable TDP Lock**
Configurable Processor Base Power (cTDP) Mode Lock sets the Lock bits on TURBO_ACTIVATION_RATIO and CONFIG_TDP_CONTROL. Note: When CTDP Lock is enabled, Custom ConfigTDP Count will be forced to 1 and Custom ConfigTDP Boot Index will be forced to 0.
- **CTDP BIOS Control**
Enables Configurable Processor Base Power (cTDP) control via runtime ACPI BIOS methods. This “BIOS only” feature does not require EC or driver support.
- **Power Limit 1**
Power Limit 1 in milliwatts. BIOS will round to the nearest 1/8W when programming. 0 = no custom override. For 12.50W, enter 12500. Overclocking SKU: Value must be between Max and Min Power Limits (specified by PACKAGE_POWER_SKU_MSR). Other SKUs: This value must be between Min Power Limit and Processor Base Power (TDP) Limit.
- **Power Limit 2**
Power Limit 2 value in milliwatts. BIOS will round to the nearest 1/8W when programming. 0 = no custom override. For 12.50W, enter 12500. Processor applies control polices such that the package power does not exceed this limit.

- **Power Limit 1 Time Window**

Power Limit 1 Time Window value in seconds. The value may vary from 0 to 128. 0 = default value (28 sec for Mobile and 8 sec for Desktop). It defines the time window for which the Processor Base Power (TDP) value should be maintained.

- **ConfigTDP Turbo Activation Ratio**

Custom value for Turbo Activation Ratio. It needs to be configured with valid values from LFM to Max Turbo. 0 means to not use a custom value.

3.4.2.3 GT - Power Management Control

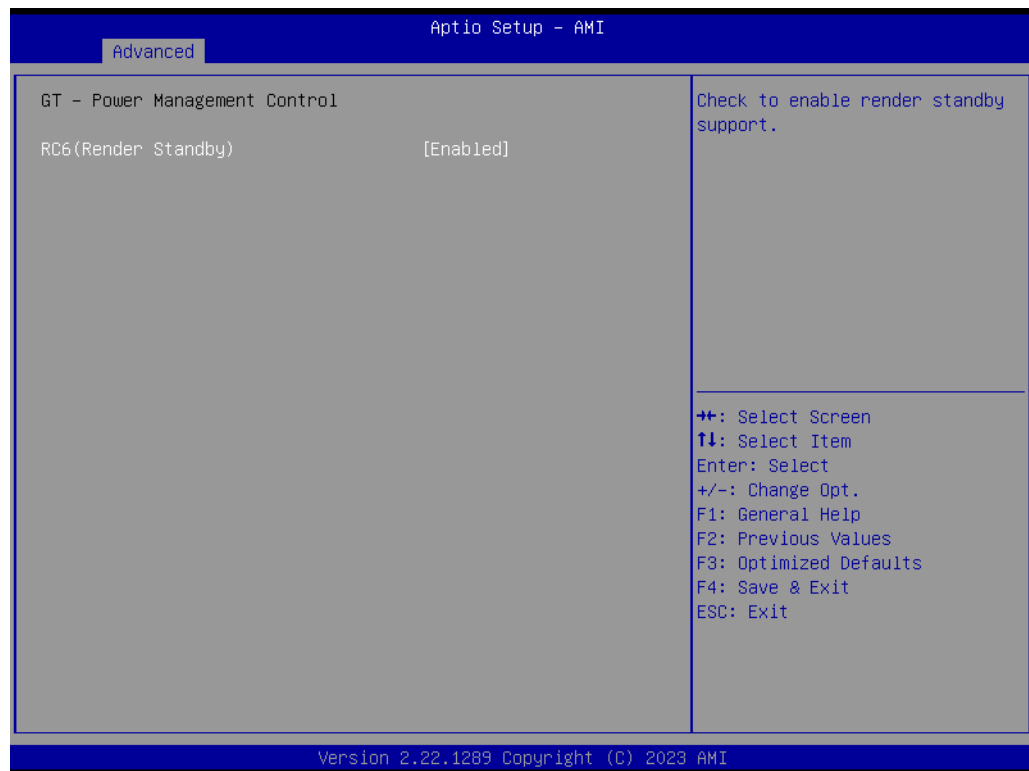


Figure 3.9 GT - Power Management Control

- **RC6(Render Standby)**

Check to enable render standby support.

3.4.3 PCH-FW Configuration

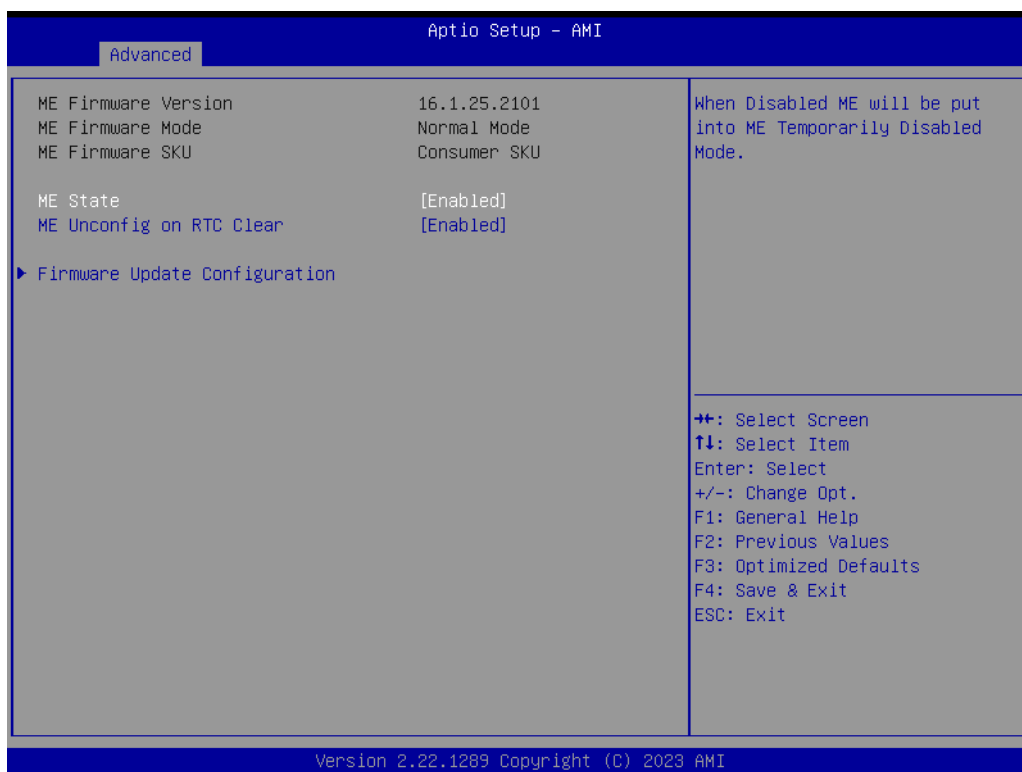


Figure 3.10 ME FW Configuration

- **ME State**
When Disabled, ME will be put into ME Temporarily Disabled Mode.
- **ME Unconfig on RTC Clear**
When Disabled, ME will not be unconfigured on RTC clear.
- **Firmware Update Configuration**
Configure Management Engine Technology Parameters.

3.4.3.1 Firmware Update Configuration

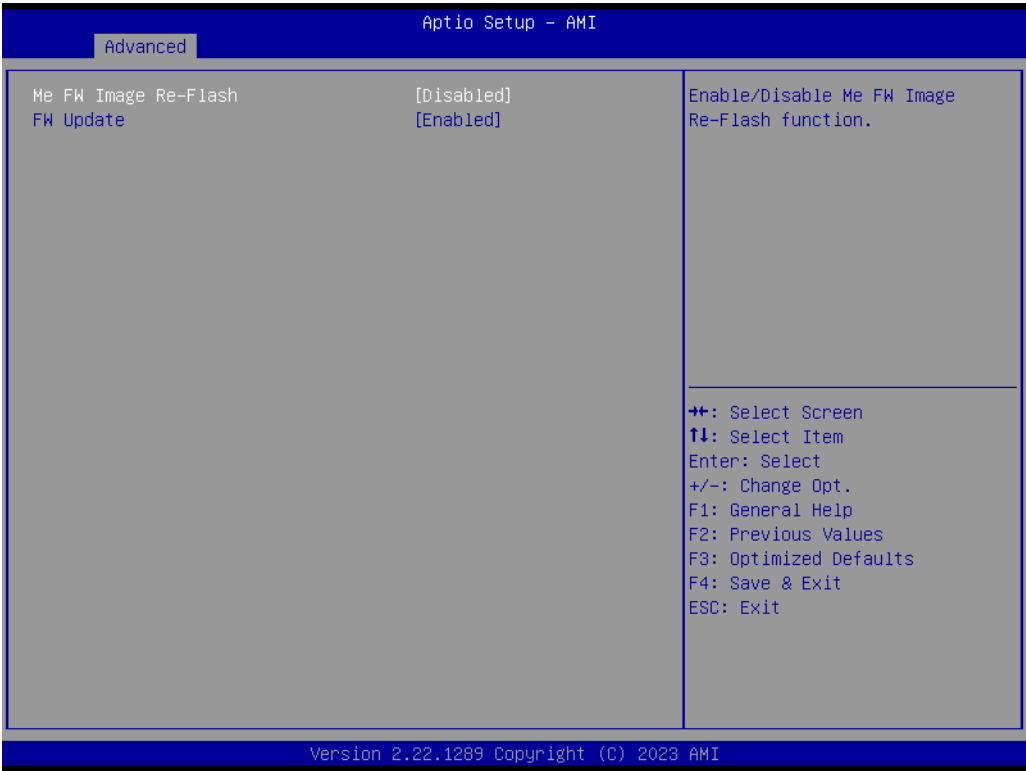


Figure 3.11 FW Update Configuration

- **ME FW Image Re-Flash**
Enable/Disable the ME FW Image Re-Flash Function.
- **FW Update**
Enable/Disable the ME FW update function.

3.4.4 Trusted Computing



Figure 3.12 Trusted Computing

- **SHA256 PCR Bank**
Enable or Disable SHA256 PCR Bank.
- **Pending Operation**
Pending operation.
- **Platform Hierarchy**
Enable or Disable Platform Hierarchy.
- **Storage Hierarchy**
Enable or Disable Storage Hierarchy.
- **Endorsement Hierarchy**
Enable or Disable Endorsement Hierarchy.
- **Physical Presence Spec Version**
Select to Tell the OS to support PPI Spec Version 1.2 or 1.3. Note some HCK tests might not support 1.3.
- **Device Select**
TPM 1.2 will restrict support to TPM 1.2 devices. TPM 2.0 will restrict support to TPM 2.0 devices. Auto will support both with the default set to TPM 2.0 devices if not found. TPM 1.2 devices will be enumerated.
- **Disable Block Sid**
Override to allow SID authentication in TCG Storage device.

3.4.5 ACPI Settings

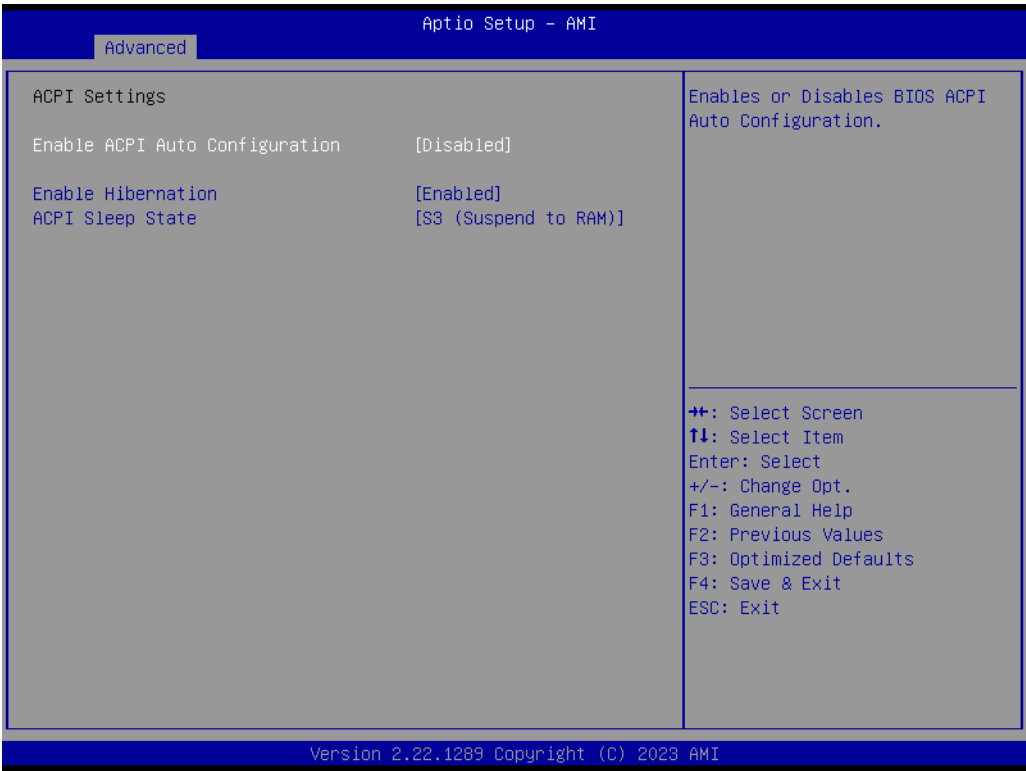


Figure 3.13 ACPI Settings

- **Enable ACPI Auto Configuration**
Enables or Disables BIOS ACPI Auto Configuration.
- **Enable Hibernation**
Enables or Disables the system’s ability to hibernate (OS/S4 Sleep State). This option may not be effective with some OS.
- **ACPI Sleep State**
Select the highest ACPI sleep state the system will enter when the SUSPEND button is pressed.

3.4.6 Embedded Controller

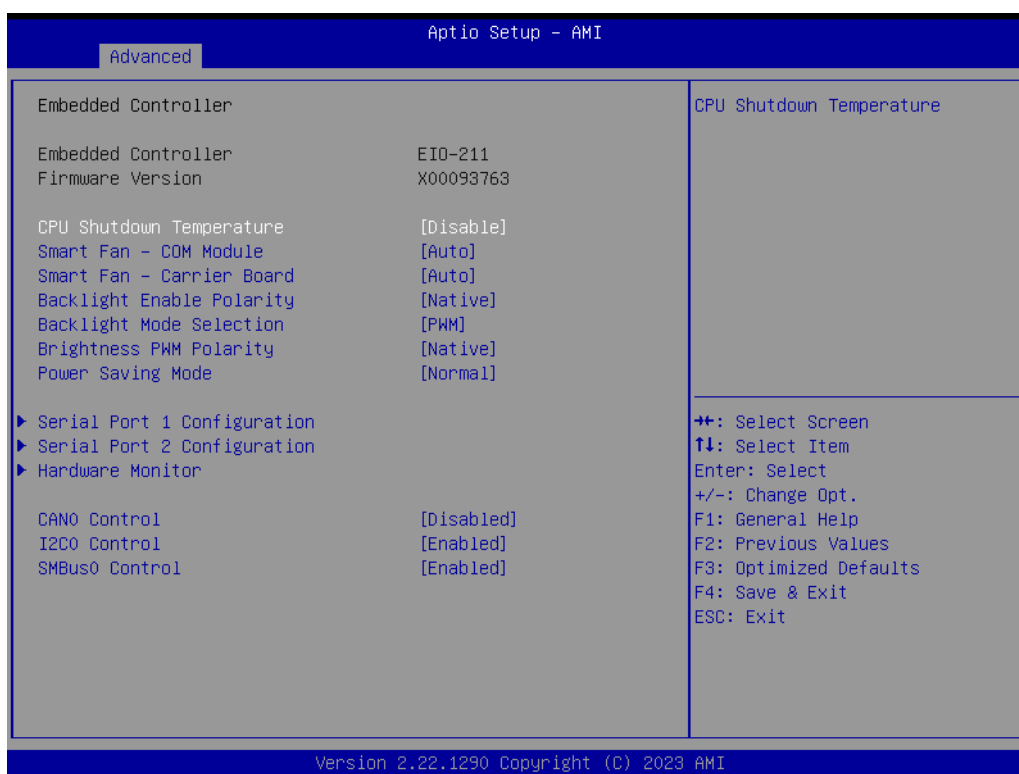


Figure 3.14 Embedded Controller

- **CPU Shutdown Temperature**
CPU Shutdown Temperature
- **Smart Fan - COM Module**
Control the COM Module Smart FAN function.
- **Smart Fan - Carrier Board**
Control the Carrier Board Smart FAN function. Get the value from EC and only set the value when saving changes.
- **Backlight Enable Polarity**
Switch Backlight Enable Polarity to Native or Invert.
- **Backlight Mode Selection**
Switch Backlight Control to PWM or DC mode.
- **Brightness PWM Polarity**
Backlight Control Brightness PWM Polarity for Native or Invert.
- **Power Saving Mode**
Select Power Saving Mode.
- **Serial Port 1 Configuration**
Set Parameters of Serial Port 1 (COMA).
- **Serial Port 2 Configuration**
Set Parameters of Serial Port 2 (COMB).
- **Hardware Monitor**
Monitor hardware status.
- **CAN0 Control**
Enable/Disable CAN0 controller on RDC-IS200.

- **I2C0 Control**
Enable/Disable I2C0 controller on RDC-IS200.
- **SMBus0 Control**
Enable/Disable SMBus0 controller on RDC-IS200.

3.4.6.1 Serial Port 1 Configuration

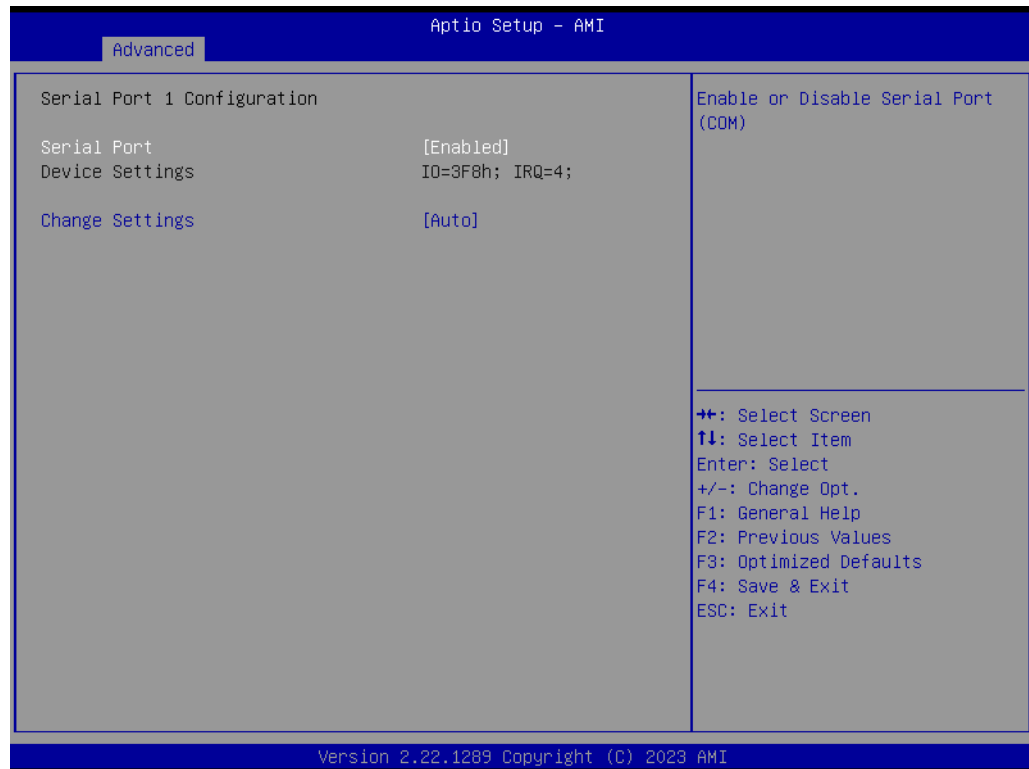


Figure 3.15 Serial Port 1 Configuration

- **Serial Port**
Enable or Disable Serial Port (COM).
- **Change Settings**
Select an optimal setting for a Super IO Device.

3.4.7 Serial Port Console Redirection

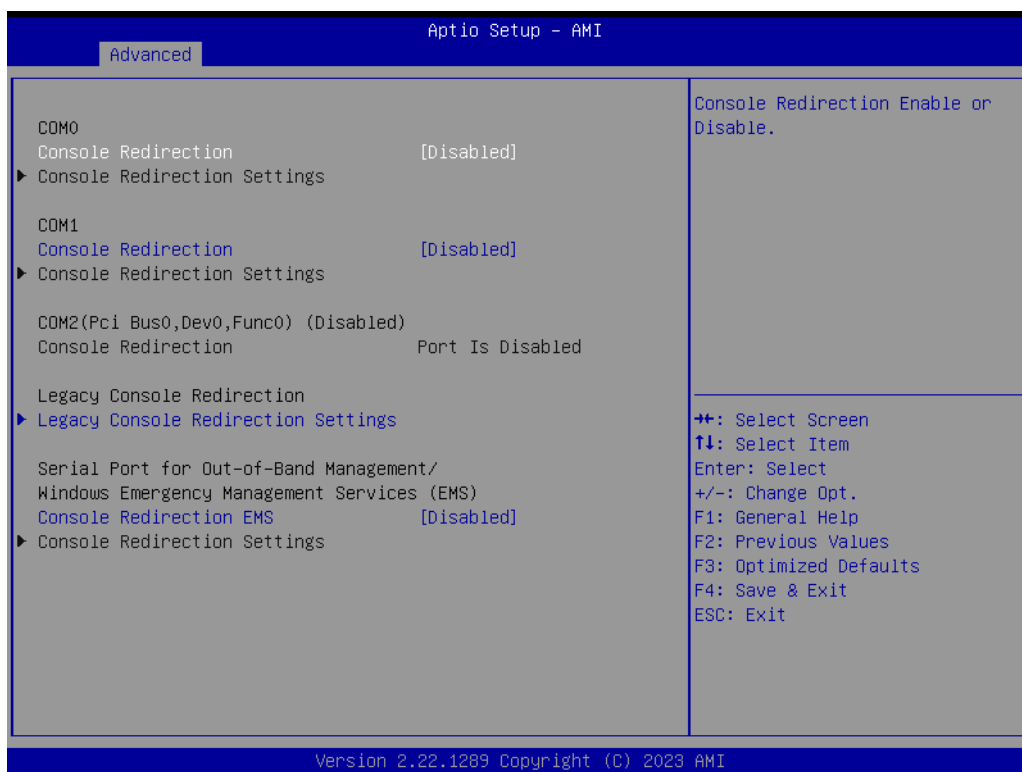


Figure 3.16 Serial Port Console Redirection

- **Console Redirection**
Console Redirection Enable or Disable.
- **Legacy Console Redirection**
Legacy Console Redirection Settings.
- **Console Redirection EMS**
Console Redirection Enable or Disable.

3.4.7.1 Legacy Console Redirection Settings

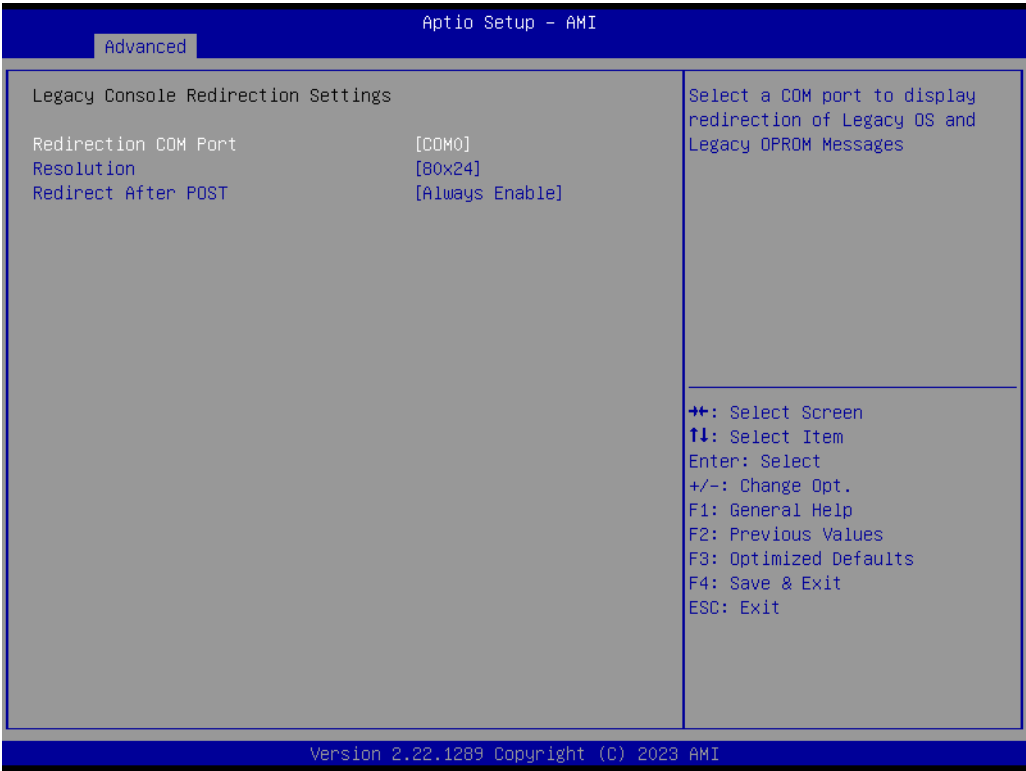


Figure 3.17 Legacy Console Redirection Settings

- **Redirection COM Port**
Select a COM port to display redirection of Legacy OS and Legacy OPROM Messages.
- **Resolution**
On Legacy OS, the Number of Rows and Columns supported for redirection.
- **Redirect After POST**
When Bootloader is selected, then Legacy Console Redirection is disabled before booting to the legacy OS. When Always Enable is selected, then Legacy Console Redirection is enabled for the legacy OS. Default setting for this option is set to Always Enable.

3.4.8 USB Configuration

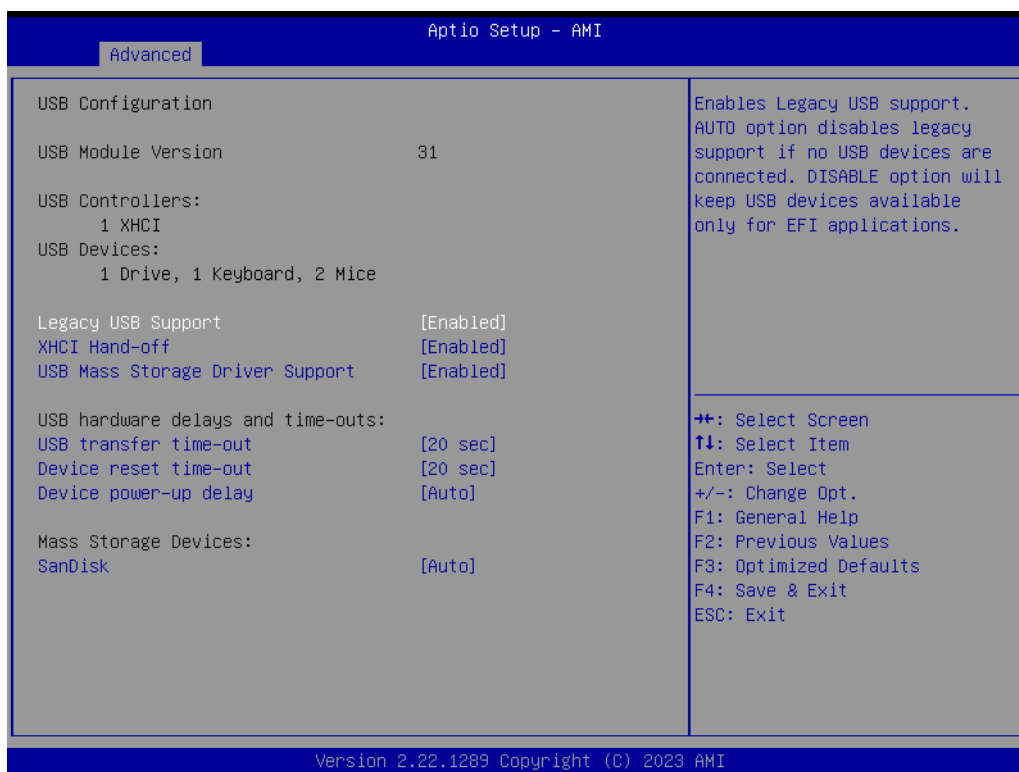


Figure 3.18 USB Configuration

- **Legacy USB Support**
Enables Legacy USB support. The AUTO option disables legacy support if no USB devices are connected. The DISABLE option will keep USB devices available only for EFI applications.
- **XHCI Hand-off**
This is a workaround for OS without XHCI hand-off support. The XHCI ownership change should be claimed by the XHCI driver.
- **USB Mass Storage Driver Support**
Enable/Disable USB Mass Storage Driver Support.
- **USB Transfer Time-out**
The time-out value for Control, Bulk, and Interrupt transfers.
- **Device Reset Time-out**
USB mass storage device Start Unit command time-out.
- **Device Power-up Delay**
Maximum time the device will take before it properly reports itself to the Host Controller. 'Auto' uses the default value: for a Root port it is 100 ms, for a Hub port the delay is taken from the Hub descriptor.

3.4.9 Network Stack Configuration

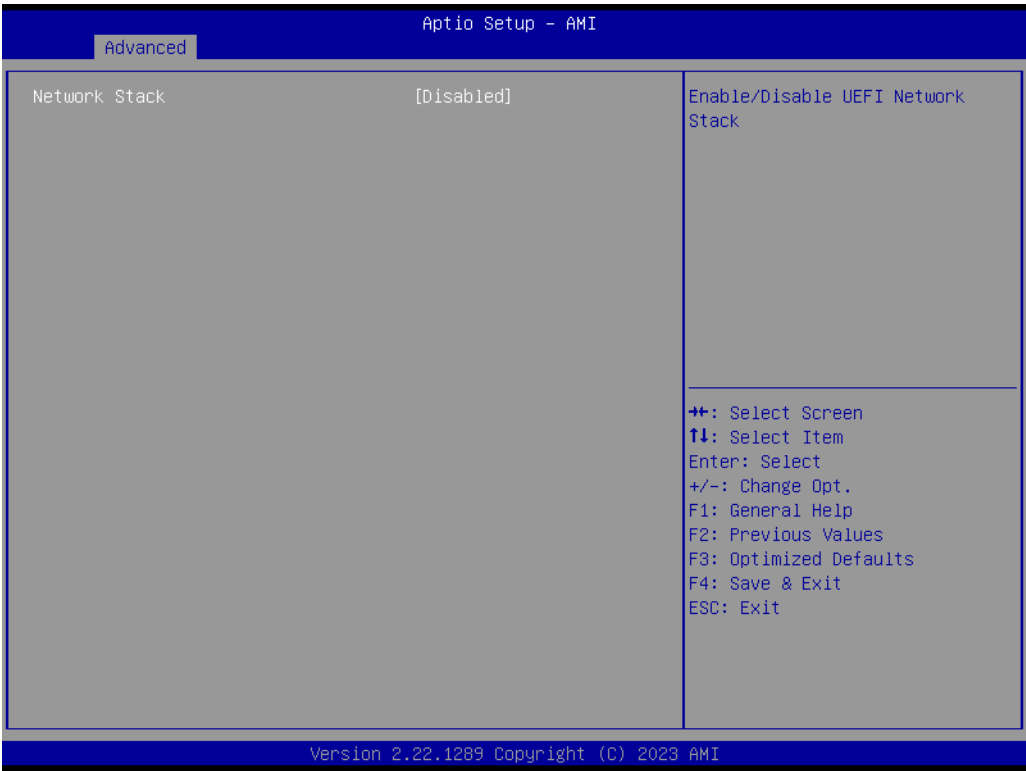


Figure 3.19 Network Stack Configuration

- **Network Stack**
Enable/Disable UEFI Network Stack.

3.4.10 CSM Configuration



Figure 3.20 CSM Configuration

- **CSM Support**
Enable/Disable CSM support.

3.4.11 OEM Configuration

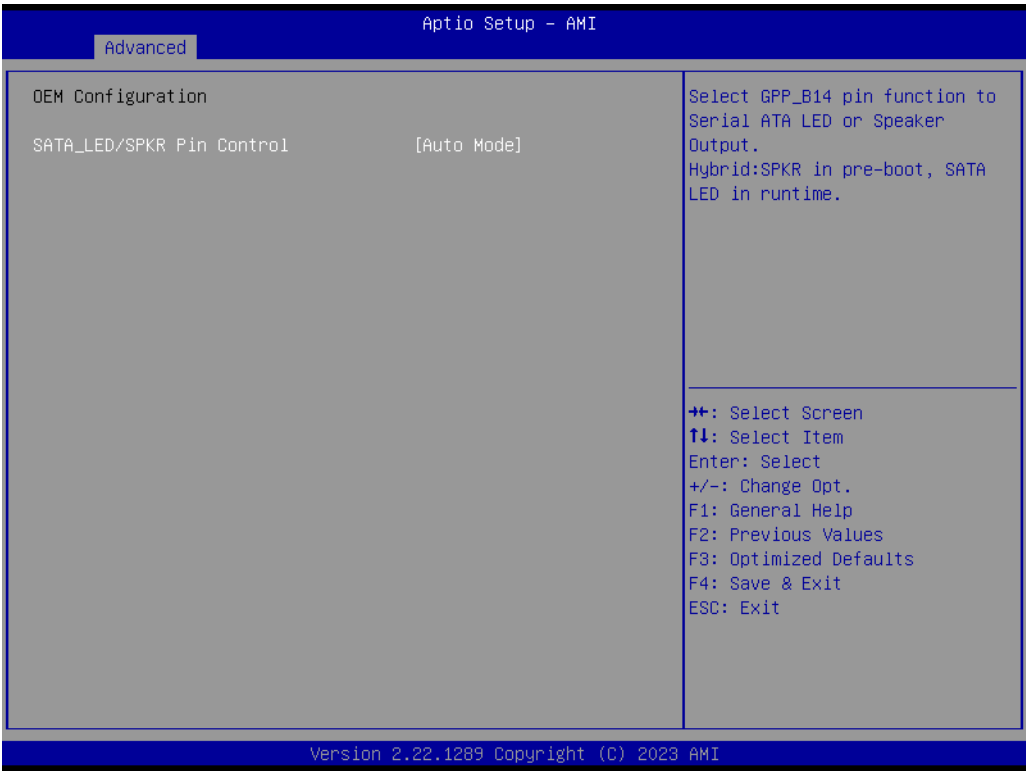


Figure 3.21 OEM Configuration

- **SATA_LED/SPKR Pin Control**
Select the GPP_B14 pin function to Serial ATA LED or Speaker Output. Hybrid: SPKR in pre-boot, SATA LED in runtime.

3.4.12 Tls Auth Configuration



Figure 3.22 Tls Auth Configuration

- **Server CA Configuration**
Press <Enter> to configure Sever CA.
- **Client Cert Configuration**

3.4.13 Intel® Ethernet Controller I226-IT -00:A0:C9:00:00:00



Figure 3.23 Intel® Ethernet Controller I226-IT

3.5 Chipset Setup



Figure 3.24 Chipset Setup

- **System Agent (SA) Configuration**
System Agent Parameters
- **PCH-I/O Configuration**
PCH parameters

3.5.1 System Agent (SA) Configuration

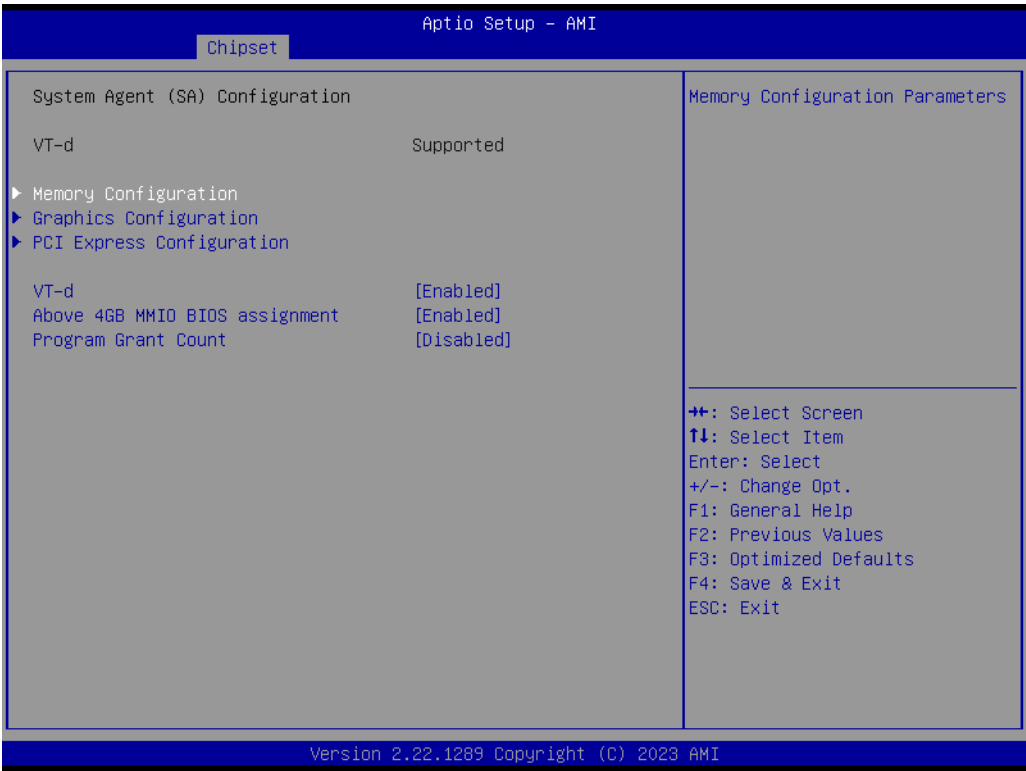


Figure 3.25 System Agent (SA) Configuration

- **Memory Configuration**
Memory Configuration Parameters
- **Graphics Configuration**
Graphics Configuration
- **PCI Express Configuration**
PCI Express Configuration settings
- **VT-d**
VT-d capability
- **Above 4GB MMIO BIOS Assignment**
Enable/Disable above 4GB memory mapped IO BIOS assignment. This is enabled automatically when the aperture size is set to 2048MB.
- **Program Grant Count**
Enable/Disable Programming of Grant Count.

3.5.1.1 Memory Configuration

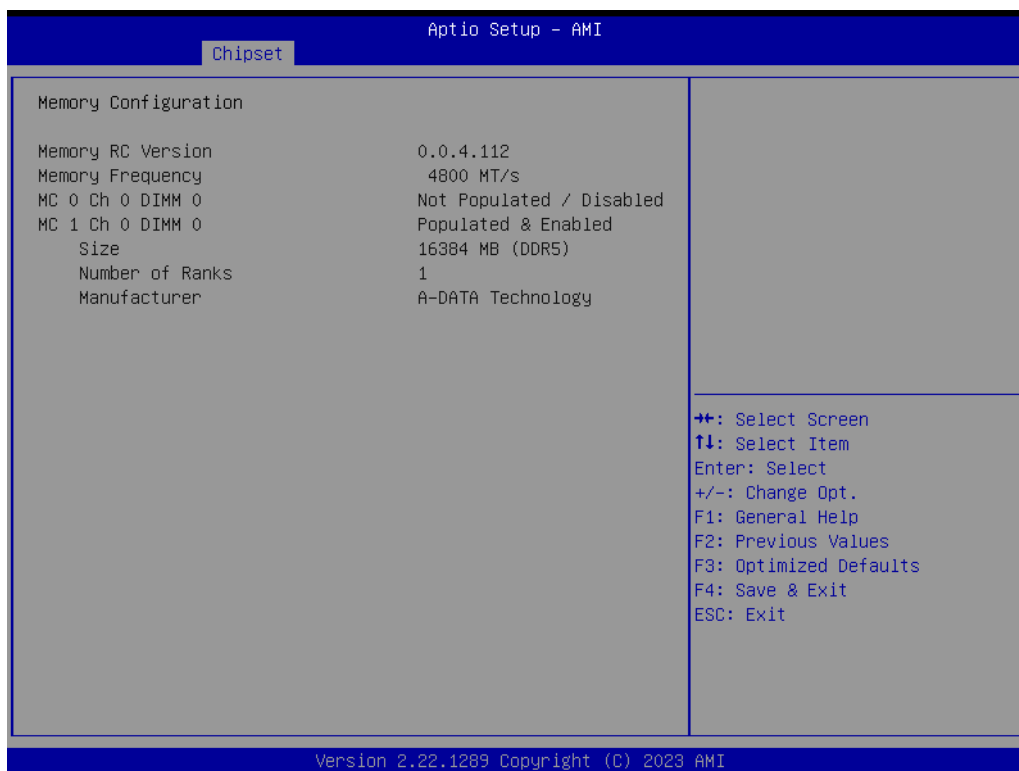


Figure 3.26 A1 Version Memory Configuration

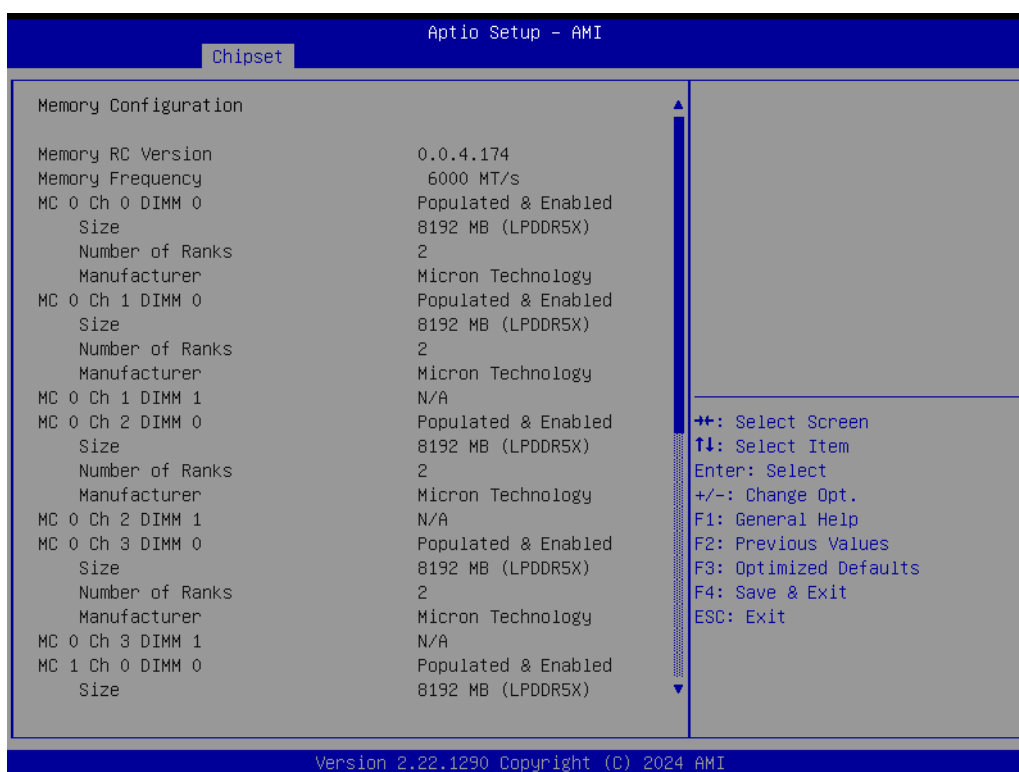


Figure 3.27 A2 Version Memory Configuration

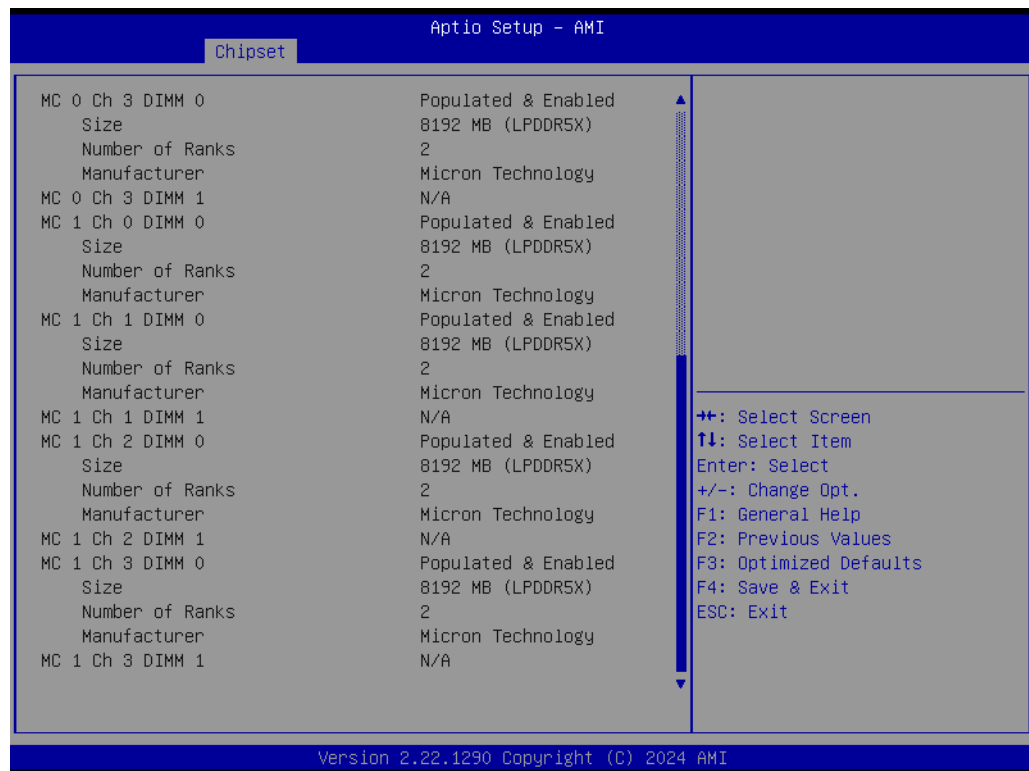


Figure 3.28 A2 Version Memory Configuration

3.5.1.2 Graphics Configuration

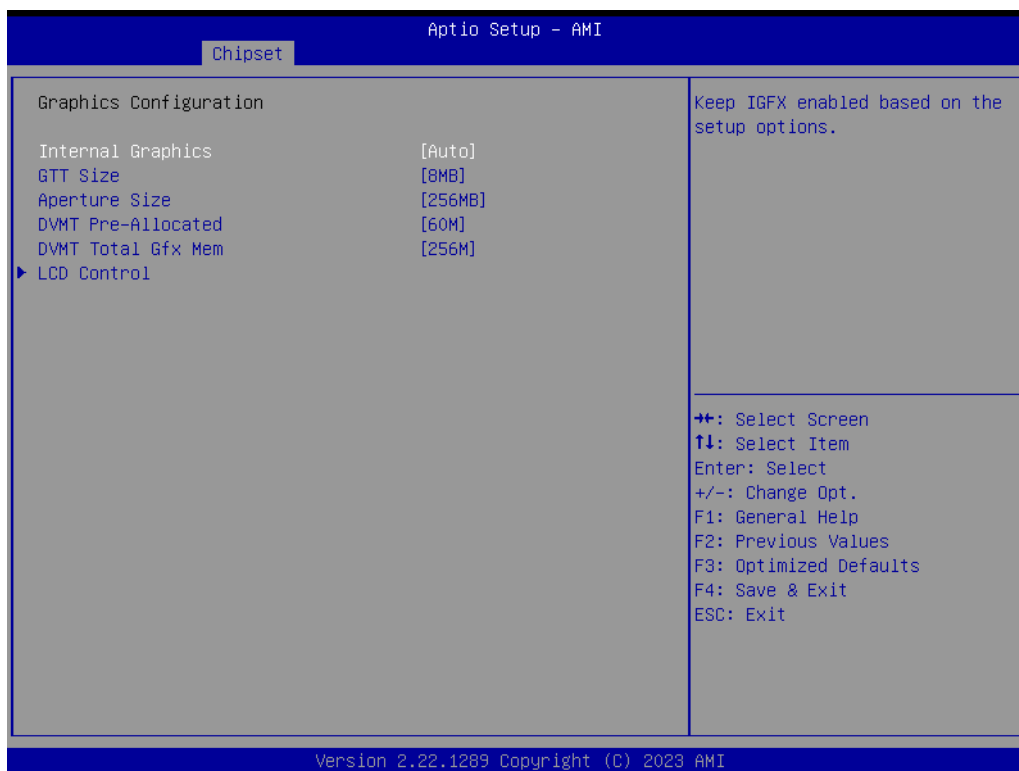


Figure 3.29 Graphics Configuration

- **Internal Graphics**
Keep IGFX enabled base on the setup options.
- **GTT Size**
Select the GTT size.
- **Aperture Size**
Select the aperture size. Note: Above 4GB MMIO BIOS assignment is automatically enabled when selecting the 2048MB aperture. To use this feature, please disable CSM support.
- **DVMT Pre-Allocated**
Select DVMT5.0 pre-allocated (fixed) Graphics Memory size to be used by the internal graphics device.
- **DVMT Total Gfx Mem**
Select DVMT5.0 total graphics memory size is used by the internal graphics device.
- **LCD Control**

LCD Control

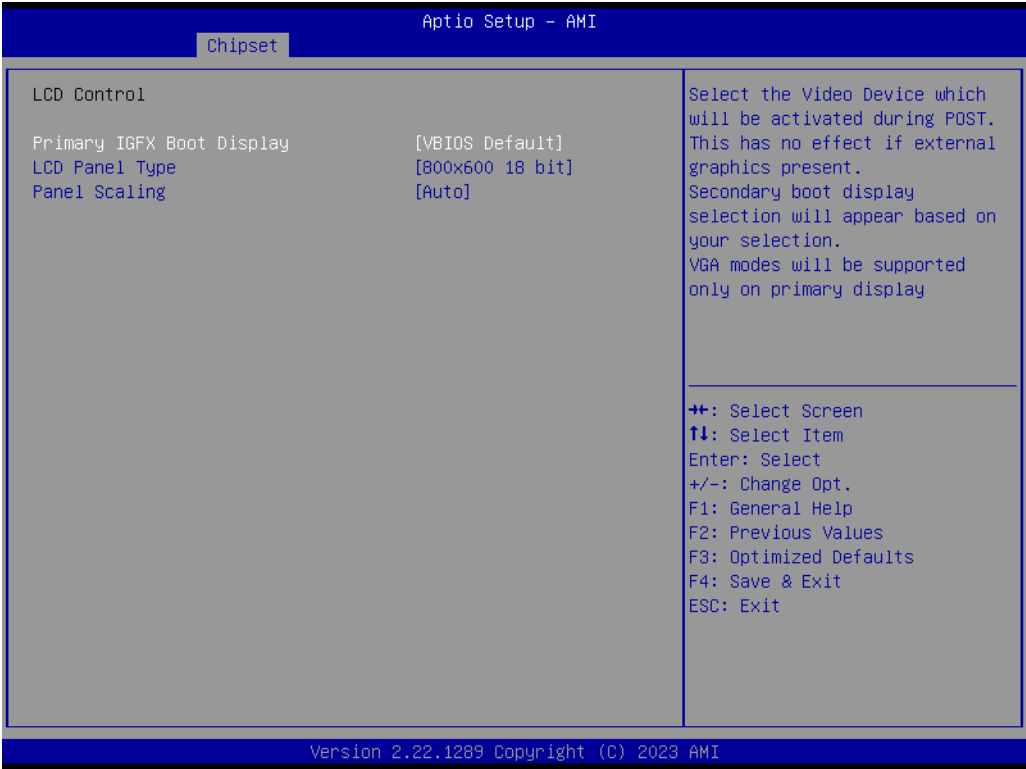


Figure 3.30 LCD Control

- **Primary IGFX Boot Display**
Select the Video Device which will be activated during POST. This has no effect if external graphics are present. The Secondary Boot display selection will appear based on your selection. VGA modes will be supported only on the primary display.
- **LCD Panel Type**
Select the LCD panel used by the Internal Graphics Device by selecting the appropriate setup item.
- **Panel Security**
Select the LCD panel scaling option used by the Internal Graphics Device.

3.5.1.3 PCI Express Configuration



Figure 3.31 A1 Version PCI Express Configuration

- **Compliance Test Mode**
Enable when using the Compliance Load board.
- **PCI Express Root Port 1 (PEG_4)**
- **PCI Express Root Port 2 (PEG_8)**
- **PCI Express Root Port 3 (PEG_NVMe)**

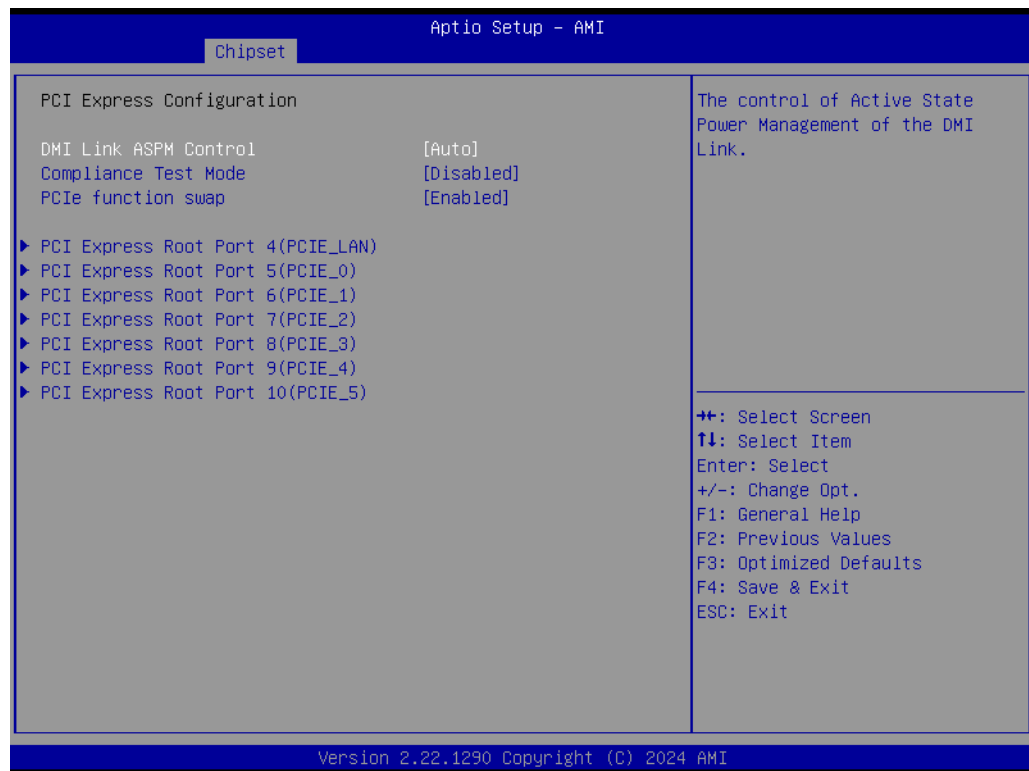


Figure 3.32 A2 Version PCI Express Configuration

- **MI Link ASPM Control**
The control of Active State Power Management of the DMI Link
- **Compliance Test Mode**
Enable when using the Compliance Load board.
- **PCI Express Root Port 4 (PCIE_LAN)**
- **PCI Express Root Port 5 (PEG_0)**
- **PCI Express Root Port 6 (PEG_1)**
- **PCI Express Root Port 7 (PEG_2)**
- **PCI Express Root Port 8 (PEG_3)**
- **PCI Express Root Port 9 (PEG_4)**
- **PCI Express Root Port 10 (PEG_5)**

PCI Express Root Port 1 (PEG_4)

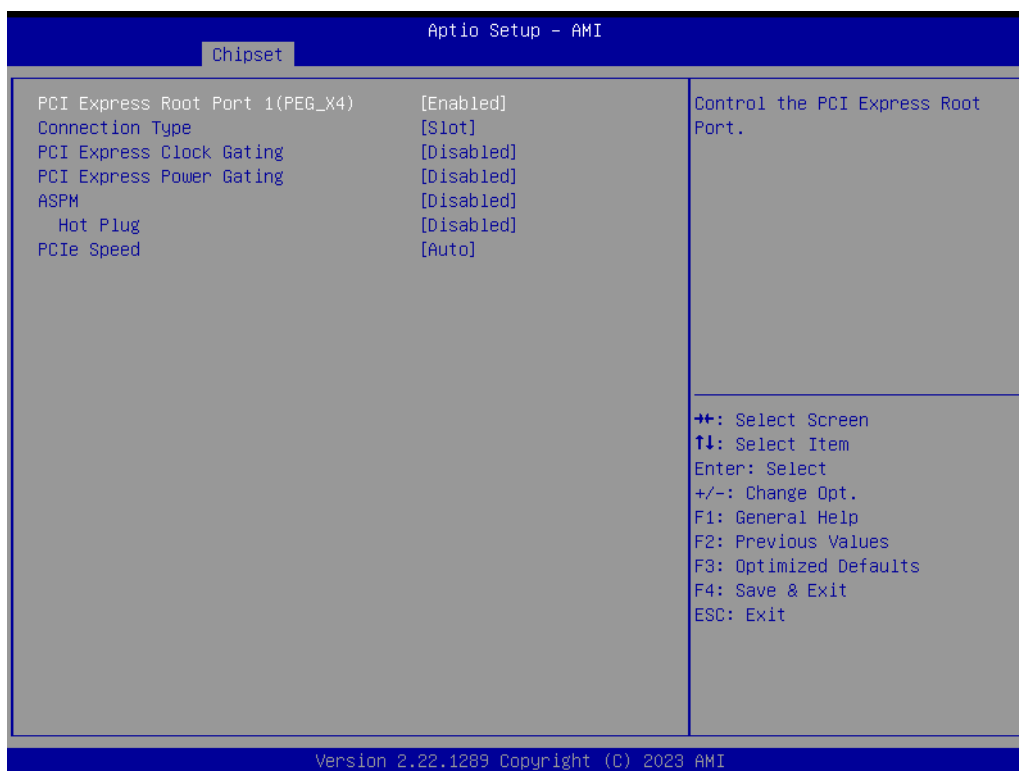


Figure 3.33 PCI Express Root Port 1 (PEG_4)

- **PCI Express Root Port 1 (PEG_4)**
Control the PCI Express Root Port.
- **Connection Type**
Built-In: a built-in device is connected to this rootport. The SlotImplemented bit will be clear. Slot: this rootport connects to user-accessible slot. SlotImplemented bit will be set.
- **PCIe Express Clock Gating**
Enable/Disable for each root port.
- **PCIe Express Power Gating**
Enable/Disable for each root port.
- **ASPM**
Set the ASPM Level:
Force L0s- Force all links to L0s State
AUTO – BIOS auto configure
DISABLE – Disables ASPM
- **Hot Plug**
PCI Express Hot Plug Enable/Disable.
- **PCIe Speed**
Configure PCIe Speed.

PCI Express Root Port 2 (PEG_8)



Figure 3.34 PCI Express Root Port 2 (PEG_8)

- **PCI Express Root Port 1 (PEG_4)**
Control the PCI Express Root Port.
- **Connection Type**
Built-In: a built-in device is connected to this rootport. The SlotImplemented bit will be clear. Slot: this rootport connects to a user-accessible slot. The SlotImplemented bit will be set.
- **PCIe Express Clock Gating**
Enable/Disable for each root port.
- **PCIe Express Power Gating**
Enable/Disable for each root port.
- **ASPM**
Set the ASPM Level:
Force L0s- Force all links to L0s State
AUTO – BIOS auto configure
DISABLE – Disables ASPM
- **PCIe Speed**
Configure PCIe Speed.

PCI Express Root Port 3 (PEG_NVMe)

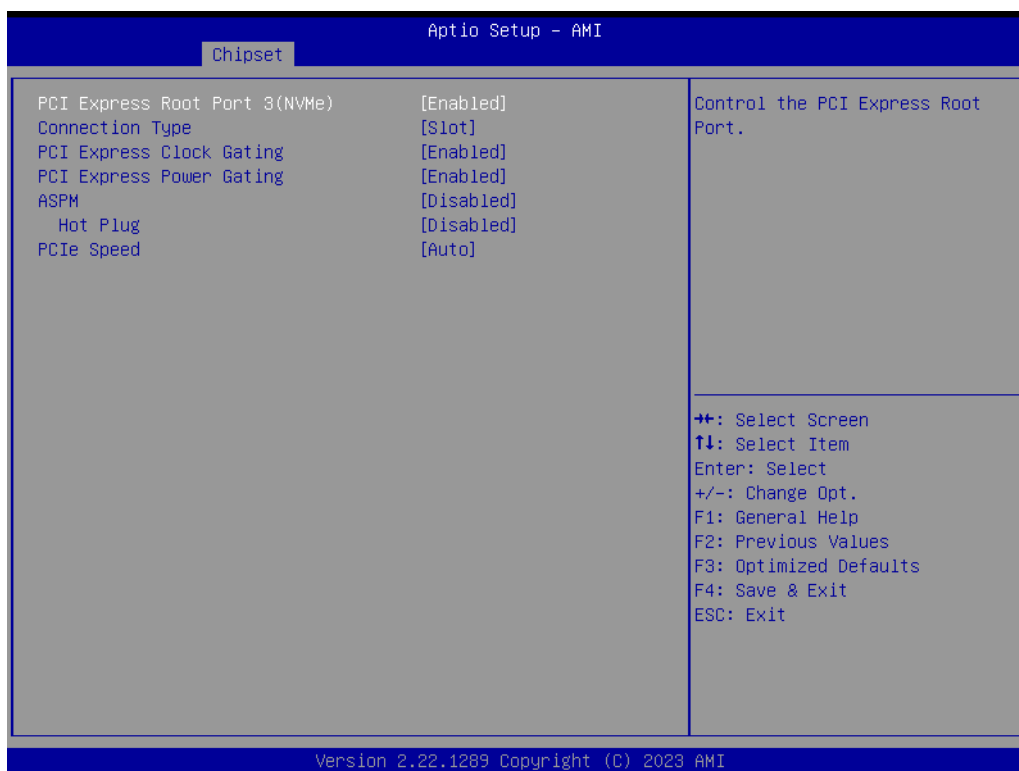


Figure 3.35 PCI Express Root Port 3 (NVME)

- **PCI Express Root Port 3 (NVME)**
Control the PCI Express Root Port.
- **Connection Type**
Built-In: a built-in device is connected to this rootport. The SlotImplemented bit will be clear. Slot: this rootport connects to user-accessible slot. The SlotImplemented bit will be set.
- **PCIe Express Clock Gating**
Enable/Disable for each root port.
- **PCIe Express Power Gating**
Enable/Disable for each root port.
- **ASPM**
Set the ASPM Level:
Force L0s- Force all links to L0s State
AUTO – BIOS auto configure
DISABLE – Disables ASPM
- **Hot Plug**
PCI Express Hot Plug Enable/Disable.
- **PCIe Speed**
Configure PCIe Speed.

3.5.2 PCH-IO Configuration



Figure 3.36 PCH-IO Configuration

- **PCI Express Configuration**
PCI Express Configuration settings
- **SATA Configuration**
SATA device option settings
- **USB Configuration**
USB Configuration settings
- **Security Configuration**
Security Configuration settings
- **HD Audio Configuration**
HD Audio subsystem configuration settings
- **SerialIo Configuration**
SerialIo Configuration settings
- **State After G3**
Specify what state to go to when power is re-applied after a power failure (G3 state).
- **Flash Protection Range Register (FPRR)**
Enable Flash Protection Range Registers.
- **SPD Write Disable**
Enable/Disable setting SPD Write Disable. For security recommendations, SPD write disable bit must be set.

3.5.2.1 PCI Express Configuration

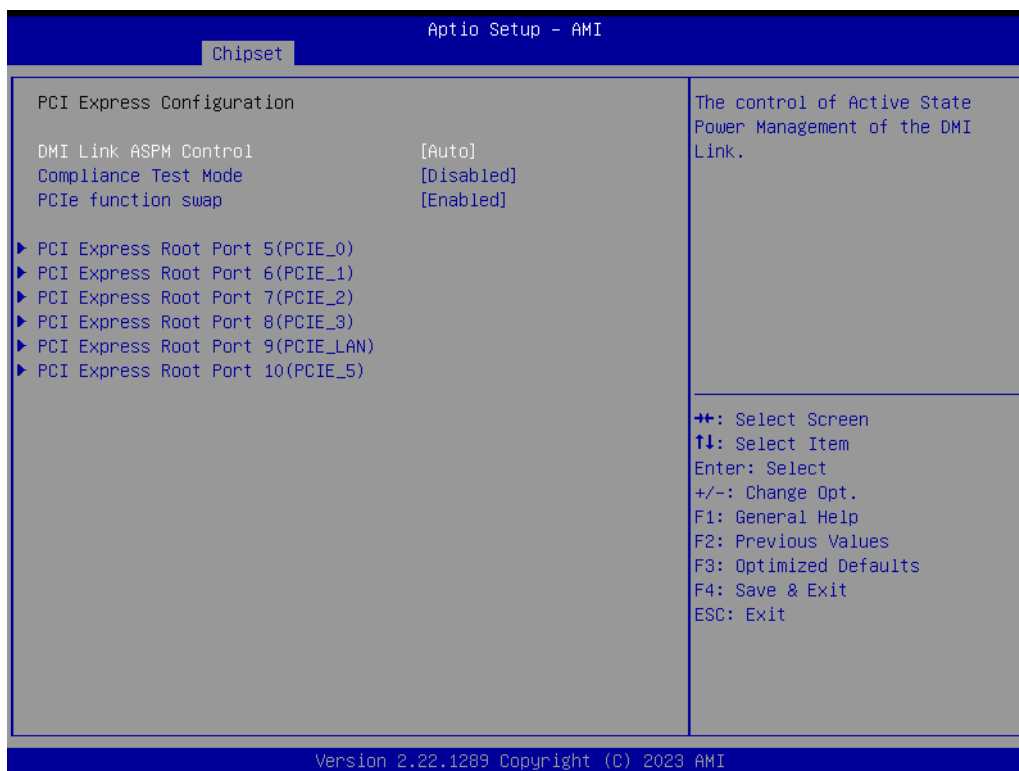


Figure 3.37 PCI Express Configuration

- **DMI Link ASPM Control**
The control of Active State Power Management of the DMI Link.
- **Compliance Test Mode**
Enable when using Compliance Load Board.
- **PCIe Function Swap**
When Disabled, prevents PCIe rootport function swap. If any function other than 0th is enabled, 0th will become visible.
- **PCI Express Root Port 5 (PCIE_0)**
- **PCI Express Root Port 6 (PCIE_1)**
- **PCI Express Root Port 7 (PCIE_2)**
- **PCI Express Root Port 8 (PCIE_3)**
- **PCI Express Root Port 9 (PCIE_LAN)**
- **PCI Express Root Port 10 (PCIE_5)**

PCI Express Root Port 5 (PCIE_0)



Figure 3.38 PCI Express Root Port 0

- **PCI Express Root Port 0**
Control the PCI Express Root Port.
- **ASPM**
Set the ASPM Level:
Force L0s- Force all links to L0s State
AUTO – BIOS auto configure
DISABLE – Disables ASPM
- **Hot Plug**
PCI Express hot plug enable/disable
- **PCIe Speed**
Configure PCIe Speed.

3.5.2.2 SATA Configuration

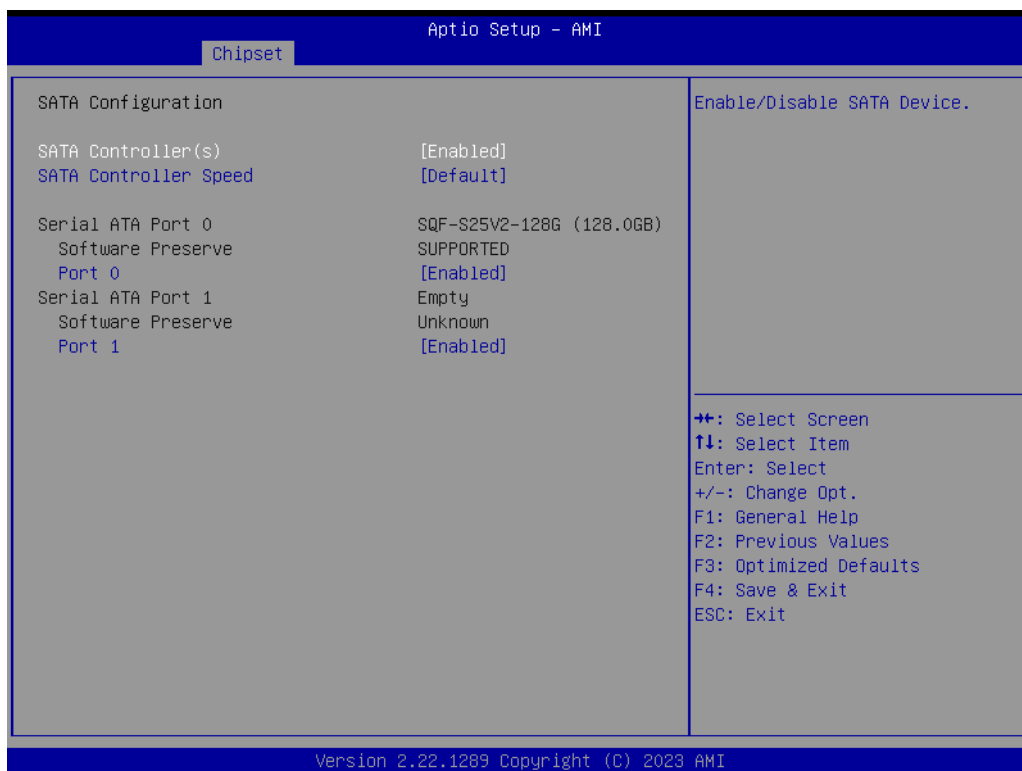


Figure 3.39 SATA Drives

- **SATA Controller(s)**
Enable/Disable SATA Device.
- **SATA Controller Speed**
Indicates the maximum speed the SATA controller can support.
- **Port 0**
Enable or Disable SATA Port.
- **Port 1**
Enable or Disable SATA Port.

3.5.2.3 USB Configuration

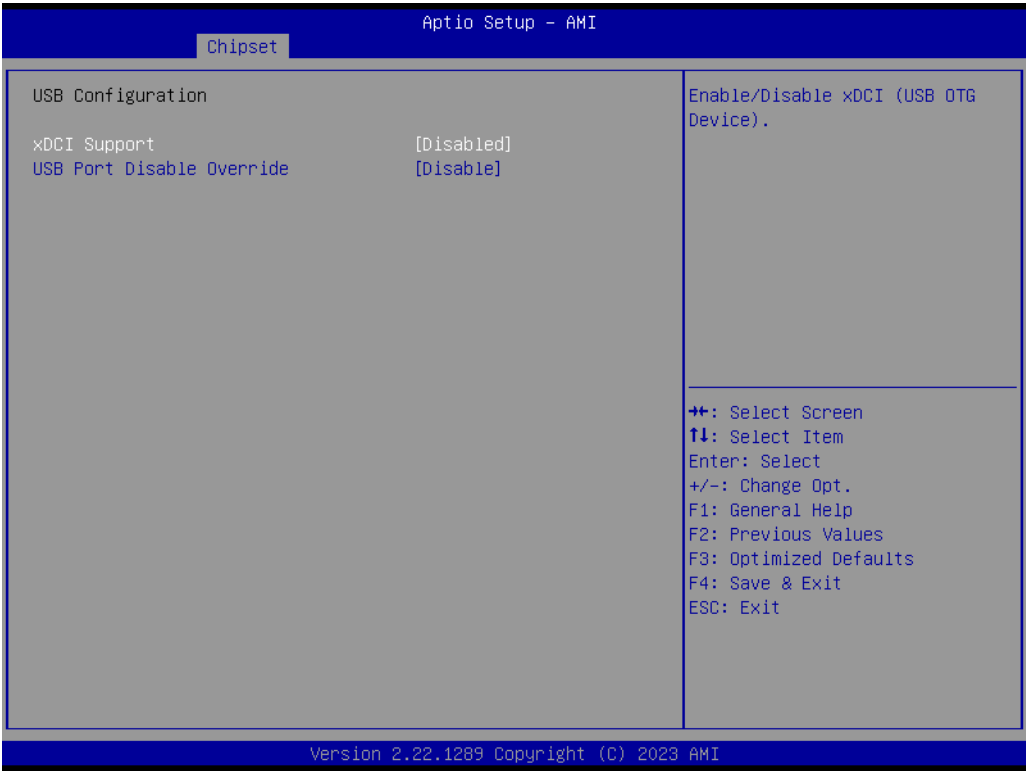


Figure 3.40 USB Configuration

- **xDCI Support**
Enable/Disable Xdci (USB OTG Device).
- **USB Port Disable Override**
Selectively Enable/Disable the corresponding USB port from reporting a Device Connection to the controller.

3.5.2.4 Security Configuration



Figure 3.41 Security Configuration

- **BIOS Lock**
Enable/Disable the PCH BIOS lock enable feature. It is required to be Enabled to ensure SMM protection of flash.
- **Force Unlock on All GPIO Pads**
If Enabled, BIOS will force all GPIO pads to be in the unlocked state.

3.5.2.5 HD Audio Subsystem Configuration Settings

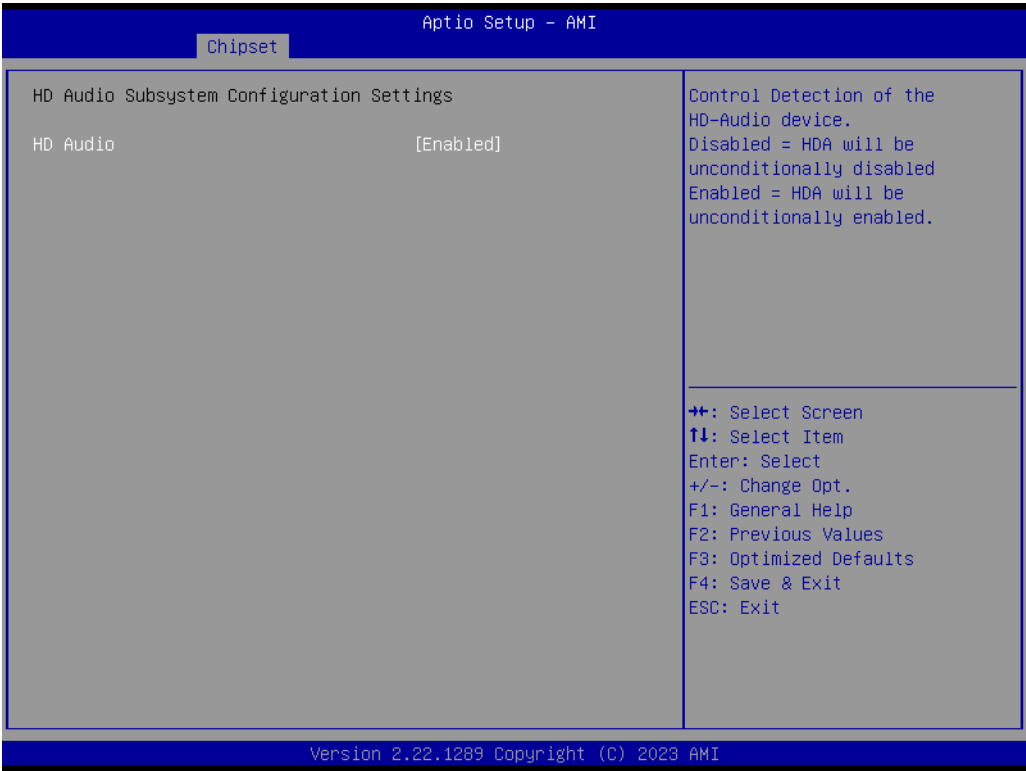


Figure 3.42 HD Audio Subsystem Configuration Settings

- **HD Audio**
Control Detection of the HD-Audio device. Disabled=HDA will be unconditionally disabled. Enabled=HDA will be unconditionally enabled.

3.5.2.6 SerialIo Configuration

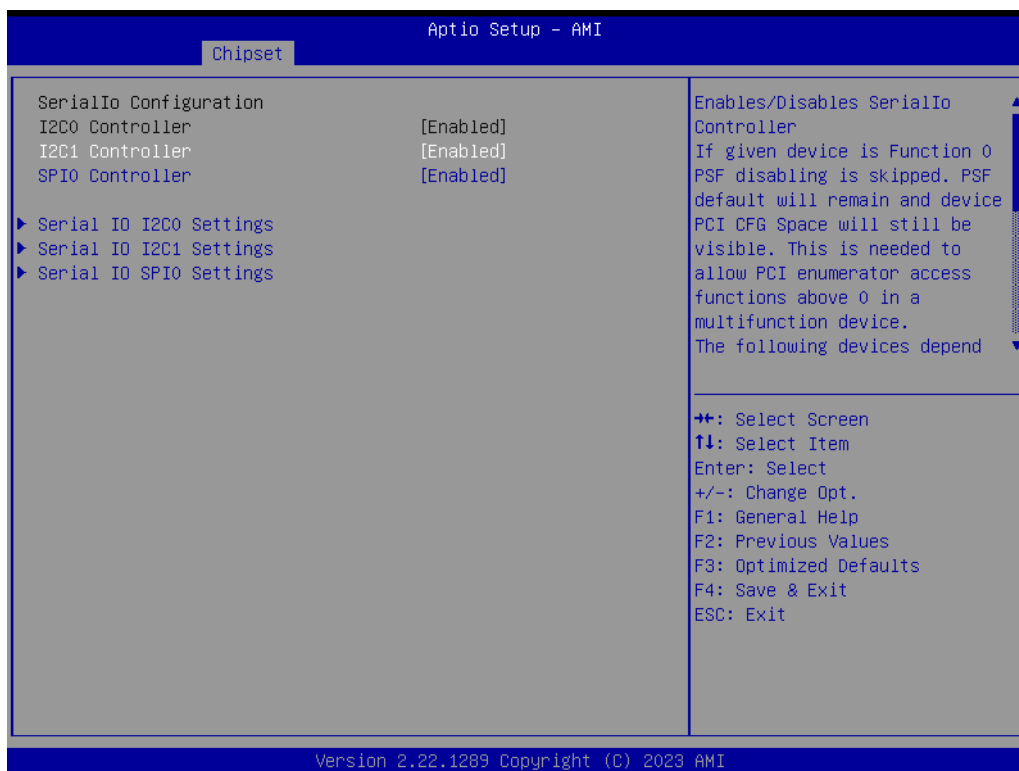


Figure 3.43 SerialIo Configuration

■ I2C1 Controller

Enables/Disables the SerialIo Controller

If a given device's Function 0 PSF disabling is skipped, the PSF default will remain and the device PCI CFG Space will still be visible. This is needed to allow the PCI enumerator to access functions above 0 in a multifunction device.

The following devices depend on each other:

I2C0 and I2C1,2,3

UART0 and UART1,SPI0,1

UART2 and I2C4,5

UART 0 (00:30:00) cannot be disabled when:

1. Child device is enabled like CNVi Bluetooth (_SB.PC00.UA00.BTH0)

UART 0 (00:30:00) cannot be enabled when:

1. I2S Audio codec is enabled (_SB.PC00.I2C0.HDAC)

■ SPI0 Controller

Enables/Disables the SerialIo Controller

If a given device's Function 0 PSF disabling is skipped, the PSF default will remain and the device PCI CFG Space will still be visible. This is needed to allow PCI enumerator access functions above 0 in a multifunction device.

The following devices depend on each other:

I2C0 and I2C1,2,3

UART0 and UART1,SPI0,1

UART2 and I2C4,5

UART 0 (00:30:00) cannot be disabled when:

1. Child device is enabled like CNVi Bluetooth (_SB.PC00.UA00.BTH0)

UART 0 (00:30:00) cannot be enabled when:

1. I2S Audio codec is enabled (_SB.PC00.I2C0.HDAC)

- **Serial IO I2C0 Settings**

Configure SerialIO Controller.

- **Serial IO I2C1 Settings**

Configure SerialIO Controller.

- **Serial IO SPIO Settings**

Configure SerialIO Controller.

3.6 Security Chipset

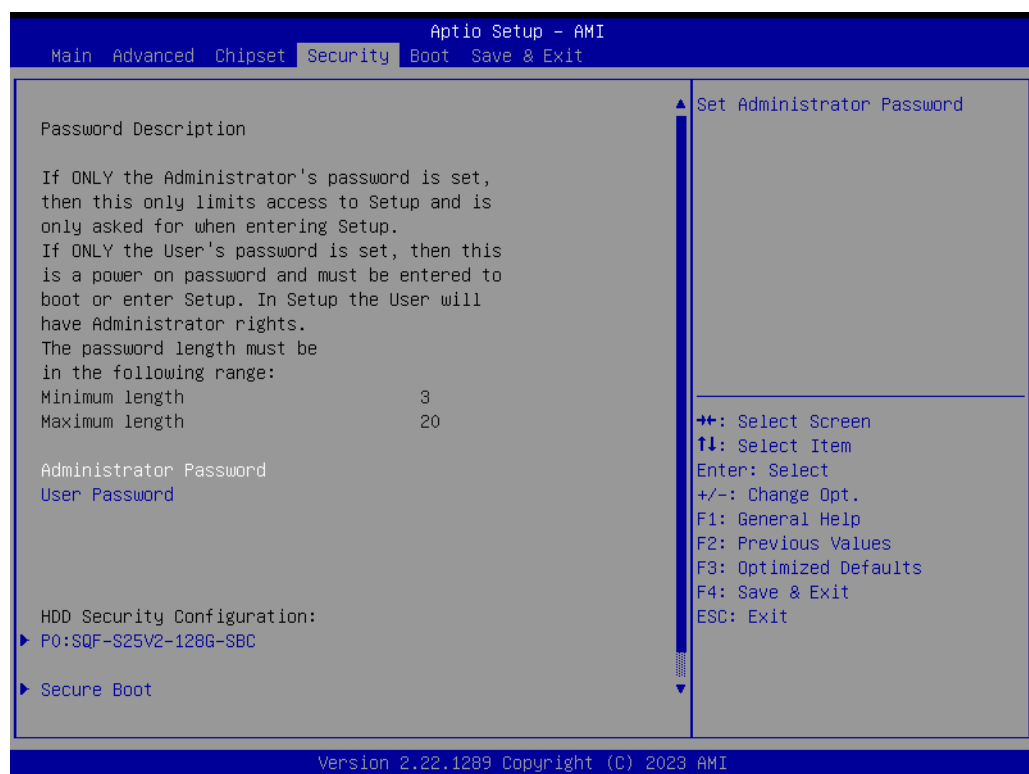


Figure 3.44 Security Chipset

- **Administrator Password**

Set Administrator Password.

- **User Password**

Set User Password.

- **Secure Boot**

Secure Boot Configuration.

3.6.1 Secure Boot



Figure 3.45 Secure Boot

- **Secure Boot**
The Secure Boot feature is Active if Secure Boot is Enabled, Platform Key (PK) is enrolled, and the System is in User mode. The mode change requires a platform reset.
- **Secure Boot Mode**
Secure Boot mode options:
Standard or Custom.
In Custom mode, Secure Boot Policy variables can be configured by a physically present user without full authentication.
- **Restore Factory Keys**
Force System to User Mode. Install factory default Secure Boot Key databases.
- **Key Management**
Enables expert users to modify Secure Boot Policy variables without variable authentication.

3.6.2 Boot Setup

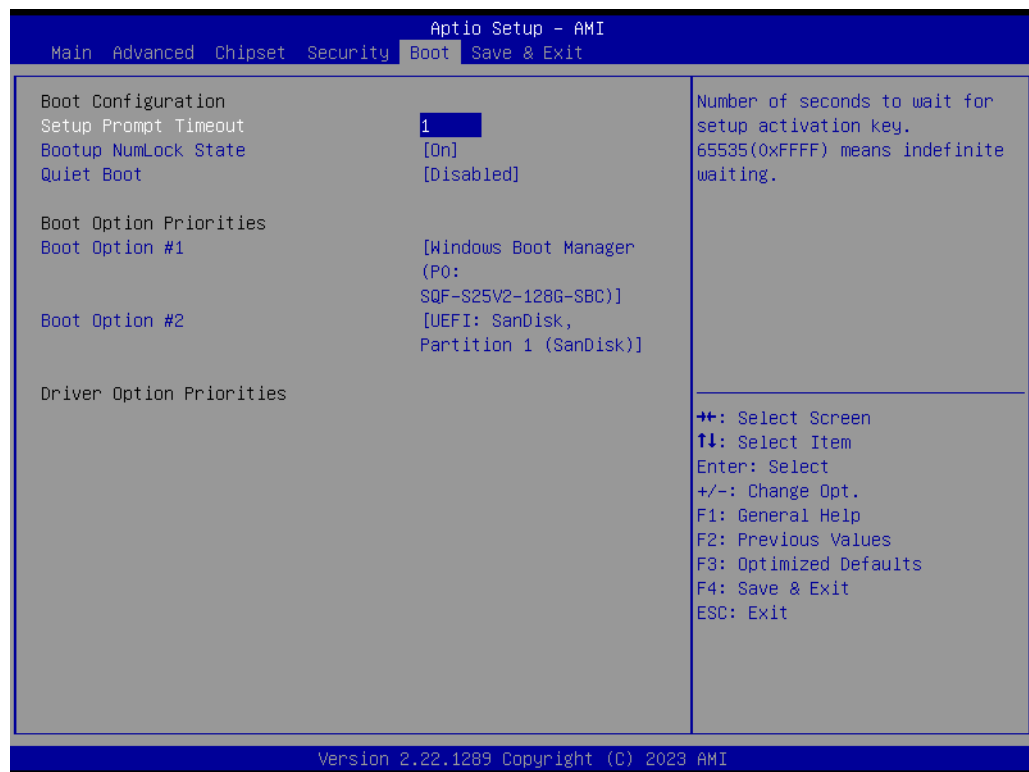


Figure 3.46 Boot Setup

- **Setup Prompt Timeout**
Number of seconds to wait for the setup activation key. 65535(0xFFFF) means indefinite waiting.
- **Bootup NumLock State**
Select the keyboard NumLock state.
- **Quiet Boot**
Enables or Disables Quiet Boot option.
- **Boot Option #1**
Sets the system boot order.
- **Boot Option #2**
Sets the system boot order.

3.7 Save & Exit

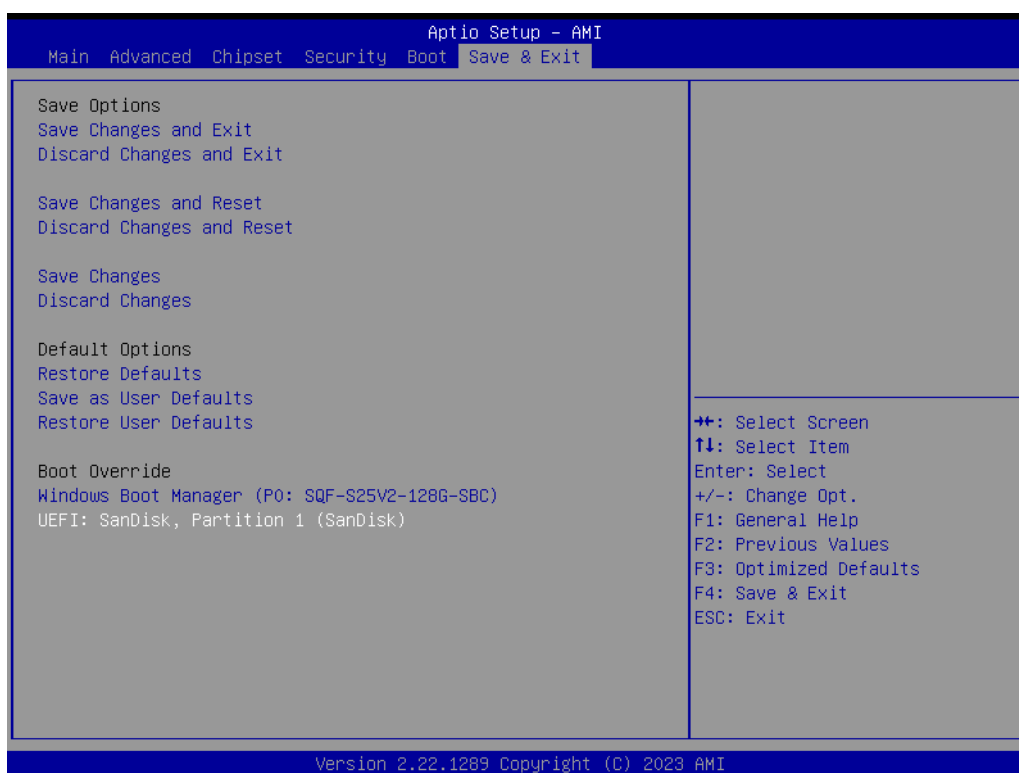


Figure 3.47 Save & Exit

- **Save Changes and Exit**
Exit system setup after saving the changes.
- **Discard Changes and Exit**
Exit system setup without saving any changes.
- **Save Changes and Reset**
Reset the system after saving the changes.
- **Discard Changes and Reset**
Reset system setup without saving any changes.
- **Save Changes**
Save changes done so far to any of the setup options.
- **Discard Changes**
(005B) Discard changes done so far to any of the setup options.
- **Restore Defaults**
Restore/Load default values for all the setup options.
- **Save as User Defaults**
Save the changes done so far as user defaults.
- **Restore User Defaults**
Restore the user defaults to all the setup options.
- **Boot Override**

Chapter 4

S/W Introduction & Installation

Sections include:

- S/W Introduction
- Driver Installation
- Advantech iManager

4.1 S/W Introduction

The mission of Advantech Embedded Software Services is to "Enhance quality of life with Advantech platforms and Microsoft Windows embedded technology". We enable Windows Embedded software products on Advantech platforms to more effectively support the embedded computing community. Customers are freed from the hassle of dealing with multiple vendors (hardware suppliers, system integrators, embedded OS distributors) for projects. Our goal is to make Windows Embedded Software solutions easily and widely available to the embedded computing community.

4.2 Driver Installation

The Intel® Chipset Software Installation (CSI) utility installs the Windows INF files that outline to the operating system how the chipset components will be configured.

4.2.1 Windows Driver Setup

To install the drivers on a Windows-based operating system, please connect to the Internet and go to the website <http://support.advantech.com.tw> and download the drivers that you want to install and follow the Driver Setup instructions to complete the installation.

4.2.2 Other OS

To install the drivers for other Windows OS or Linux, please connect to the Internet and go to the website <http://support.advantech.com.tw> to download the setup file.

4.3 Advantech iManager

Advantech's platforms come equipped with iManager, a microcontroller that provides embedded features for system integrators. Embedded features have been moved from the OS/BIOS level to the board level to increase reliability and simplify integration. iManager runs whether the operating system is running or not; it can count the boot times and running hours of the device, monitor device health, and provide an advanced watchdog to handle errors just as they happen. iManager also comes with a secure & encrypted EEPROM for storing important security keys or other customer-defined information. All the embedded functions are configured through API and provide corresponding utilities to demonstrate. These APIs comply with PICMG EAPI (Embedded Application Programmable Interface) specifications and are unified in the same structures. It makes these embedded features easier to integrate, speed up development schedules, and provide the customer with software continuity when upgrading hardware. For more details on how to use the APIs and utilities, please refer to the Advantech iManager 2.0 Software API User Manual.

Control	Monitor
 GPIO General Purpose Input/Output is a flexible parallel interface that allows a variety of custom connections. It allows users to monitor the level of signal input or set the output status to switch on/off a device. Our API also provides Programmable GPIO, which allows developers to dynamically set the GPIO input or output status.	 Watchdog A watchdog timer (WDT) is a device that performs a specific operation after a certain period of time if something goes wrong and the system does not recover on its own. A watchdog timer can be programmed to perform a warm boot (restarting the system) after a certain number of seconds.
 SMBus SMBus is the System Management Bus defined by Intel® Corporation in 1995. It is used in personal computers and servers for low-speed system management communications. The SMBus API allows a developer to interface a embedded system environment and transfer serial messages using the SMBus protocols, allowing multiple simultaneous device control.	 Hardware Monitor The Hardware Monitor (HWM) API is a system health supervision API that inspects certain condition indexes, such as fan speed, temperature and voltage.
 I2C I2C is a bi-directional two wire bus that was developed by Philips for use in their televisions in the 1980s. The I2C API allows a developer to interface with an embedded system environment and transfer serial messages using the I2C protocols, allowing multiple simultaneous device control.	 Hardware Control The Hardware Control API allows developers to set the PWM (Pulse Width Modulation) value to adjust fan speed or other devices; it can also be used to adjust the LCD brightness.
Display	Power Saving
 Brightness Control The Brightness Control API allows a developer to interface with an embedded device to easily control brightness.	 CPU Speed Make use of Intel SpeedStep technology to reduce power consumption. The system will automatically adjust the CPU Speed depending on system loading.
 Backlight The Backlight API allows a developer to control the backlight (screen) on/off in an embedded device.	 System Throttling Refers to a series of methods for reducing power consumption in computers by lowering the clock frequency. These APIs allow the user to lower the clock from 87.5% to 12.5%.

Appendix **A**

Pin Assignments

A.1 SOM-6884 Pin Assignments

This section gives SOM-6884 pin assignments on the COM Express connector which is compliant with COMR.0 R3.1 Type 6 pin-out definitions. For more details on how to use these pins and for design reference, please contact Advantech for a design guide, checklist, reference schematic, and other hardware/software support.

Table A.1: SOM-6884 A1 Pin Assignments

SOM-6884 Rows A, B			
A1	GND (FIXED)	B1	GND (FIXED)
A2	GBE0_MDI3-	B2	GBE0_ACT#
A3	GBE0_MDI3+	B3	LPC_FRAME#/ESPI_CS0#
A4	GBE0_LINK100#	B4	LPC_AD0/ESPI_IO_0
A5	GBE0_LINK1000#	B5	LPC_AD1/ESPI_IO_1
A6	GBE0_MDI2-	B6	LPC_AD2/ESPI_IO_2
A7	GBE0_MDI2+	B7	LPC_AD3/ESPI_IO_3
A8	GBE0_LINK#	B8	LPC_DRQ0#/ESPI_ALERT0#
A9	GBE0_MDI1-	B9	LPC_DRQ1#/ESPI_ALERT1#
A10	GBE0_MDI1+	B10	LPC_CLK/ESPI_CK
A11	GND (FIXED)	B11	GND (FIXED)
A12	GBE0_MDI0-	B12	PWRBTN#
A13	GBE0_MDI0+	B13	SMB_CK
A14	GBE0_CTREF	B14	SMB_DAT
A15	SUS_S3#	B15	SMB_ALERT#
A16	SATA0_TX+	B16	SATA1_TX+
A17	SATA0_TX-	B17	SATA1_TX-
A18	SUS_S4#	B18	SUS_STAT#/ESPI_RESET#
A19	SATA0_RX+	B19	SATA1_RX+
A20	SATA0_RX-	B20	SATA1_RX-
A21	GND (FIXED)	B21	GND (FIXED)
A22	SATA2_TX+	B22	SATA3_TX+
A23	SATA2_TX-	B23	SATA3_TX-
A24	SUS_S5#	B24	PWR_OK
A25	SATA2_RX+	B25	SATA3_RX+
A26	SATA2_RX-	B26	SATA3_RX-
A27	BATLOW#	B27	WDT
A28	(S)ATA_ACT#	B28	HDA_SDIN2/SNDW0_CLK
A29	HDA_SYNC	B29	HDA_SDIN1/SNDW0_DAT
A30	HDA_RST#	B30	HDA_SDIN0
A31	GND (FIXED)	B31	GND (FIXED)
A32	HDA_BITCLK	B32	SPKR
A33	HDA_SDOUT	B33	I2C_CK
A34	BIOS_DIS0#/ESPI_SAFS	B34	I2C_DAT
A35	THRMTRIP#	B35	THRM#
A36	USB6-	B36	USB7-
A37	USB6+	B37	USB7+
A38	USB_6_7_OC#	B38	USB_4_5_OC#
A39	USB4-	B39	USB5-

Table A.1: SOM-6884 A1 Pin Assignments			
A40	USB4+	B40	USB5+
A41	GND (FIXED)	B41	GND (FIXED)
A42	USB2-	B42	USB3-
A43	USB2+	B43	USB3+
A44	USB_2_3_OC#	B44	USB_0_1_OC#
A45	USB0-	B45	USB1-
A46	USB0+	B46	USB1+
A47	VCC_RTC	B47	ESPI_EN#
A48	RSMRST_OUT#	B48	USB0_HOST_PRSENT
A49	GBE0_SDP	B49	SYS_RESET#
A50	LPC_SERIRQ/ESPI_CS1#	B50	CB_RESET#
A51	GND (FIXED)	B51	GND (FIXED)
A52	PCIE_TX5+	B52	PCIE_RX5+
A53	PCIE_TX5-	B53	PCIE_RX5-
A54	GPI0	B54	GPO1
A55	PCIE_TX4+	B55	PCIE_RX4+
A56	PCIE_TX4-	B56	PCIE_RX4-
A57	GND	B57	GPO2
A58	PCIE_TX3+	B58	PCIE_RX3+
A59	PCIE_TX3-	B59	PCIE_RX3-
A60	GND (FIXED)	B60	GND (FIXED)
A61	PCIE_TX2+	B61	PCIE_RX2+
A62	PCIE_TX2-	B62	PCIE_RX2-
A63	GPI1	B63	GPO3
A64	PCIE_TX1+	B64	PCIE_RX1+
A65	PCIE_TX1-	B65	PCIE_RX1-
A67	GPI2	B67	WAKE1#
A68	PCIE_TX0+	B68	PCIE_RX0+
A69	PCIE_TX0-	B69	PCIE_RX0-
A70	GND (FIXED)	B70	GND (FIXED)
A71	LVDS_A0+	B71	LVDS_B0+
A72	LVDS_A0-	B72	LVDS_B0-
A73	LVDS_A1+	B73	LVDS_B1+
A74	LVDS_A1-	B74	LVDS_B1-
A75	LVDS_A2+	B75	LVDS_B2+
A76	LVDS_A2-	B76	LVDS_B2-
A77	LVDS_VDD_EN	B77	LVDS_B3+
A78	LVDS_A3+	B78	LVDS_B3-
A79	LVDS_A3-	B79	LVDS_BKLT_EN
A80	GND (FIXED)	B80	GND (FIXED)
A81	LVDS_A_CK+	B81	LVDS_B_CK+
A82	LVDS_A_CK-	B82	LVDS_B_CK-
A83	LVDS_I2C_CK	B83	LVDS_BKLT_CTRL
A84	LVDS_I2C_DAT	B84	VCC_5V_SBY
A85	GPI3	B85	VCC_5V_SBY
A86	GP_SPI_MOSI	B86	VCC_5V_SBY
A87	eDP_HPD	B87	VCC_5V_SBY

Table A.1: SOM-6884 A1 Pin Assignments

A88	PCIE_CLK_REF+	B88	BIOS_DIS1#
A89	PCIE_CLK_REF-	B89	VGA_RED
A90	GND (FIXED)	B90	GND (FIXED)
A91	SPI_POWER	B91	VGA_GRN
A92	SPI_MISO	B92	VGA_BLU
A93	GPO0	B93	VGA_HSYNC
A94	SPI_CLK	B94	VGA_VSYNC
A95	SPI_MOSI	B95	VGA_I2C_CK
A96	TPM_PP	B96	VGA_I2C_DAT
A97	TYPE10#	B97	SPI_CS#
A98	SER0_TX	B98	GP_SPI_MISO
A99	SER0_RX	B99	GP_SPI_CK
A100	GND (FIXED)	B100	GND (FIXED)
A101	SER1_TX	B101	FAN_PWMOUT
A102	SER1_RX	B102	FAN_TACHIN
A103	LID#	B103	SLEEP#
A104	VCC_12V	B104	VCC_12V
A105	VCC_12V	B105	VCC_12V
A106	VCC_12V	B106	VCC_12V
A107	VCC_12V	B107	VCC_12V
A108	VCC_12V	B108	VCC_12V
A109	VCC_12V	B109	VCC_12V
A110	GND (FIXED)	B110	GND (FIXED)
SOM-6884 Rows C, D			
C1	GND (FIXED)	D1	GND (FIXED)
C2	GND	D2	GND
C3	USB_SSRX0-	D3	USB_SSTX0-
C4	USB_SSRX0+	D4	USB_SSTX0+
C5	GND	D5	GND
C6	USB_SSRX1-	D6	USB_SSTX1-
C7	USB_SSRX1+	D7	USB_SSTX1+
C8	GND	D8	GND
C9	USB_SSRX2-	D9	USB_SSTX2-
C10	USB_SSRX2+	D10	USB_SSTX2+
C11	GND (FIXED)	D11	GND (FIXED)
C12	USB_SSRX3-	D12	USB_SSTX3-
C13	USB_SSRX3+	D13	USB_SSTX3+
C14	GND	D14	GND
C15	USB4_1_LSTX	D15	DDI1_CTRLCLK_AUX+/ USB4_1_AUX+
C16	USB4_1_LSRX	D16	DDI1_CTRLCLK_AUX-/ USB4_1_AUX-
C17	USB4_RT_ENA	D17	USB4_PD_I2C_ALERT#
C18	GND	D18	PMCALERT#
C19	PCIE_RX6+	D19	PCIE_TX6+
C20	PCIE_RX6-	D20	PCIE_TX6-
C21	GND (FIXED)	D21	GND (FIXED)

Table A.1: SOM-6884 A1 Pin Assignments			
C22	PCIE_RX7+	D22	PCIE_TX7+
C23	PCIE_RX7-	D23	PCIE_TX7-
C24	DDI1_HPD	D24	GND
C25	SML0_CLK	D25	GND
C26	SML0_DAT	D26	DDI1_PAIR0+/USB4_1_SSTX0+
C27	SML1_CLK	D27	DDI1_PAIR0-/USB4_1_SSTX0-
C28	SML1_DAT	D28	GND
C29	USB4_PD_I2C_CLK	D29	DDI1_PAIR1+/USB4_1_SSRX0+
C30	USB4_PD_I2C_DAT	D30	DDI1_PAIR1-/USB4_1_SSRX0-
C31	GND (FIXED)	D31	GND (FIXED)
C32	DDI2_CTRLCLK_AUX+/USB4_2_AUX+	D32	DDI1_PAIR2+/USB4_1_SSTX1+
C33	DDI2_CTRLCLK_AUX-/USB4_2_AUX-	D33	DDI1_PAIR2-/USB4_1_SSTX1-
C34	DDI2_DDC_AUX_SEL	D34	DDI1_DDC_AUX_SEL
C35	USB4_2_LSTX	D35	USB4_2_LSRX
C36	DDI3_CTRLCLK_AUX+	D36	DDI1_PAIR3+/USB4_1_SSRX1+
C37	DDI3_CTRLCLK_AUX-	D37	DDI1_PAIR3-/USB4_1_SSRX1-
C38	DDI3_DDC_AUX_SEL	D38	GND
C39	DDI3_PAIR0+	D39	DDI2_PAIR0+/USB4_2_SSTX0+
C40	DDI3_PAIR0-	D40	DDI2_PAIR0-/USB4_2_SSTX0-
C41	GND (FIXED)	D41	GND (FIXED)
C42	DDI3_PAIR1+	D42	DDI2_PAIR1+/USB4_2_SSRX0+
C43	DDI3_PAIR1-	D43	DDI2_PAIR1-/USB4_2_SSRX0-
C44	DDI3_HPD	D44	DDI2_HPD
C45	GP_SPI_CS#	D45	GND
C46	DDI3_PAIR2+	D46	DDI2_PAIR2+/USB4_2_SSTX1+
C47	DDI3_PAIR2-	D47	DDI2_PAIR2-/USB4_2_SSTX1-
C48	RSVD	D48	GND
C49	DDI3_PAIR3+	D49	DDI2_PAIR3+/USB4_2_SSRX1+
C50	DDI3_PAIR3-	D50	DDI2_PAIR3-/USB4_2_SSRX1-
C51	GND (FIXED)	D51	GND (FIXED)
C52	PEG_RX0+	D52	PEG_TX0+
C53	PEG_RX0-	D53	PEG_TX0-
C54	TYPE0#	D54	PEG_LANE_RV#
C55	PEG_RX1+	D55	PEG_TX1+
C56	PEG_RX1-	D56	PEG_TX1-
C57	TYPE1#	D57	TYPE2#
C58	PEG_RX2+	D58	PEG_TX2+
C59	PEG_RX2-	D59	PEG_TX2-
C60	GND (FIXED)	D60	GND (FIXED)
C61	PEG_RX3+	D61	PEG_TX3+
C62	PEG_RX3-	D62	PEG_TX3-
C63	RSVD	D63	GND
C64	RSVD	D64	GND
C65	PEG_RX4+	D65	PEG_TX4+
C66	PEG_RX4-	D66	PEG_TX4-

Table A.1: SOM-6884 A1 Pin Assignments

C67	RAPID_SHUTDOWN	D67	GND
C68	PEG_RX5+	D68	PEG_TX5+
C69	PEG_RX5-	D69	PEG_TX5-
C70	GND (FIXED)	D70	GND (FIXED)
C71	PEG_RX6+	D71	PEG_TX6+
C72	PEG_RX6-	D72	PEG_TX6-
C73	GND	D73	GND
C74	PEG_RX7+	D74	PEG_TX7+
C75	PEG_RX7-	D75	PEG_TX7-
C76	GND	D76	GND
C77	GND	D77	GND
C78	PEG_RX8+	D78	PEG_TX8+
C79	PEG_RX8-	D79	PEG_TX8-
C80	GND (FIXED)	D80	GND (FIXED)
C81	PEG_RX9+	D81	PEG_TX9+
C82	PEG_RX9-	D82	PEG_TX9-
C83	GND	D83	GND
C84	GND	D84	GND
C85	PEG_RX10+	D85	PEG_TX10+
C86	PEG_RX10-	D86	PEG_TX10-
C87	GND	D87	GND
C88	PEG_RX11+	D88	PEG_TX11+
C89	PEG_RX11-	D89	PEG_TX11-
C90	GND (FIXED)	D90	GND (FIXED)
C91	PEG_RX12+	D91	PEG_TX12+
C92	PEG_RX12-	D92	PEG_TX12-
C93	GND	D93	GND
C94	PEG_RX13+	D94	PEG_TX13+
C95	PEG_RX13-	D95	PEG_TX13-
C96	GND	D96	GND
C97	GND	D97	GND
C98	PEG_RX14+	D98	PEG_TX14+
C99	PEG_RX14-	D99	PEG_TX14-
C100	GND (FIXED)	D100	GND (FIXED)
C101	PEG_RX15+	D101	PEG_TX15+
C102	PEG_RX15-	D102	PEG_TX15-
C103	GND	D103	GND
C104	VCC_12V	D104	VCC_12V
C105	VCC_12V	D105	VCC_12V
C106	VCC_12V	D106	VCC_12V
C107	VCC_12V	D107	VCC_12V
C108	VCC_12V	D108	VCC_12V
C109	VCC_12V	D109	VCC_12V
C110	GND (FIXED)	D110	GND (FIXED)

Table A.2: SOM-6884 A2 Pin Assignments

SOM-6884 Rows A, B			
A1	GND (FIXED)	B1	GND (FIXED)
A2	GBE0_MDI3-	B2	GBE0_ACT#
A3	GBE0_MDI3+	B3	LPC_FRAME#/ESPI_CS0#
A4	GBE0_LINK100#	B4	LPC_AD0/ESPI_IO_0
A5	GBE0_LINK1000#	B5	LPC_AD1/ESPI_IO_1
A6	GBE0_MDI2-	B6	LPC_AD2/ESPI_IO_2
A7	GBE0_MDI2+	B7	LPC_AD3/ESPI_IO_3
A8	GBE0_LINK#	B8	LPC_DRQ0#/ESPI_ALERT0#
A9	GBE0_MDI1-	B9	LPC_DRQ1#/ESPI_ALERT1#
A10	GBE0_MDI1+	B10	LPC_CLK/ESPI_CK
A11	GND (FIXED)	B11	GND (FIXED)
A12	GBE0_MDI0-	B12	PWRBTN#
A13	GBE0_MDI0+	B13	SMB_CK
A14	GBE0_CTREF	B14	SMB_DAT
A15	SUS_S3#	B15	SMB_ALERT#
A16	SATA0_TX+	B16	SATA1_TX+
A17	SATA0_TX-	B17	SATA1_TX-
A18	SUS_S4#	B18	SUS_STAT#/ESPI_RESET#
A19	SATA0_RX+	B19	SATA1_RX+
A20	SATA0_RX-	B20	SATA1_RX-
A21	GND (FIXED)	B21	GND (FIXED)
A22	SATA2_TX+	B22	SATA3_TX+
A23	SATA2_TX-	B23	SATA3_TX-
A24	SUS_S5#	B24	PWR_OK
A25	SATA2_RX+	B25	SATA3_RX+
A26	SATA2_RX-	B26	SATA3_RX-
A27	BATLOW#	B27	WDT
A28	(S)ATA_ACT#	B28	HDA_SDIN2/SNDW0_CLK
A29	HDA_SYNC	B29	HDA_SDIN1/SNDW0_DAT
A30	HDA_RST#	B30	HDA_SDIN0
A31	GND (FIXED)	B31	GND (FIXED)
A32	HDA_BITCLK	B32	SPKR
A33	HDA_SDOUT	B33	I2C_CK
A34	BIOS_DIS0#/ESPI_SAFS	B34	I2C_DAT
A35	THRMTRIP#	B35	THRM#
A36	USB6-	B36	USB7-
A37	USB6+	B37	USB7+
A38	USB_6_7_OC#	B38	USB_4_5_OC#
A39	USB4-	B39	USB5-
A40	USB4+	B40	USB5+
A41	GND (FIXED)	B41	GND (FIXED)
A42	USB2-	B42	USB3-
A43	USB2+	B43	USB3+
A44	USB_2_3_OC#	B44	USB_0_1_OC#
A45	USB0-	B45	USB1-

Table A.2: SOM-6884 A2 Pin Assignments

A46	USB0+	B46	USB1+
A47	VCC_RTC	B47	ESPI_EN#
A48	RSMRST_OUT#	B48	USB0_HOST_PRSNT
A49	GBE0_SDP	B49	SYS_RESET#
A50	LPC_SERIRQ/ESPI_CS1#	B50	CB_RESET#
A51	GND (FIXED)	B51	GND (FIXED)
A52	PCIE_TX5+	B52	PCIE_RX5+
A53	PCIE_TX5-	B53	PCIE_RX5-
A54	GPI0	B54	GPO1
A55	PCIE_TX4+	B55	PCIE_RX4+
A56	PCIE_TX4-	B56	PCIE_RX4-
A57	GND	B57	GPO2
A58	PCIE_TX3+	B58	PCIE_RX3+
A59	PCIE_TX3-	B59	PCIE_RX3-
A60	GND (FIXED)	B60	GND (FIXED)
A61	PCIE_TX2+	B61	PCIE_RX2+
A62	PCIE_TX2-	B62	PCIE_RX2-
A63	GPI1	B63	GPO3
A64	PCIE_TX1+	B64	PCIE_RX1+
A65	PCIE_TX1-	B65	PCIE_RX1-
A66	GND	B66	WAKE0#
A67	GPI2	B67	WAKE1#
A68	PCIE_TX0+	B68	PCIE_RX0+
A69	PCIE_TX0-	B69	PCIE_RX0-
A70	GND (FIXED)	B70	GND (FIXED)
A71	LVDS_A0+	B71	LVDS_B0+
A72	LVDS_A0-	B72	LVDS_B0-
A73	LVDS_A1+	B73	LVDS_B1+
A74	LVDS_A1-	B74	LVDS_B1-
A75	LVDS_A2+	B75	LVDS_B2+
A76	LVDS_A2-	B76	LVDS_B2-
A77	LVDS_VDD_EN	B77	LVDS_B3+
A78	LVDS_A3+	B78	LVDS_B3-
A79	LVDS_A3-	B79	LVDS_BKLT_EN
A80	GND (FIXED)	B80	GND (FIXED)
A81	LVDS_A_CK+	B81	LVDS_B_CK+
A82	LVDS_A_CK-	B82	LVDS_B_CK-
A83	LVDS_I2C_CK	B83	LVDS_BKLT_CTRL
A84	LVDS_I2C_DAT	B84	VCC_5V_SBY
A85	GPI3	B85	VCC_5V_SBY
A86	GP_SPI_MOSI	B86	VCC_5V_SBY
A87	eDP_HPD	B87	VCC_5V_SBY
A88	PCIE_CLK_REF+	B88	BIOS_DIS1#
A89	PCIE_CLK_REF-	B89	VGA_RED
A90	GND (FIXED)	B90	GND (FIXED)
A91	SPI_POWER	B91	VGA_GRN
A92	SPI_MISO	B92	VGA_BLU

Table A.2: SOM-6884 A2 Pin Assignments

A93	GPO0	B93	VGA_HSYNC
A94	SPI_CLK	B94	VGA_VSYNC
A95	SPI_MOSI	B95	VGA_I2C_CK
A96	TPM_PP	B96	VGA_I2C_DAT
A97	TYPE10#	B97	SPI_CS#
A98	SER0_TX	B98	GP_SPI_MISO
A99	SER0_RX	B99	GP_SPI_CK
A100	GND (FIXED)	B100	GND (FIXED)
A101	SER1_TX	B101	FAN_PWMOUT
A102	SER1_RX	B102	FAN_TACHIN
A103	LID#	B103	SLEEP#
A104	VCC_12V	B104	VCC_12V
A105	VCC_12V	B105	VCC_12V
A106	VCC_12V	B106	VCC_12V
A107	VCC_12V	B107	VCC_12V
A108	VCC_12V	B108	VCC_12V
A109	VCC_12V	B109	VCC_12V
A110	GND (FIXED)	B110	GND (FIXED)
SOM-6884 Rows C, D			
C1	GND (FIXED)	D1	GND (FIXED)
C2	GND	D2	GND
C3	USB_SSRX0-	D3	USB_SSTX0-
C4	USB_SSRX0+	D4	USB_SSTX0+
C5	GND	D5	GND
C6	USB_SSRX1-	D6	USB_SSTX1-
C7	USB_SSRX1+	D7	USB_SSTX1+
C8	GND	D8	GND
C9	USB_SSRX2-	D9	USB_SSTX2-
C10	USB_SSRX2+	D10	USB_SSTX2+
C11	GND (FIXED)	D11	GND (FIXED)
C12	USB_SSRX3-	D12	USB_SSTX3-
C13	USB_SSRX3+	D13	USB_SSTX3+
C14	GND	D14	GND
C16	USB4_1_LSRX	D16	DDI1_CTRLCLK_AUX-
C17	USB4_RT_ENA	D17	USB4_PD_I2C_ALERT#
C18	GND	D18	PMCALERT#
C19	PCIE_RX6+	D19	PCIE_TX6+
C20	PCIE_RX6-	D20	PCIE_TX6-
C21	GND (FIXED)	D21	GND (FIXED)
C22	PCIE_RX7+	D22	PCIE_TX7+
C23	PCIE_RX7-	D23	PCIE_TX7-
C24	DDI1_HPD	D24	GND
C25	SML0_CLK	D25	GND
C26	SML0_DAT	D26	DDI1_PAIR0+
C27	SML1_CLK	D27	DDI1_PAIR0-
C28	SML1_DAT	D28	GND
C29	USB4_PD_I2C_CLK	D29	DDI1_PAIR1+

Table A.2: SOM-6884 A2 Pin Assignments

C30	USB4_PD_I2C_DAT	D30	DDI1_PAIR1-
C31	GND (FIXED)	D31	GND (FIXED)
C32	DDI2_CTRLCLK_AUX+ +	D32	DDI1_PAIR2+
C33	DDI2_CTRLDATA_AUX-	D33	DDI1_PAIR2-
C34	DDI2_DDC_AUX_SEL	D34	DDI1_DDC_AUX_SEL
C35	USB4_2_LSTX	D35	USB4_2_LSRX
C36	DDI3_CTRLCLK_AUX+	D36	DDI1_PAIR3+
C37	DDI3_CTRLDATA_AUX-	D37	DDI1_PAIR3-
C38	DDI3_DDC_AUX_SEL	D38	GND
C39	DDI3_PAIR0+	D39	DDI2_PAIR0+
C40	DDI3_PAIR0-	D40	DDI2_PAIR0-
C41	GND (FIXED)	D41	GND (FIXED)
C42	DDI3_PAIR1+	D42	DDI2_PAIR1+
C43	DDI3_PAIR1-	D43	DDI2_PAIR1-
C44	DDI3_HPD	D44	DDI2_HPD
C45	GP_SPI_CS#	D45	GND
C46	DDI3_PAIR2+	D46	DDI2_PAIR2+
C47	DDI3_PAIR2-	D47	DDI2_PAIR2- -
C48	RSVD	D48	GND
C49	DDI3_PAIR3+	D49	DDI2_PAIR3+ +
C50	DDI3_PAIR3-	D50	DDI2_PAIR3-
C51	GND (FIXED)	D51	GND (FIXED)
C52	PEG_RX0+	D52	PEG_TX0+
C53	PEG_RX0-	D53	PEG_TX0-
C54	TYPE0#	D54	PEG_LANE_RV#
C55	PEG_RX1+	D55	PEG_TX1+
C56	PEG_RX1-	D56	PEG_TX1-
C57	TYPE1#	D57	TYPE2#
C58	PEG_RX2+	D58	PEG_TX2+
C59	PEG_RX2-	D59	PEG_TX2-
C60	GND (FIXED)	D60	GND (FIXED)
C61	PEG_RX3+	D61	PEG_TX3+
C62	PEG_RX3-	D62	PEG_TX3-
C63	RSVD	D63	GND
C64	RSVD	D64	GND
C65	PEG_RX4+	D65	PEG_TX4+
C66	PEG_RX4-	D66	PEG_TX4-
C67	RAPID_SHUTDOWN	D67	GND
C68	PEG_RX5+	D68	PEG_TX5+
C69	PEG_RX5-	D69	PEG_TX5-
C70	GND (FIXED)	D70	GND (FIXED)
C71	PEG_RX6+	D71	PEG_TX6+
C72	PEG_RX6-	D72	PEG_TX6-
C73	GND	D73	GND
C74	PEG_RX7+	D74	PEG_TX7+
C75	PEG_RX7-	D75	PEG_TX7-
C76	GND	D76	GND

Table A.2: SOM-6884 A2 Pin Assignments			
C78	PEG_RX8+	D78	PEG_TX8+
C79	PEG_RX8-	D79	PEG_TX8-
C80	GND (FIXED)	D80	GND (FIXED)
C81	PEG_RX9+	D81	PEG_TX9+
C82	PEG_RX9-	D82	PEG_TX9-
C83	GND	D83	GND
C85	PEG_RX10+	D85	PEG_TX10+
C86	PEG_RX10-	D86	PEG_TX10-
C87	GND	D87	GND
C88	PEG_RX11+	D88	PEG_TX11+
C89	PEG_RX11-	D89	PEG_TX11-
C90	GND (FIXED)	D90	GND (FIXED)
C91	PEG_RX12+	D91	PEG_TX12+
C92	PEG_RX12-	D92	PEG_TX12-
C93	GND	D93	GND
C94	PEG_RX13+	D94	PEG_TX13+
C95	PEG_RX13-	D95	PEG_TX13-
C96	GND	D96	GND
C97	GND	D97	GND
C98	PEG_RX14+	D98	PEG_TX14+
C99	PEG_RX14-	D99	PEG_TX14-
C100	GND (FIXED)	D100	GND (FIXED)
C101	PEG_RX15+	D101	PEG_TX15+
C102	PEG_RX15-	D102	PEG_TX15-
C103	GND	D103	GND
C104	VCC_12V	D104	VCC_12V
C105	VCC_12V	D105	VCC_12V
C106	VCC_12V	D106	VCC_12V
C107	VCC_12V	D107	VCC_12V
C108	VCC_12V	D108	VCC_12V
C109	VCC_12V	D109	VCC_12V
C110	GND (FIXED)	D110	GND (FIXED)

Appendix **B**

Watchdog Timer

This appendix gives you information for the watchdog timer programming on the SOM-6884 CPU System on Module.

Sections include:

- Programming the Watchdog Timer

B.1 Programming the Watchdog Timer

Table B.1: Programming the Watchdog Timer

Trigger Event	Note
IRQ	(BIOS setting default disable)**
NMI	N/A
SCI	Power button event
Power Off	Support
H/W Restart	Support
WDT Pin Activate	Support

** WDT new driver support automatically selects the available IRQ number from BIOS, and then sets it to EC. Only Win10 supports this.

In other OS, it will still use the IRQ number from the BIOS setting as usual.

For details, please refer to the iManager and Software API User Manual.

Appendix **C**

Programming GPIO

This Appendix illustrates the General Purpose Input and Output pin settings.

Sections include:

- GPIO Register

C.1 GPIO Register

Table C.1: GPIO Register

GPIO Byte Mapping	H/W Pin Name
BIT0	GPI0
BIT1	GPI1
BIT2	GPI2
BIT3	GPI3
BIT4	GPO0
BIT5	GPO1
BIT6	GPO2
BIT7	GPO3

For details, please refer to the iManager and Software API User Manual.

Appendix **D**

System Assignments

This appendix gives you information about the system resource allocation on the SOM-6884 CPU System on Module

Sections include:

- System I/O Ports
- DMA Channel Assignments
- Interrupt Assignments
- 1st MB Memory Map

D.1 System I/O Ports

Table D.1: System I/O Ports

Addr.Range (Hex)	Device
0x00000299-0x0000029A	Motherboard resources
0x000002C0-0x000002DF	Motherboard resources
0x000002A0-0x000002BF	Motherboard resources
0x00000290-0x0000029F	Motherboard resources
0x0000029E-0x000002AD	Motherboard resources
0x00000060-0x0000006F	Motherboard resources
0x00000200-0x0000027F	Motherboard resources
0x00000300-0x0000037F	Motherboard resources
0x00000280-0x0000028F	Motherboard resources
0x00000280-0x0000028F	Motherboard resources
0x000002F0-0x000002F7	Motherboard resources
0x0000002E-0x0000002F	Motherboard resources
0x0000004E-0x0000004F	Motherboard resources
0x00000061-0x00000061	Motherboard resources
0x00000063-0x00000063	Motherboard resources
0x00000065-0x00000065	Motherboard resources
0x00000067-0x00000067	Motherboard resources
0x00000070-0x00000070	Motherboard resources
0x00000080-0x00000080	Motherboard resources
0x00000092-0x00000092	Motherboard resources
0x000000B2-0x000000B3	Motherboard resources
0x00000068-0x0000006F	Motherboard resources
0x0000164E-0x0000164F	Motherboard resources
0x00000062-0x00000062	Microsoft ACPI-Compliant Embedded Controller
0x00000066-0x00000066	Microsoft ACPI-Compliant Embedded Controller
0x00000020-0x00000021	Programmable interrupt controller
0x00000024-0x00000025	Programmable interrupt controller
0x00000028-0x00000029	Programmable interrupt controller
0x0000002C-0x0000002D	Programmable interrupt controller
0x00000030-0x00000031	Programmable interrupt controller
0x00000034-0x00000035	Programmable interrupt controller
0x00000038-0x00000039	Programmable interrupt controller
0x0000003C-0x0000003D	Programmable interrupt controller
0x000000A0-0x000000A1	Programmable interrupt controller
0x000000A4-0x000000A5	Programmable interrupt controller
0x000000A8-0x000000A9	Programmable interrupt controller
0x000000AC-0x000000AD	Programmable interrupt controller
0x000000B0-0x000000B1	Programmable interrupt controller
0x000000B4-0x000000B5	Programmable interrupt controller
0x000000B8-0x000000B9	Programmable interrupt controller
0x000000BC-0x000000BD	Programmable interrupt controller
0x000004D0-0x000004D1	Programmable interrupt controller
0x00003090-0x00003097	Standard SATA AHCI Controller

Table D.1: System I/O Ports

0x00003080-0x00003083	Standard SATA AHCI Controller
0x00003060-0x0000307F	Standard SATA AHCI Controller
0x000003F8-0x000003FF	Communications Port (COM1)
0x000002F8-0x000002FF	Communications Port (COM2)
0x00001854-0x00001857	Motherboard resources
0x00000000-0x00000CF7	PCI Express Root Complex
0x00000D00-0x0000FFFF	PCI Express Root Complex
0x00000040-0x00000043	System timer
0x00000050-0x00000053	System timer
0x00003000-0x0000303F	Intel® Iris® Xe Graphics
0x00002000-0x000020FE	Motherboard resources
0x0000EFA0-0x0000EFBF	Intel® SMBus - 51A3

D.2 Interrupt Assignments

Table D.2: A1 Version Interrupt Assignments

Interrupt#	Interrupt Source
IRQ 16	Intel® Serial IO UART Host Controller - 51A8
IRQ 4294967291	Standard SATA AHCI Controller
IRQ 14	Intel® Serial I/O GPIO Host Controller - INTC1055
IRQ 4294967274	Intel® USB 3.10 eXtensible Host Controller - 1.20 (Microsoft)
IRQ 4	Communications Port (COM1)
IRQ 3	Communications Port (COM2)
IRQ 4294967294	PCI Express Root Port
IRQ 4294967290	Standard NVM Express Controller
IRQ 4294967289	Standard NVM Express Controller
IRQ 4294967288	Standard NVM Express Controller
IRQ 4294967287	Standard NVM Express Controller
IRQ 4294967286	Standard NVM Express Controller
IRQ 4294967285	Standard NVM Express Controller
IRQ 4294967284	Standard NVM Express Controller
IRQ 4294967283	Standard NVM Express Controller
IRQ 4294967282	Standard NVM Express Controller
IRQ 4294967281	Standard NVM Express Controller
IRQ 4294967280	Standard NVM Express Controller
IRQ 4294967279	Standard NVM Express Controller
IRQ 4294967278	Standard NVM Express Controller
IRQ 4294967277	Standard NVM Express Controller
IRQ 4294967276	Standard NVM Express Controller
IRQ 4294967275	Standard NVM Express Controller
IRQ 40	Intel® Serial I/O I2C Host Controller - 51E9
IRQ 4294967257	Intel® Smart Sound Technology BUS
IRQ 4294967293	Intel® PCI Express Root Port #9 - 51B0
IRQ 6	Motherboard resources
IRQ 0	System timer
IRQ 55	Microsoft ACPI-Compliant System
IRQ 56	Microsoft ACPI-Compliant System
IRQ 57	Microsoft ACPI-Compliant System
IRQ 58	Microsoft ACPI-Compliant System
IRQ 59	Microsoft ACPI-Compliant System
IRQ 60	Microsoft ACPI-Compliant System
IRQ 61	Microsoft ACPI-Compliant System
IRQ 62	Microsoft ACPI-Compliant System
IRQ 63	Microsoft ACPI-Compliant System
IRQ 64	Microsoft ACPI-Compliant System
IRQ 65	Microsoft ACPI-Compliant System
IRQ 66	Microsoft ACPI-Compliant System
IRQ 67	Microsoft ACPI-Compliant System
IRQ 68	Microsoft ACPI-Compliant System
IRQ 69	Microsoft ACPI-Compliant System

Table D.2: A1 Version Interrupt Assignments	
IRQ 70	Microsoft ACPI-Compliant System
IRQ 71	Microsoft ACPI-Compliant System
IRQ 72	Microsoft ACPI-Compliant System
IRQ 73	Microsoft ACPI-Compliant System
IRQ 74	Microsoft ACPI-Compliant System
IRQ 75	Microsoft ACPI-Compliant System
IRQ 76	Microsoft ACPI-Compliant System
IRQ 77	Microsoft ACPI-Compliant System
IRQ 78	Microsoft ACPI-Compliant System
IRQ 79	Microsoft ACPI-Compliant System
IRQ 80	Microsoft ACPI-Compliant System
IRQ 81	Microsoft ACPI-Compliant System
IRQ 82	Microsoft ACPI-Compliant System
IRQ 83	Microsoft ACPI-Compliant System
IRQ 84	Microsoft ACPI-Compliant System
IRQ 85	Microsoft ACPI-Compliant System
IRQ 86	Microsoft ACPI-Compliant System
IRQ 87	Microsoft ACPI-Compliant System
IRQ 88	Microsoft ACPI-Compliant System
IRQ 89	Microsoft ACPI-Compliant System
IRQ 90	Microsoft ACPI-Compliant System
IRQ 91	Microsoft ACPI-Compliant System
IRQ 92	Microsoft ACPI-Compliant System
IRQ 93	Microsoft ACPI-Compliant System
IRQ 94	Microsoft ACPI-Compliant System
IRQ 95	Microsoft ACPI-Compliant System
IRQ 96	Microsoft ACPI-Compliant System
IRQ 97	Microsoft ACPI-Compliant System
IRQ 98	Microsoft ACPI-Compliant System
IRQ 99	Microsoft ACPI-Compliant System
IRQ 100	Microsoft ACPI-Compliant System
IRQ 101	Microsoft ACPI-Compliant System
IRQ 102	Microsoft ACPI-Compliant System
IRQ 103	Microsoft ACPI-Compliant System
IRQ 104	Microsoft ACPI-Compliant System
IRQ 105	Microsoft ACPI-Compliant System
IRQ 106	Microsoft ACPI-Compliant System
IRQ 107	Microsoft ACPI-Compliant System
IRQ 108	Microsoft ACPI-Compliant System
IRQ 109	Microsoft ACPI-Compliant System
IRQ 110	Microsoft ACPI-Compliant System
IRQ 111	Microsoft ACPI-Compliant System
IRQ 112	Microsoft ACPI-Compliant System
IRQ 113	Microsoft ACPI-Compliant System
IRQ 114	Microsoft ACPI-Compliant System
IRQ 115	Microsoft ACPI-Compliant System
IRQ 116	Microsoft ACPI-Compliant System

Table D.2: A1 Version Interrupt Assignments

IRQ 117	Microsoft ACPI-Compliant System
IRQ 118	Microsoft ACPI-Compliant System
IRQ 119	Microsoft ACPI-Compliant System
IRQ 120	Microsoft ACPI-Compliant System
IRQ 121	Microsoft ACPI-Compliant System
IRQ 122	Microsoft ACPI-Compliant System
IRQ 123	Microsoft ACPI-Compliant System
IRQ 124	Microsoft ACPI-Compliant System
IRQ 125	Microsoft ACPI-Compliant System
IRQ 126	Microsoft ACPI-Compliant System
IRQ 127	Microsoft ACPI-Compliant System
IRQ 128	Microsoft ACPI-Compliant System
IRQ 129	Microsoft ACPI-Compliant System
IRQ 130	Microsoft ACPI-Compliant System
IRQ 131	Microsoft ACPI-Compliant System
IRQ 132	Microsoft ACPI-Compliant System
IRQ 133	Microsoft ACPI-Compliant System
IRQ 134	Microsoft ACPI-Compliant System
IRQ 135	Microsoft ACPI-Compliant System
IRQ 136	Microsoft ACPI-Compliant System
IRQ 137	Microsoft ACPI-Compliant System
IRQ 138	Microsoft ACPI-Compliant System
IRQ 139	Microsoft ACPI-Compliant System
IRQ 140	Microsoft ACPI-Compliant System
IRQ 141	Microsoft ACPI-Compliant System
IRQ 142	Microsoft ACPI-Compliant System
IRQ 143	Microsoft ACPI-Compliant System
IRQ 144	Microsoft ACPI-Compliant System
IRQ 145	Microsoft ACPI-Compliant System
IRQ 146	Microsoft ACPI-Compliant System
IRQ 147	Microsoft ACPI-Compliant System
IRQ 148	Microsoft ACPI-Compliant System
IRQ 149	Microsoft ACPI-Compliant System
IRQ 150	Microsoft ACPI-Compliant System
IRQ 151	Microsoft ACPI-Compliant System
IRQ 152	Microsoft ACPI-Compliant System
IRQ 153	Microsoft ACPI-Compliant System
IRQ 154	Microsoft ACPI-Compliant System
IRQ 155	Microsoft ACPI-Compliant System
IRQ 156	Microsoft ACPI-Compliant System
IRQ 157	Microsoft ACPI-Compliant System
IRQ 158	Microsoft ACPI-Compliant System
IRQ 159	Microsoft ACPI-Compliant System
IRQ 160	Microsoft ACPI-Compliant System
IRQ 161	Microsoft ACPI-Compliant System
IRQ 162	Microsoft ACPI-Compliant System
IRQ 163	Microsoft ACPI-Compliant System

Table D.2: A1 Version Interrupt Assignments	
IRQ 164	Microsoft ACPI-Compliant System
IRQ 165	Microsoft ACPI-Compliant System
IRQ 166	Microsoft ACPI-Compliant System
IRQ 167	Microsoft ACPI-Compliant System
IRQ 168	Microsoft ACPI-Compliant System
IRQ 169	Microsoft ACPI-Compliant System
IRQ 170	Microsoft ACPI-Compliant System
IRQ 171	Microsoft ACPI-Compliant System
IRQ 172	Microsoft ACPI-Compliant System
IRQ 173	Microsoft ACPI-Compliant System
IRQ 174	Microsoft ACPI-Compliant System
IRQ 175	Microsoft ACPI-Compliant System
IRQ 176	Microsoft ACPI-Compliant System
IRQ 177	Microsoft ACPI-Compliant System
IRQ 178	Microsoft ACPI-Compliant System
IRQ 179	Microsoft ACPI-Compliant System
IRQ 180	Microsoft ACPI-Compliant System
IRQ 181	Microsoft ACPI-Compliant System
IRQ 182	Microsoft ACPI-Compliant System
IRQ 183	Microsoft ACPI-Compliant System
IRQ 184	Microsoft ACPI-Compliant System
IRQ 185	Microsoft ACPI-Compliant System
IRQ 186	Microsoft ACPI-Compliant System
IRQ 187	Microsoft ACPI-Compliant System
IRQ 188	Microsoft ACPI-Compliant System
IRQ 189	Microsoft ACPI-Compliant System
IRQ 190	Microsoft ACPI-Compliant System
IRQ 191	Microsoft ACPI-Compliant System
IRQ 192	Microsoft ACPI-Compliant System
IRQ 193	Microsoft ACPI-Compliant System
IRQ 194	Microsoft ACPI-Compliant System
IRQ 195	Microsoft ACPI-Compliant System
IRQ 196	Microsoft ACPI-Compliant System
IRQ 197	Microsoft ACPI-Compliant System
IRQ 198	Microsoft ACPI-Compliant System
IRQ 199	Microsoft ACPI-Compliant System
IRQ 200	Microsoft ACPI-Compliant System
IRQ 201	Microsoft ACPI-Compliant System
IRQ 202	Microsoft ACPI-Compliant System
IRQ 203	Microsoft ACPI-Compliant System
IRQ 204	Microsoft ACPI-Compliant System
IRQ 256	Microsoft ACPI-Compliant System
IRQ 257	Microsoft ACPI-Compliant System
IRQ 258	Microsoft ACPI-Compliant System
IRQ 259	Microsoft ACPI-Compliant System
IRQ 260	Microsoft ACPI-Compliant System
IRQ 261	Microsoft ACPI-Compliant System

Table D.2: A1 Version Interrupt Assignments

IRQ 262	Microsoft ACPI-Compliant System
IRQ 263	Microsoft ACPI-Compliant System
IRQ 264	Microsoft ACPI-Compliant System
IRQ 265	Microsoft ACPI-Compliant System
IRQ 266	Microsoft ACPI-Compliant System
IRQ 267	Microsoft ACPI-Compliant System
IRQ 268	Microsoft ACPI-Compliant System
IRQ 269	Microsoft ACPI-Compliant System
IRQ 270	Microsoft ACPI-Compliant System
IRQ 271	Microsoft ACPI-Compliant System
IRQ 272	Microsoft ACPI-Compliant System
IRQ 273	Microsoft ACPI-Compliant System
IRQ 274	Microsoft ACPI-Compliant System
IRQ 275	Microsoft ACPI-Compliant System
IRQ 276	Microsoft ACPI-Compliant System
IRQ 277	Microsoft ACPI-Compliant System
IRQ 278	Microsoft ACPI-Compliant System
IRQ 279	Microsoft ACPI-Compliant System
IRQ 280	Microsoft ACPI-Compliant System
IRQ 281	Microsoft ACPI-Compliant System
IRQ 282	Microsoft ACPI-Compliant System
IRQ 283	Microsoft ACPI-Compliant System
IRQ 284	Microsoft ACPI-Compliant System
IRQ 285	Microsoft ACPI-Compliant System
IRQ 286	Microsoft ACPI-Compliant System
IRQ 287	Microsoft ACPI-Compliant System
IRQ 288	Microsoft ACPI-Compliant System
IRQ 289	Microsoft ACPI-Compliant System
IRQ 290	Microsoft ACPI-Compliant System
IRQ 291	Microsoft ACPI-Compliant System
IRQ 292	Microsoft ACPI-Compliant System
IRQ 293	Microsoft ACPI-Compliant System
IRQ 294	Microsoft ACPI-Compliant System
IRQ 295	Microsoft ACPI-Compliant System
IRQ 296	Microsoft ACPI-Compliant System
IRQ 297	Microsoft ACPI-Compliant System
IRQ 298	Microsoft ACPI-Compliant System
IRQ 299	Microsoft ACPI-Compliant System
IRQ 300	Microsoft ACPI-Compliant System
IRQ 301	Microsoft ACPI-Compliant System
IRQ 302	Microsoft ACPI-Compliant System
IRQ 303	Microsoft ACPI-Compliant System
IRQ 304	Microsoft ACPI-Compliant System
IRQ 305	Microsoft ACPI-Compliant System
IRQ 306	Microsoft ACPI-Compliant System
IRQ 307	Microsoft ACPI-Compliant System
IRQ 308	Microsoft ACPI-Compliant System

Table D.2: A1 Version Interrupt Assignments	
IRQ 309	Microsoft ACPI-Compliant System
IRQ 310	Microsoft ACPI-Compliant System
IRQ 311	Microsoft ACPI-Compliant System
IRQ 312	Microsoft ACPI-Compliant System
IRQ 313	Microsoft ACPI-Compliant System
IRQ 314	Microsoft ACPI-Compliant System
IRQ 315	Microsoft ACPI-Compliant System
IRQ 316	Microsoft ACPI-Compliant System
IRQ 317	Microsoft ACPI-Compliant System
IRQ 318	Microsoft ACPI-Compliant System
IRQ 319	Microsoft ACPI-Compliant System
IRQ 320	Microsoft ACPI-Compliant System
IRQ 321	Microsoft ACPI-Compliant System
IRQ 322	Microsoft ACPI-Compliant System
IRQ 323	Microsoft ACPI-Compliant System
IRQ 324	Microsoft ACPI-Compliant System
IRQ 325	Microsoft ACPI-Compliant System
IRQ 326	Microsoft ACPI-Compliant System
IRQ 327	Microsoft ACPI-Compliant System
IRQ 328	Microsoft ACPI-Compliant System
IRQ 329	Microsoft ACPI-Compliant System
IRQ 330	Microsoft ACPI-Compliant System
IRQ 331	Microsoft ACPI-Compliant System
IRQ 332	Microsoft ACPI-Compliant System
IRQ 333	Microsoft ACPI-Compliant System
IRQ 334	Microsoft ACPI-Compliant System
IRQ 335	Microsoft ACPI-Compliant System
IRQ 336	Microsoft ACPI-Compliant System
IRQ 337	Microsoft ACPI-Compliant System
IRQ 338	Microsoft ACPI-Compliant System
IRQ 339	Microsoft ACPI-Compliant System
IRQ 340	Microsoft ACPI-Compliant System
IRQ 341	Microsoft ACPI-Compliant System
IRQ 342	Microsoft ACPI-Compliant System
IRQ 343	Microsoft ACPI-Compliant System
IRQ 344	Microsoft ACPI-Compliant System
IRQ 345	Microsoft ACPI-Compliant System
IRQ 346	Microsoft ACPI-Compliant System
IRQ 347	Microsoft ACPI-Compliant System
IRQ 348	Microsoft ACPI-Compliant System
IRQ 349	Microsoft ACPI-Compliant System
IRQ 350	Microsoft ACPI-Compliant System
IRQ 351	Microsoft ACPI-Compliant System
IRQ 352	Microsoft ACPI-Compliant System
IRQ 353	Microsoft ACPI-Compliant System
IRQ 354	Microsoft ACPI-Compliant System
IRQ 355	Microsoft ACPI-Compliant System

Table D.2: A1 Version Interrupt Assignments

IRQ 356	Microsoft ACPI-Compliant System
IRQ 357	Microsoft ACPI-Compliant System
IRQ 358	Microsoft ACPI-Compliant System
IRQ 359	Microsoft ACPI-Compliant System
IRQ 360	Microsoft ACPI-Compliant System
IRQ 361	Microsoft ACPI-Compliant System
IRQ 362	Microsoft ACPI-Compliant System
IRQ 363	Microsoft ACPI-Compliant System
IRQ 364	Microsoft ACPI-Compliant System
IRQ 365	Microsoft ACPI-Compliant System
IRQ 366	Microsoft ACPI-Compliant System
IRQ 367	Microsoft ACPI-Compliant System
IRQ 368	Microsoft ACPI-Compliant System
IRQ 369	Microsoft ACPI-Compliant System
IRQ 370	Microsoft ACPI-Compliant System
IRQ 371	Microsoft ACPI-Compliant System
IRQ 372	Microsoft ACPI-Compliant System
IRQ 373	Microsoft ACPI-Compliant System
IRQ 374	Microsoft ACPI-Compliant System
IRQ 375	Microsoft ACPI-Compliant System
IRQ 376	Microsoft ACPI-Compliant System
IRQ 377	Microsoft ACPI-Compliant System
IRQ 378	Microsoft ACPI-Compliant System
IRQ 379	Microsoft ACPI-Compliant System
IRQ 380	Microsoft ACPI-Compliant System
IRQ 381	Microsoft ACPI-Compliant System
IRQ 382	Microsoft ACPI-Compliant System
IRQ 383	Microsoft ACPI-Compliant System
IRQ 384	Microsoft ACPI-Compliant System
IRQ 385	Microsoft ACPI-Compliant System
IRQ 386	Microsoft ACPI-Compliant System
IRQ 387	Microsoft ACPI-Compliant System
IRQ 388	Microsoft ACPI-Compliant System
IRQ 389	Microsoft ACPI-Compliant System
IRQ 390	Microsoft ACPI-Compliant System
IRQ 391	Microsoft ACPI-Compliant System
IRQ 392	Microsoft ACPI-Compliant System
IRQ 393	Microsoft ACPI-Compliant System
IRQ 394	Microsoft ACPI-Compliant System
IRQ 395	Microsoft ACPI-Compliant System
IRQ 396	Microsoft ACPI-Compliant System
IRQ 397	Microsoft ACPI-Compliant System
IRQ 398	Microsoft ACPI-Compliant System
IRQ 399	Microsoft ACPI-Compliant System
IRQ 400	Microsoft ACPI-Compliant System
IRQ 401	Microsoft ACPI-Compliant System
IRQ 402	Microsoft ACPI-Compliant System

Table D.2: A1 Version Interrupt Assignments	
IRQ 403	Microsoft ACPI-Compliant System
IRQ 404	Microsoft ACPI-Compliant System
IRQ 405	Microsoft ACPI-Compliant System
IRQ 406	Microsoft ACPI-Compliant System
IRQ 407	Microsoft ACPI-Compliant System
IRQ 408	Microsoft ACPI-Compliant System
IRQ 409	Microsoft ACPI-Compliant System
IRQ 410	Microsoft ACPI-Compliant System
IRQ 411	Microsoft ACPI-Compliant System
IRQ 412	Microsoft ACPI-Compliant System
IRQ 413	Microsoft ACPI-Compliant System
IRQ 414	Microsoft ACPI-Compliant System
IRQ 415	Microsoft ACPI-Compliant System
IRQ 416	Microsoft ACPI-Compliant System
IRQ 417	Microsoft ACPI-Compliant System
IRQ 418	Microsoft ACPI-Compliant System
IRQ 419	Microsoft ACPI-Compliant System
IRQ 420	Microsoft ACPI-Compliant System
IRQ 421	Microsoft ACPI-Compliant System
IRQ 422	Microsoft ACPI-Compliant System
IRQ 423	Microsoft ACPI-Compliant System
IRQ 424	Microsoft ACPI-Compliant System
IRQ 425	Microsoft ACPI-Compliant System
IRQ 426	Microsoft ACPI-Compliant System
IRQ 427	Microsoft ACPI-Compliant System
IRQ 428	Microsoft ACPI-Compliant System
IRQ 429	Microsoft ACPI-Compliant System
IRQ 430	Microsoft ACPI-Compliant System
IRQ 431	Microsoft ACPI-Compliant System
IRQ 432	Microsoft ACPI-Compliant System
IRQ 433	Microsoft ACPI-Compliant System
IRQ 434	Microsoft ACPI-Compliant System
IRQ 435	Microsoft ACPI-Compliant System
IRQ 436	Microsoft ACPI-Compliant System
IRQ 437	Microsoft ACPI-Compliant System
IRQ 438	Microsoft ACPI-Compliant System
IRQ 439	Microsoft ACPI-Compliant System
IRQ 440	Microsoft ACPI-Compliant System
IRQ 441	Microsoft ACPI-Compliant System
IRQ 442	Microsoft ACPI-Compliant System
IRQ 443	Microsoft ACPI-Compliant System
IRQ 444	Microsoft ACPI-Compliant System
IRQ 445	Microsoft ACPI-Compliant System
IRQ 446	Microsoft ACPI-Compliant System
IRQ 447	Microsoft ACPI-Compliant System
IRQ 448	Microsoft ACPI-Compliant System
IRQ 449	Microsoft ACPI-Compliant System

Table D.2: A1 Version Interrupt Assignments

IRQ 450	Microsoft ACPI-Compliant System
IRQ 451	Microsoft ACPI-Compliant System
IRQ 452	Microsoft ACPI-Compliant System
IRQ 453	Microsoft ACPI-Compliant System
IRQ 454	Microsoft ACPI-Compliant System
IRQ 455	Microsoft ACPI-Compliant System
IRQ 456	Microsoft ACPI-Compliant System
IRQ 457	Microsoft ACPI-Compliant System
IRQ 458	Microsoft ACPI-Compliant System
IRQ 459	Microsoft ACPI-Compliant System
IRQ 460	Microsoft ACPI-Compliant System
IRQ 461	Microsoft ACPI-Compliant System
IRQ 462	Microsoft ACPI-Compliant System
IRQ 463	Microsoft ACPI-Compliant System
IRQ 464	Microsoft ACPI-Compliant System
IRQ 465	Microsoft ACPI-Compliant System
IRQ 466	Microsoft ACPI-Compliant System
IRQ 467	Microsoft ACPI-Compliant System
IRQ 468	Microsoft ACPI-Compliant System
IRQ 469	Microsoft ACPI-Compliant System
IRQ 470	Microsoft ACPI-Compliant System
IRQ 471	Microsoft ACPI-Compliant System
IRQ 472	Microsoft ACPI-Compliant System
IRQ 473	Microsoft ACPI-Compliant System
IRQ 474	Microsoft ACPI-Compliant System
IRQ 475	Microsoft ACPI-Compliant System
IRQ 476	Microsoft ACPI-Compliant System
IRQ 477	Microsoft ACPI-Compliant System
IRQ 478	Microsoft ACPI-Compliant System
IRQ 479	Microsoft ACPI-Compliant System
IRQ 480	Microsoft ACPI-Compliant System
IRQ 481	Microsoft ACPI-Compliant System
IRQ 482	Microsoft ACPI-Compliant System
IRQ 483	Microsoft ACPI-Compliant System
IRQ 484	Microsoft ACPI-Compliant System
IRQ 485	Microsoft ACPI-Compliant System
IRQ 486	Microsoft ACPI-Compliant System
IRQ 487	Microsoft ACPI-Compliant System
IRQ 488	Microsoft ACPI-Compliant System
IRQ 489	Microsoft ACPI-Compliant System
IRQ 490	Microsoft ACPI-Compliant System
IRQ 491	Microsoft ACPI-Compliant System
IRQ 492	Microsoft ACPI-Compliant System
IRQ 493	Microsoft ACPI-Compliant System
IRQ 494	Microsoft ACPI-Compliant System
IRQ 495	Microsoft ACPI-Compliant System
IRQ 496	Microsoft ACPI-Compliant System

Table D.2: A1 Version Interrupt Assignments	
IRQ 497	Microsoft ACPI-Compliant System
IRQ 498	Microsoft ACPI-Compliant System
IRQ 499	Microsoft ACPI-Compliant System
IRQ 500	Microsoft ACPI-Compliant System
IRQ 501	Microsoft ACPI-Compliant System
IRQ 502	Microsoft ACPI-Compliant System
IRQ 503	Microsoft ACPI-Compliant System
IRQ 504	Microsoft ACPI-Compliant System
IRQ 505	Microsoft ACPI-Compliant System
IRQ 506	Microsoft ACPI-Compliant System
IRQ 507	Microsoft ACPI-Compliant System
IRQ 508	Microsoft ACPI-Compliant System
IRQ 509	Microsoft ACPI-Compliant System
IRQ 510	Microsoft ACPI-Compliant System
IRQ 511	Microsoft ACPI-Compliant System
IRQ 4294967256	Intel® Management Engine Interface #1
IRQ 41	Trusted Platform Module 2.0
IRQ 27	Intel® Serial I/O I2C Host Controller - 51E8
IRQ 4294967292	PCI Express Root Port
IRQ 4294967273	Intel® Iris® Xe Graphics
IRQ 36	Intel® Serial I/O SPI Host Controller - 51AA
IRQ 4294967272	Intel® Ethernet Controller I226-IT
IRQ 4294967271	Intel® Ethernet Controller I226-IT
IRQ 4294967270	Intel® Ethernet Controller I226-IT
IRQ 4294967269	Intel® Ethernet Controller I226-IT
IRQ 4294967268	Intel® Ethernet Controller I226-IT
IRQ 4294967267	Intel® Ethernet Controller I226-IT
IRQ 4294967266	Intel® Ethernet Controller I226-IT
IRQ 4294967265	Intel® Ethernet Controller I226-IT
IRQ 4294967264	Intel® Ethernet Controller I226-IT
IRQ 4294967263	Intel® Ethernet Controller I226-IT
IRQ 4294967262	Intel® Ethernet Controller I226-IT
IRQ 4294967261	Intel® Ethernet Controller I226-IT
IRQ 4294967260	Intel® Ethernet Controller I226-IT
IRQ 4294967259	Intel® Ethernet Controller I226-IT
IRQ 4294967258	Intel® Ethernet Controller I226-IT

Table D.3: A2 Version Interrupt Assignments

Interrupt#	Interrupt Source
IRQ 0	System timer
IRQ 3	Communications Port (COM2)
IRQ 4	Communications Port (COM1)
IRQ 6	Motherboard resources
IRQ 14	Intel® Serial IO GPIO Host Controller - INTC1055
IRQ 16	Intel® Serial IO UART Host Controller - 51A8
IRQ 27	Intel® Serial IO I2C Host Controller - 51E8
IRQ 36	Intel® Serial IO SPI Host Controller - 51AA
IRQ 40	Intel® Serial IO I2C Host Controller - 51E9
IRQ 41	Trusted Platform Module 2.0
IRQ 55	Microsoft ACPI-Compliant System
IRQ 56	Microsoft ACPI-Compliant System
IRQ 57	Microsoft ACPI-Compliant System
IRQ 58	Microsoft ACPI-Compliant System
IRQ 59	Microsoft ACPI-Compliant System
IRQ 60	Microsoft ACPI-Compliant System
IRQ 61	Microsoft ACPI-Compliant System
IRQ 62	Microsoft ACPI-Compliant System
IRQ 63	Microsoft ACPI-Compliant System
IRQ 64	Microsoft ACPI-Compliant System
IRQ 65	Microsoft ACPI-Compliant System
IRQ 66	Microsoft ACPI-Compliant System
IRQ 67	Microsoft ACPI-Compliant System
IRQ 68	Microsoft ACPI-Compliant System
IRQ 69	Microsoft ACPI-Compliant System
IRQ 70	Microsoft ACPI-Compliant System
IRQ 71	Microsoft ACPI-Compliant System
IRQ 72	Microsoft ACPI-Compliant System
IRQ 73	Microsoft ACPI-Compliant System
IRQ 74	Microsoft ACPI-Compliant System
IRQ 75	Microsoft ACPI-Compliant System
IRQ 76	Microsoft ACPI-Compliant System
IRQ 77	Microsoft ACPI-Compliant System
IRQ 78	Microsoft ACPI-Compliant System
IRQ 79	Microsoft ACPI-Compliant System
IRQ 80	Microsoft ACPI-Compliant System
IRQ 81	Microsoft ACPI-Compliant System
IRQ 82	Microsoft ACPI-Compliant System
IRQ 83	Microsoft ACPI-Compliant System
IRQ 84	Microsoft ACPI-Compliant System
IRQ 85	Microsoft ACPI-Compliant System
IRQ 86	Microsoft ACPI-Compliant System
IRQ 87	Microsoft ACPI-Compliant System
IRQ 88	Microsoft ACPI-Compliant System
IRQ 89	Microsoft ACPI-Compliant System

Table D.3: A2 Version Interrupt Assignments	
IRQ 90	Microsoft ACPI-Compliant System
IRQ 91	Microsoft ACPI-Compliant System
IRQ 92	Microsoft ACPI-Compliant System
IRQ 93	Microsoft ACPI-Compliant System
IRQ 94	Microsoft ACPI-Compliant System
IRQ 95	Microsoft ACPI-Compliant System
IRQ 96	Microsoft ACPI-Compliant System
IRQ 97	Microsoft ACPI-Compliant System
IRQ 98	Microsoft ACPI-Compliant System
IRQ 99	Microsoft ACPI-Compliant System
IRQ 100	Microsoft ACPI-Compliant System
IRQ 101	Microsoft ACPI-Compliant System
IRQ 102	Microsoft ACPI-Compliant System
IRQ 103	Microsoft ACPI-Compliant System
IRQ 104	Microsoft ACPI-Compliant System
IRQ 105	Microsoft ACPI-Compliant System
IRQ 106	Microsoft ACPI-Compliant System
IRQ 107	Microsoft ACPI-Compliant System
IRQ 108	Microsoft ACPI-Compliant System
IRQ 109	Microsoft ACPI-Compliant System
IRQ 110	Microsoft ACPI-Compliant System
IRQ 111	Microsoft ACPI-Compliant System
IRQ 112	Microsoft ACPI-Compliant System
IRQ 113	Microsoft ACPI-Compliant System
IRQ 114	Microsoft ACPI-Compliant System
IRQ 115	Microsoft ACPI-Compliant System
IRQ 116	Microsoft ACPI-Compliant System
IRQ 117	Microsoft ACPI-Compliant System
IRQ 118	Microsoft ACPI-Compliant System
IRQ 119	Microsoft ACPI-Compliant System
IRQ 120	Microsoft ACPI-Compliant System
IRQ 121	Microsoft ACPI-Compliant System
IRQ 122	Microsoft ACPI-Compliant System
IRQ 123	Microsoft ACPI-Compliant System
IRQ 124	Microsoft ACPI-Compliant System
IRQ 125	Microsoft ACPI-Compliant System
IRQ 126	Microsoft ACPI-Compliant System
IRQ 127	Microsoft ACPI-Compliant System
IRQ 128	Microsoft ACPI-Compliant System
IRQ 129	Microsoft ACPI-Compliant System
IRQ 130	Microsoft ACPI-Compliant System
IRQ 131	Microsoft ACPI-Compliant System
IRQ 132	Microsoft ACPI-Compliant System
IRQ 133	Microsoft ACPI-Compliant System
IRQ 134	Microsoft ACPI-Compliant System
IRQ 135	Microsoft ACPI-Compliant System
IRQ 136	Microsoft ACPI-Compliant System

Table D.3: A2 Version Interrupt Assignments

IRQ 137	Microsoft ACPI-Compliant System
IRQ 138	Microsoft ACPI-Compliant System
IRQ 139	Microsoft ACPI-Compliant System
IRQ 140	Microsoft ACPI-Compliant System
IRQ 141	Microsoft ACPI-Compliant System
IRQ 142	Microsoft ACPI-Compliant System
IRQ 143	Microsoft ACPI-Compliant System
IRQ 144	Microsoft ACPI-Compliant System
IRQ 145	Microsoft ACPI-Compliant System
IRQ 146	Microsoft ACPI-Compliant System
IRQ 147	Microsoft ACPI-Compliant System
IRQ 148	Microsoft ACPI-Compliant System
IRQ 149	Microsoft ACPI-Compliant System
IRQ 150	Microsoft ACPI-Compliant System
IRQ 151	Microsoft ACPI-Compliant System
IRQ 152	Microsoft ACPI-Compliant System
IRQ 153	Microsoft ACPI-Compliant System
IRQ 154	Microsoft ACPI-Compliant System
IRQ 155	Microsoft ACPI-Compliant System
IRQ 156	Microsoft ACPI-Compliant System
IRQ 157	Microsoft ACPI-Compliant System
IRQ 158	Microsoft ACPI-Compliant System
IRQ 159	Microsoft ACPI-Compliant System
IRQ 160	Microsoft ACPI-Compliant System
IRQ 161	Microsoft ACPI-Compliant System
IRQ 162	Microsoft ACPI-Compliant System
IRQ 163	Microsoft ACPI-Compliant System
IRQ 164	Microsoft ACPI-Compliant System
IRQ 165	Microsoft ACPI-Compliant System
IRQ 166	Microsoft ACPI-Compliant System
IRQ 167	Microsoft ACPI-Compliant System
IRQ 168	Microsoft ACPI-Compliant System
IRQ 169	Microsoft ACPI-Compliant System
IRQ 170	Microsoft ACPI-Compliant System
IRQ 171	Microsoft ACPI-Compliant System
IRQ 172	Microsoft ACPI-Compliant System
IRQ 173	Microsoft ACPI-Compliant System
IRQ 174	Microsoft ACPI-Compliant System
IRQ 175	Microsoft ACPI-Compliant System
IRQ 176	Microsoft ACPI-Compliant System
IRQ 177	Microsoft ACPI-Compliant System
IRQ 178	Microsoft ACPI-Compliant System
IRQ 179	Microsoft ACPI-Compliant System
IRQ 180	Microsoft ACPI-Compliant System
IRQ 181	Microsoft ACPI-Compliant System
IRQ 182	Microsoft ACPI-Compliant System
IRQ 183	Microsoft ACPI-Compliant System

Table D.3: A2 Version Interrupt Assignments	
IRQ 184	Microsoft ACPI-Compliant System
IRQ 185	Microsoft ACPI-Compliant System
IRQ 186	Microsoft ACPI-Compliant System
IRQ 187	Microsoft ACPI-Compliant System
IRQ 188	Microsoft ACPI-Compliant System
IRQ 189	Microsoft ACPI-Compliant System
IRQ 190	Microsoft ACPI-Compliant System
IRQ 191	Microsoft ACPI-Compliant System
IRQ 192	Microsoft ACPI-Compliant System
IRQ 193	Microsoft ACPI-Compliant System
IRQ 194	Microsoft ACPI-Compliant System
IRQ 195	Microsoft ACPI-Compliant System
IRQ 196	Microsoft ACPI-Compliant System
IRQ 197	Microsoft ACPI-Compliant System
IRQ 198	Microsoft ACPI-Compliant System
IRQ 199	Microsoft ACPI-Compliant System
IRQ 200	Microsoft ACPI-Compliant System
IRQ 201	Microsoft ACPI-Compliant System
IRQ 202	Microsoft ACPI-Compliant System
IRQ 203	Microsoft ACPI-Compliant System
IRQ 204	Microsoft ACPI-Compliant System
IRQ 256	Microsoft ACPI-Compliant System
IRQ 257	Microsoft ACPI-Compliant System
IRQ 258	Microsoft ACPI-Compliant System
IRQ 259	Microsoft ACPI-Compliant System
IRQ 260	Microsoft ACPI-Compliant System
IRQ 261	Microsoft ACPI-Compliant System
IRQ 262	Microsoft ACPI-Compliant System
IRQ 263	Microsoft ACPI-Compliant System
IRQ 264	Microsoft ACPI-Compliant System
IRQ 265	Microsoft ACPI-Compliant System
IRQ 266	Microsoft ACPI-Compliant System
IRQ 267	Microsoft ACPI-Compliant System
IRQ 268	Microsoft ACPI-Compliant System
IRQ 269	Microsoft ACPI-Compliant System
IRQ 270	Microsoft ACPI-Compliant System
IRQ 271	Microsoft ACPI-Compliant System
IRQ 272	Microsoft ACPI-Compliant System
IRQ 273	Microsoft ACPI-Compliant System
IRQ 274	Microsoft ACPI-Compliant System
IRQ 275	Microsoft ACPI-Compliant System
IRQ 276	Microsoft ACPI-Compliant System
IRQ 277	Microsoft ACPI-Compliant System
IRQ 278	Microsoft ACPI-Compliant System
IRQ 279	Microsoft ACPI-Compliant System
IRQ 280	Microsoft ACPI-Compliant System
IRQ 281	Microsoft ACPI-Compliant System

Table D.3: A2 Version Interrupt Assignments

IRQ 282	Microsoft ACPI-Compliant System
IRQ 283	Microsoft ACPI-Compliant System
IRQ 284	Microsoft ACPI-Compliant System
IRQ 285	Microsoft ACPI-Compliant System
IRQ 286	Microsoft ACPI-Compliant System
IRQ 287	Microsoft ACPI-Compliant System
IRQ 288	Microsoft ACPI-Compliant System
IRQ 289	Microsoft ACPI-Compliant System
IRQ 290	Microsoft ACPI-Compliant System
IRQ 291	Microsoft ACPI-Compliant System
IRQ 292	Microsoft ACPI-Compliant System
IRQ 293	Microsoft ACPI-Compliant System
IRQ 294	Microsoft ACPI-Compliant System
IRQ 295	Microsoft ACPI-Compliant System
IRQ 296	Microsoft ACPI-Compliant System
IRQ 297	Microsoft ACPI-Compliant System
IRQ 298	Microsoft ACPI-Compliant System
IRQ 299	Microsoft ACPI-Compliant System
IRQ 300	Microsoft ACPI-Compliant System
IRQ 301	Microsoft ACPI-Compliant System
IRQ 302	Microsoft ACPI-Compliant System
IRQ 303	Microsoft ACPI-Compliant System
IRQ 304	Microsoft ACPI-Compliant System
IRQ 305	Microsoft ACPI-Compliant System
IRQ 306	Microsoft ACPI-Compliant System
IRQ 307	Microsoft ACPI-Compliant System
IRQ 308	Microsoft ACPI-Compliant System
IRQ 309	Microsoft ACPI-Compliant System
IRQ 310	Microsoft ACPI-Compliant System
IRQ 311	Microsoft ACPI-Compliant System
IRQ 312	Microsoft ACPI-Compliant System
IRQ 313	Microsoft ACPI-Compliant System
IRQ 314	Microsoft ACPI-Compliant System
IRQ 315	Microsoft ACPI-Compliant System
IRQ 316	Microsoft ACPI-Compliant System
IRQ 317	Microsoft ACPI-Compliant System
IRQ 318	Microsoft ACPI-Compliant System
IRQ 319	Microsoft ACPI-Compliant System
IRQ 320	Microsoft ACPI-Compliant System
IRQ 321	Microsoft ACPI-Compliant System
IRQ 322	Microsoft ACPI-Compliant System
IRQ 323	Microsoft ACPI-Compliant System
IRQ 324	Microsoft ACPI-Compliant System
IRQ 325	Microsoft ACPI-Compliant System
IRQ 326	Microsoft ACPI-Compliant System
IRQ 327	Microsoft ACPI-Compliant System
IRQ 328	Microsoft ACPI-Compliant System

Table D.3: A2 Version Interrupt Assignments	
IRQ 329	Microsoft ACPI-Compliant System
IRQ 330	Microsoft ACPI-Compliant System
IRQ 331	Microsoft ACPI-Compliant System
IRQ 332	Microsoft ACPI-Compliant System
IRQ 333	Microsoft ACPI-Compliant System
IRQ 334	Microsoft ACPI-Compliant System
IRQ 335	Microsoft ACPI-Compliant System
IRQ 336	Microsoft ACPI-Compliant System
IRQ 337	Microsoft ACPI-Compliant System
IRQ 338	Microsoft ACPI-Compliant System
IRQ 339	Microsoft ACPI-Compliant System
IRQ 340	Microsoft ACPI-Compliant System
IRQ 341	Microsoft ACPI-Compliant System
IRQ 342	Microsoft ACPI-Compliant System
IRQ 343	Microsoft ACPI-Compliant System
IRQ 344	Microsoft ACPI-Compliant System
IRQ 345	Microsoft ACPI-Compliant System
IRQ 346	Microsoft ACPI-Compliant System
IRQ 347	Microsoft ACPI-Compliant System
IRQ 348	Microsoft ACPI-Compliant System
IRQ 349	Microsoft ACPI-Compliant System
IRQ 350	Microsoft ACPI-Compliant System
IRQ 351	Microsoft ACPI-Compliant System
IRQ 352	Microsoft ACPI-Compliant System
IRQ 353	Microsoft ACPI-Compliant System
IRQ 354	Microsoft ACPI-Compliant System
IRQ 355	Microsoft ACPI-Compliant System
IRQ 356	Microsoft ACPI-Compliant System
IRQ 357	Microsoft ACPI-Compliant System
IRQ 358	Microsoft ACPI-Compliant System
IRQ 359	Microsoft ACPI-Compliant System
IRQ 360	Microsoft ACPI-Compliant System
IRQ 361	Microsoft ACPI-Compliant System
IRQ 362	Microsoft ACPI-Compliant System
IRQ 363	Microsoft ACPI-Compliant System
IRQ 364	Microsoft ACPI-Compliant System
IRQ 365	Microsoft ACPI-Compliant System
IRQ 366	Microsoft ACPI-Compliant System
IRQ 367	Microsoft ACPI-Compliant System
IRQ 368	Microsoft ACPI-Compliant System
IRQ 369	Microsoft ACPI-Compliant System
IRQ 370	Microsoft ACPI-Compliant System
IRQ 371	Microsoft ACPI-Compliant System
IRQ 372	Microsoft ACPI-Compliant System
IRQ 373	Microsoft ACPI-Compliant System
IRQ 374	Microsoft ACPI-Compliant System
IRQ 375	Microsoft ACPI-Compliant System

Table D.3: A2 Version Interrupt Assignments

IRQ 376	Microsoft ACPI-Compliant System
IRQ 377	Microsoft ACPI-Compliant System
IRQ 378	Microsoft ACPI-Compliant System
IRQ 379	Microsoft ACPI-Compliant System
IRQ 380	Microsoft ACPI-Compliant System
IRQ 381	Microsoft ACPI-Compliant System
IRQ 382	Microsoft ACPI-Compliant System
IRQ 383	Microsoft ACPI-Compliant System
IRQ 384	Microsoft ACPI-Compliant System
IRQ 385	Microsoft ACPI-Compliant System
IRQ 386	Microsoft ACPI-Compliant System
IRQ 387	Microsoft ACPI-Compliant System
IRQ 388	Microsoft ACPI-Compliant System
IRQ 389	Microsoft ACPI-Compliant System
IRQ 390	Microsoft ACPI-Compliant System
IRQ 391	Microsoft ACPI-Compliant System
IRQ 392	Microsoft ACPI-Compliant System
IRQ 393	Microsoft ACPI-Compliant System
IRQ 394	Microsoft ACPI-Compliant System
IRQ 395	Microsoft ACPI-Compliant System
IRQ 396	Microsoft ACPI-Compliant System
IRQ 397	Microsoft ACPI-Compliant System
IRQ 398	Microsoft ACPI-Compliant System
IRQ 399	Microsoft ACPI-Compliant System
IRQ 400	Microsoft ACPI-Compliant System
IRQ 401	Microsoft ACPI-Compliant System
IRQ 402	Microsoft ACPI-Compliant System
IRQ 403	Microsoft ACPI-Compliant System
IRQ 404	Microsoft ACPI-Compliant System
IRQ 405	Microsoft ACPI-Compliant System
IRQ 406	Microsoft ACPI-Compliant System
IRQ 407	Microsoft ACPI-Compliant System
IRQ 408	Microsoft ACPI-Compliant System
IRQ 409	Microsoft ACPI-Compliant System
IRQ 410	Microsoft ACPI-Compliant System
IRQ 411	Microsoft ACPI-Compliant System
IRQ 412	Microsoft ACPI-Compliant System
IRQ 413	Microsoft ACPI-Compliant System
IRQ 414	Microsoft ACPI-Compliant System
IRQ 415	Microsoft ACPI-Compliant System
IRQ 416	Microsoft ACPI-Compliant System
IRQ 417	Microsoft ACPI-Compliant System
IRQ 418	Microsoft ACPI-Compliant System
IRQ 419	Microsoft ACPI-Compliant System
IRQ 420	Microsoft ACPI-Compliant System
IRQ 421	Microsoft ACPI-Compliant System
IRQ 422	Microsoft ACPI-Compliant System

Table D.3: A2 Version Interrupt Assignments	
IRQ 423	Microsoft ACPI-Compliant System
IRQ 424	Microsoft ACPI-Compliant System
IRQ 425	Microsoft ACPI-Compliant System
IRQ 426	Microsoft ACPI-Compliant System
IRQ 427	Microsoft ACPI-Compliant System
IRQ 428	Microsoft ACPI-Compliant System
IRQ 429	Microsoft ACPI-Compliant System
IRQ 430	Microsoft ACPI-Compliant System
IRQ 431	Microsoft ACPI-Compliant System
IRQ 432	Microsoft ACPI-Compliant System
IRQ 433	Microsoft ACPI-Compliant System
IRQ 434	Microsoft ACPI-Compliant System
IRQ 435	Microsoft ACPI-Compliant System
IRQ 436	Microsoft ACPI-Compliant System
IRQ 437	Microsoft ACPI-Compliant System
IRQ 438	Microsoft ACPI-Compliant System
IRQ 439	Microsoft ACPI-Compliant System
IRQ 440	Microsoft ACPI-Compliant System
IRQ 441	Microsoft ACPI-Compliant System
IRQ 442	Microsoft ACPI-Compliant System
IRQ 443	Microsoft ACPI-Compliant System
IRQ 444	Microsoft ACPI-Compliant System
IRQ 445	Microsoft ACPI-Compliant System
IRQ 446	Microsoft ACPI-Compliant System
IRQ 447	Microsoft ACPI-Compliant System
IRQ 448	Microsoft ACPI-Compliant System
IRQ 449	Microsoft ACPI-Compliant System
IRQ 450	Microsoft ACPI-Compliant System
IRQ 451	Microsoft ACPI-Compliant System
IRQ 452	Microsoft ACPI-Compliant System
IRQ 453	Microsoft ACPI-Compliant System
IRQ 454	Microsoft ACPI-Compliant System
IRQ 455	Microsoft ACPI-Compliant System
IRQ 456	Microsoft ACPI-Compliant System
IRQ 457	Microsoft ACPI-Compliant System
IRQ 458	Microsoft ACPI-Compliant System
IRQ 459	Microsoft ACPI-Compliant System
IRQ 460	Microsoft ACPI-Compliant System
IRQ 461	Microsoft ACPI-Compliant System
IRQ 462	Microsoft ACPI-Compliant System
IRQ 463	Microsoft ACPI-Compliant System
IRQ 464	Microsoft ACPI-Compliant System
IRQ 465	Microsoft ACPI-Compliant System
IRQ 466	Microsoft ACPI-Compliant System
IRQ 467	Microsoft ACPI-Compliant System
IRQ 468	Microsoft ACPI-Compliant System
IRQ 469	Microsoft ACPI-Compliant System

Table D.3: A2 Version Interrupt Assignments

IRQ 470	Microsoft ACPI-Compliant System
IRQ 471	Microsoft ACPI-Compliant System
IRQ 472	Microsoft ACPI-Compliant System
IRQ 473	Microsoft ACPI-Compliant System
IRQ 474	Microsoft ACPI-Compliant System
IRQ 475	Microsoft ACPI-Compliant System
IRQ 476	Microsoft ACPI-Compliant System
IRQ 477	Microsoft ACPI-Compliant System
IRQ 478	Microsoft ACPI-Compliant System
IRQ 479	Microsoft ACPI-Compliant System
IRQ 480	Microsoft ACPI-Compliant System
IRQ 481	Microsoft ACPI-Compliant System
IRQ 482	Microsoft ACPI-Compliant System
IRQ 483	Microsoft ACPI-Compliant System
IRQ 484	Microsoft ACPI-Compliant System
IRQ 485	Microsoft ACPI-Compliant System
IRQ 486	Microsoft ACPI-Compliant System
IRQ 487	Microsoft ACPI-Compliant System
IRQ 488	Microsoft ACPI-Compliant System
IRQ 489	Microsoft ACPI-Compliant System
IRQ 490	Microsoft ACPI-Compliant System
IRQ 491	Microsoft ACPI-Compliant System
IRQ 492	Microsoft ACPI-Compliant System
IRQ 493	Microsoft ACPI-Compliant System
IRQ 494	Microsoft ACPI-Compliant System
IRQ 495	Microsoft ACPI-Compliant System
IRQ 496	Microsoft ACPI-Compliant System
IRQ 497	Microsoft ACPI-Compliant System
IRQ 498	Microsoft ACPI-Compliant System
IRQ 499	Microsoft ACPI-Compliant System
IRQ 500	Microsoft ACPI-Compliant System
IRQ 501	Microsoft ACPI-Compliant System
IRQ 502	Microsoft ACPI-Compliant System
IRQ 503	Microsoft ACPI-Compliant System
IRQ 504	Microsoft ACPI-Compliant System
IRQ 505	Microsoft ACPI-Compliant System
IRQ 506	Microsoft ACPI-Compliant System
IRQ 507	Microsoft ACPI-Compliant System
IRQ 508	Microsoft ACPI-Compliant System
IRQ 509	Microsoft ACPI-Compliant System
IRQ 510	Microsoft ACPI-Compliant System
IRQ 511	Microsoft ACPI-Compliant System
IRQ 4294967254	Intel® Management Engine Interface #1
IRQ 4294967255	Intel® Smart Sound Technology BUS
IRQ 4294967256	Intel® Ethernet Controller I226-IT
IRQ 4294967257	Intel® Ethernet Controller I226-IT
IRQ 4294967258	Intel® Ethernet Controller I226-IT

Table D.3: A2 Version Interrupt Assignments	
IRQ 4294967259	Intel® Ethernet Controller I226-IT
IRQ 4294967260	Intel® Ethernet Controller I226-IT
IRQ 4294967261	Intel® Ethernet Controller I226-IT
IRQ 4294967262	Intel® Ethernet Controller I226-IT
IRQ 4294967263	Intel® Ethernet Controller I226-IT
IRQ 4294967264	Intel® Ethernet Controller I226-IT
IRQ 4294967265	Intel® Ethernet Controller I226-IT
IRQ 4294967266	Intel® Ethernet Controller I226-IT
IRQ 4294967267	Intel® Ethernet Controller I226-IT
IRQ 4294967268	Intel® Ethernet Controller I226-IT
IRQ 4294967269	Intel® Ethernet Controller I226-IT
IRQ 4294967270	Intel® Ethernet Controller I226-IT
IRQ 4294967271	Intel® USB 3.20 eXtensible Host Controller - 1.20 (Microsoft)
IRQ 4294967272	Intel® Iris® Xe Graphics
IRQ 4294967273	Intel® USB 3.10 eXtensible Host Controller - 1.20 (Microsoft)
IRQ 4294967274	Standard NVM Express Controller
IRQ 4294967275	Standard NVM Express Controller
IRQ 4294967276	Standard NVM Express Controller
IRQ 4294967277	Standard NVM Express Controller
IRQ 4294967278	Standard NVM Express Controller
IRQ 4294967279	Standard NVM Express Controller
IRQ 4294967280	Standard NVM Express Controller
IRQ 4294967281	Standard NVM Express Controller
IRQ 4294967282	Standard NVM Express Controller
IRQ 4294967283	Standard NVM Express Controller
IRQ 4294967284	Standard NVM Express Controller
IRQ 4294967285	Standard NVM Express Controller
IRQ 4294967286	Standard NVM Express Controller
IRQ 4294967287	Standard NVM Express Controller
IRQ 4294967288	Standard NVM Express Controller
IRQ 4294967289	Standard NVM Express Controller
IRQ 4294967290	Standard NVM Express Controller
IRQ 4294967291	Standard SATA AHCI Controller
IRQ 4294967292	PCI Express Root Port
IRQ 4294967293	Intel® PCI Express Root Port #4 - 51BB
IRQ 4294967294	PCI Express Root Port

D.3 1st MB Memory Map

Table D.4: 1st MB Memory Map

Addr. Range (Hex)	Device
0xFFEF7000-0xFFEF7FFF	Intel® Serial I/O UART Host Controller - 51A8
0xFEDC0000-0xFEDC7FFF	Motherboard resources
0xFEDA0000-0xFEDA0FFF	Motherboard resources
0xFEDA1000-0xFEDA1FFF	Motherboard resources
0xC0000000-0xCFFFFFFF	Motherboard resources
0xFED20000-0xFED7FFFF	Motherboard resources
0xFED90000-0xFED93FFF	Motherboard resources
0xFED45000-0xFED8FFFF	Motherboard resources
0xFEE00000-0xFEEFFFFF	Motherboard resources
0x50800000-0x50801FFF	Standard SATA AHCI Controller
0x50803000-0x508030FF	Standard SATA AHCI Controller
0x50802000-0x508027FF	Standard SATA AHCI Controller
0xFD6E0000-0xFD6EFFFF	Intel® Serial IO GPIO Host Controller - INTC1055
0xFD6D0000-0xFD6DFFFF	Intel® Serial IO GPIO Host Controller - INTC1055
0xFD6A0000-0xFD6AFFFF	Intel® Serial IO GPIO Host Controller - INTC1055
0xFD690000-0xFD69FFFF	Intel® Serial IO GPIO Host Controller - INTC1055
0x11100000-0x1117FFFF	Intel® Crashlog - A77D
0x11000000-0x110FFFFF	Intel® USB 3.10 eXtensible Host Controller - 1.20 (Microsoft)
0xFED00000-0xFED003FF	High precision event timer
0x50700000-0x507FFFFF	PCI Express Root Port
0x50700000-0x507FFFFF	Standard NVM Express Controller
0xFFEF9000-0xFFEF9FFF	Intel® Serial IO I2C Host Controller - 51E9
0xFFEFC000-0xFFEFFFFF	Intel® Smart Sound Technology BUS
0xFFF00000-0xFFFFFFF	Intel® Smart Sound Technology BUS
0x50400000-0x506FFFFF	Intel® PCI Express Root Port #9 - 51B0
0x50400000-0x506FFFFF	PCI Express Root Complex
0xFE010000-0xFE010FFF	Intel® SPI (flash) Controller - 51A4
0xA0000-0xBFFFF	PCI Express Root Complex
0xE0000-0xE3FFF	PCI Express Root Complex
0xE4000-0xE7FFF	PCI Express Root Complex
0xE8000-0xEBFFF	PCI Express Root Complex
0xEC000-0xEFFFF	PCI Express Root Complex
0xF0000-0xFFFFF	PCI Express Root Complex
0xFFEF8000-0xFFEF8FFF	Intel® Management Engine Interface #1
0xFED40000-0xFED44FFF	Trusted Platform Module 2.0
0xFFEFA000-0xFFEFAFFF	Intel® Serial IO I2C Host Controller - 51E8
0x0000-0xFFFFF	Intel® Iris® Xe Graphics
0x0000-0xFFFFF	Intel® Iris® Xe Graphics
0xFFEFB000-0xFFEFBFFF	Intel® Serial I/O SPI Host Controller - 51AA
0x50500000-0x505FFFFF	Intel® Ethernet Controller I226-IT
0x50600000-0x50603FFF	Intel® Ethernet Controller I226-IT
0x1128000-0x11280FFF	Intel® SMBus - 51A3



Enabling an Intelligent Planet

www.advantech.com

Please verify specifications before quoting. This guide is intended for reference purposes only.

All product specifications are subject to change without notice.

No part of this publication may be reproduced in any form or by any means, such as electronically, by photocopying, recording, or otherwise, without prior written permission from the publisher.

All brand and product names are trademarks or registered trademarks of their respective companies.

© Advantech Co., Ltd. 2024