


GHI-268

2U Rackmount Chassis

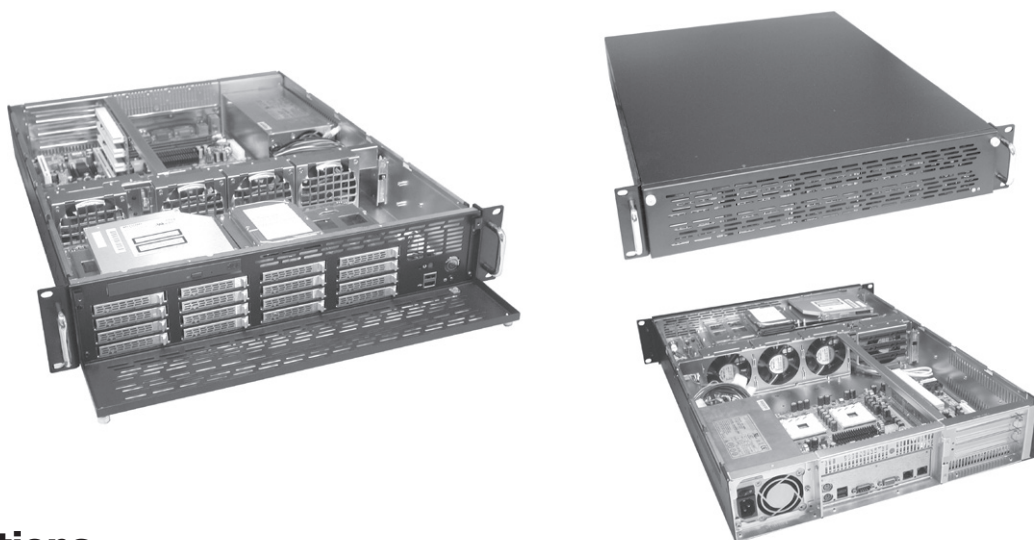

Specifications

- **EIA RS-310C 19" Rackmount Standard**
- **Construction:** Heavy Duty Cold Rolled Electroplated Steel
- **Color:** Black (Standard), Beige or Custom
- **Support EATX M/B (Max. to 12" x 13") SSI EEB 3.0**
- **Drive Capacity:** 16x Hot Swap 2.5" Drive Trays & 1x 2.5"HDD (Hidden) & 1x Slim CD-ROM (Option)
- **Drive Interface:** SATA
- **Power Supply :** 2U Single or Redundant up to 400W ATX P/S (Rear Installation) Max. Depth 350mm
- **Cooling:** 4x (80mm = 42.5CFM ea.) Fans
- **Front Door:** Single Door With 2 Thumbscrews
- **Riser Card:** Refer to Page 227-229 For Optional 2U Riser Card
- **Connector Port (Front):** 2x USB Ports
- **Expansion Slots (Optional):** 3x PCI or 7x Low Profile Slots
- **Indicators:** LEDs for Power ON/OFF, HDD Power/Activity
- **Switch:** Power ON/OFF, System Reset
- **Dimensions (W x H x D):** 483 x 88 x 580mm (19" x 3.5" x 22.8")
- **Cuft:** 3.9
- **GW:** 17 kgs / 37.5 lbs
- **Carton Size(cm):** 58.5 x 23.5 x 73 (23" x 9.3" x 28.7")
- **Humidity:** 5% - 95% Non-condensing

Dimension

