

F8000

NXP i.MX8M Plus Processor
SMARC



Top View



Bottom View

KEY FEATURES



NXP iMX8M Plus

Up to 4 Arm Cortex A53 cores



LPDDR4

2/4/8GB LPDDR4
Memory Down



Display Options

1 LVDS, 1 HDMI



Multiple Expansion


1 PCIe 3.0 x1,
SPI, I2C, CAN



Rich I/O

2 GbE LAN, 1 USB OTG,
2 USB 3.0, 4 USB 2.0

BLOCK DIAGRAM

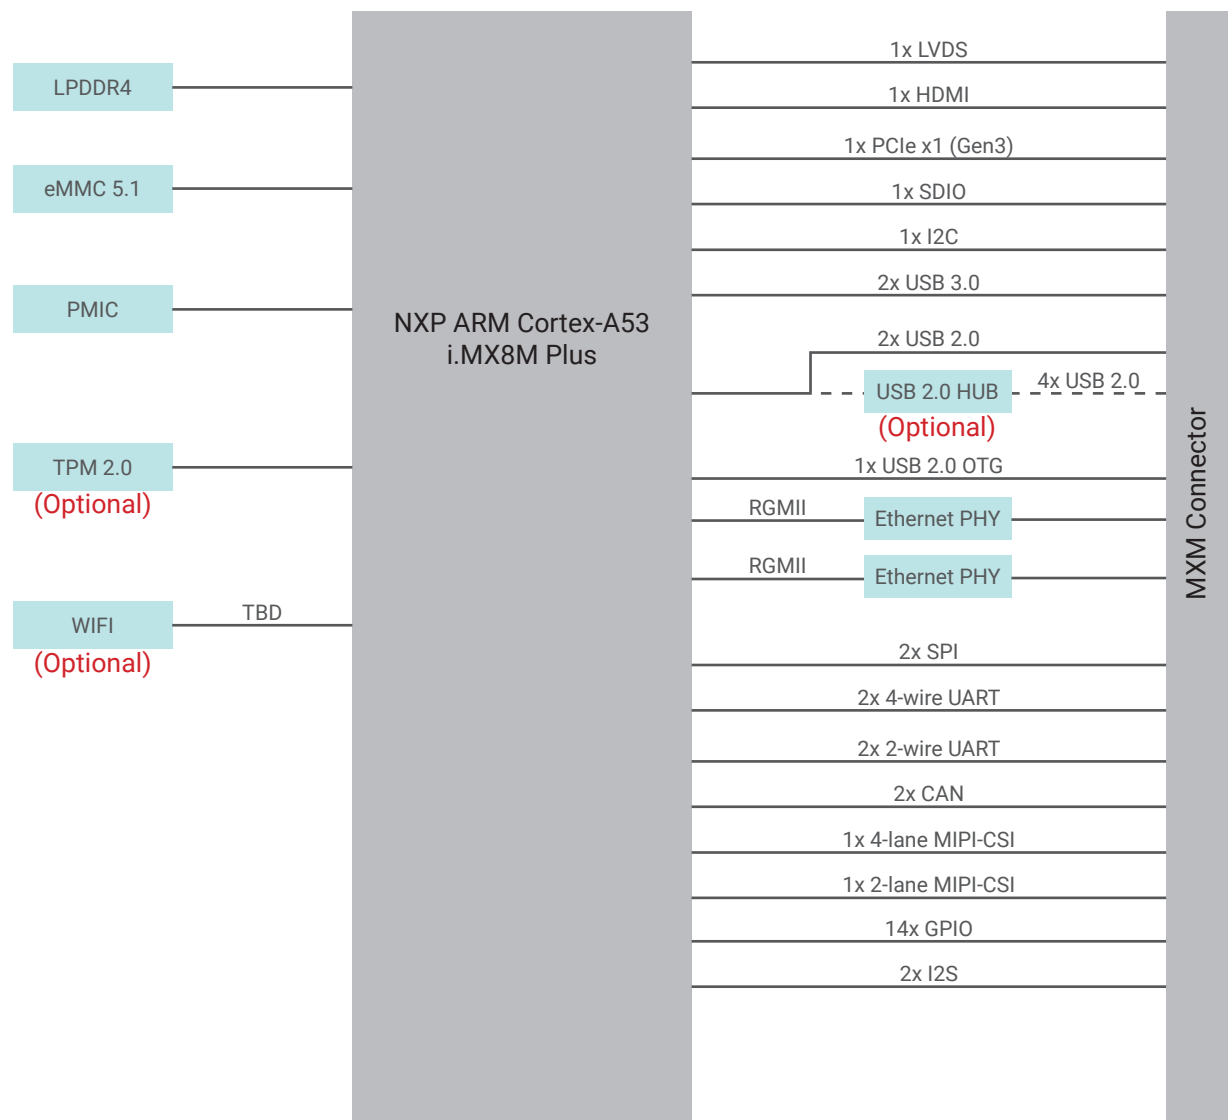

SPECIFICATION

SYSTEM	Processor	NXP i.MX 8M plus Cortex-A53 processors MIMX8ML6CVNKZAB (Industrial), Quad 1.6GHz MIMX8ML8CVNKZAB (Industrial), Quad 1.6GHz	
	Memory	On-board 2/4/8GB LPDDR4	
NPU	NPU	2.3 TOPS	
GRAPHICS	Controller	GC7000UL	
	Feature	HW Decode: 1080p60 H.265, H.264, VP9, VP8 HW Endcode: 1080p60 H.265, H.264	
	Display	1 x single-channel LVDS 1 x HDMI	
EXPENSION	Interface	1 x PCIe x1 (Gen 3) 1 x SDIO 3.0 1 x I2C 2 x SPI 2 x 4-wire UART and 2 x 2-wire UART 2 x CAN bus 1 x 4-lanes MIPI-CSI, 1 x 2-lanes MIPI-CSI	
AUDIO	Interface	2 x I2S	
ETHERNET	Controller	2 x 10/100/1000Mbps GbE	
WIRELESS	Wireless	IEEE 802.11 ac/a/b/g/n wireless LAN + Bluetooth 5.0 (available upon request)	
I/O	USB	1 x USB OTG 2 x USB 3.0 2 x USB 2.0 or 4 x USB2.0 thru USB HUB (available upon request)	
	eMMC	Supports eMMC 5.1 up to 128GB	
	GPIO	1 x 14-bit GPIO	
SECURITY	TPM	TPM 2.0 (available upon request)	
POWER	Type	5V DC-In	
	Consumption	TBD	
OS SUPPORT	Linux	Linux Yocto	
ENVIRONMENT	Temperature	Operating: -40 to 85°C	
	Humidity	Operating: 5 to 90% RH	Storage: 5 to 90% RH
	MTBF	TBD	
MECHANISM	Dimensions	SMARC form factor	82 mm (3.23") x 50 mm (1.97")
	Compliance	SMARC specification revision 2.2 compliance	
STANDARDS AND CERTIFICATIONS	Certifications	CE, FCC, RoHS	

ORDERING INFORMATION

Model Name	P/N	CPU Cores	Memory	Display	TPM	USB 2.0	eMMC	Operating Temp.
F8000-TC41	TBD	4	4GB	LVDS	NA	2	16GB	-40 to 85°C

PACKING LIST

• 1 F8000 board
• Heat spreader

OPTIONAL ITEMS

• SMARC Carrier Board
• Heat sink