

Slim SSD

3ME3 Series

Customer: _____
Customer
Part
Number: _____
Innodisk
Part
Number: _____
Innodisk
Model Name: _____
Date: _____

Innodisk Approver	Customer Approver

Total Solution For
Industrial Flash Storage

Table of contents

LIST OF FIGURES	6
1. PRODUCT OVERVIEW	7
1.1 INTRODUCTION OF INNODisk SLIM SSD 3ME3	7
1.2 PRODUCT VIEW AND MODELS	7
1.3 SATA INTERFACE.....	7
1.4 1.8-INCH FORM FACTOR	7
2. PRODUCT SPECIFICATIONS	8
2.1 CAPACITY AND DEVICE PARAMETERS.....	8
2.2 PERFORMANCE	8
2.3 ELECTRICAL SPECIFICATIONS	8
2.3.1 Power Requirement.....	8
2.3.2 Power Consumption	9
2.4 ENVIRONMENTAL SPECIFICATIONS	9
2.4.1 Temperature Ranges	9
2.4.2 Humidity.....	9
2.4.3 Shock and Vibration	9
2.4.4 Mean Time between Failures (MTBF)	9
2.5 CE AND FCC COMPATIBILITY	10
2.6 RoHS COMPLIANCE	10
2.7 RELIABILITY	10
2.8 TRANSFER MODE	10
2.9 PIN ASSIGNMENT	10
2.11 ASSEMBLY WEIGHT	12
2.12 SEEK TIME	12
2.13 HOT PLUG.....	12
2.14 NAND FLASH MEMORY.....	12
3. THEORY OF OPERATION	14
3.1 OVERVIEW.....	14
3.2 SATA III CONTROLLER	15
3.3 ERROR DETECTION AND CORRECTION.....	15
3.4 WEAR-LEVELING	15
3.5 BAD BLOCKS MANAGEMENT	15
3.6 iDATA GUARD	15
3.7 GARBAGE COLLECTION.....	16
4. INSTALLATION REQUIREMENTS	16
4.1 SLIM SSD 3ME3 PIN DIRECTIONS.....	16

4.2 ELECTRICAL CONNECTIONS FOR SLIM SSD 3ME3.....16

4.3 FORM FACTOR.....16

4.4 DEVICE DRIVE16

5. PART NUMBER RULE18

APPENDIX.....19

REVISION HISTORY

Revision	Description	Date
Rev 1.0	First Released	Oct. 2015
Rev 2.0	Update to Toshiba 15nm	Dec. 2015

List of Tables

TABLE 1: DEVICE PARAMETERS	8
TABLE 2: PERFORMANCE	8
TABLE 3: INNO DISK SLIM SSD 3ME3 POWER REQUIREMENT	8
TABLE 4: POWER CONSUMPTION	9
TABLE 5: TEMPERATURE RANGE FOR SLIM SSD 3ME3	9
TABLE 6: SHOCK/VIBRATION TESTING FOR SLIM SSD 3ME3	9
TABLE 7: SLIM SSD 3ME3 MTBF	10
TABLE 8: INNO DISK SLIM SSD 3ME3 PIN ASSIGNMENT	10

List of Figures

FIGURE 1: INNODISK SLIM SSD 3ME3	7
FIGURE 2: INNODISK SLIM SSD 3ME3 BLOCK DIAGRAM.....	14
FIGURE 3: SIGNAL SEGMENT AND POWER SEGMENT	16

1. Product Overview

1.1 Introduction of InnoDisk Slim SSD 3ME3

Innodisk Slim SSD 3ME3 products provide high capacity flash memory Solid State Drive (SSD) that electrically complies with Serial ATA (SATA) standard. It supports SATA III standard (6.0GHz) with high performance. Innodisk Slim SSD 3ME3 is designed for industrial field, and supports several standard features, including NCQ, and S.M.A.R.T. The SSD have good performance, no latency time and small seek time. It effectively reduces the booting time of operation system and the power consumption is less than hard disk drive (HDD).

1.2 Product View and Models

Innodisk Slim SSD 3ME3 is available in follow capacities:

Slim SSD 3ME3 8GB

Slim SSD 3ME3 64GB

Slim SSD 3ME3 16GB

Slim SSD 3ME3 128GB

Slim SSD 3ME3 32GB

Slim SSD 3ME3 256GB



Figure 1: Innodisk Slim SSD 3ME3

1.3 SATA Interface

Innodisk Slim SSD 3ME3 supports SATA III interface, and compliant with SATA I and SATA II. SATA III interface can work with Serial Attached SCSI (SAS) host system, which is used in server computer. Innodisk Slim SSD 3ME3 is compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps /3.0Gbps/6.0Gbps data rate). SATA connector uses a 7-pin signal segment and a 15-pin power segment.

1.4 1.8-inch Form Factor

Innodisk Slim SSD is designed with 1.8-inch housing. Innodisk Slim SSD 3ME3 has a compact design 69.85mm (W) x 50.0mm (L) x 9.0mm (H).

2. Product Specifications

2.1 Capacity and Device Parameters

Slim SSD 3ME3 device parameters are shown in Table 1.

Table 1: Device parameters

Capacity	LBA	Cylinders	Heads	Sectors	User Capacity(MB)
8GB	15649200	15525	16	63	7641
16GB	31277232	16383	16	63	15272
32GB	62533296	16383	16	63	30533
64GB	125045424	16383	16	63	61057
128GB	250069680	16383	16	63	122104
256GB	500118192	16383	16	63	244,198

2.2 Performance

Burst Transfer Rate: 6.0Gbps

Table 2: Performance

	Capacity	8GB	16GB***	32GB (ID109)	64GB	128GB	256GB
Toshiba 15nm	Sequential Read (max.)	100 MB/sec	100 MB/sec	200 MB/sec	370 MB/sec	400 MB/sec	420 MB/sec
	Sequential Write (max.)	20 MB/sec	20 MB/sec	40 MB/sec	80 MB/sec	140 MB/sec	140 MB/sec
	4KB Random** Read (QD32)	4,000 IOPS	4,000 IOPS	6,100 IOPS	8,900 IOPS	10,000 IOPS	10,000 IOPS
	4KB Random** Write (QD32)	5,300 IOPS	5,300 IOPS	8,400 IOPS	14,000 IOPS	23,000 IOPS	23,200 IOPS

Note: * Sequential performance based on CrystalDiskMark 3.03 with file size 1000MB

** Random performance based on Iometer with Queue Depth 32

***16GB with Toshiba 15nm is single channel.

2.3 Electrical Specifications

2.3.1 Power Requirement

Table 3: InnoDisk Slim SSD 3ME3 Power Requirement

Item	Symbol	Rating	Unit
Input voltage	V _{IN}	+5 DC +- 5%	V

2.3.2 Power Consumption

Table 4: Power Consumption

Mode	Power Consumption (mA)
Read	352 (max.)
Write	362 (max.)
Idle	102 (max.)

* Target: Slim SSD 3ME3 256GB

2.4 Environmental Specifications

2.4.1 Temperature Ranges

Table 5: Temperature range for Slim SSD 3ME3

Temperature	Range
Operating	Standard Grade: 0°C to +70°C
	Industrial Grade: -40°C to +85°C
Storage	-55°C to +95°C

2.4.2 Humidity

Relative Humidity: 10-95%, non-condensing

2.4.3 Shock and Vibration

Table 6: Shock/Vibration Testing for Slim SSD 3ME3

Reliability	Test Conditions	Reference Standards
Vibration	7 Hz to 2K Hz, 20G, 3 axes	IEC 68-2-6
Mechanical Shock	Duration: 0.5ms, 1500 G, 3 axes	IEC 68-2-27

2.4.4 Mean Time between Failures (MTBF)

Table 7 summarizes the MTBF prediction results for various Slim SSD 3ME3 configurations. The analysis was performed using a RAM Commander™ failure rate prediction.

- **Failure Rate:** The total number of failures within an item population, divided by the total number of life units expended by that population, during a particular measurement interval under stated condition.
- **Mean Time between Failures (MTBF):** A basic measure of reliability for repairable items: The mean number of life units during which all parts of the item perform within their specified limits, during a particular measurement interval under stated conditions.

Table 7: Slim SSD 3ME3 MTBF

Product	Condition	MTBF (Hours)
Innodisk Slim SSD 3ME3	Telcordia SR-332 GB, 25°C	>3,000,000

2.5 CE and FCC Compatibility

Slim SSD 3ME3 conforms to CE and FCC requirements.

2.6 RoHS Compliance

Slim SSD 3ME3 is fully compliant with RoHS directive.

2.7 Reliability

Parameter	Value
Read Cycles	Unlimited Read Cycles
Wear-Leveling Algorithm	Support
Bad Blocks Management	Support
Error Correct Code	Support
TBW (Unit: TB)	
8GB	2.3
16GB	4.7
32GB	9.4
64GB	18.8
128GB	37.5
256GB	75

2.8 Transfer Mode

Slim SSD 3ME3 support following transfer mode:

Serial ATA III 6.0Gbps

Serial ATA II 3.0Gbps

Serial ATA I 1.5Gbps

2.9 Pin Assignment


Innodisk Slim SSD 3ME3 uses a standard SATA pin-out. See Table 8 for Slim SSD 3ME3 pin assignment.

Table 8: InnoDisk Slim SSD 3ME3 Pin Assignment

Name	Type	Description
S1	GND	NA
S2	A+	Differential Signal Pair A
S3	A-	
S4	GND	NA

S5	B-	Differential Signal Pair B
S6	B+	
S7	GND	NA
Key and Spacing separate signal and power segments		
P1	NC	NA
P2	NC	NA
P3	NC	NA
P4	GND	NA
P5	GND	NA
P6	GND	NA
P7	V5	5V Power, Pre-Charge
P8	V5	5V Power
P9	V5	5V Power
P10	GND	NA
P11	DAS/DSS	Device Activity Signal / Disable Staggered
P12	GND	NA
P13	NC	NA
P14	NC	NA
P15	NC	NA

2.10 Mechanical Dimensions

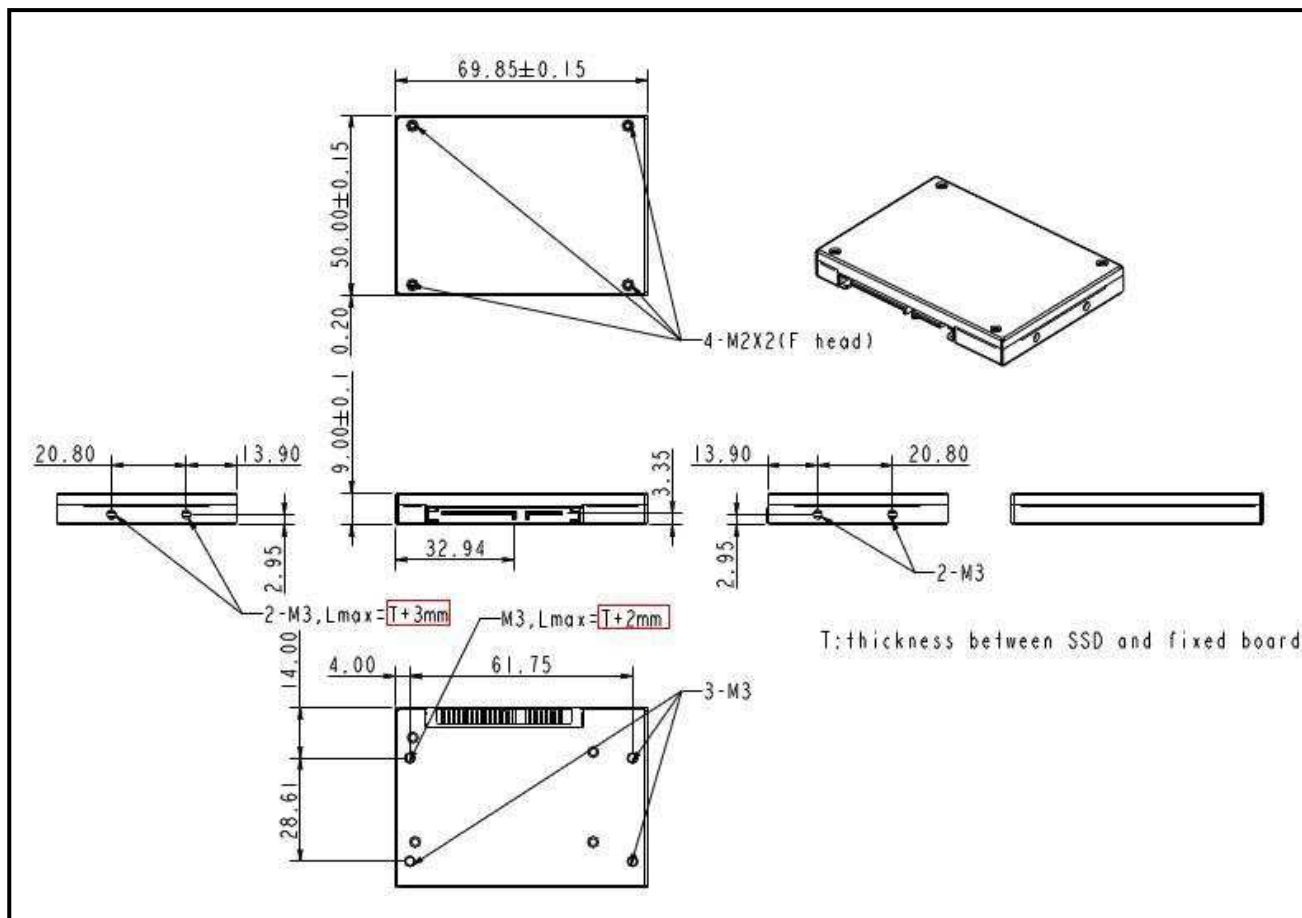

2.11 Assembly Weight

An InnodiskSlim SSD 3ME3 within MLC flash ICs, 8GB's weight is 30 grams approx. The total weight of SSD will be less than 35 grams.

2.12 Seek Time

Innodisk Slim SSD 3ME3 is not a magnetic rotating design. There is no seek or rotational latency required.

2.13 Hot Plug

The SSD support hot plug function and can be removed or plugged-in during operation. User has to avoid hot plugging the SSD which is configured as boot device and installed operation system. Surprise hot plug : The insertion of a SATA device into a backplane (combine signal and power) that has power present. The device powers up and initiates an OOB sequence.

Surprise hot removal: The removal of a SATA device from a powered backplane, without first being placed in a quiescent state.

2.14 NAND Flash Memory

Innodisk Slim SSD 3ME3 uses Multi Level Cell (MLC) NAND flash memory, which is non-volatility,

high reliability and high speed memory storage.

3. Theory of Operation

3.1 Overview

Figure 2 shows the operation of Innodisk Slim SSD 3ME3 from the system level, including the major hardware blocks.

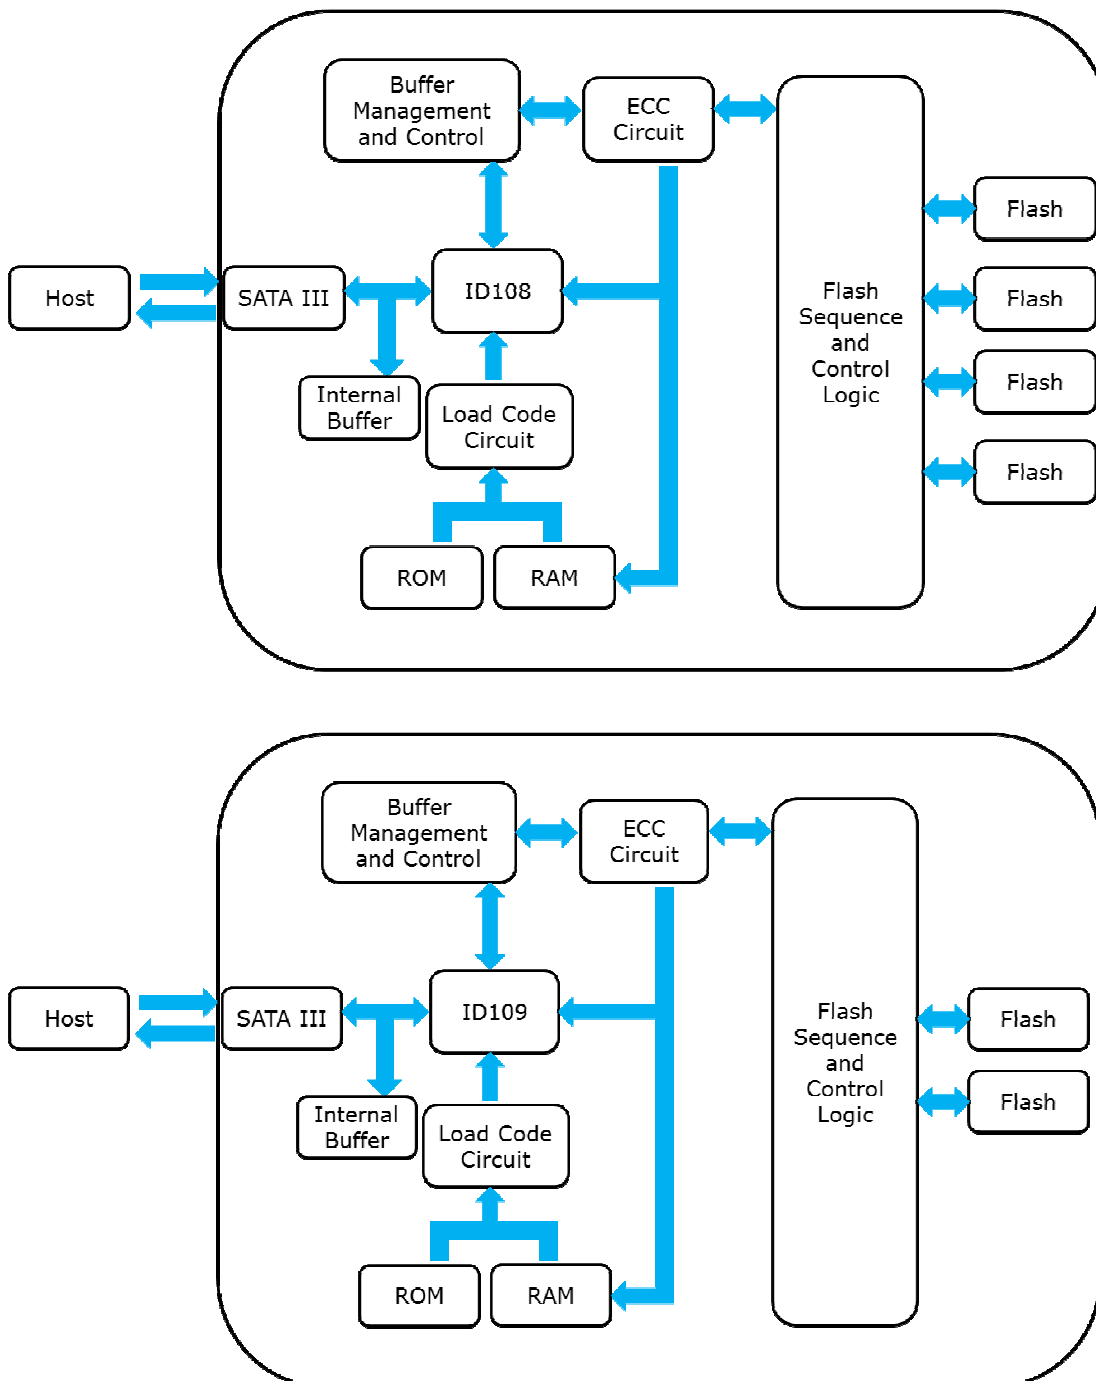


Figure 2: Innodisk Slim SSD 3ME3 Block Diagram

Innodisk Slim SSD 3ME3 integrates a SATA III controller and NAND flash memories. Communication with the host occurs through the host interface, using the standard ATA protocol. Communication with the flash device(s) occurs through the flash interface.

3.2 SATA III Controller

Innodisk SATA Slim 3ME3 is designed with ID 108, ID 109, a SATA III 6.0Gbps (Gen. 3) controller. The Serial ATA physical, link and transport layers are compliant with Serial ATA Gen 1, Gen 2 and Gen 3 specification (Gen 3 supports 1.5Gbps/3.0Gbps/6.0Gbps data rate). ID 108 controller has 4 channels while ID 109 controller has 2 channels for flash interface.

3.3 Error Detection and Correction

Highly sophisticated Error Correction Code algorithms are implemented. The ECC unit consists of the Parity Unit (parity-byte generation) and the Syndrome Unit (syndrome-byte computation). This unit implements an algorithm that can correct 40 bits per 1024 bytes in an ECC block. Code-byte generation during write operations, as well as error detection during read operation, is implemented on the fly without any speed penalties.

3.4 Wear-Leveling

Flash memory can be erased within a limited number of times. This number is called the **erase cycle limit** or **write endurance limit** and is defined by the flash array vendor. The erase cycle limit applies to each individual erase block in the flash device.

Innodisk Slim SSD 3ME3 uses a static wear-leveling algorithm to ensure that consecutive writes of a specific sector are not written physically to the same page/block in the flash. This spreads flash media usage evenly across all pages, thereby extending flash lifetime.

3.5 Bad Blocks Management

Bad Blocks are blocks that contain one or more invalid bits whose reliability are not guaranteed. The Bad Blocks may be presented while the SSD is shipped, or may develop during the life time of the SSD. When the Bad Blocks is detected, it will be flagged, and not be used anymore. The SSD implement Bad Blocks management, Bad Blocks replacement, Error Correct Code to avoid data error occurred. The functions will be enabled automatically to transfer data from Bad Blocks to spare blocks, and correct error bit.

3.6 iDATA Guard

Innodisk's iData Guard is a comprehensive data protection mechanism that functions before and after a sudden power outage to SSD. Low-power detection terminates data writing before an

abnormal power-off, while table-remapping after power-on deletes corrupt data and maintains data integrity. Innodisk's iData Guard provides effective power cycling management, preventing data stored in flash from degrading with use.

3.7 Garbage Collection

Garbage collection technology is used to maintain data consistency and perform continual data cleansing on SSDs. It runs as a background process, freeing up valuable controller resources while sorting good data into available blocks, and deleting bad blocks. It also significantly reduces write operations to the drive, thereby increasing the SSD's speed and lifespan.

4. Installation Requirements

4.1 Slim SSD 3ME3 Pin Directions

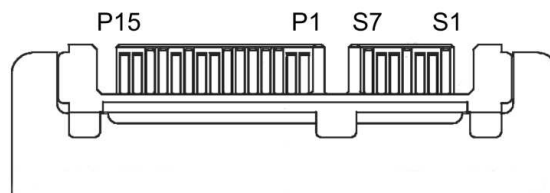


Figure 3: Signal Segment and Power Segment

4.2 Electrical Connections for Slim SSD 3ME3

A Serial ATA device may be either directly connected to a host or connected to a host through a cable. For connection via cable, the cable should be no longer than 1 meter. The SATA interface has a separate connector for the power supply. Please refer to the pin description for further details.

4.3 Form Factor

Please prepare following things:

- Screw driver.
- Four M3 screws.
- SATA single cable (7-pin, Maximum length 1 meter).
- SATA power cable (15-pin).

Please turn off your computer, and open your computer's case. Find one of available 2.5-inch slot, and plug the SSD in. To use the screws fix the SSD. Plug in the SATA single cable, and power cable. Please boot the installation Operation System from CD-ROM, and install Operation System into SSD.

4.4 Device Drive

No additional device drives are required. Innodisk Slim SSD 3ME3 can be configured as a boot

5. Part Number Rule

CODE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
	D	E	M	L	M	-	3	2	G	D	0	8	B	W	1	Q	C	-	X	X
Description	Disk	Slim SSD 3ME3				Capacity			Category			Flash Mode	Operation Temp.	Internal Control	CH.	Flash	-	Customized Code		
Definition																				
Code 1 st (Disk)												Code 13 th (Flash Type)								
D : Disk												B: Toshiba 15nm Synchronous flash								
Code 2 nd																				
E: Embedded												Code 14 th (Operation Temperature)								
												C: Standard Grade (0℃~ +70℃)								
Code 3 rd ~ 5 th (Form Factor)												W: Industrial Grade (-40℃~ +85℃)								
MLM: Slim SSD												Code 15 th (Internal control)								
												Code 16 th (Channel of data transfer)								
Code 7 th ~9 th (Capacity)												S: Single Channel								
08G: 8GB												D: Dual Channels								
16G: 16GB												Q: Quad Channels								
32G: 32GB																				
64G: 64GB												Code 17 th (Flash Type)								
A28: 128GB												C: Toshiba MLC								
B56: 256GB												Code 19 th ~20 th (Customized Code)								
Code 10 th ~12 th (Series)																				
D08: ID108																				
D09: ID109																				

Appendix

innodisk

宜鼎國際股份有限公司 Innodisk Corporation

Page: 1/1

Tel: (02)7703-3000 Fax: (02) 7703-3555 Internet: <http://www.innodisk.com/>

RoHS 自我宣告書 (RoHS Declaration of Conformity)

Manufacturer Product: All Innodisk EM Flash and Dram products

- 一、 宜鼎國際股份有限公司 (以下稱本公司) 特此保證售予新漢股份有限公司之所有產品, 皆符合歐盟 2011/65/EU 關於 RoHS 之規範要求。

Innodisk Corporation declares that all products sold to Nexcom are complied with European Union RoHS Directive (2011/65/EU) requirement.

- 二、 本公司同意因本保證書或與本保證書相關事宜有所爭議時, 雙方宜友好協商, 達成協議。

Innodisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

Name of hazardous substance	Limited of RoHS ppm (mg/kg)
鉛 (Pb)	< 1000 ppm
汞 (Hg)	< 1000 ppm
鎘 (Cd)	< 100 ppm
六價鉻 (Cr 6+)	< 1000 ppm
多溴聯苯 (PBBs)	< 1000 ppm
多溴二苯醚 (PBDEs)	< 1000 ppm

立 保 證 書 人 (Guarantor)

Company name 公司名稱: Innodisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人: Randy Chien 簡川勝

Company Representative Title 公司代表人職稱: Chairman 董事長

Date 日期: 2016 / 08 / 04



innodisk

宜鼎國際股份有限公司
Innodisk Corporation

Tel: (02) 7703-3000 Fax: (02) 7703-3555 Internet: <http://www.innodisk.com/>

REACH Declaration of Conformity

Manufacturer Product: All Innodisk EM Flash and Dram products

1. 宜鼎國際股份有限公司（以下稱本公司）特此保證此售予貴公司之產品，皆符合歐盟化學品法案(Registration, Evaluation and Authorization of Chemicals: REACH)之規定

(<http://www.echa.europa.eu/de/candidate-list-table> last updated: 20/06/2016)。所提供之產品包含：(1) 產品或產品所使用到的所有原物料；(2) 包裝材料；(3) 設計、生產及重工過程中所使用到的所有原物料。

We Innodisk Corporation hereby declare that our products are in compliance with the requirements according to the REACH Regulation

(<http://www.echa.europa.eu/de/candidate-list-table> last updated: 20/06/2016).

Products include: 1) Product and raw material used by the product; 2) Packaging material; 3) Raw material used in the process of design, production and rework

2. 本公司同意因本保證書或與本保證書相關事宜有所爭議時，雙方宜友好協商，達成協議。

InnoDisk Corporation agrees that both parties shall settle any dispute arising from or in connection with this Declaration of Conformity by friendly negotiations.

立 保 證 書 人 (Guarantor)

Company name 公司名稱: InnoDisk Corporation 宜鼎國際股份有限公司

Company Representative 公司代表人: Randy Chien 簡川勝

Company Representative Title 公司代表人職稱: Chairman 董事長

Date 日期: 2016 / 06 / 23



Certificate

Issue Date: January 16, 2013
Ref. Report No. ISL-15LE018FB

Product Name : 2.5" SATA SSD
Model(s) : 2.5" SATA SSD 35*#-& (\$:Flash type: (S:SLC,I:SLC,M:MLC) *: Product line: (E:Embedded, G: EverGreen, R: ImmoRobust) #:controller: (empty:106/107/167/170, 2: 201/ 202, 3:108/109) &: Product feature: (P: with DRAM, empty: without DRAM))
Applicant : Innodisk Corporation
Address : 5F No.237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)

We, International Standards Laboratory, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified. (refer to Test Report if any modifications were made for compliance).



Standards:

FCC CFR Title 47 Part 15 Subpart B: 2012- Section 15.107 and 15.109
ANSI C63.4-2009
Industry Canada Interference-Causing Equipment Standard ICES-003 Issue 5: 2012

Class B

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

International Standards Laboratory

Jim Chu
Jim Chu / Director

☐ Hsi-Chih LAB:
No. 65, Gu Dai Keng Street, Hsi-Chih Dist.,
New Taipei City 221, Taiwan
Tel: 886-2-2646-2550; Fax: 886-2-2646-4641



☒ Lung-Tan LAB:
No. 120, Lane 180, San Ho Tuen, Hsin Ho Rd.,
Lung-Tan Hsiang, Tao Yuan County 325, Taiwan
Tel: 886-3-407-1718; Fax: 886-3-407-1738



Certificate

Issue Date: April 14, 2016
Ref. Report No. ISL-15LE018CE-1

Product Name : 2.5" SATA SSD
Model(s) : 2.5" SATA SSD 35*#-&
\$Flash type: (S:SLC, LiSLC, M:MLC)
*Product line: (E:Embedded, G:EverGreen, R:InnoRobust)
#Controller: (empty:106/107/167, 2:201/202, 3:108/109/170, 4~9:Others)
&Product feature: (P:with DRAM, empty:without DRAM)
Responsible Party : Innodisk Corporation
Address : 5F.No.237, Sec. 1, Datong Rd., Xinxhi Dist., New Taipei City 221, Taiwan (R.O.C.)

We, International Standards Laboratory, hereby certify that:

The device bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in European Council Directive- EMC Directive 2004/108/EC (marketed before 2016/04/18) 2014/53/EU (marketed after 2016/04/20). The device was passed the test performed according to :



Standards:
EN 55022: 2010-AC2011 and CISPR 22: 2008 (modified)
EN 61000-3-2:2014 and IEC 61000-3-2:2014
EN 61000-3-3: 2013 and IEC 61000-3-3: 2013
EN 55024: 2010 and CISPR 24: 2010
EN 61000-4-2: 2009 and IEC 61000-4-2: 2008
EN 61000-4-3: 2006+A1: 2008 +A2: 2010 and
IEC 61000-4-3:2006+A1: 2007+A2: 2010
EN 61000-4-4:2012 and IEC 61000-4-4:2012

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

International Standards Laboratory

W.H. Chang

W.H. Chang / Director

☐ Hsi-Chih LAB:
No. 65, Gu Dai Keng Street, Hsi-Chih Dist.,
New Taipei City 221, Taiwan
Tel: 886-2-2646-2550; Fax: 886-2-2646-4641



☒ Lung-Tan LAB:
No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.,
Lung-Tan Hsiang, Tao Yuan County 325, Taiwan
Tel: 886-3-407-1718; Fax: 886-3-407-1738

