

Datasheet

# 2.5" PATA SSD

## 1SE series

- 2.5" PATA solution for industrial field
- iSMART disk health monitoring
- Intelligent error recovery system
- Excellent data transfer speed
- Enhanced power cycling management



### Introduction


Innodisk 2.5" PATA SSD 1SE complies with ATA 7 standard, and supports Ultra DMA (0-5) and PIO (0-4) transfer modes, which delivers good performance and reliability making it the ideal solution for a variety of applications, including embedded system, industrial computing, and enterprise field. 2.5" PATA SSD 1SE not only performs unmatched performance, but also designed with Innodisk owned technical knowhow to ensure the data integrity and highest levels of reliability.

# 2.5" PATA SSD

## 1SE series Drawing

Contact us for more information  
about the 2.5" PATA SSD 1SE

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

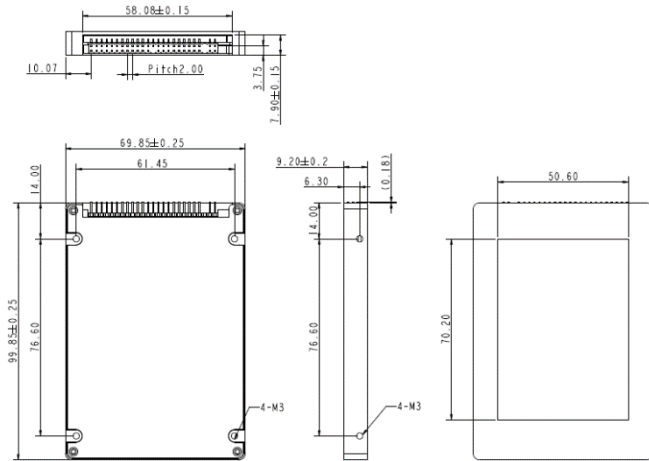

## Specifications

Interface	PATA
Flash Type	SLC
Capacity	4GB~256GB
Max. Channels	4
Sequential R/W (MB/sec, max.)	90 / 90
Max. Power Consumption	1.8 W (5V x 355 mA)
Thermal Sensor	WT Only
External DRAM Buffer	-
H/W Write Protect	-
Pin7 Power	-
ATA Security	√
S.M.A.R.T.	√
Dimension (WxLxH)	69.85 X 99.85 X 9.20 mm
Environment	Vibration: 20G @ 7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

### Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,  
Xizhi Dist., New Taipei City 221,  
Taiwan (R.O.C.)  
Tel: +886-2-77033000  
Email: sales@innodisk.com

### Branch Offices:

USA  
[usasales@innodisk.com](mailto:usasales@innodisk.com)  
+1-510-770-9421  
Europe  
[eusales@innodisk.com](mailto:eusales@innodisk.com)  
+31-040-282-1818  
Japan  
[jpsales@innodisk.com](mailto:jpsales@innodisk.com)  
+81-45-594-7581  
China  
[sales\\_cn@innodisk.com](mailto:sales_cn@innodisk.com)  
+86-755-21673689  
[www.innodisk.com](http://www.innodisk.com)

© 2014 Innodisk Corporation.  
All right reserved. Specifications  
are subject to change without  
prior notice.

20150514

## Ordering Information

Operation Temp.	4GB	8GB	16GB	32GB	64GB	128GB	256GB
Standard Grade (0°C ~ +70°C)	DEP25-04GD06AC1DB	DEP25-08GD06AC1QB	DEP25-16GD06AC1QB	DEP25-32GD06AC1QB	DEP25-64GD06AC1QB	DEP25-A28D06AC1QB	DEP25-B56D06AC1QB
Industrial Grade (-40°C ~ +85°C)	DEP25-04GD06AW1DB	DEP25-08GD06AW1QB	DEP25-16GD06AW1QB	DEP25-32GD06AW1QB	DEP25-64GD06AW1QB	DEP25-A28D06AW1QB	DEP25-B56D06AW1QB

**innodisk**

[www.innodisk.com](http://www.innodisk.com)