

J21

1U Active Air Cooler
PRODUCT SPECIFICATIONS

Speficiation Version: 09/12/2024

(Specifications are subject to change without notice)



Model Number: J21

- Recommend for AMD® CPU as following
 - AMD® Processor Family, Socket SP7
- Active Air Cooler for 1U Server and Up

Overall Specification


Dimension	120.0 x 103.6 x 27.2 mm
Weight	605g
Material	Copper Fin + Vapor Chamber
Thermal Grease	Shin-Etsu 8195-4 or Equivalent Pre-Printed
TDP	Up to 300 Watts

Cooling Fan Specification

Model Number	DB128013BU-PWM(Dual-Outlet)
Dimension	φ80 x 13 mm
Bearing	Double Ball
Rated Voltage	12V
Rated Speed	At Duty Cycle 0~20%: 2000± 200 RPM
	At Duty Cycle 50%: 5900± 10% RPM
	At Duty Cycle 100%: 10000±10% RPM
Input Power	At Duty Cycle 0~20%: 1.44 W
·	At Duty Cycle 50%: 10.8W
	At Duty Cycle 100%: 42.0 W
Maximum Airflow	At Duty Cycle 0~20%: 7.54 CFM
	At Duty Cycle 50%: 17.8 CFM
	At Duty Cycle 100%: 26.25 CFM
Rated Static Pressure	At Duty Cycle 0~20%: 7.54 mm-H2O
	At Duty Cycle 50%: 41.3 mm-H2O
	At Duty Cycle 100%: 118.64 mm-H2O
Acoustical Noise	At Duty Cycle 0~20%: 35.1 dBA
	At Duty Cycle 50%: 53.8 dBA
	At Duty Cycle 100%: 65.2 dBA
Lead Wire Pin Out	Pin#1- Black(-)
	Pin#2- Yellow(+)
	Pin#3- Green(Tachometer/ Signal Output)
	Pin#4- Blue (PWM)





J21 | Socket SP7

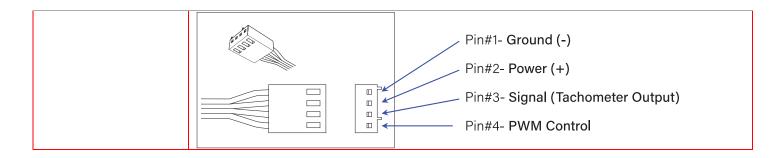


Performance Chart: Passive Cooler J21 Thermal Resistance Thermal Resistance vs. Blower Speed

(Pending Sample Test)

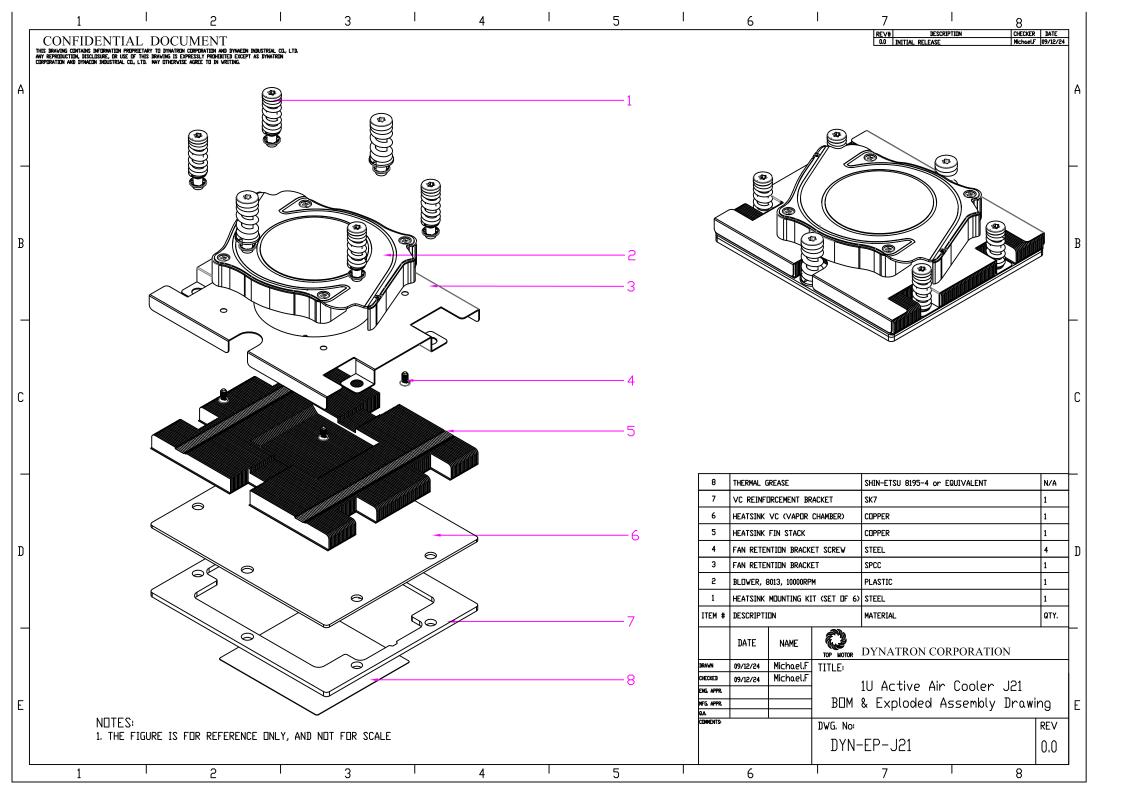

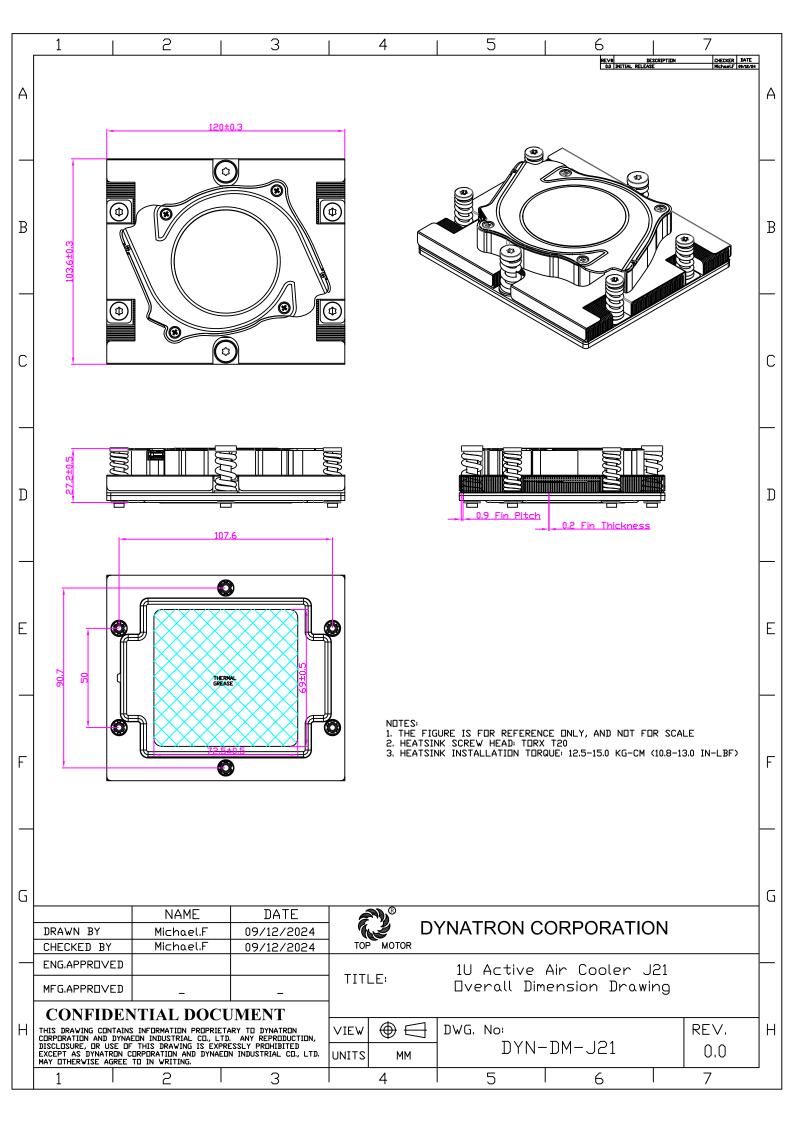

Recommended Torque Application Pattern for Socket SP7 Coolers

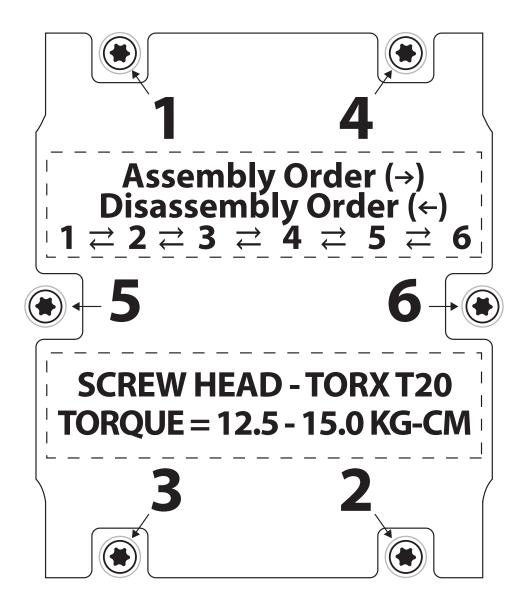

WARNING: Failure to attach thermal solutions one-at-a-time in the sequence 1-2-3-4-5-6 and failure to remove thermal solutions one at a time in the sequence 6-5-4-3-2-1 can lead to permanent socket damage.



J21 | Socket SP7

Publication History:

09/12/2024: Initial Release

(Specifications are subject to change without notice)