

## DESCRIPTION

The PU101 series of compact, open PCB constructed, AC-DC switching power supplies are capable of delivering 100 watts of continuous power at 7.5 CFM forced air cooling or 80 watts at convection cooling. They operate at 80-264 VAC input voltage without the need of voltage selection. The units are certified to IEC/EN/UL/CSA 62368-1 and suitable for data networking, computer, telecommunication, audio/video and industrial applications.

## FEATURES

- Operation altitude up to 5000 meters
- 2 x 4 inch footprint with 1.29 inch low profile
- Less than 175  $\mu$ A leakage current
- Meet EN55032 class B emissions
- Short-circuit protection
- Compliant with RoHS requirements
- No load power consumption less than 0.15W

## INPUT SPECIFICATIONS

Input voltage:	80-264 VAC
Input frequency:	47-63 Hz
Input current:	2.0 A (rms) for 115 VAC 1.1 A (rms) for 230 VAC
Earth leakage current:	175 $\mu$ A max. @ 264 VAC, 63 Hz


## OUTPUT SPECIFICATIONS

Output voltage/current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	1% peak to peak maximum
Overvoltage protection:	set at 112-140% of its nominal output voltage
Overcurrent protection:	Output protected to short circuit conditions
Temperature coefficient:	All outputs $\pm$ 0.04% / $^{\circ}$ C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 $\mu$ s after a 25% step load change

## ENVIRONMENTAL SPECIFICATIONS


Operating temperature:	-20 $^{\circ}$ C to +70 $^{\circ}$ C
Storage temperature:	-40 $^{\circ}$ C to +85 $^{\circ}$ C
Relative humidity:	5% to 95% non-condensing
Temperature derating:	Derate from 100% at +50 $^{\circ}$ C linearly to 50% at +70 $^{\circ}$ C, applicable to convection and forced-air cooling conditions

## PU101 SERIES

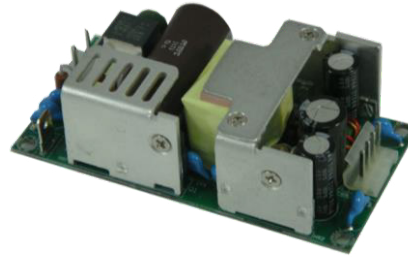

CE (LVD)  
RoHS

## SAFETY STANDARD APPROVALS



UL 62368-1, CSA C22.2 No. 62368-1

TÜV EN 62368-1

## GENERAL SPECIFICATIONS

Switching frequency:	65 KHz (typical)
Efficiency:	See rating chart.
Hold-up time:	10 ms minimum at 100 W load and 115 VAC 10 ms minimum at 80W load and 100 VAC
Line regulation:	$\pm$ 0.5% maximum at full load
Inrush current:	80 A @ 115 VAC or 160 A @ 230 VAC, at 25 $^{\circ}$ C cold start
Withstand voltage:	4242 VDC from input to output, 2500 VDC from input to ground, 707 VDC from output to ground
MTBF:	150,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per MIL-HDBK-217F
EMC Performance	
EN55032:	Class B conducted, class B radiated
EN61000-3-2:	Harmonic distortion, class A
EN61000-3-3:	Line flicker
EN55024	
EN61000-4-2:	ESD, $\pm$ 8 KV air and $\pm$ 4 KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, $\pm$ 1 KV
EN61000-4-5:	Surge, $\pm$ 1 KV diff., $\pm$ 2 KV com
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 1 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, and >95% reduction for 10 ms

## OUTPUT VOLTAGE/CURRENT RATING CHART




Model	Output							Efficiency (typical) 115/230 Vac
	V1	Min. load	Max. Current at convection	Max. Current at 7.5 CFM	Tol.	Ripple & Noise <sup>(2)</sup>	Max. Power <sup>(1)</sup>	
PU101-12A	12 V	0 A	6.67 A	8.34 A	±2%	120 mV	80 W /100 W	87 /90%
PU101-13A	15 V	0 A	5.34 A	6.67 A	±2%	150 mV	80 W /100 W	87 /90%
PU101-13-1A	18 V	0 A	4.45 A	5.56 A	±2%	180 mV	80 W /100 W	87 /90%
PU101-14A	24 V	0 A	3.34 A	4.17 A	±2%	240 mV	80 W /100 W	88 /90%
PU101-15A	28 V	0 A	2.86 A	3.58 A	±2%	280 mV	80 W /100 W	88 /90%
PU101-16-1A	32 V	0 A	2.50 A	3.13 A	±2%	320 mV	80 W /100 W	88 /90%
PU101-17A	36 V	0 A	2.23 A	2.78 A	±2%	360 mV	80 W /100 W	88 /90%
PU101-18A	48 V	0 A	1.67A	2.09 A	±2%	480 mV	80 W /100 W	88 /90%

### NOTES:

- The first value of max. power is at convection cooling. The second value is with 7.5 CFM forced air provided by user.
- Ripple and noise is maximum peak to peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum (or electrolytic) capacitor in parallel with a 0.1 µF ceramic capacitor across the output except model PU101-12A which is with a 22 µF tantalum (or electrolytic) capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

## MECHANICAL SPECIFICATIONS

## OUTPUT POWER DERATING CURVE

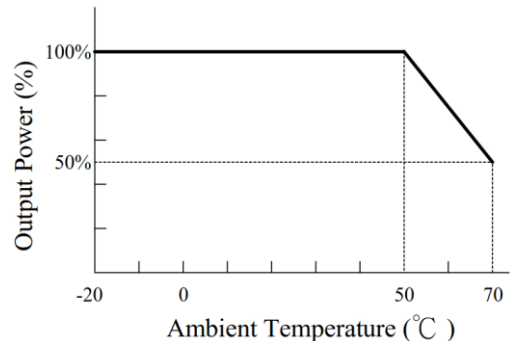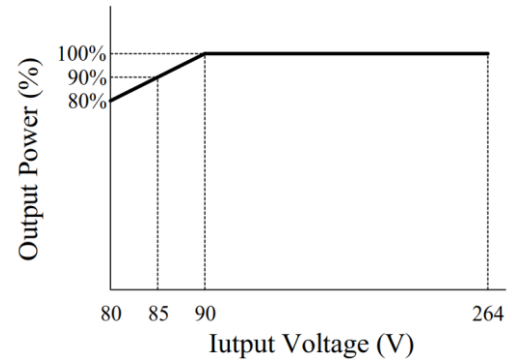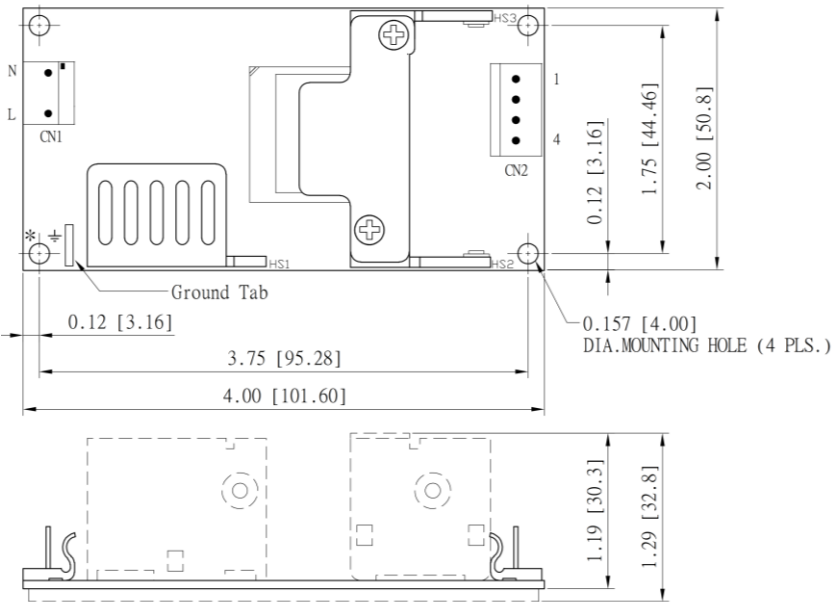

### NOTES:

- Dimensions shown in inches [mm]
- Tolerance 0.02 [0.5] maximum
- Input connector P1: Molex header 09-65-2038, mating with Molex housing 09-50-1031 or equivalent.
- Output connector P2: Molex header 09-65-2048, mating with Molex housing 09-50-1041 or equivalent.
- Ground tab is 0.25 [6.35] x 0.032 [0.8] fast-on connector.
- To ensure compliance with level B emissions, connect the three "\*" marked mounting holes with metallic standoffs to chassis.
- Weight: 155 grams (0.34 lbs.) approx.

## PIN CHART

Connect	CN1			CN2			
	1	2	3	1	2	3	4
PIN NO.	1	2	3	1	2	3	4
Polarity	Live	Void	Neutral	+V1	+V1	Common Return	Common Return