



FSP060-RAAK3

FEATURES

- Certified IEC 62368-1 & CB 60950-1
- Peak current function
- Meet Energy Efficiency DOE Level VI
- Meet Code of Conduct Version 5 Tier 2
- High Reliability
- Low Profile
- Over Current Protection
- Over Temperature Protection
- Over Voltage Protection
- With PFC Circuit

SAFETY STANDARD APPROVAL



DESCRIPTION

This product is an 60 watts AC to DC adapter with peak current function . It use in thermal printer. This adapter operates at 90 to 264 VAC input voltage. The unit meets CISPR32 EN55032 CLASS B, EN55024 and FCC PART 15B Class B emission limits, and is designed for ITE application.

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	100Vac, 240Vac / full load \leq 1.5A
No load power consumption	115Vac , 230Vac \leq 0.15W
Touch current:	264Vac / 50Hz \leq 0.7mA


OUTPUT SPECIFICATIONS

Output voltage/current:	24V/2.5A
Total output power:	60W
Protection:	
Over voltage:	The adapter will enter into shut down that means no output while over voltage happened at output terminal that caused by internal fault,the output trip voltage shall not exceed 31 volts.That will be return to normal state by AC reset.
Short circuit & Over current:	When an internal fault occurs, or an external fault is applied to the output, the power supply shall shut down and latch.
Over temperature:	The power supply will enter into shut down while the abnormal thermal rise occurs. That will be return to normal state by AC reset.
Brown-out	Shutdown and no damage
Environment	
Working TEMP.	0~70°C (> 40°C de-rating)
Storage TEMP.	-20~+80°C
Working Humidity	20~80% RH non-condensing
Storage Humidity	10~90% RH non-condensing


INPUT SPECIFICATIONS

Power factor:	N/A
Efficiency:	DOE 6 : 88% ; CoC V5 Tier 2 : 89%
Power turn-on time	At 100Vac / full load, output voltage shall remain regulation \leq 3Sec
Hold-up time:	At 100Vac or 240Vac / full load, output voltage shall remain regulation \geq 8ms
Inrush current:	100Vac, 240Vac / full load , Shall be less than the rating of adapter critical component (including rectifiers, fuse surge and current limiting device)
Operating altitude:	5000 meters above sea level
Withstand voltage:	Between AC input and secondary applied DC 4000V, test time 1 minute, cut off current shall be less than 10mA
MTBF:	100Vac, 240Vac / full load, 300,000 hours at 25°C, standard SR332
EMC Performance:	
EN55032	Class B conducted, class B radiated
FCC	Class B conducted, class B radiated
VCCI	Class B conducted, class B radiated
EN61000-3-2	N/A
EN61000-3-3	Meet regulation
EN61000-4-2	Air discharge: \pm 15KV,contact discharge: \pm 8KV, meet criterion A
EN61000-4-3	80 ~1000 MHz, 3V/m, 80% AM(1kHz), meet criterion A
EN61000-4-4	Impulse: \pm 1kV applied to L,N,meet criterion A
EN61000-4-5	\pm 1kV applied differential mode, \pm 2kV applied common mode,meet criterion A
EN61000-4-6	0.15 ~ 80 MHz,3Vrms,80% AM(1kHz),meet criterion A
EN61000-4-8	50 Hz or 60Hz,1A/m,meet criterion A
EN61000-4-11	Voltage Dips : >95% reduction for 0.5 period, meet criterion B 30% reduction for 25 period, meet criterion C
Power de-rating:	N/A


INPUT VOLTAGE DERATING CURVE

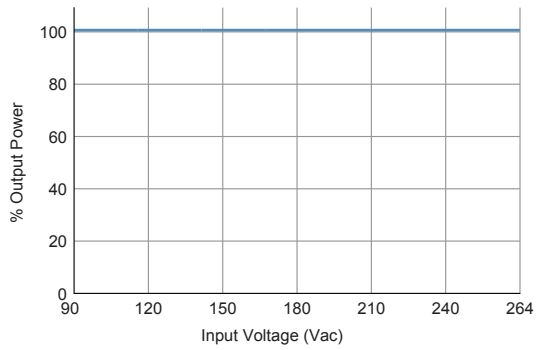

OUTPUT POWER DERATING CURVE

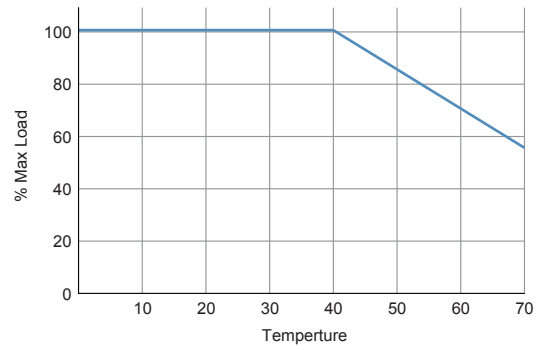

MECHANICAL SPECIFICATIONS

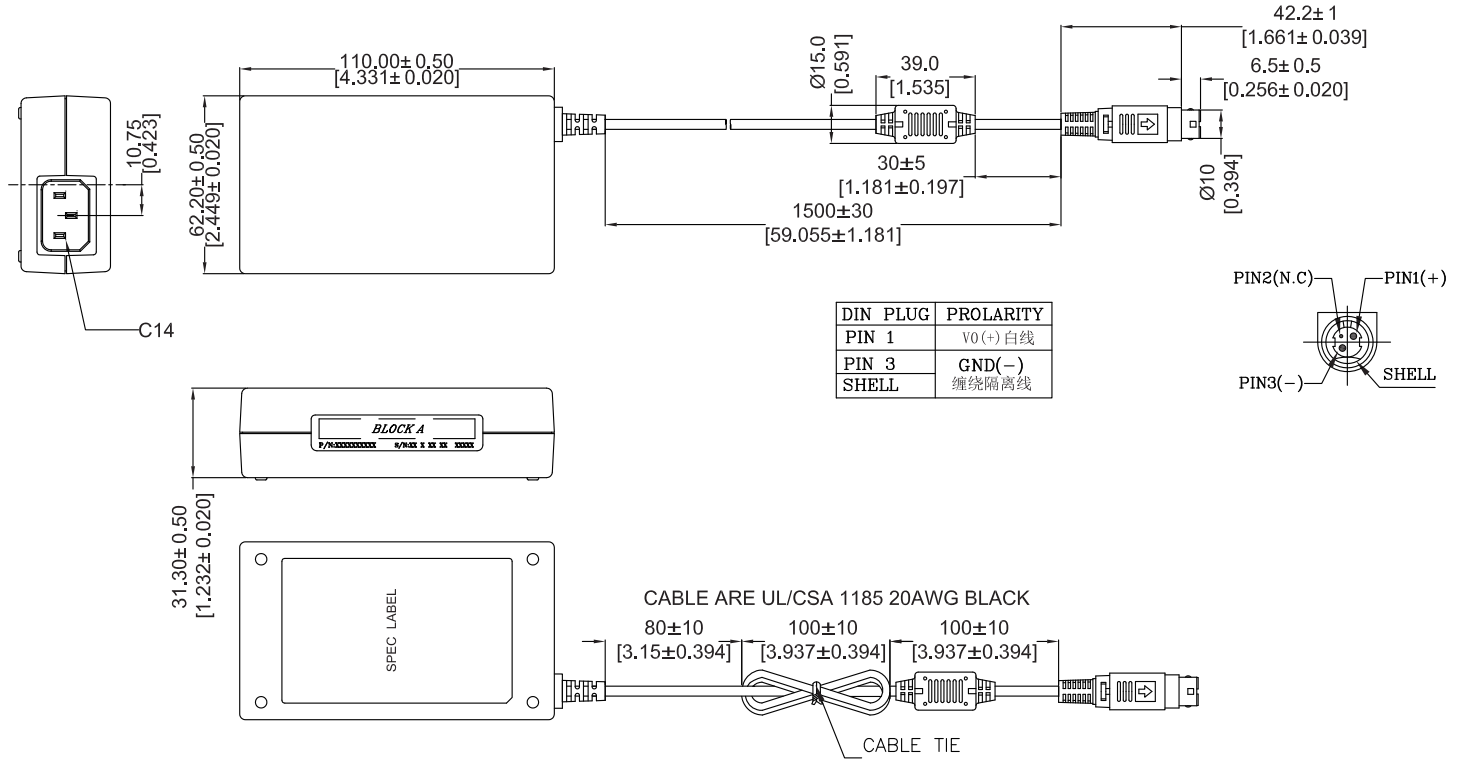

CONNECTOR SPECIFICATIONS

