


MX610HD

12/13th Gen. Intel® Core™ i9/i7/i5/i3 Processors,
LGA 1700 socket, Thin Mini ITX Motherboard
with Intel® H610E Chipset

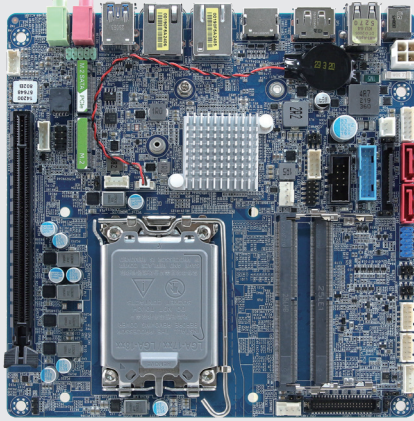

Features

- 12/13th Gen. Intel® Core™ i9/i7/i5/i3 / Pentium / Celeron Processor with Intel® H610E Chipset
- 2 x 262-Pin DDR5 4800 MHz S0-DIMM Socket Supports Up to 64GB (Non-ECC)
- HDMI, LVDS, Optional eDP
- 1 x PCIe x16 (Gen4)
- 1 x Intel® I219V, 1 x Intel® I225LM
- 4 x USB 3.2, 6 x USB 2.0
- 1 x M.2 M-Key 2242/2280, 1 x M.2 E-Key 2230
- 3 x COM
- DC in +12V~24V



HDMI



DP++



DDR5
SO-DIMM



USB 3.2



RS232/422/485

Specifications

System Information

Processor	LGA 1700 Socket Supports 12/13th Generation Intel® Core™ i7/i5/i3 / Pentium / Celeron Processors (Max. TDP at 65W)
Platform Controller Hub	Intel® H610E Chipset
System Memory	2 x 262-Pin DDR5 4800MHz S0-DIMM Socket Supports Up to 64GB (Non-ECC)
I/O Chipset	nuvoton NCT6126D
Watchdog Timer	H/W Reset, 5~255 Seconds/5~255 Minutes
BIOS	AMI uEFI BIOS, 256Mbit SPI Flash ROM
H/W Status Monitor	CPU Temperature Monitoring Voltage Monitoring CPU Fan Speed Control
TPM	Onboard infineon SLB 9670V02.0 support TPM2.0
Board	Thin Mini ITX

Expansion

Expansion	1 x PCIe x16 (Gen4) 1 x M.2 M-Key 2242/2280 NVMe (PCIe x4 + SATA III) 1 x M.2 E-Key 2230 CNVi (PCIe x1 + USB 2.0)
-----------	---

Display

Graphic Chipset	Intel® 12th/13th Generation CPU Integrated
Spec. & Resolution	1 x HDMI 1.4b 4K@60Hz 1 x Dual Mode DisplayPort (DP++) 1.4a 4K@60Hz Dual Channel 18/24-bits LVDS, Optional eDP
Multiple Display	Triple Display
LVDS	Dual Channel 18/24-bits LVDS (Chrontel CH7513A-BF eDP to LVDS) or 1 x eDP 1920 x 1080@60Hz (2 Lanes)

Audio

Audio Codec	Realtek ALC897 HD Audio Decoding Controller
Audio Interface	Mic-in, Line-out
Audio Amplifier	2 x 6W 8Ω Amplifier

Ethernet

LAN Chipset	1 x Intel® I219V Gigabit Ethernet 1 x Intel® I225LM 2.5 Gigabit Ethernet
Ethernet Interface	10/100/1000 Base-Tx GbE compatible & 2.5 Gigabit Ethernet
LAN Port	2 x RJ-45

Software Support

OS	Windows 11, Linux
----	-------------------

Certification

Certification Information CE, FCC, RoHS Compliant

I/O

USB	2 x USB 3.2 2 x USB 2.0 2 x USB 3.2 Gen1 by pin header 2 x USB 2.0 by pin header
COM Port	1 x RS-232 2 x RS-232/422/485
SATA	2 x SATA III 2 x SATA power
DIO	1 x 8-bit GPIO


Mechanical & Environmental

Operating Temp.	0°C to 60°C (32°F ~ 140°F)
Storage Temp.	-20°C ~ 80°C (-4°F ~ 176°F)
Operating Humidity	5% to 90% Non-condensing
Weight	0.88lbs (0.4Kgs)
Power Requirement	DC in +12V~24V
Power Mode	AT/ATX (Default Setting: ATX)
Dimension (L x W)	6.7" x 6.7" (170mm x 170mm)

MX610HD

12/13th Gen. Intel® Core™ i9/i7/i5/i3 Processors,
LGA 1700 socket, Thin Mini ITX Motherboard
with Intel® H610E Chipset

Mechanical Drawing

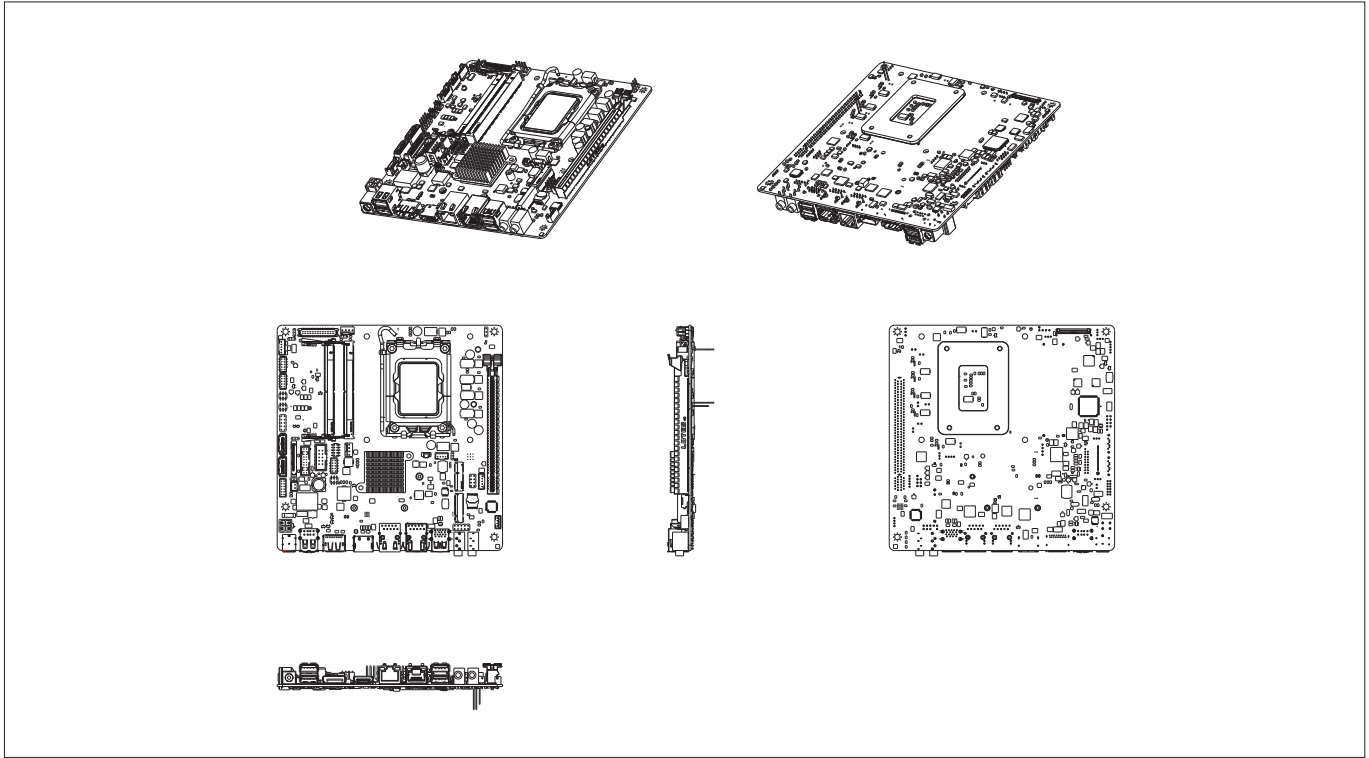

Ordering Information

P/N	Processor	Chipset	LAN	USB	COM	PCIe Slot	Power Input	Temp.
MX610HD 71852-1A	12th/13th/14th Gen. Intel® Core™ i9/i7/i5/i3 Processors, LGA 1700 Socket, 65W TDP	Intel® H610E	2	8	3	1	ATX Power	0°C ~ 60°C (32~140°F)


Packing List

Item	P/N	Quantity
SATA Power Cable	-	1
Full Size IO Shield	-	1
Half Size IO Shield	-	1

MX610HD

12/13th Gen. Intel® Core™ i9/i7/i5/i3 Processors,
LGA 1700 socket, Thin Mini ITX Motherboard
with Intel® H610E Chipset

Block Diagram

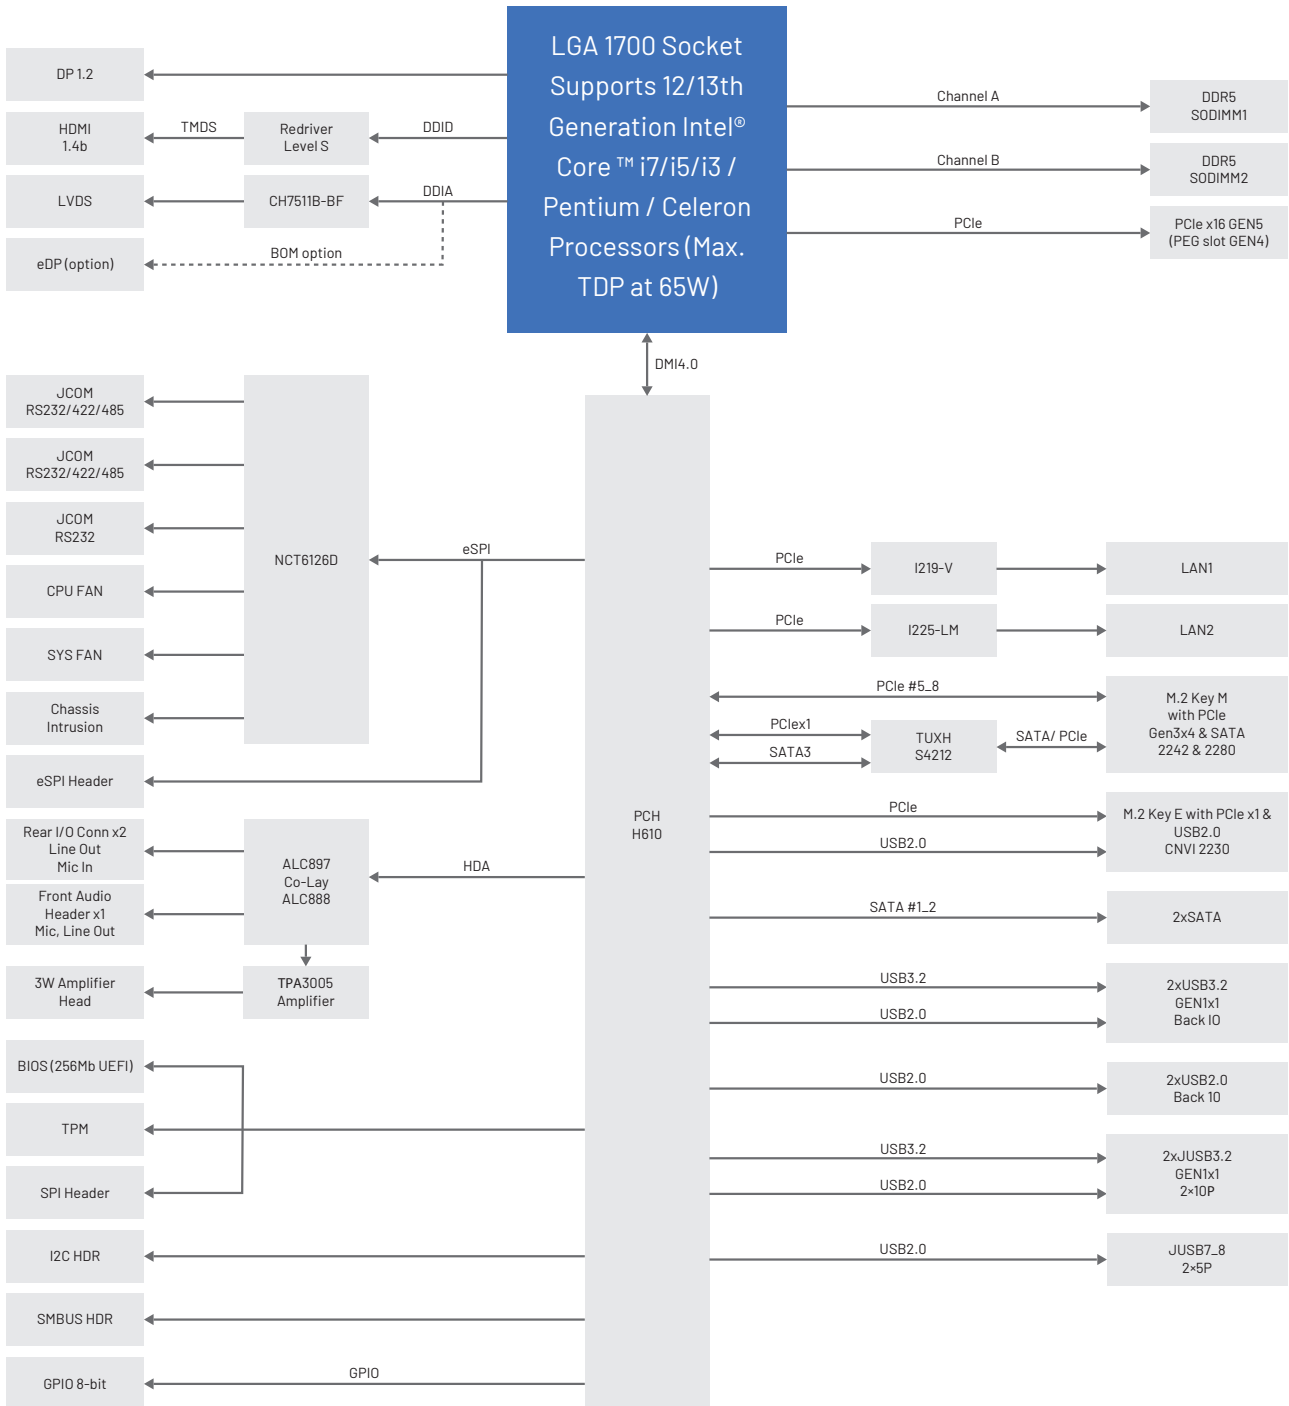

MX610HD

12/13th Gen. Intel® Core™ i9/i7/i5/i3 Processors,
LGA 1700 socket, Thin Mini ITX Motherboard
with Intel® H610E Chipset

I/O Overview

