

W24IT3S-SPA2-R

23.8" Intel® Core™ i5-1135G7 IP65 Stainless Panel PC with Round corner design



KEY FEATURES

- 11th Generation Intel® Core™ i5-1135G7 2.4GHz (up to 4.2GHz)
- Round corner design, IP65 Stainless Panel PC
- A true flat, easy-to-clean front surface with an edge-to-edge design
- Sealed to IP65 for protection against water and dust
- Support Glove / Rain mode
- SUS 316 / AISI 316 stainless steel for food and chemical industries
- Various mounting solutions
- Optical bonding (optional)




SPECIFICATIONS

Display	
Resolution	1920x1080
Contrast Ratio	3000:1
View Angles	89,89,89,89
Touch / Glass	Projected Capacitive Multi Touch Screen
Size	23.8 inches
Panel Brightness	250.0 nits
Active Area	527.04x296.46 mm
System Specification	
WLAN	Support (Optional)
Processor	Intel Core i5-1135G7 2.4GHz (up to 4.2GHz)
Memory	1 x SO-DIMM, DDR4 3200 MHz, 4GB 8GB (Optional) 16GB (Optional) 32GB (Optional)
Storage	1 x M.2 2280 M-Key NVMe SSD 128GB 256GB (Optional) 512GB (Optional) 1TB (Optional) 2TB (Optional) 1 x SATA III for 2.5" SSD/HDD up to 2TB (Optional)
Ethernet controller	2 x Intel® Ethernet Controller
Security	TPM 2.0
Operating System	*Note : Only Windows 11 support Wake on touch Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 22.04 (Optional)
Mechanical	
Dimension	620 x 390 x 56 mm (with junction box) 620 x 390 x 153 mm (without junction box)
Mounting	VESA Mount Yoke Mount Arm Mount
Enclosure	Stainless Housing
Cooling System	Fanless design
Environment	
Operating Humidity	10% to 90% RH, Non-Condensing
Storage Temperature	-20°C to 60°C
Operating Temperature	0°C to 45°C
IP rating	IP65
Certification	
Certification	CE, FCC
IO Ports	

Power Input	1 x M12 waterproof connector for 12V DC	USB Port	1x M12 waterproof connector for 2 x USB2.0
Serial Port	1 x M12 waterproof connector for RS232	LAN	1 x waterproof Giga LAN RJ45 connector
Indicator	1 x LED Indicator for power 1 x LED Indicator for storage		
Control			
Button	1 x Power Button 1 x Reset Button		
Accessory			
Accessory	100~240V AC to DC Adapter with waterproof connector Power Cord External USB cable with waterproof connector External COM cable with waterproof connector External LAN cable with waterproof connector Junction Box Waterproof caps Manual VESA screws		
Power			
Power Rating	12V DC (M12 type)		

DIMENSIONS UNIT:MM

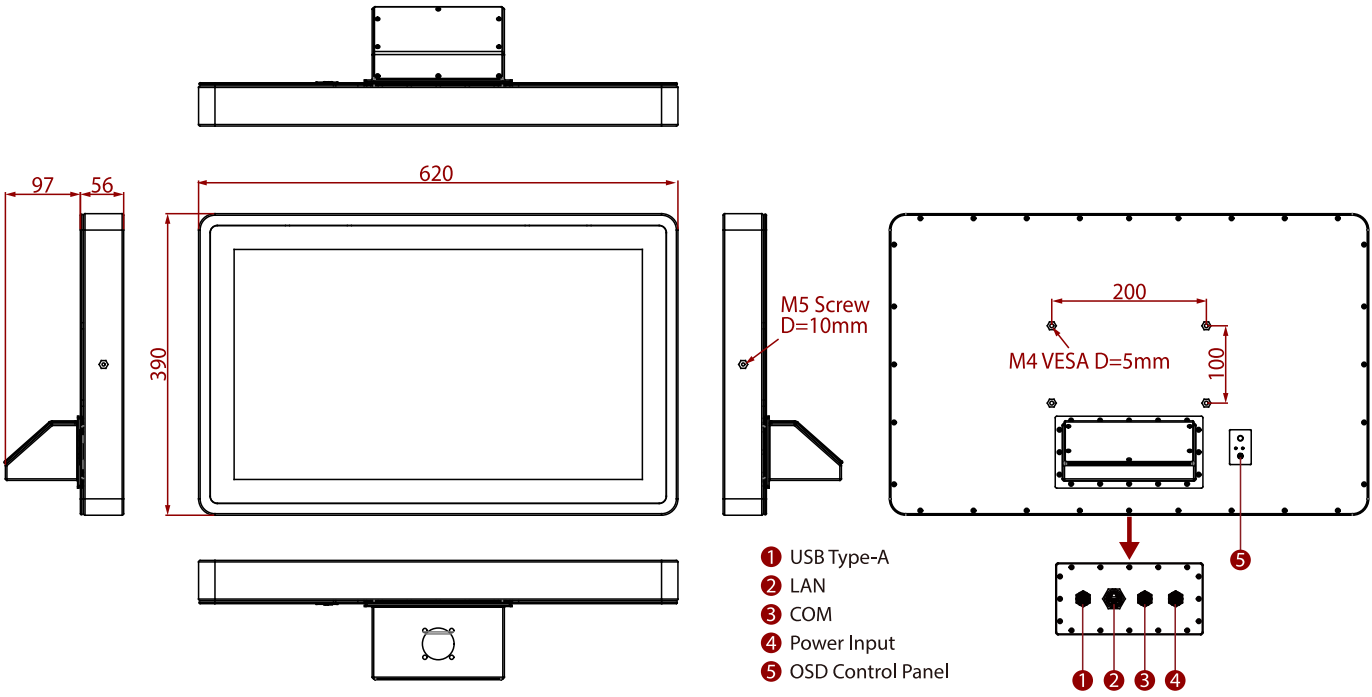

- NOTE**
1. This is a simplified drawing and some components are not marked in detail.
 2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
 3. All specifications are subject to change without prior notice.
 4. For more information about Universal Carrying System Adapter for Winmate Stainless Panel PCs/ Display (with Junction Box), pls reference https://www.winmate.com/Support/Mounting_ARMMount