PR-1500G

5-slot Half-size Compact Chassis

- 2 x USB Ports
- Reset Button
- HDD LED
- Power LED

- Slim Type 5.25"
- Front Accessible 3.5"
- 3.5" HDD

- COM Port Opening
- LPT Port Opening

2 x Rackmount Brackets
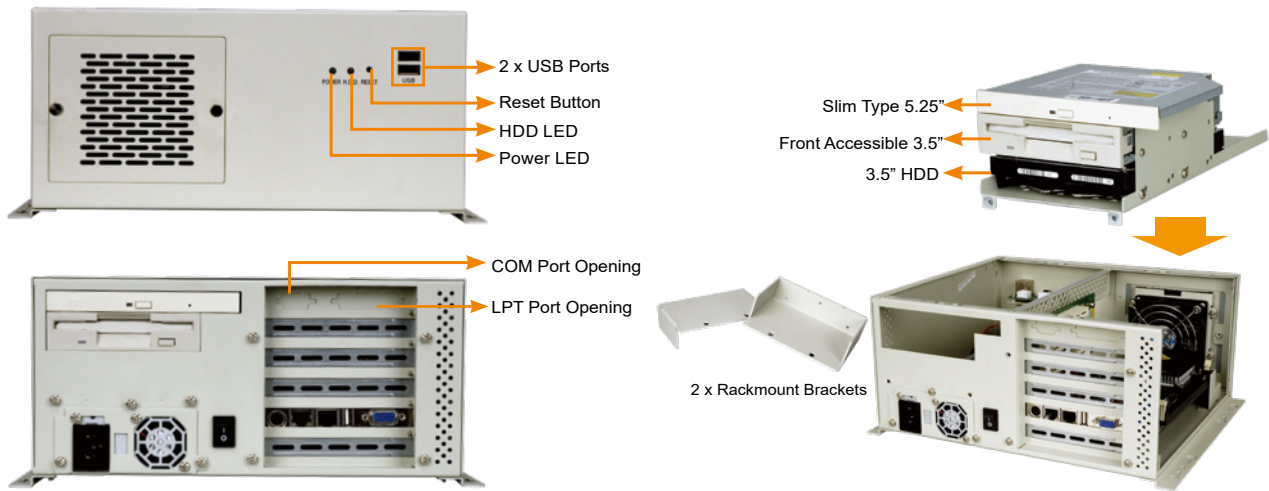
CD-ROM and HDD are not included in package.

Features

- RoHS compliant design
- One slim type 5.25" drive bay
- One 3.5" drive bay and one internal 3.5" HDD bay
- Two USB ports on the front panel
- One 8 cm cooling fan

Specifications

|	
◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot SBC
◆ Drive Bays	1 x 3.5" HDD 1 x Front accessible 3.5" 1 x Slim 5.25"
◆ Cooling Fans	1 x 8 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	5 slots
◆ Indicators	Power, HDD
◆ Button	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operating Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	3.6 kg/6.2 kg
◆ Dimensions (DxWxH)	254 mm x 286 mm x 132 mm

Ordering Information

Part No.	Description
PR-1500GWPX-R20/180W	5-Slot Half size Chassis, White, Powder paint, 1x 8cm fan, with 180W ATX power supply, RoHS

Cable Options

Part No.	Description
32100-126600-RS **(2.54mm→2.0mm)**	This optional cable is required for motherboard with 2mm USB connector (the USB cable inside the chassis is with 2.54mm pitch). Refer to motherboard spec. for details.

Dimensions *(Unit: mm)*

132.00mm
138.00mm
138.00mm
316.40mm
302.40mm
206.00mm
254.00mm
286.00mm
482.00mm
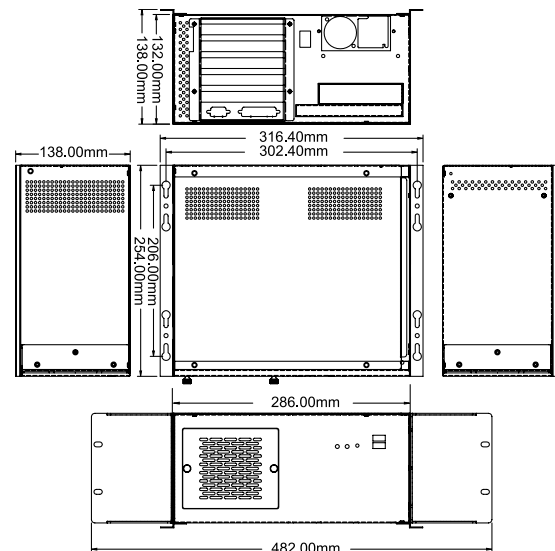
Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-5S-RS	ISA	0	5	0	0	0	AT
IP-5SA2-RS	PCISA	4	1	0	0	0	ATX
HPE-5S1	PICO/PICOe	4	0	0	0	0	ATX
HPE-5S2	PICO/PICOe	3	0	0	1	0	ATX
HPXE2-5S1	HPCIE	2	0	0	0	1	ATX

Power Supply Options

Type	Model No.	Watt
ATX	63030-010180-000-RS	180W
	63030-010220-010-RS	220W
	63030-010300-000-RS	300W

PR-1500G supports single PS/2 PSU. For more IEI PSU models, please visit www.ieiworld.com.